



AUTEL MX Programmable Universal TPMS Sensor User Manual

[Home](#) » [AUTEL](#) » AUTEL MX Programmable Universal TPMS Sensor User Manual 

AUTEL®

MX Programmable Universal TPMS Sensor
User Manual

Web: www.autel.com

www.max1tpms.com

PROGRAMMABLE UNIVERSAL TPMS SENSOR MX-SENSOR



CAUTION

- Autel MX-Sensors arrive blank and must be programmed with Autel TPMS tool, which recommended to program prior to installation
- Do not race with the vehicle on which the Clamp-in MX-Sensor 1s mounted, and always keep the drive speed under 240km/h battery 3V/320mAh

Contents

- [1 INSTALLATION GUIDE](#)
- [2 CUSTOMER & TECH SUPPORT](#)
- [3 INSTALLATION GUIDE](#)
- [4 SAFETY INSTRUCTIONS](#)
- [5 WARRANTY](#)
- [6 FCC STATEMENT:](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

INSTALLATION GUIDE


IMPORTANT: Before operating or maintaining this unit, please read these instructions carefully and pay extra attention to the safety warnings and precautions. Use this unit correctly and with care. Failure to do so may cause damage and/or personal injury and will void the warranty

Loosening the tire

Remove the valve cap and core and deflate the tire Use the bead loosener to unseat the tire bead



CAUTION: The bead loosener must be lacing the valve.

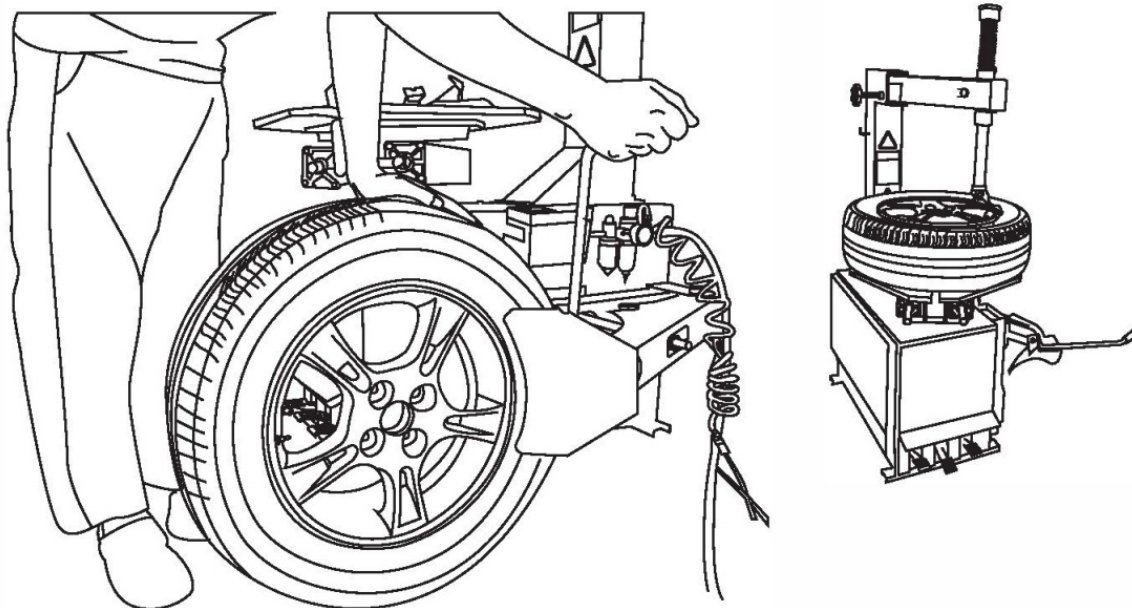

Before installing the sensor, read the installation and safety instructions carefully. For reasons of safety and for optimal operation, we recommend that any maintenance and repair work be carried out by trained experts only, in accordance with the guidelines of the vehicle manufacturer. The valves are safety-relevant parts that are intended for professional installation only. Failure to do so may result in the failure of the TPMS sensor. AUTEL does not assume any liability in case of faulty or incorrect installation of the product




CAUTION


- The TPMS sensor assemblies are replacement or maintenance parts for vehicles with factory-installed TPMS.
- Make sure to program the sensors by AUTEL sensor programming tools by the specific vehicle make, model and year before installation
- Do not install programmed TPMS sensors in the damaged wheel
- In order to guarantee optimal function, the sensors may only be installed with original Vahles and accessories provided by ALJTEL.
- Upon completing the installation, test the vehicle's TPMS following the procedures described in the original manufacturer's user guide to confirm proper installation

Dismounting the tire

Clamp the tire onto the tire changer, and adjust the valve at 1 o'clock relative to the tire separation head. Insert the tire tool and lift the tire bead onto the mounting head to dismount the bead

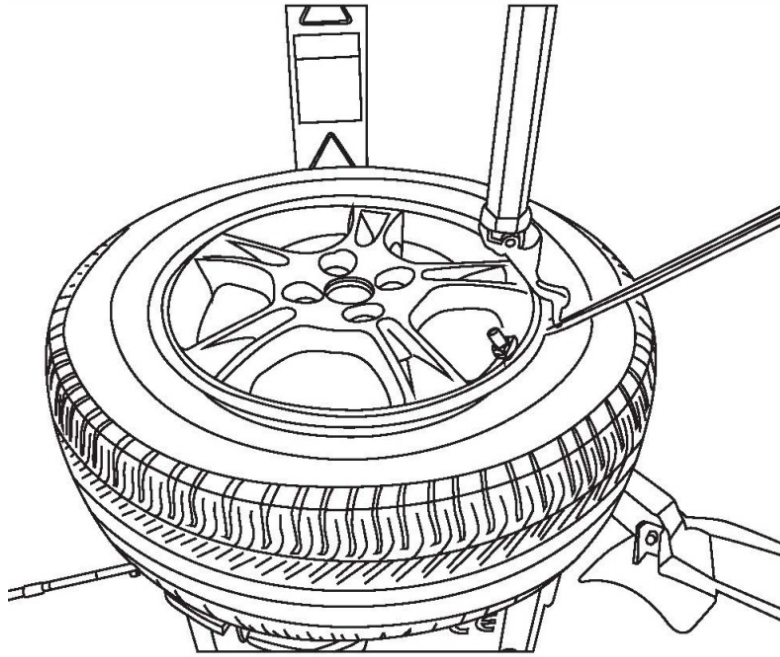

CAUTION This starting position must be observed during the whole dismantling process
Dismounting the sensor

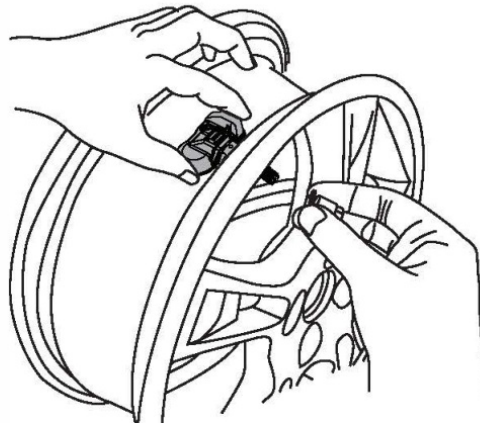

Remove the cap, screw nut, and washer from the valve stem, and then remove the sensor assembly from the rim



WARRANTY

AUTEL guarantees that the sensor is free from material and manufacturing defects for a period of twenty-four (24) months or for 24,000 miles, whichever comes first. AUTEL will at its discretion replace any merchandise during the warranty period. The warranty shall be void if any of the following occurs:

1. Improper installation of products
2. Improper usage
3. Induction of defect by other products
4. Mishandling of products
5. Incorrect application
6. Damage due to collision or tire failure
6. Damage due to racing or competition
7. Exceeding specific limits of the product

CUSTOMER & TECH SUPPORT

855-288-3587 (US)

0049 (0) 61032000522

(EU) 0086-755-86147779 (CN)

sales@autel.com

supportpms@auteltech.com

www.autel.com

www.maxitpms.com

Mounting sensor and valve

Step 1. Firmly connect the valve stem and the sensor body Note: ensure the assembly will not fall apart


Step 2. Remove the cap, screw nut, and washer from the valve stem one by one.

Step 3. Slide the valve stem through the valve hole of the rim with the sensor on the inside of the rim, assemble the two parts back on the stem in the order of washer, screw nut.


Step 4. Tighten the screw nut with 4.0N·m with the help of the fixed rod, then assemble the cap back on the stem

! WARNING: It's mandatory to use the fixed rod to install the clamp, n MwaXs-hSeern, ssocrr,elsneusto, maneducnak pnoswhonu dldam beagle created,11be caused. The outside of the rim.
Please ensure the sensor body and valve stem are firmly connected.


Step 1

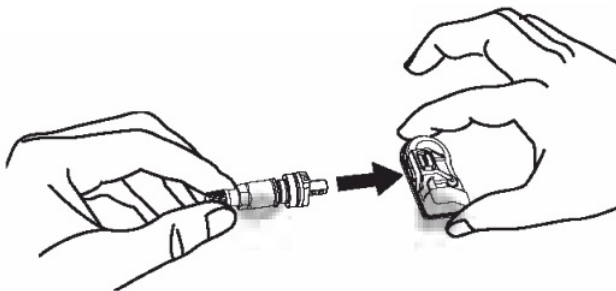

Step 2

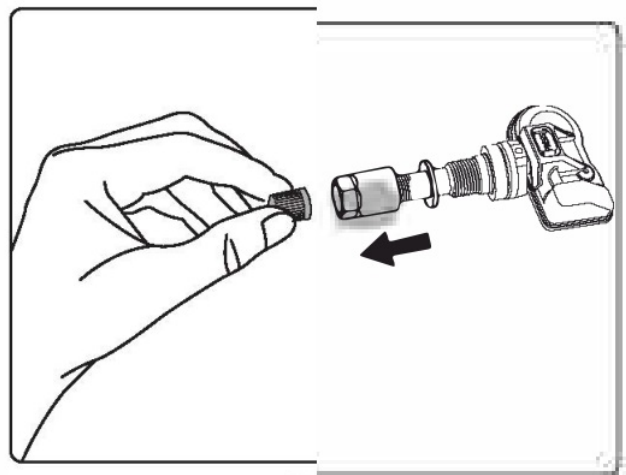

EXPLODED VIEW OF SENSOR

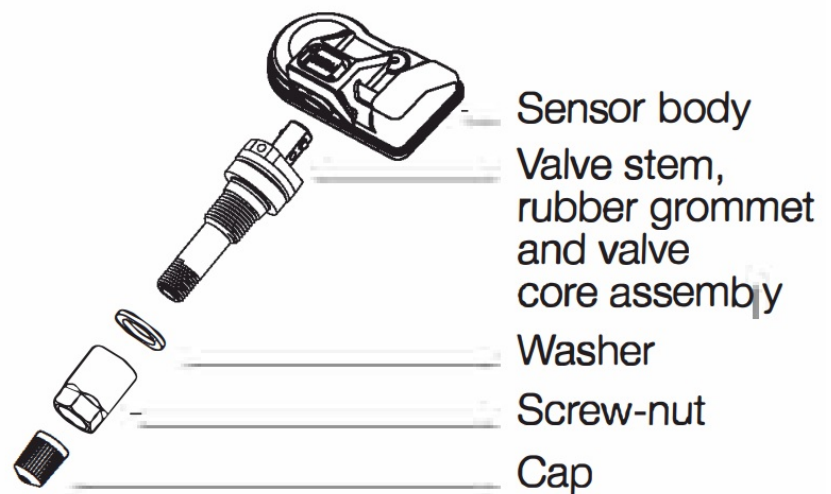

Technical data of the sensor


Weight of sensor without valve..... 12 g

Dimensions..... approx. 42.2'27.9'17.4mm


Max. pressure range..... 800 kPa

! CAUTION: Each time a tire is serviced or dismounted, or if the sensor is removed or replaced, it is mandatory to replace the rubber grommet, washer, nut, and valve core with our parts to ensure proper sealing. It is mandatory to replace the sensor if it is externally damaged Correct sensor nut torque: 4 Newton-meters

Step 3

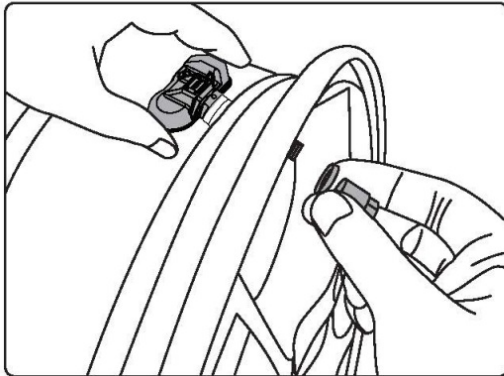

Step 4

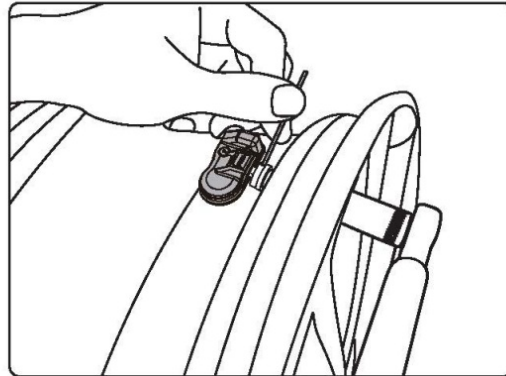

Mounting the tire Place the tire on the rim, make sure that the valve faces the separation head at an angle of 180 °. Mount the tire over the rim.

! CAUTION: The tire should be mounted to the wheel using tire changer manual lecturers instructions

PROGRAMMABLE UNIVERSAL PMS SENSOR MX-SENSOR



! CAUTION

- Autel MX-Sensors arrive blank and must be programmed with the Autel TPMS tool, which is recommended to the program prior to installation.
- Do not race with the vehicle on which the Snap-in MX-Sensor is mounted, and always keep the drive speed

under 21 Okm/h

INSTALLATION GUIDE


IMPORTANT: Before operating or maintaining this unit, please read these instructions carefully and pay extra attention to the safety warnings and precautions. Use this unit correctly and with care. Failure to do so may cause damage and/or personal injury and will void the warranty.

Loosening the tire

Remove the valve cap and core and deflate the tire. Use the bead loosener to unseat the tire bead.



CAUTION: The bead loosener must be facing the valve.

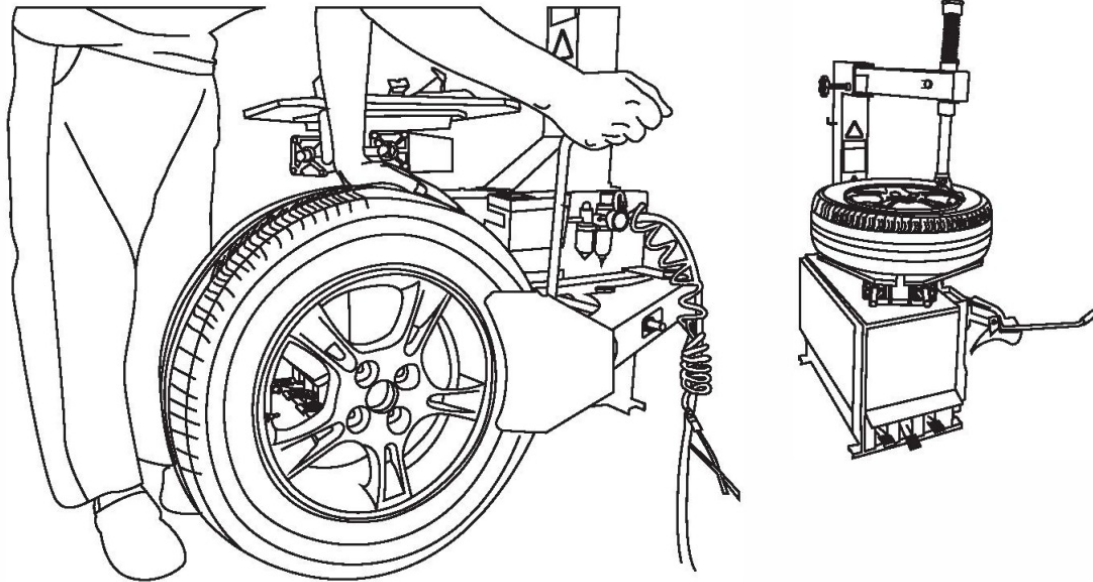

SAFETY INSTRUCTIONS



Before installing the sensor, read the installation and safety instructions carefully. For reasons of safety and for optimal operation, we recommend that any maintenance and repair work be carried out by trained experts only, in accordance with the guidelines of the vehicle manufacturer. The valves are safety-relevant parts that are intended for professional installation only. Failure to do so may result in the failure of the TPMS sensor. AUL does not assume any liability in case of faulty or incorrect installation of the product.



CAUTION

- The TPMS sensor assemblies are replacement or maintenance parts for vehicles with factory-installed TPMS
- Make sure to program the sensors by AUTEL sensor programming tools by the specific vehicle make, model and year before installation.
- Do not install programmed TPMS sensors in damaged wheels
- In order to guarantee optimal function, the sensors may only be installed with original valves and accessories provided by AUTEL
- Upon completing the installation, test the vehicle's TPMS following the procedures described in the original manufacturer's user guide to confirm proper installation


Dismounting the tire

Clamp the tire onto the tire changer, and adjust the valve at 1 o'clock relative to the tire separation head. Insert the

tire tool and lift the tire bead onto the mounting head to dismount the bead



CAUTION: This starting position must be observed during the whole dismounting process

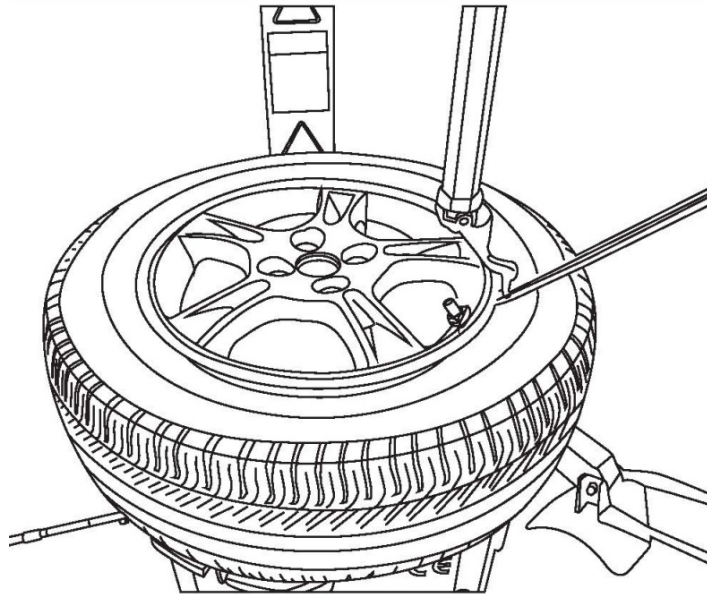

WARRANTY

AUTEL guarantees that the sensor is free from material and manufacturing defects for a period of twenty-four (24) months or for 24,000 miles, whichever comes first. AUTEL will at its discretion replace any merchandise during the warranty period. The warranty shall be void if any of the following occurs:

1. Improper installation of products
2. Improper usage
3. Induction of detection by other products
4. Mishandling of products
5. Incorrect application
6. Damage due to collision or tire failure
7. Damage due to racing or competition
8. Exceeding specific limits of the product

CUSTOMER & TECH SUPPORT

855-288-3587 (US)

0049 (O) 61032000522 (EU)

0086-755-86147779 (CN)

sales@autel.com

supporttpms@auteltech.com

www.autel.com

www.maxitpms.com

Dismounting the sensor

Depress the Press button on the sensor body, carefully pull the sensor body straight back off the valve. Cut the rubber bulb and attach a standard TTV tool to the valve. Remove the valve from the rim by pulling through the rim



Mounting sensor and valve

Step 1. Apply tire soap or lube solution to the rubber valve stem


Step 2. Line the sensor up with rim hole and attach a standard TTY pull-in tool to the end of the law.

Step 3. Pull the valve stem straight through the valve hole. Note the rubber bulb of the valve resting against the rim, then assemble the cap back on the stem




CAUTION: The valve and rim hole should be concentric

Step1 Please ensure the sensor body and valve stem are firmly connected.

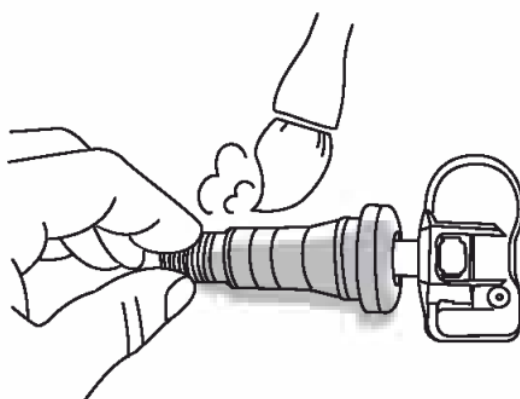

EXPLODED VIEW OF SENSOR

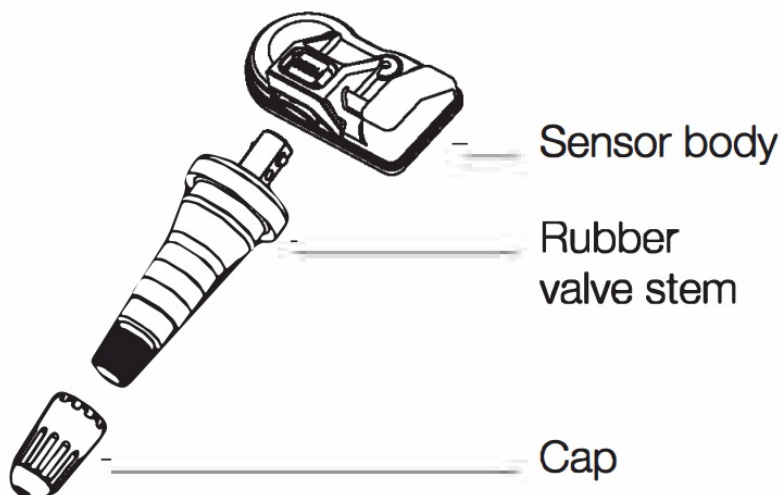

Technical data of the sensor

Weight of sensor without valve 12 g

Dimensions..... approx. 42.2·27_9·17.4mm
Max. pressure range..... 800 kPa




CAUTION: Each time a tire is serviced or dismounted, or if the sensor is removed or replaced, it is mandatory to replace the rubber vase stem and the plastic cap with our parts to ensure proper sealing. Please avoid extreme temperatures

Step 2



Step 3

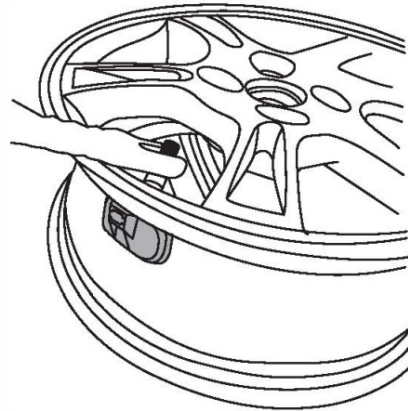

Mounting the tire

Place the tire on the rim, make sure that the valve faces the separation head at an angle of 180 °. Mount the tire over the rim



CAUTION: The tire should be mounted to the wheel using tire changer manual lecturers' instructions

FCC STATEMENT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance 20cm between the radiator & your body.

" This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device."

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to IC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

IC Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

Documents / Resources



[AUTEL MX Programmable Universal TPMS Sensor](#) [pdf] User Manual
TPMSDF88, WQ8TPMSDF88, MX, Programmable Universal TPMS Sensor

References

- [Home | AUTEL](#)
- [Home | AUTEL](#)
- [TPMS Home | Autel](#)

Manuals+.