AXXESS AXDI-VW2 Wiring Interface



AXXESS AXDI-VW2 Wiring Interface Instruction Manual

Home » AXXESS » AXXESS AXDI-VW2 Wiring Interface Instruction Manual



Contents

- 1 AXXESS AXDI-VW2 Wiring
- Interface
- **2 INSTALLATION INSTRUCTIONS**
- **3 INTERFACE FEATURES**
- **4 INTERFACE COMPONENTS**
- **5 APPLICATIONS**
- 6 CONNECTIONS: LD-XSVI-9006NAV
- **7 INSTALLATION**
- **8 PROGRAMMING**
- 9 Documents / Resources
- 9.1 References
- **10 Related Posts**



AXXESS AXDI-VW2 Wiring Interface



INSTALLATION INSTRUCTIONS

Volkswagen Data Interface 2015-Up

Visit <u>AxxessInterfaces.com</u> for more detailed information about the product and up-to-date vehicle specific applications

INTERFACE FEATURES

- Provides accessory power (12-volt 10-amp)
- Retains R.A.P. (Retained Accessory Power)
- Provides NAV outputs (parking brake, reverse, speed sense)
- For use in non-amplified systems, or when replacing an amplified system
- 48-inch leads for remote tuner location
- Pre-wired AXSWC harness (AXSWC sold separately)
- · Retains the factory backup camera
- · Retains balance and fade
- Micro-B USB updatable

INTERFACE COMPONENTS

- AXDI-VW2 interface
- LD-XSVI-9006NAV harness

APPLICATIONS

Volkswagen

• Beetle	2016-2019
• Golf Series	2015-Up
• Jetta	2016-2019
• Jetta GLI	2016-2018
• Passat	2016-Up


TOOLS REQUIRED

- · Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- · Wire cutter
- · Zip ties

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.

NOTE: Refer also to the instructions included with the aftermarket radio.

CONNECTIONS: LD-XSVI-9006NAV

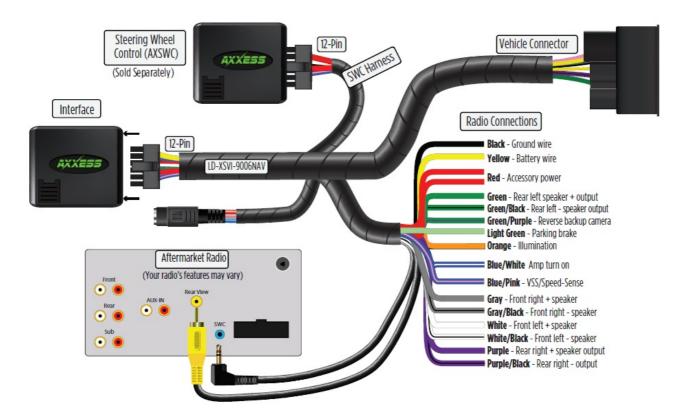

INSTALLATION

With the key in the off position:

- Connect the AXDI-VW2 harness into the interface, and then to the wiring harness in the vehicle.
 Note: The harness will connect to the harness removed from the disc drive located in the glove box for remote tuner applications.
- 2. If an AXSWC (sold separately) will be used, do not connect it until the interface is programmed and fully functional.

PROGRAMMING

Attention! If the interface ever loses power, the following steps will need to be performed again. Please ensure that the owner of the vehicle knows this.

- 1. Turn the key (or push-to-start button) to the ignition position and wait until the radio comes on. Note: If the radio does not come on within 60 seconds, turn the key to the off position, disconnect the interface, check all connections, reconnect the interface, and then try again.
- 2. Turn the key (or push-to-start button) to the off position, then to the accessory position. Test all functions of the installation for proper operation, before reassembling the dash.



Having difficulties? We're here to help.

• Contact our Tech Support line at:

• <u>386-257-1187</u>

Or via email at: techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

• Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM – 5:00 PM
 Sunday: 10:00 AM – 4:00 PM

KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry.

Log onto www.installerinstitute.com or call

800-354-6782 for more information and take steps toward a better tomorrow.





Documents / Resources



AXXESS AXDI-VW2 Wiring Interface [pdf] Instruction Manual AXDI-VW2 Wiring Interface, AXDI-VW2, Wiring Interface, Interface

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.