


## blum Compact Series Spring Closing Overlay for Face Frame Cabinet Instructions

[Home](#) » [blum](#) » blum Compact Series Spring Closing Overlay for Face Frame Cabinet Instructions 




**Hinge adjustments**


**COMPACT series (See inside for adjustments and installation instructions.)**

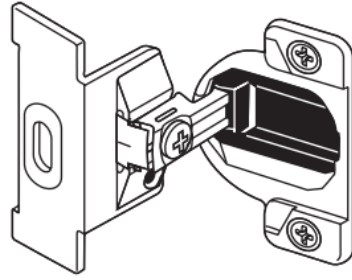


**COMPACT 33 series**  
Large overlay

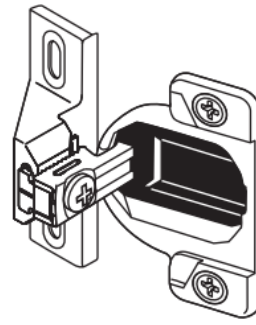

**COMPACT 33 series**  
Small overlay

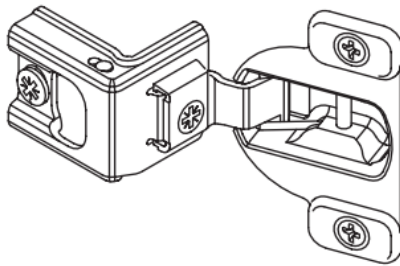

**COMPACT 38C/39C series**  
Large overlay

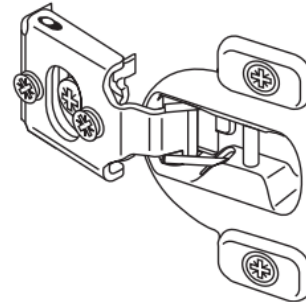

**COMPACT 38N series**  
Small overlay

#### Contents





















[1 Compact Series Spring Closing Overlay for Face Frame Cabinet](#)

[2 Documents / Resources](#)

### Compact Series Spring Closing Overlay for Face Frame Cabinet

**COMPACT 33 series**

**COMPACT 38C/39C & 38N series**

Side adjustment	Large overlay	Small overlay	Side adjustment	Large overlay	Small overlay
 <p>Loosen front screw, position door, tighten screw. Range = 1/8" (3mm)</p>			 <p>Turn front screw counter-clockwise to increase door overlay, clockwise to decrease. Range = 1/8" (3mm)</p>		
Height adjustment			Height adjustment		
 <p>Loosen screw(s) on the mounting plate. Adjust door to position and tighten screw(s). Range = 9/32" (7mm)</p>			 <p>Loosen center screw. Adjust door to position and tighten screw. Range = 1/4" (6mm)</p>		
Door removal			Door removal		
<p>Loosen side adj. screw. Slide hinge off mounting plate towards center of cabinet.</p>			 <p>Turn back screw counter-clockwise to increase door gap, clockwise to decrease. Range = -1/32" (1mm) + 3/32" (2mm)</p>		
Door installation					
<p>To reinstall reverse procedure, tighten screws on all hinges.</p>  <p>Note: Before finishing hinge installation, place set screw in hinge plate to prevent hinge plate movement. (1 3/8" or greater overlays only.)</p>					



### Blum, Inc.

7733 Old Plank Rd.  
Stanley, NC 28164  
toll free 800-438-6788  
local 704-827-1345  
fax 704-827-0799


internet [www.blum.us](http://www.blum.us)

Perfecting motion 1085.01.05

© 2005 Printed in USA

Subject to technical modifications without notice © 2005 Blum, Inc.

## Documents / Resources

	<p><a href="#">blum Compact Series Spring Closing Overlay for Face Frame Cabinet</a> [pdf] Instructions Compact Series Spring Closing Overlay for Face Frame Cabinet, Compact Series, Spring Closing Overlay for Face Frame Cabinet, Face Frame Cabinet, Frame Cabinet, Cabinet</p>
---	---