

BN thermic OUH3-DT Programmable Controller



# BN thermic OUH3-DT Programmable Controller Instruction Manual


[Home](#) » [BN Thermic](#) » BN thermic OUH3-DT Programmable Controller Instruction Manual 

## Contents

- 1 BN thermic OUH3-DT Programmable Controller
- 2 Product Usage Instructions
- 3 INTRODUCTION & SPECIFICATION
- 4 OPERATING GUIDE
- 5 INSTALLATION SAFETY INSTRUCTIONS
- 6 INSTALLATION
- 7 CHANGING THE MASTER / DEFAULT SETTINGS.
- 8 USING AS A CONVENTIONAL THERMOSTAT.
- 9 SENSOR FAULT CODES.
- 10 FUSE.
- 11 Documents / Resources
  - 11.1 References
- 12 Related Posts



**BN thermic OUH3-DT Programmable Controller**

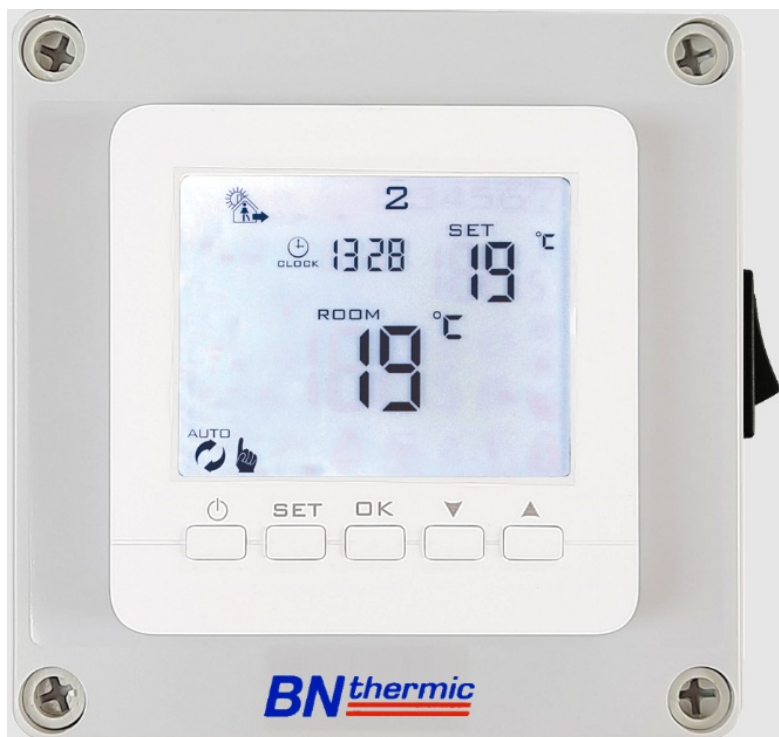

## Specifications:

- **Model:** OUH3-DT
- **Programming:** 7 Day, 6+1 Day or 5+2 Day (Default 5+2 Day)
- **Power Supply:** 230V (Fed from a 3A fused supply inside OUH3 Heater (Battery back-up for settings)
- **Remote Sensor (Optional):** CXS, CXSIP, BBS and BBSIP (IP versions are IP65 rated)
- **Temperature Range:** Display
- **Programs Per Day:** 4
- **Tamper Resistant:** Facility for locking all thermostat buttons or all thermostat buttons except On / Off button.  
Note: Mode switch on side still operates for Fan Only when thermostat does not require heat.
- **Dimensions:** 125mm (H) x 132mm (W) x 90mm (D)
- **Electrical Protection:** IP20
- **Complies with:** EN 301489-1, EMC Directive 2014/30/EU, EN60950-1:2006+a11:2009+a1:2010+a12:2011+a2:2013

## Product Usage Instructions

### Operating Guide:

#### 1. To Set Time and Week Day Number:

- Turn thermostat on by pressing a button.
- Press the button and the minutes will start to flash. Adjust the minutes by pressing the + or – buttons.  
When correct, press the button and the hours will flash. Set these by pressing the + or – buttons
- When correct, press the button and the day number will flash. Set this by pressing the + or – buttons.
- Note that Monday is 1, Tuesday is 2, etc.
- If you don't press a button for 5 seconds, the display returns to standard mode

#### 2. Programming:

- The controller is pre-set to specific times and temperatures

for different periods of the day.

- Follow the instructions to set all 4 periods for each day of the week.
- Days will change to 6+7 for Saturday and Sunday programming.
- If you don't press a button for approximately 5 seconds, the controller will automatically store the settings and exit programming mode.

### 3. Thermostat Run Modes:

- The thermostat has Manual mode with a set temperature until switched to Auto mode or turned off.
- You can return to the auto temperature set point by pressing a specific button.

### Frequently Asked Questions (FAQ):

#### 1. Q: How do I register my product for warranty activation?

A: Please register your product online at [www.bnthermic.co.uk](http://www.bnthermic.co.uk) to activate your guarantee.

#### 2. Q: What should I do if the display returns to standard mode while setting time and day?

A: Simply repeat the section where you were setting the time and day numbers if the display returns to standard mode.

#### 3. Q: How can I lock all thermostat buttons for tamper resistance?

A: Use the facility provided in the controller to lock all thermostat buttons or leave only the On/Off button operational for tamper resistance.

### INSTRUCTIONS FOR:- PROGRAMMABLE CONTROLLER

**Model:-** OUH3-DT

Thank you for purchasing a BN Thermic product. Manufactured to a high standard, this product will, if used according to these instructions and properly maintained, give you years of trouble free performance. Please ensure instructions remain with your customer for their reference.

**REGISTER:** PLEASE REGISTER THIS PRODUCT ONLINE TO ACTIVATE YOUR GUARANTEE AT [www.bnthermic.co.uk](http://www.bnthermic.co.uk)

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS, NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS, AND CAUTIONS. USE THIS PRODUCT CORRECTLY, AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.

### SECTION A – USER INSTRUCTIONS.

For installation instructions go to page 4

### INTRODUCTION & SPECIFICATION


The OUH3-DT Controller includes a mode switch on the right side for OFF, Fan Only or Heat using the digital thermostat. It is easy to install wiring directly to an OUH3 heaters 3A fused supply. The Programmable Thermostat offers 7 Day, 6/1 Day or 5/2 Day settings and four time and temperature changes each day. It is designed to provide automatic time and temperature control for heating applications using its inbuilt air temperature sensor or a

remote-mounted temperature sensor. Supplied with 2 x M20 Cable glands.











OUH3-DT- Programmable Heater Controller	
Programming	7 Day, 6+1 Day or 5+2 Day (Default 5+2 Day)
Power Supply	230V (Fed from a 3A fused supply inside OUH3 Heater (Battery back-up for settings))
Remote Sensor (Optional)	CXS, CXSIP, BBS and BBSIP (IP versions are IP65 rated)
Temperature Range	1°C to 45°C (Default 5°C to 30°C)
Display	LCD + back light that operates when any button is pressed.
Programs Per Day	4
Tamper Resistant	Facility for locking all thermostat buttons or all thermostat buttons except "On / Off" button. <b>Note:</b> Mode switch on side still operates for "Fan Only" when thermostat does not require heat.
Dimensions	125mm (H) x 132mm (W) x 90mm (D).
Electrical Protection	IP20
Complies with:	EN 301489-1, EMC Directive 2014/30/EU, EN60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

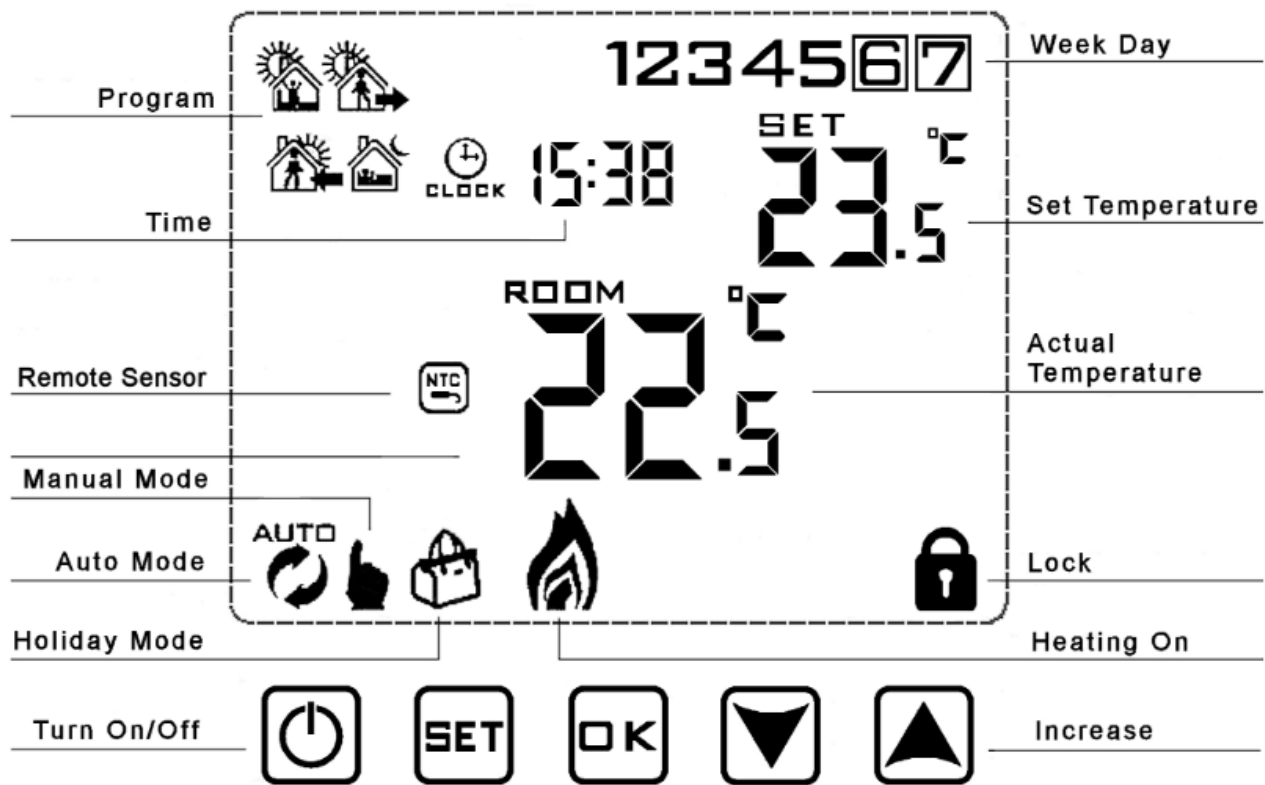



## OPERATING GUIDE



### To Set Time and Week Day Number











- Turn thermostat on by pressing  button.
- Press the  button and the minutes will start to flash. Adjust the minutes by pressing the  or  buttons. When correct, press button and the hours will flash. Set these by pressing the  or  buttons. When correct, press button and the day number will flash. Set this by pressing the  or  buttons. When correct, press . Note that Monday is 1, Tuesday 2 etc. If you don't press a button for 5 seconds display returns to standard mode and you will need to repeat section b.

Programming – The controller is pre-set to the following times and temperatures:-











	Period							
Day Number	 Wake up		 Outdoor		 Back home		 Sleep	
1	06:00	20°C	08:00	15°C	17:00	20°C	22:00	15°C
2	06:00	20°C	08:00	15°C	17:00	20°C	22:00	15°C
3	06:00	20°C	08:00	15°C	17:00	20°C	22:00	15°C
4	06:00	20°C	08:00	15°C	17:00	20°C	22:00	15°C
5	06:00	20°C	08:00	15°C	17:00	20°C	22:00	15°C
6	08:00	20°C	10:00	15°C	16:00	20°C	23:00	15°C
7	08:00	20°C	10:00	15°C	16:00	20°C	23:00	15°C



- By default the thermostat is set to 5+2 days this means when programming Monday – Friday settings will all be the same and you can then program different settings for Saturday – Sunday. If you require 7 day or 6+1 day settings enter default settings and adjust parameters first (See section 5).

To adjust or program the time & temperature periods

- Make sure the thermostat is on, or turn on by pressing  button.
- Press and hold the  button for 3-5 seconds until the time starts to flash, display will also show “12 34 5” and the first period symbol will show. Adjust the hours by pressing the  or  buttons. When correct, press buttons.
- When correct, press  button and the minutes will flash. Set these by pressing the  or  buttons. When correct, press  button and the temperature will flash. Set this by pressing  or  buttons. When correct, press or and the second period symbol will show and the hours will flash. Now repeat the above to set all 4 periods. Once set, the days will change to 6+7 and you repeat the above procedure to program Saturday and Sunday. Note “1 234 5 ” on the display while programming means you are setting all 5 Weekdays “6+7” on the display while setting means you are programming Saturday & Sunday. If you don't press a button for approx. 5 seconds the controller will automatically store the settings and exit programming mode.

## Thermostat Run Modes












- Turn thermostat On or Off by pressing the  button.
- When “ON” press  to toggle between Auto mode  and Manual mode .
- When in Auto mode  you can override the set temperature by pressing the  or  buttons.
- When in Manual mode  you can override the set temperature by pressing the  or  buttons.
- Note:-** The thermostat will stay in Manual mode with the same set temperature until you switch it to Auto mode or turn the thermostat off.

At any time you can return to the auto temperature set point by pressing the  button until only the Auto mode  shows.

### Locking the Thermostat

The thermostat has 2 lock settings selected in the default settings (see section 5). Half lock, when set only allows the On / Off button to be pressed. Full lock disables all buttons except the unlock sequence. Putting the controller in lock mode indicated by a symbol on the screen is done by pressing and holding the button until the symbol appears. Unlocking is the reverse process.

### Holiday / Shutdown Mode – Note: 1 day = 24 hours count down

Holiday days (count down) and temperature set point can be set so that the heating runs at a lower temperature whilst you are away and reverts back to normal when you return. To access, make sure controller is on and then press  button for 3-5 seconds until the screen displays “Off”. Change to “On” by using the  or  buttons. Then press  button to set the number of days you are away by using the  or  buttons. Then press  button to set the temperature required while you are away by using the  or  or button to set. Holiday mode is shown by a  symbol displayed on the screen. Once set and counting down, to exit holiday mode early press the  button.

## SECTION B – INSTALLATION AND MASTER SETTINGS

### INSTALLATION SAFETY INSTRUCTIONS

#### ELECTRICAL SAFETY

**WARNING!** It is the responsibility of the owner and the installer to read, understand and comply with the following: You must check all electrical products, before use, to ensure that they are safe. You must inspect power cables, plugs, sockets and any other connectors for wear or damage. You must ensure that the risk of electric shock is minimized by the installation of appropriate safety devices. You must also read and understand the following instructions concerning electrical safety.

- The Health & Safety at Work Act 1974 makes owners of electrical appliances responsible for the safe condition of those appliances and the safety of the appliance operators. If in any doubt about electrical safety, contact a qualified electrician.
- Installation should always be carried out by a qualified electrician or a competent person in accordance with current electrical regulation.
- Ensure that the cables are always protected against short circuit and overload.
- This controller is IP20 rated and is suitable for indoor use only.

#### GENERAL SAFETY INSTRUCTIONS

- Remove all packaging and store it away from children, check the package and controller for visible damage or tampering.
- Familiarize yourself with the applications and limitations of the
- Only use recommended attachments and To use unauthorized parts may be dangerous and will invalidate your warranty.
- **DO NOT** use in areas where hazardous gasses or dusts may be present.
- **DO NOT** disassemble the controller for any reason. There are no user serviceable parts inside.
- **DO NOT** use this controller to perform a task for which it has not been designed.

Please leave these instructions with the end user where they should be kept in a safe place for further reference.

## INSTALLATION

The OUH3-DT thermostat can be used with its internal air sensor or if required with an optional remote air sensor or optional remote black bulb sensor.



Optional Air  
Sensor  
Part No. CXS



Optional IP Rated  
Air Sensor  
Part No. CXSIP



Optional Black  
Bulb Sensor  
Part No. BBS




Optional IP Rated  
Black Bulb Sensor  
Part No. BBSIP

## CHOOSING A LOCATION FOR YOUR OUH3-DT OR REMOTE SENSORS

The OUH3-DT controller or sensors should be mounted on an internal wall approximately 1.5 meters from floor level and should be in a position away from draughts, direct heat and sunlight.


If you decide to use remote sensors you will need to change "A4" to "N2" on the master / default settings. See page 7 for more information.

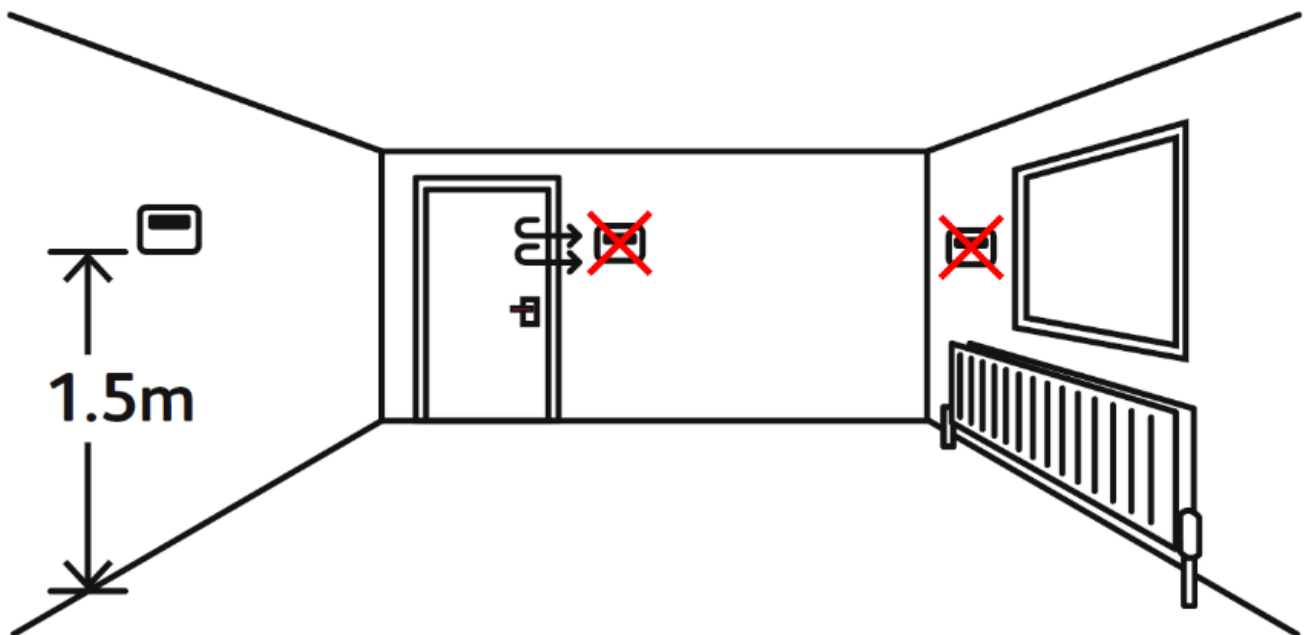


## INSTALLING THE OUH3-DT CONTROLLER

- Decide if it is easier to drill holes for cable glands or conduit in the enclosure before mounting to the wall.
- Screw the OUH3-DT in position using suitable fixtures and fittings allowing space to the right to access the control switch.
- There are 4 holes in the corners of the case, or you can drill additional holes in the back below the circuit board.



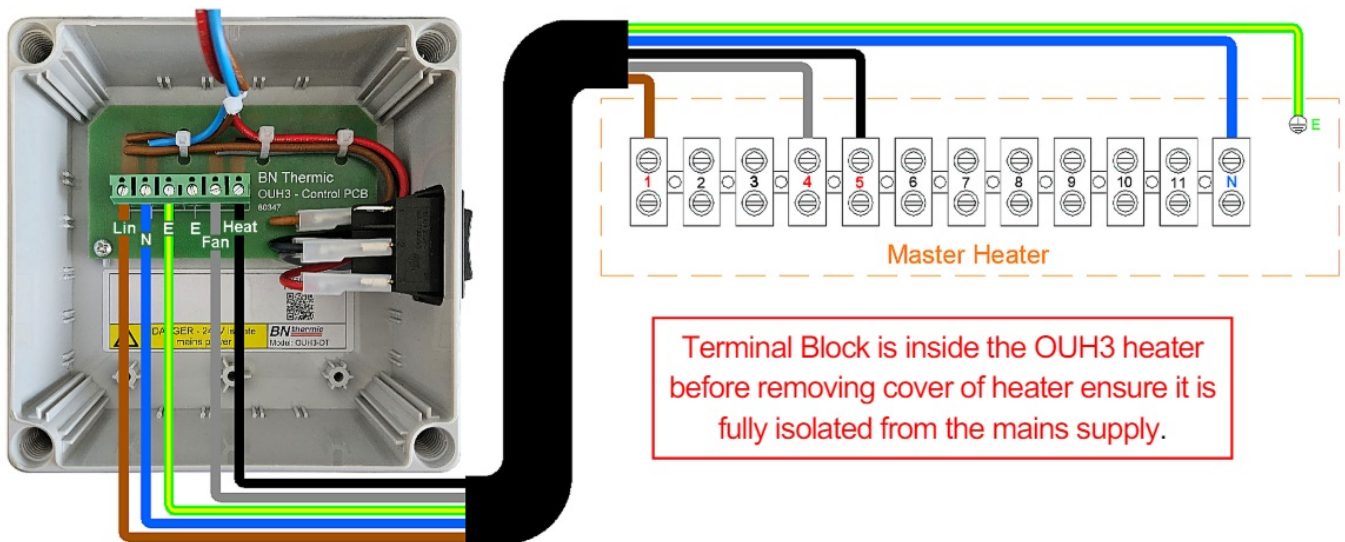

1. Wire the controller as per picture above, making sure all the terminals are done up tightly.
2. If you are using a remote sensor connect to terminals 5 and 6 (marked NTC). These are positioned on the thermostat mounted on the front cover. You can use any insulated copper wire. Polarity of the sensor does not matter. (you will also need to change the default settings to activate the remote sensor see page 7).
3. Please also read the heater instructions regarding connection as it gives details on wires sizes etc.

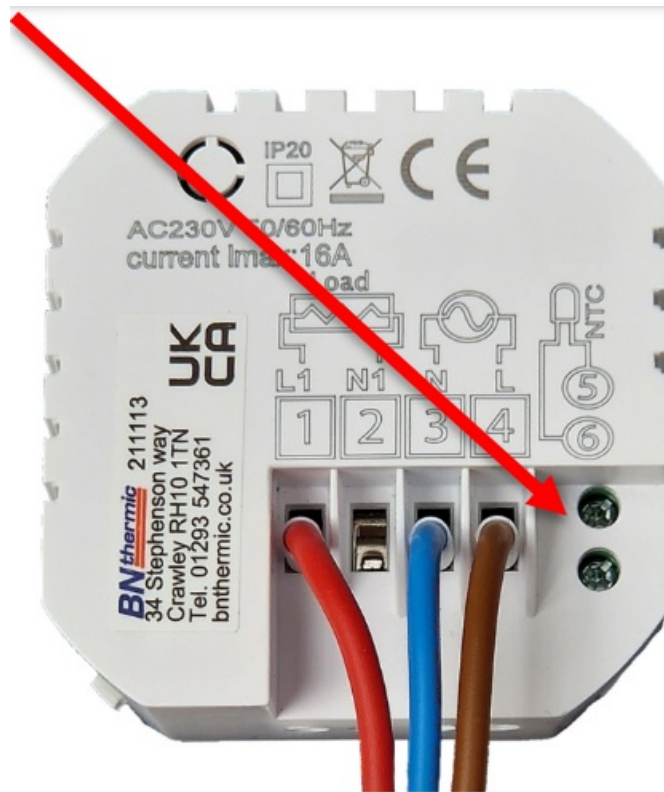

Back view of thermostat  
mounted on the lid






## SWITCH MODES

- The switch on the right hand side of the controller has the following modes:
- OFF – When in this position both the fan and the heat are turned off.

**Please Note:**– Should you have a frost thermostat fitted to the heater it will still operate even with this switch in the off position.

- FAN – When in this position the fan will operate regardless of the thermostat settings. Useful in the summer for moving air around.
- HEAT – When in this position the heater will turn on and start warming up the building BUT only when the thermostat is asking for heat. It will not over-ride the thermostat settings.

## **CHANGING THE MASTER / DEFAULT SETTINGS.**

There are various master / default settings that can be changed by entering the default settings. To enter these settings, turn off the thermostat by pressing the  button. Then press and hold the  button for 3-5 seconds until the A1 appears on the screen. You are now in settings mode and if you don't press any button for 5 seconds the display reverts back to off mode. Press button to switch to next option and press or  or  buttons to adjust the data. If you wish to exit the settings without waiting 5 seconds press the  button.

No.	Setting Options	Data Setting Function	Default
A1	Temperature calibration	-9°C to +9°C in 0.5°C steps. (Can be used to fine tune existing temperature reading so it matches another thermostat)	0°C Step
A2	Differential between set point and On and Off	0.5°C – 2.5°C in 0.5°C steps.	0.5°C
A3	Not used.	1°C – 9°C in 1°C steps.	2°C
A4	Temperature sensor used	N1= Built in sensor N2= External sensor only N3= Built in sensor and external sensor. <b>NOTE.</b> N3 only used for specialist applications if recommended by BN Thermic.	N1
A5	lock settings	0 = half lock 1 = full lock	0
A6	Maximum set point of external sensor if A4 set to N3.	5°C – 45°C	27°C
A7	Minimum set point of external sensor if A4 set to N3.	1°C – 10°C or ( = Not active)	5°C
A8	Minimum set point of internal sensor if A4 set to N1 or N3 or external sensor or if A4 set to N2.	1°C – 10°C	5°C
A9	Maximum set point of internal sensor if A4 set to N1 or N3 or external sensor or if A4 set to N2.	20°C – 45°C	30°C
AA	Power Cut function.	0 = Power heating as per controller memory. 1 = Shut down controller after power cut. 2 = Shutdown heating but turn controller on after power cut.	0
AB	Programming selection	0 = 5 + 2 (same settings Mon-Fri + Sat-Sun) 1 = 6 + 1 (same settings Mon-Sat + Sun) 2 = 7 (different settings each day Mon-Sun)	0
AC	Window Opening detection	— = Not active 10 – 20°C = Sudden drop set point at which heating turns off.	—
AD	Window Opening OFF period	5 – 40 minutes (only if AC above is set to a temperature and not —).	10
AE	Factory Reset	Press & hold OK key until whole screen shows. If you Factory Reset please ensure you set A4 above correctly.	

## USING AS A CONVENTIONAL THERMOSTAT.

It is easy to set up your OUH3-DT thermostat to operate as a simple, conventional thermostat without the need to programme different times and temperatures. There are 2 steps.

1. Set the temperature required – Refer to “Run Modes” on page 3 and use manual mode, then select the

required temperature by using the ▼ or ▲ or buttons.

2. Lock the thermostat – Refer to “Locking the controller” on page 3. Locking the thermostat will disable all the buttons except the on/off button. If you want to disable the on/off button as well, you will need to change the default lock settings before starting this process (see section 5).

## SENSOR FAULT CODES.



- E1 or E2 fault codes are displayed if the temperature sensors are faulty or are not connected. The thermostat will stop heating until the fault is corrected.
- E1= Internal sensor faulty.
- E2 = External sensor faulty or missing / not present.
- If in the master settings shown overleaf, you have selected N3 for option A4 (Sensors used) you will get a fault code and the thermostat will not work, please select either N1 if you are using the internal sensor or N2 if you are using an external mounted sensor.

## FUSE.


- There are no serviceable parts inside but before removing the cover to the controller make sure you have isolated all sources of power.
- **Please Note:** There may be more than one power source entering the enclosure.
- The thermostat is protected by a 3A fuse but this is positioned in the heater it attaches to. (See heater instructions for more information)
- **NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

## WEEE REGULATIONS:



- This appliance bears the symbol of the crossed waste bin. This indicates that, at the end of its useful life, it must not be disposed of as domestic waste, but must be taken to a collection Centre for waste electrical and electronic equipment. It is the user's responsibility to dispose of this appliance through the appropriate channels. Failure to do so may incur penalties established by laws governing waste disposal.
  - **REGISTER:** Activate your warranty by registering online at [www.bnthermic.co.uk](http://www.bnthermic.co.uk) and retain this installation data for future reference.
  - **IMPORTANT:** No liability is accepted for incorrect use of this product.
  - **WARRANTY:** Your BN Thermic product is guaranteed for one year from date of purchase. We will repair or replace at our discretion any part found to be defective. We cannot assume any consequential liability. This guarantee in no way prejudices your rights under common law and is offered as an addition to consumer liability rights.
  - BN Thermic Ltd,
  - 34 Stephenson Way, Crawley, RH10 1TN
  - **Tel:** 01293 547361 [sales@bnthermic.co.uk](mailto:sales@bnthermic.co.uk) [www.bnthermic.co.uk](http://www.bnthermic.co.uk)
  - OUH3-DTINS-v01
- 

## Documents / Resources

	<a href="#">BN thermic OUH3-DT Programmable Controller</a> [pdf] Instruction Manual OUH3-DT Programmable Controller, OUH3-DT, Programmable Controller, Controller
---	--

## References

-  [BN Thermic | Industrial & Commercial Heating Suppliers](#)
- [User Manual](#)

