



dahua DH-IPC-HFW1230TL-PV 2MP Dual Light Active Network Camera Instruction Manual

[Home](#) » [Dahua](#) » dahua DH-IPC-HFW1230TL-PV 2MP Dual Light Active Network Camera Instruction Manual 

Contents

- 1 dahua DH-IPC-HFW1230TL-PV 2MP Dual Light Active Network Camera
- 2 Series Overview
- 3 Functions
 - 3.1 Smart Dual Light
 - 3.2 Human Detection
 - 3.3 Smart H.265+ & Smart H.264+
 - 3.4 Cyber Security
 - 3.5 Protection (IP67, Wide Voltage)
- 4 Technical Specification
- 5 Accessories
- 6 Dimensions (mm[inch])
- 7 Specifications:
- 8 Frequently Asked Questions (FAQ):
 - 8.1 Q: How far can the camera detect objects?
 - 8.2 Q: Can I customize the voice alarm on the camera?
 - 8.3 Q: What security features are available on the camera?
- 9 Documents / Resources
 - 9.1 References
- 10 Related Posts

dahua DH-IPC-HFW1230TL-PV 2MP Dual Light Active Network Camera



INSTRUCTION MANUAL

Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

Functions

Siren and Light Active Deterrence

Dahua siren and light active deterrence network camera supports the light alarm and voice alarm when perimeter event occurs, to realize the deterrence and effective intervention. The camera is built in multiple voices for selection, and supports customized voice importing.

Smart Dual Light

Dahua Smart Dual Light technology adopts smart algorithm to detect targets. Usually, the IR illuminator is on at night; when the target appears in the monitoring area, the white light is on, and the camera records the full-color video and information of key events. That is, the camera links snapshot and video with full-color image. When the target is out of the monitoring area, the white light is off and the IR illuminator is on, which reduces light pollution efficiently.


Human Detection

Dahua intelligent algorithms extract moving human targets from videos and filters out alarms that are triggered by non-human targets to increase the accuracy and effectiveness of alarms.

Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

- 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 2 MP (1920 × 1080)@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in IR LED and warm light, and the max. IR distance is 50 m, the max. warm light distance is 50 m.
- DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Abnormality detection: Motion detection, video tampering, audio detection, network disconnection, IP conflict and illegal access.
- Built-in Mic; built-in speaker; support two-way talk.
- 12 VDC/PoE power supply, easy for installation.
- IP67 protection.
- Sound and light alarm.
- Supports human detection.
- One-tap arming/disarming.



Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

Protection (IP67, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows $\pm 30\%$ (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification

Camera

Image Sensor	1/2.8" CMOS
Max. Resolution	1920 (H) × 1080 (V)
ROM	128 MB
RAM	128 MB

Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
Min. Illumination	0.005 lux@F1.6 (Color, 30 IRE) 0.0005 lux@F1.6 (B/W, 30 IRE) 0 lux (Illuminator on)
S/N Ratio	>56 dB
Illumination Distance	Up to 50 m (164.04 ft)(IR) Up to 50 m (164.04 ft)(Warm light)
Illuminator On/Off Control	Auto;Manual
Illuminator Number	2 (IR LED); 2 (Warm light)
Angle Adjustment	Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°

Lens

Lens Type	Fixed-focal
Lens Mount	M12
Focal Length	2.8 mm; 3.6 mm; 6 mm
Max. Aperture	F1.6
Field of View	2.8 mm: H: 103°; V: 55°; D: 123° 3.6 mm: H: 86°; V: 46°; D: 103° 6 mm: H: 53°; V: 29°; D: 62°
Iris Control	Fixed
Close Focus Distance	2.8 mm: 0.8 m (2.62 ft) 3.6 mm: 1.1 m (3.61 ft) 6 mm: 2.6 m (8.53 ft)

	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	44.1 m (144.69 ft)	17.7 m (58.07 ft)	8.8 m (28.87 ft)	4.4 m (14.4 ft)
	3.6 mm	53.8 m	21.5 m	10.8 m	5.4 m

DORI Distance	3.0 m	(176.51 ft)	(70.54 ft)	(35.43 ft)	(17.72 ft)
	6 mm	85.5 m (280.51 ft)	34.2 m (112.2 ft)	17.1 m (56.10 ft)	8.6 m (28.22 ft)
	<p>*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.</p>				

Intelligence

Human Detection	Support the classification and accurate detection of human
Smart Search	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos

Video

Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)
Smart Codec	Smart H.265+; Smart H.264+
Video Frame Rate	<p>Main stream: 1920 × 1080@(1–25/30 fps) sub stream: 704 × 576@(1–25 fps)/704 × 480@(1–30 fps)</p> <p>*The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.</p>
Stream Capability	2 streams
Resolution	1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
Bit Rate Control	CBR/VBR

Video Bit Rate	H.264: 32 kbps–4096 kbps; H.265: 12 kbps–4096 kbps
Day/Night	Auto(ICR)/Color/B/W
BLC	Yes
HLC	Yes
WDR	DWDR
White Balance	Auto; natural; street lamp; outdoor; manual; regional custom
Gain Control	Manual;Auto
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 areas, rectangular)
Region of Interest (RoI)	Yes (4 areas)
Smart Illumination	Yes
Smart Dual Light	Yes
Image Rotation	0°/90°/180°/270° (Support 90°/270° with 1080p resolution and lower)
Mirror	Yes
Privacy Masking	Yes (4 areas)

Audio

Built-in MIC	Yes, built-in Mic
Built-in Speaker	Yes, built-in speaker
Audio Compression	G.711a; G.711Mu; PCM; G.726

Alarm

Alarm Event	Network disconnection; IP conflict; illegal access; motion detection; video tampering; audio detection; SMD (human); security exception;
-------------	--

, SIMD (human), security exception,

Network

Network Port	RJ-45 (10/100 Base-T)
SDK and API	Yes

Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; DHCP; DNS; DDNS; NTP; Multicast; ICMP; IGMP ; P2P; Auto Registration
Interoperability	ONVIF (Profile S & Profile T); CGI
User/Host	6 (Total bandwidth: 24 M)
Storage	FTP
Browser	IE; Chrome; Firefox
Management Software	Smart PSS Lite; DSS; DMSS
Mobile Client	iOS;Android
Cyber Security	Video encryption;Configuration encryption;Digest;WSSE;Account lockout;Security logs;Generation and importing of X.509 certification;HTTPS;Trusted boot;Trusted execution;Trusted upgrade

Certification

Certifications	CE-LVD: EN62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU
----------------	--

Power

Power Supply	12 VDC/PoE (802.3af)
Power Consumption	Basic: 1.9 W (12 VDC); 2.4 W (PoE); Max.: 11.5 W (12 VDC); 13.1 W (PoE) (H.265 + intelligence on + WDR + IR intensity + warm light

deterrence + speaker)

Environment

Operating Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Operating Humidity	≤95% (RH), non-condensing
Storage Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Storage Humidity	≤95% (RH), non-condensing
Protection	IP67

Structure

Casing Material	Metal + Plastic
Product Dimensions	197.9 mm × 80.2 mm × 76.2 mm (7.79" × 3.16" × 3.00") (L × W × H)
Net Weight	0.35 kg (0.77 lb)
Gross Weight	0.49 kg (1.08 lb)

Ordering Information

Type	Model	Description
IP CAMERA	DH-IPC-HFW1230TL-PV	2MP Entry Smart Dual Light Active Deterrence Fixed-focal Bullet Network Camera
Accessories (Optional)	DH-PFA151	Corner Mount Bracket
	G3416GW	G3/4" Water Joint
	DH-PFA130-E	Water-proof Junction Box
	DH-PFA157	Pole Mount Bracket
	DH-PFA134	Junction Box
	DH-PFM321-EN	DC12V1A power adapter
	DH-PFM321D-EN	DC12V 1A power adapter
	DH-PFM320D-EN	DC12V2A power adapter
	PFM900-E	Integrated Mount Tester

Accessories

Optional:



DH-PFA151
Corner Mount Bracket



G3416GW
G3/4" Water Joint



DH-PFA130-E
Water-proof Junction Box



DH-PFA157
Pole Mount Bracket



DH-PFA134
Junction Box



DH-PFM321-EN
DC12V1A power adapter






DH-PFM321D-EN
DC12V 1A power adapter




DH-PFM320D-EN
DC12V2A power adapter



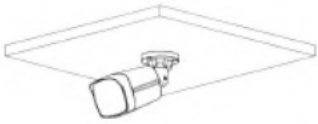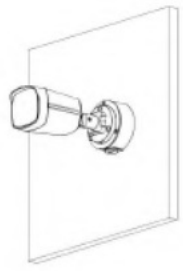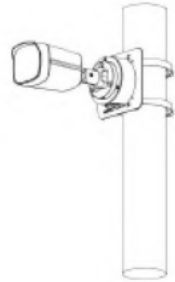PFM900-E
Integrated Mount Tester

Ceiling Mount	Wall Mount	Pole Mount(Vertical)
		

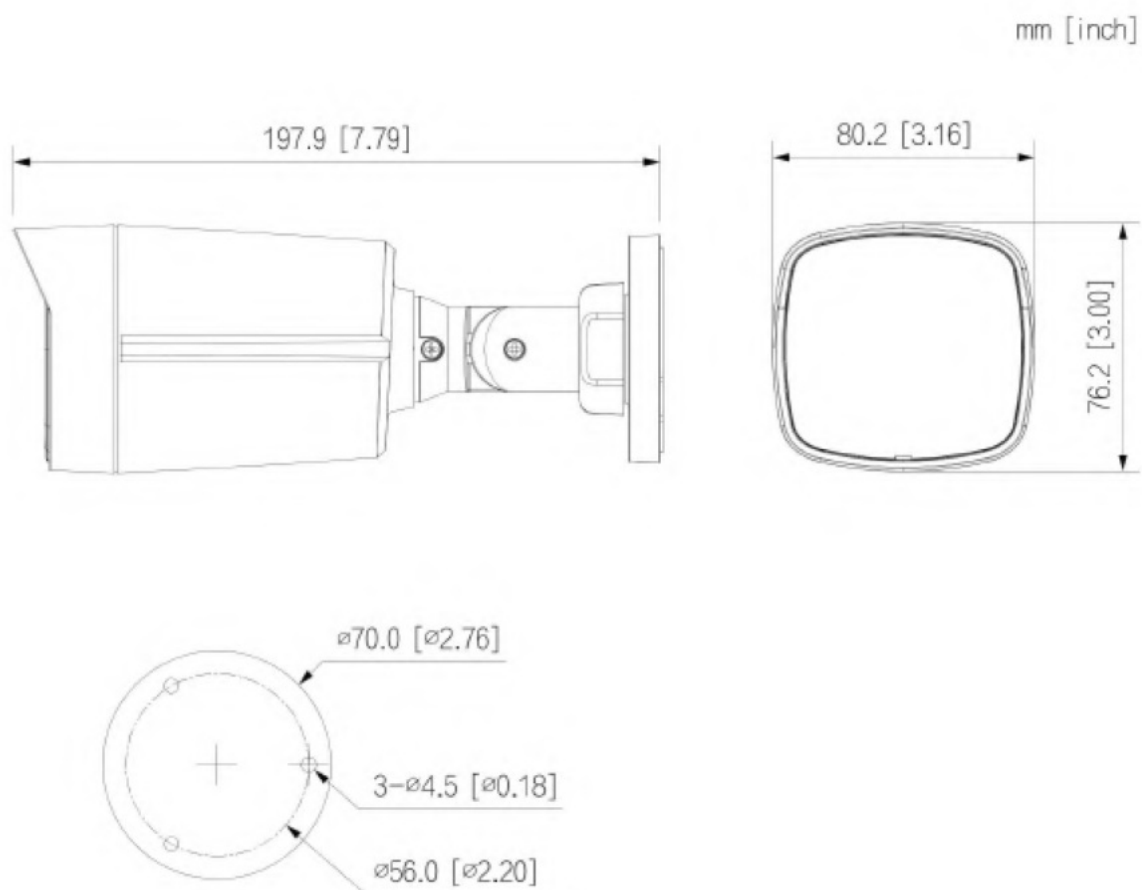Dimensions (mm[inch])



Specifications:

- Model: DH-IPC-HFW1230TL-PV
- Resolution: 2MP
- Camera Type: Fixed-focal Bullet Network Camera
- Image Sensor: 1/2.8" CMOS

- RAM: 128 MB
- ROM: 128 MB
- Min. Illumination: 0.005 lux@F1.6 (Color, 30 IRE), 0.0005 lux@F1.6 (B/W, 30 IRE), 0 lux (Illuminator on)
- Illumination Distance: Up to 50 m (164.04 ft)(IR), Up to 50 m, (164.04 ft)(Warm light)
- Lens Type: Fixed-focal
- Focal Length: 2.8 mm; 3.6 mm; 6 mm



© 2024 Dahua. All rights reserved. Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.

www.dahuasecurity.com

Frequently Asked Questions (FAQ):

Q: How far can the camera detect objects?

A: The camera can detect objects at varying distances based on the lens used. Refer to the DORI Distance specifications for more details.


Q: Can I customize the voice alarm on the camera?

A: Yes, the camera supports customized voice importing for the voice alarm feature.

Q: What security features are available on the camera?

A: The camera includes security authentication, access control protocols, encryption for transmission and storage, and more to enhance cyber security.

Documents / Resources

	<p>dahua DH-IPC-HFW1230TL-PV 2MP Dual Light Active Network Camera [pdf] Instruction Manual</p> <p>DH-IPC-HFW1230TL-PV 2MP Dual Light Active Network Camera, DH-IPC-HFW1230TL-PV, 2MP Dual Light Active Network Camera, Dual Light Active Network Camera, Light Active Network Camera, Active Network Camera, Network Camera, Camera</p>
---	---

References

- [User Manual](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.