



dahua DH-IPC-HFW1239S1-LED-S5 2 MP Entry Full Color Fixed Focal Bullet Network Camera User Manual

[Home](#) » [Dahua](#) » dahua DH-IPC-HFW1239S1-LED-S5 2 MP Entry Full Color Fixed Focal Bullet Network Camera User Manual 



**Entry Series | DH-IPC-HFW1239S1-LED-S5
DH-IPC-HFW1239S1-LED-S5
2 MP Entry Full-color Fixed-focal Bullet Network Camera**



Contents

- [1 Series Overview](#)
- [2 Functions](#)
- [3 Technical Specification](#)
- [4 Ordering Information](#)
- [5 Accessories](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/ residences, small-sized retail stores, and other small and medium-sized enterprises.

Functions

Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

Full-color

With high-performance sensor and large aperture lens, Dahua Full-color technology can display clear colorful image in the environment of ultralow illuminance. With this photosensitivity technology, the camera can capture more available light, and display more colorful image details.




Motion Detection

When moving objects appear in the monitoring image, Dahua Motion Detection technology triggers alarm or records.

Image Flip

For narrow and long scenes, Dahua image flip technology flips the image by 90°/180°/270° to realize better surveillance in rotation mode.

- 2 MP 1/2.8" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 2 MP (1920 × 1080)@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in warm light, and the max. illumination distance is 15 m.
- ROI, SMART H.264 +/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Abnormality detection: Motion detection, privacy masking, network disconnection, IP conflict, and illegal access.
- 12 VDC/PoE power supply.
- IP67 protection.



Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

Protection (IP67, wide voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can works normal after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows $\pm 30\%$ (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification

Camera

Image Sensor	1/2.8" CMOS
Max. Resolution	1920 (H) × 1080 (V)
ROM	16 MB
RAM	64 MB
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
Min. Illumination	0.005 lux@F1.6 (Color, 30 IRE) 0.0005 lux@F1.6 (B/W, 30 IRE) 0 lux (Illuminator on)
S/N Ratio	> 56 dB
Illumination Distance	2.8 mm: 10 m (32.81 ft) (Warm light) 3.6 mm: 15 m (49.21 ft) (Warm light)
Illuminator On/Off Contro	Auto; Manual
Illuminator Number	1 (Warm light)
Pan/Tilt/Rotation Range	Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°

Lens	
Lens Type	Fixed-focal
Lens Mount	M12
Focal Length	2.8 mm; 3.6 mm
Max. Aperture	2.8 mm: F1.6 3.6 mm: F1.6
Field of View	2.8 mm: Horizontal: 106°; Vertical: 56°; Diagonal: 127° 3.6 mm: Horizontal: 88°; Vertical: 46°; Diagonal: 104°
Iris Control	Fixed
Close Focus Distance	2.8 mm: 0.8 m (2.62 ft) 3.6 mm: 1.1 m (3.61 ft)

Lens	Detect	Observe	Recognize	Identify
2.8 mm	43.9 m (144.0 ft)	17.5 m (57.4ft)	8.8 m (28.9 ft)	4.4 m (14.4 ft)
3.6 mm	54.8 m (179.8 ft)	21.9 m (71.9 ft)	11.0 m (36.1 ft)	5.5 m (18.0 ft)

Video

Video Compression	H.265; H.264; H.264B; MJPEG (Only supported by the sub stream)
Smart Codec	Smart H.265+; Smart H.264+
Video Frame Rate	Main stream: 1920 × 1080@1 fps–25/30 fps Sub stream: 704 × 576@1 fps–25 fps 704 × 480@1 fps–30 fps *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Stream Capability	2 streams
Resolution	1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
Bit Rate Control	CBR/VBR
Video Bit Rate	H.264: 32 kbps–6144 kbps H.265: 12 kbps–6144 kbps
Day/Night	Color/B/W
BLC	Yes
HLC	Yes
WDR	DWDR
White Balance	Auto; natural; street lamp; outdoor; manual; regional custom
Gain Control	Auto; manual
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 areas, rectangular)
Region of Interest (Rol)	Yes (4 areas)
Smart Illumination	Yes
Image Rotation	0°/90°/180°/270° (Support 90°/270° with 1080p resolution and lower)
Mirror	Yes
Privacy Masking	4 areas

Alarm

Alarm Event	Network disconnection; IP conflict; illegal access; motion detection; video tampering; security exception
Network	
Network Port	RJ-45 (10/100 Base-T)
SDK and API	Yes
Cyber Security	Video encryption; Configuration encryption; Digest; WSSE; Account lockout; Security logs; Generation and importing of X.509 certification; Trusted boot; Trusted upgrade
Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; NTP; Multicast
Interoperability	ONVIF (Profile S); CGI; P2P
User/Host	6 (Total bandwidth: 36 M)
Storage	FTP
Browser	IE; Chrome; Firefox
Management Software	Smart PSS; DSS; DMSS
Mobile Client	iOS; Android

Certification

Certifications	CE-LVD: EN 62368-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B
Power	
Power Supply	12 VDC/PoE (802.3af)
Power Consumption	Basic: 1.4 W (12 VDC); 2.2 W (PoE) Max. (H.265+IR intensity+ICR): 4.2 W (12 VDC); 5.3 W (PoE)

Environment

Operating Temperature	−40 °C to +60 °C (−40 °F to 140 °F)
Operating Humidity	≤ 95%
Storage Temperature	−40 °C to +60 °C (−40 °F to 140 °F)
Protection	IP67

Structure

Casing	Metal + plastic
Product Dimensions	162.6 mm × 70 mm × 70 mm (6.40" × 2.76" × 2.76") (L × W × H)
Net Weight	0.22 kg (0.49 lb)
Gross Weight	0.34 kg (0.75 lb)

Ordering Information

Type	Model	Description
2 MP Camera	DH-IPC-HFW1239S1-LED-S5	2 MP Entry Full-color Fixed-focal Bullet Network Camera
Accessories (Optional)	PFA134	Junction Mount Bracket
	PFA134+PFA152-E	Pole Mount Bracket
	PFM321D	12 VDC 1A Power Adapter
	LR1002-1ET/1EC	Single-port Long Reach Ethernet over Coax Extender
	PFM900-E	Integrated Mount Tester

Accessories

Optional



PFA134
Junction Box



PFA134+PFA152-E
Pole Mount Bracket




PFM321D
12 VDC 1A Power Adapter




LR1002-1ET/1EC
Single-port Long
Reach Ethernet over
Coax Extender



PFM900-E
Integrated Mount Tester

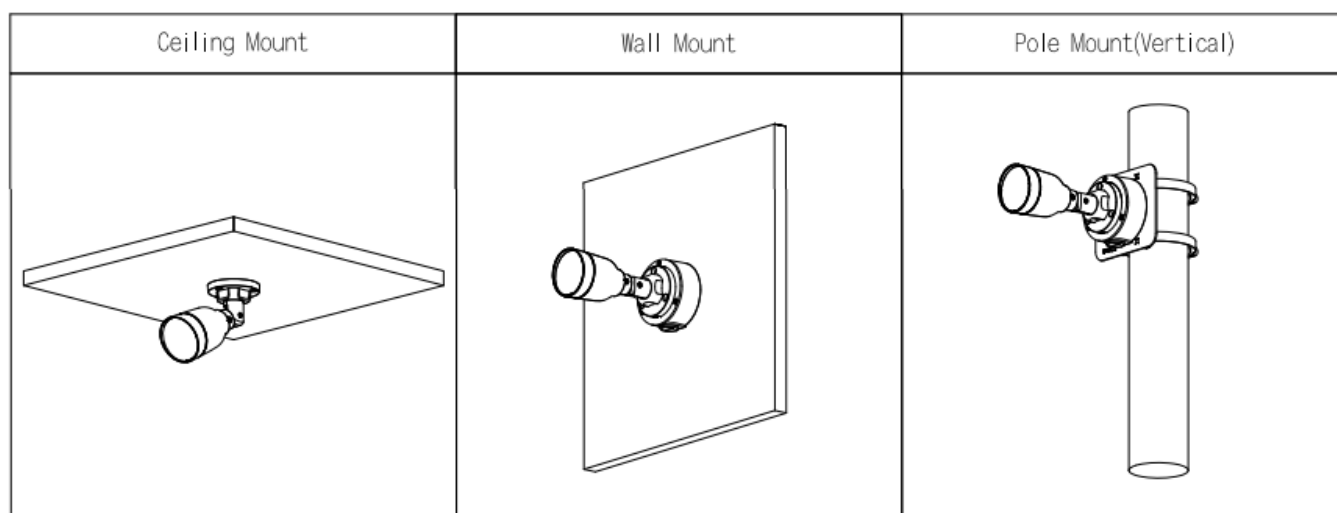


Dimensions (mm[inch])

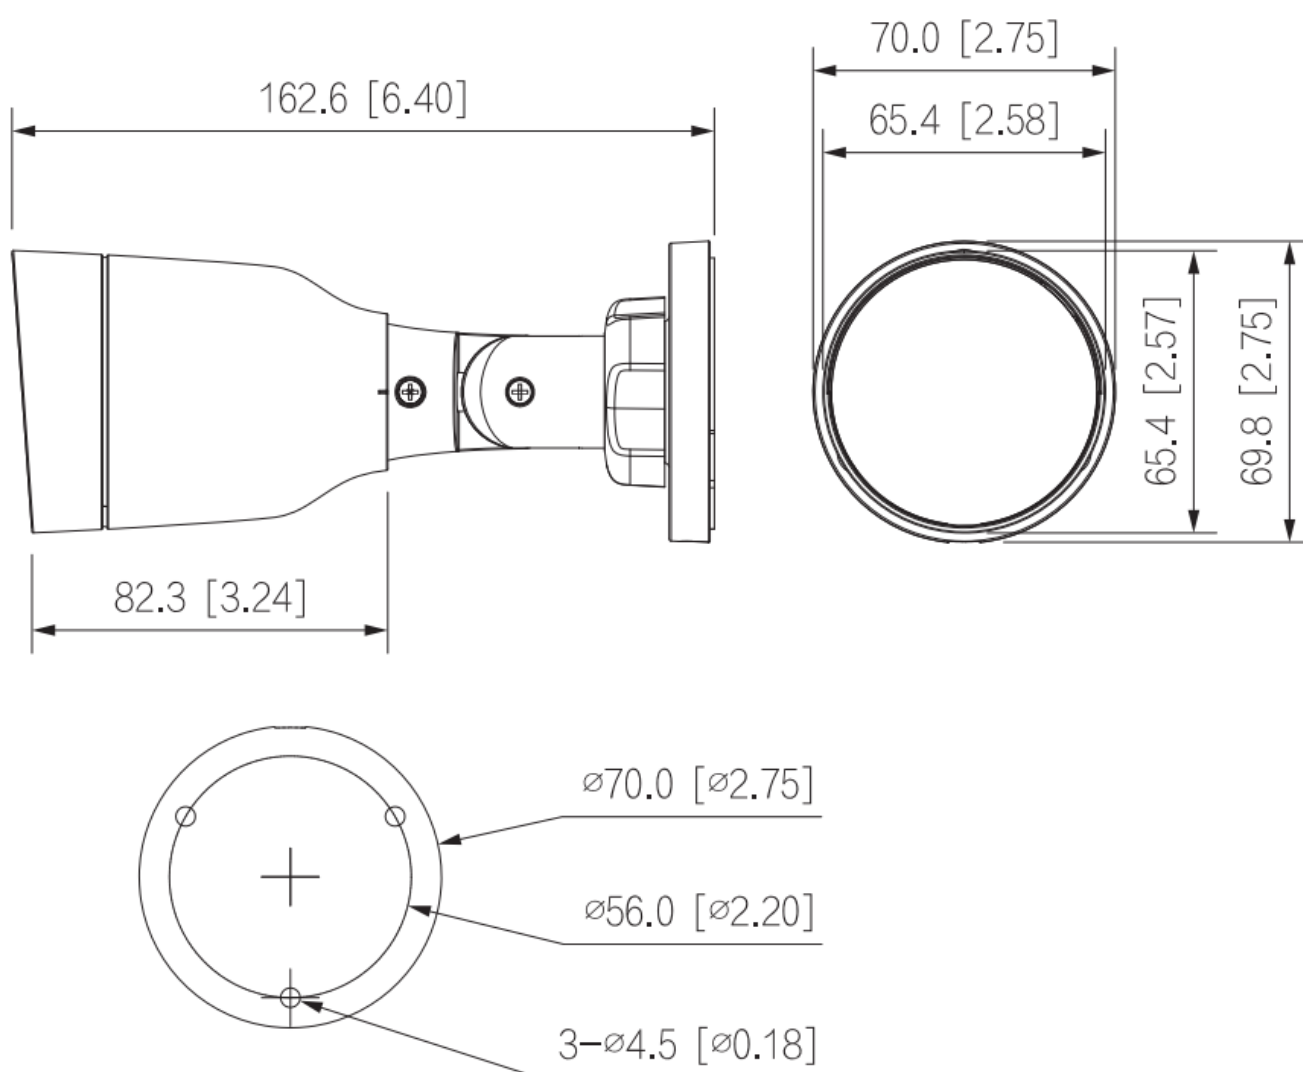

Rev 001.001

© 2021 Dahua. All rights reserved. Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.

www.dahuasecurity.com

	<p>dahua DH-IPC-HFW1239S1-LED-S5 2 MP Entry Full Color Fixed Focal Bullet Network Camera [pdf] User Manual</p> <p>DH-IPC-HFW1239S1-LED-S5, 2 MP Entry Full Color Fixed Focal Bullet Network Camera, DH-IPC-HFW1239S1-LED-S5 2 MP Entry Full Color Fixed Focal Bullet Network Camera, Entry Full Color Fixed Focal Bullet Network Camera, Full Color Fixed Focal Bullet Network Camera, Fixed Focal Bullet Network Camera, Bullet Network Camera, Network Camera, Camera</p>
--	---

References

- [Dahua Technology USA Inc - Dahua Technology USA Inc](#)