



## **dahua Entry Series 6MP Entry Smart Dual Light Eyeball Network Camera Owner's Manual**

[Home](#) » [Dahua](#) » dahua Entry Series 6MP Entry Smart Dual Light Eyeball Network Camera Owner's Manual 

**dahua Entry Series 6MP Entry Smart Dual Light Eyeball Network Camera**



## Contents

- [1 Series Overview](#)
- [2 Functions](#)
- [3 Technical Specification](#)
- [4 Ordering Information](#)
- [5 Accessories](#)
- [6 Dimensions \(mm\[inch\]\)](#)
- [7 Customer Support](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)

## Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

## Functions

### Smart Dual Light

Dahua Smart Dual Light technology adopts smart algorithm to detect targets. Usually, the IR illuminator is on at night; when the target appears in the monitoring area, the white light is on, and the camera records the full-color video and information of key events. That is, the camera links snapshot and video with full-color image. When the target is out of the monitoring area, the white light is off and the IR illuminator is on, which reduces light pollution efficiently.

### Human Detection

Dahua intelligent algorithms extract moving human targets from videos and filters out alarms that are triggered by non-human targets to increase the accuracy and effectiveness of alarms.

### Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

### Image Flip

For narrow and long scenes, Dahua image flip technology flips the image by 90°/180°/270° to realize better surveillance in rotation mode.

\* The parameters and datasheets below can only be applied to 1639-S6 series.

- 1/2.7" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 6 MP (3200 × 1800) @20 fps, and supports 2688 × 1520@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in Multi-core Light, the max. IR distance is 30 m and the max. warm light distance is 30 m.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Built in Mic.
- 12 VDC/PoE power supply, easy for installation.
- IP67 protection.
- Supports human detection.



### Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

### Protection (IP67, Wide Voltage)

**IP67:** The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

**Wide voltage:** The camera allows  $\pm 30\%$  (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with unstable voltage.

## Technical Specification

<b>Camera</b>	
Image Sensor	1/2.7" CMOS
Max. Resolution	3200 (H) × 1800 (V)
ROM	128 MB
RAM	256 MB
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
Min. Illumination	0.007 lux@F1.6 (Color, 30 IRE); 0.0007 lux@F1.6 (B/W, 30 IRE); 0 lux (Illuminator on)
S/N Ratio	56 dB
Illumination Distance	Up to 30 m (98.43 ft) (IR) Up to 30 m (98.43 ft) (Warm light)
Illuminator On/Off Control	Auto; Manual
Illuminator Number	1 (Multi-core (IR + warm) light)
Angle Adjustment	<b>Pan:</b> 0°–360°; <b>Tilt:</b> 0°–78°; <b>Rotation:</b> 0°–360°
<b>Lens</b>	
Lens Type	Fixed-focal
Lens Mount	M12
Focal Length	2.8 mm; 3.6 mm
2.8 mm; 3.6 mm	F1.6
Field of View	2.8 mm: H: 110°; V: 58°; D: 132° 3.6 mm: H: 91°; V: 46°; D: 110°

Iris Control	Fixed				
Close Focus Distance	2.8 mm: 1.1 m (3.61 ft) 3.6 mm: 1.7 m (5.58 ft)				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	63.6 m (208.66 ft)	25.4 m (93.33 ft)	12.7 m (41.67 ft)	6.4m (21.00 ft)
	3.6 mm	85.4 m (280.18 ft)	34.2 m (112.20 ft)	17.1 m (56.10 ft)	8.5 m (27.89 ft)
	*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.				
Intelligence					
Human Detection	Support the classification and accurate detection of human				
Smart Search	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos				
Video					
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)				
Smart Codec	Smart H.265+; Smart H.264+				
Video Frame Rate	Main stream: 3200 × 1800@(1–20 fps)/2688 × 1520@(1–25/30 fps) sub stream: 704 × 576@(1–25 fps)/704 × 480@(1–30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.				
Stream Capability	2 streams				
Resolution	6M (3200 × 1800); 4M (2880 × 1620/2688 × 1520); 3M (2048 × 1536/2304 × 1296); 1080P (1920 × 1080); 1.3M (1280 × 960); 720P (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240				
Bit Rate Control	VBR;CBR				
Video Bit Rate	H.264: 32 kbps–8192 kbps; H.265: 12 kbps–8192 kbps				

Day/Night	Auto(ICR)/Color/B/W
BLC	Yes
HLC	Yes
WDR	DWDR
White Balance	Auto; natural; street lamp; outdoor; manual; regional custom
Gain Control	Auto/Manual
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 areas, rectangular)
Region of Interest (ROI)	Yes (4 areas)
Smart Illumination	Yes
Smart Dual Light	Yes
Image Rotation	0°/90°/180°/270° (Support 90°/270° with 2688 × 1520 resolution and lower)
Mirror	Yes
Privacy Masking	4 areas
<b>Audio</b>	
Built-in MIC	Yes, built-in Mic
Audio Compression	G.711a; G.711Mu; PCM; G.726
<b>Alarm</b>	
Alarm Event	Network disconnection; IP conflict; illegal access; motion detection; video tampering; audio detection; SMD (human); security exception
<b>Network</b>	
Network Port	RJ-45 (10/100 Base-T)
SDK and API	Yes

Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; DHCP; DNS; DDNS; NTP; Multicast; ICMP; IGMP; P2P
Interoperability	ONVIF (Profile S & Profile T); CGI
User/Host	20 (Total bandwidth: 48 M)
Storage	FTP
Browser	IE; Chrome; Firefox
Management Software	Smart PSS Lite; DSS; DMSS; Do Lynk Care
Mobile Client	iOS; Android
Cyber Security	Video encryption; Configuration encryption ;Digest; WSSE; Account lockout; Security logs; Generation and importing of X.509 certification; HTTPS; Trusted boot; Trusted execution; Trusted upgrade
<b>Certification</b>	
Certifications	CE-LVD: EN62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU
<b>Power</b>	
Power Supply	12 VDC/PoE (802.3af)
Power Consumption	Basic: 2 W (12 VDC), 2.9 W (PoE); Max. : 4 W (12 VDC); 5.3 W (PoE) (H.265 + intelligence on+ DWDR + illuminator intensity)
<b>Environment</b>	
Operating Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Operating Humidity	≤95%(RH), non-condensing
Storage Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Storage Humidity	≤95%(RH), non-condensing
Protection	IP67
<b>Structure</b>	

Casing Material	Metal
Product Dimensions	85.6 mm × Φ94.0 mm (3.37" × Φ3.7")
Net Weight	0.34 kg (0.75 lb)
Gross Weight	0.45 kg (0.99 lb)

## Ordering Information

Type	Model	Description
IP CAMERA	DH-IPC-HDW1639T-A-IL	6MP Entry Smart Dual Light Fixed-focal Eyeball Network Camera
Accessories (Optional)	DH-PFB220C	Ceiling Mount Bracket
	DH-PFA106	Mount Adapter
	DH-PFA151	Corner mount bracket
	DH-PFB305W	Wall mount bracket
	DH-PFA150	Pole Mount Bracket
	DH-PFB204W	Wall mount bracket
	DH-PFA152-E	Pole Mount Bracket
	DH-PFA13A-E	Anti-corrosion Junction box
	DH-PFM321-EN	DC12V1A power adapter
	DH-PFM321D-EN	DC12V 1A power adapter
	DH-PFM320D-EN	DC12V2A power adapter
	PFM900-E	Integrated Mount Tester

## Accessories

### Optional:

- DH-PFB220C Ceiling Mount Bracket





- DH-PFA106 Mount Adapter



- DH-PFA151 Corner mount bracket



- DH-PFB305W Wall mount bracket



- DH-PFA150 Pole Mount Bracket



- DH-PFB204W Wall mount bracket



- DH-PFA152-E Pole Mount Bracket



- DH-PFA13A-E Anti-corrosion Junction box



- DH-PFM321-EN DC12V1A power adapter



- DH-PFM321D-EN DC12V 1A power adapter



- DH-PFM320D-EN DC12V2A power adapter




- PFM900-E Integrated Mount Tester



Junction Mount	Ceiling Mount	Wall Mount
Pole Mount (Vertical)		

Dimensions (mm[inch])

mm [inch]

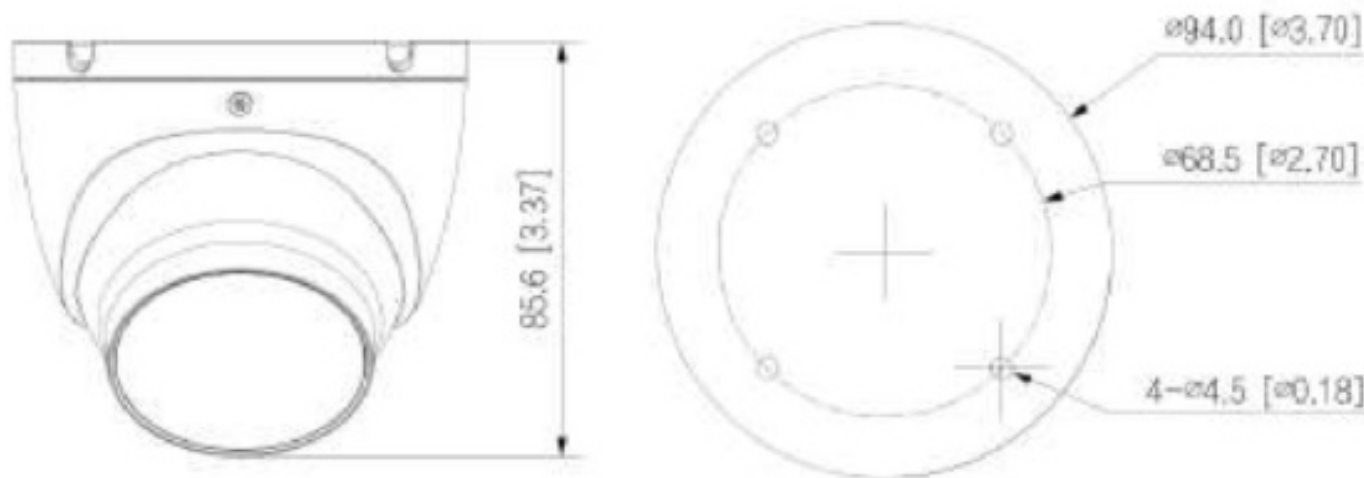


## Customer Support

©2024 Dahua. All rights reserved. Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.

[www.dahuasecurity.com](http://www.dahuasecurity.com)



## Documents / Resources

	<p><a href="#">dahua Entry Series 6MP Entry Smart Dual Light Eyeball Network Camera</a> [pdf] Owner's Manual</p> <p>Entry Series, Entry Series 6MP Entry Smart Dual Light Eyeball Network Camera, 6MP Entry Smart Dual Light Eyeball Network Camera, Smart Dual Light Eyeball Network Camera, Light Eyeball Network Camera, Eyeball Network Camera, Network Camera, Camera</p>
---	--

## References

- [Dahua Technology - World Leading Video-Centric AIoT Solution & Service Provider](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.