

DS18
PRO-
TW750C-8/BK
Super Bullet
Tweeter



DS18 PRO-TW750C-8/BK Super Bullet Tweeter Owner's Manual

[Home](#) » [DS18](#) » DS18 PRO-TW750C-8/BK Super Bullet Tweeter Owner's Manual 

Contents

- [1 DS18 PRO-TW750C-8/BK Super Bullet Tweeter](#)
- [2 Product Usage Instructions](#)
- [3 SPECIFICATIONS](#)
- [4 GRAPH](#)
- [5 MEASUREMENTS](#)
- [6 WARRANTY](#)
- [7 MORE INFORMATION](#)
- [8 FAQs](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)



DS18 PRO-TW750C-8/BK Super Bullet Tweeter



Product Usage Instructions

Installation

1. Choose a suitable location to install the tweeter in your vehicle.
2. Securely mount the tweeter using the provided mounting hardware.
3. Connect the tweeter's wires to the corresponding terminals on your audio system.

Power Handling

Ensure that your audio system is compatible with the power rating of the tweeter to prevent damage.

Sound Adjustment

Adjust the sound settings on your audio system to optimize the performance of the tweeter.

Maintenance

Regularly check the tweeter for any dust or debris accumulation and clean it using a soft, dry cloth if necessary.

SPECIFICATIONS

- **Nominal Diameter** 4" / 103mm
- **Nominal Impedance** 8 ohms
- **AES Power Handling** 150W
- **Program Power Handling** 200W
- **Peak Power Handling** 400W
- **Sensitivity (1w/1m)** 109dB

- **Frequency Response** 900Hz-20KHz
- **Recommended Hi Pass Crossover** 3KHz
- **Pair or Single** Single / Unidad

BODY / FEATURES

- **Filter (Bass Blocker)** 3.3uf / 100V
- **Bullet Material** CNC Aluminum
- **Body Material** Aluminum

COLORS AVAILABLE PRO-TW750C-8/BK

- **Body Color / Finish** Black / Sandblasted
- **Faceplate Color / Finish** Black / Sandblasted

PRO-TW750C-8/SL

- **Body Color / Finish** Aluminum / Machined
- **Faceplate Color / Finish** Aluminum / Machined


MOTOR

- **Voice Coil Diameter** 1.5" / 38mm
- **Voice Coil Former Material** KSV
- **Winding Material** CCAW
- **Diaphragm Material** Titanium / Titanio
- **Magnet Material** Ferrite / Ferrita
- **Magnet Size** 3.5"x1" / 90x25mm
- **Magnet Weight** 20.1 Oz


MEASUREMENTS

- **Overall Diameter** 4" / 103mm
- **Overall Depth** 3" / 75.3mm
- **Front Mount Baffle Cutout** 3.5" / 90mm
- **Mounting Depth** 2.5" / 63.3mm

GRAPH

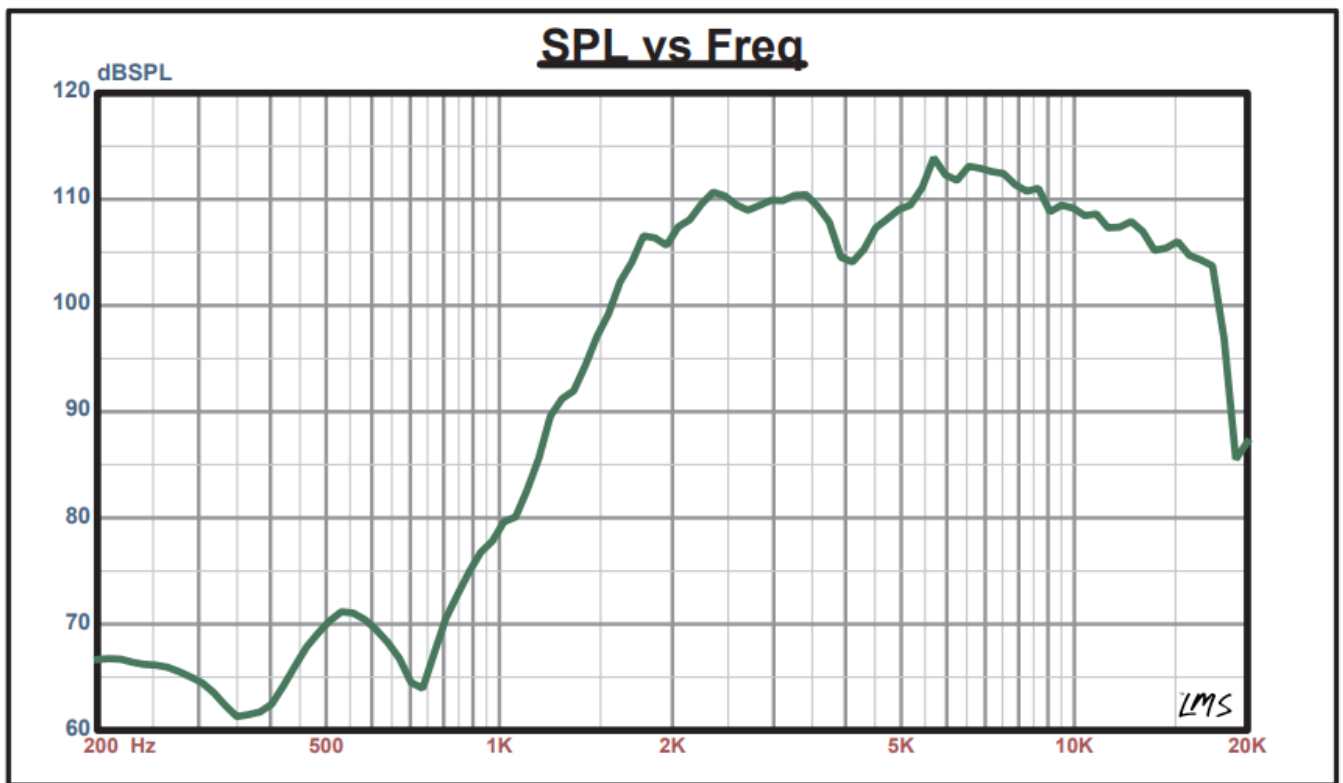

MEASUREMENTS

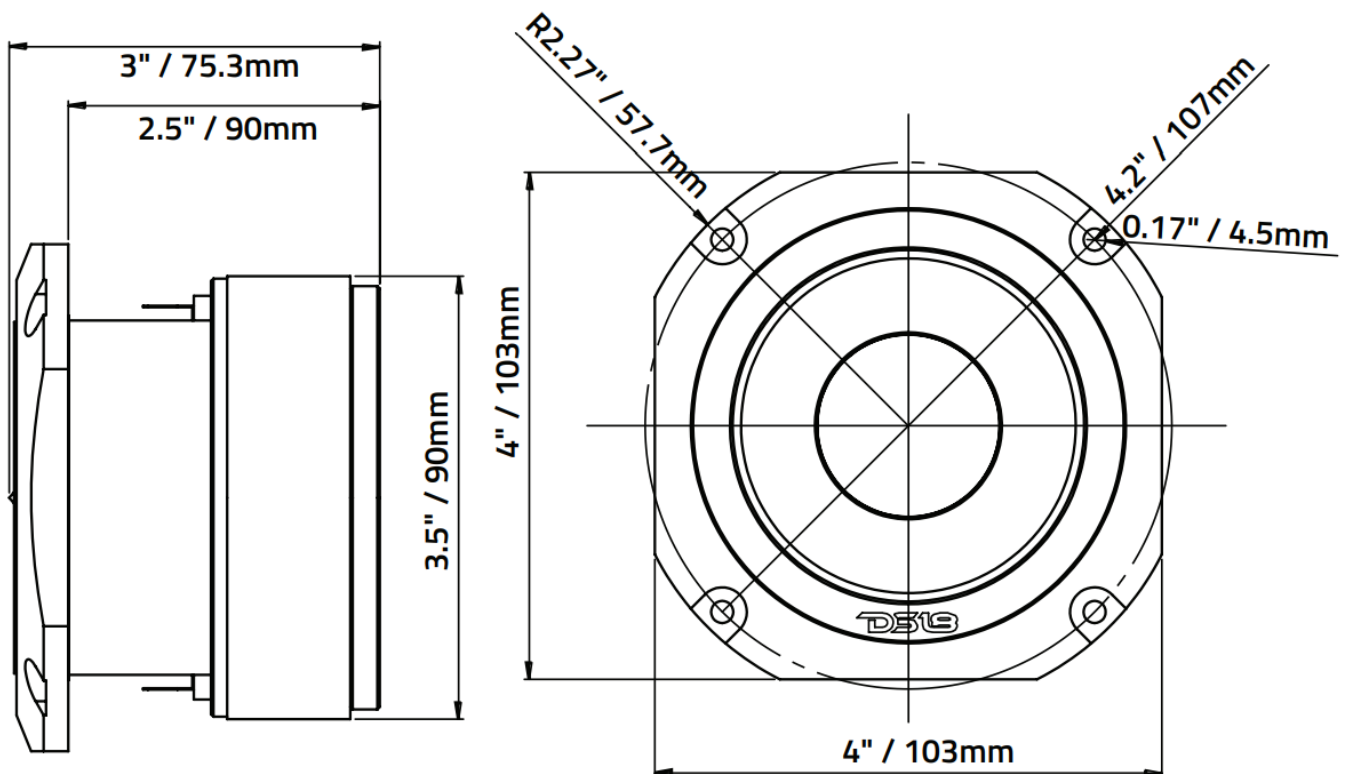

WARRANTY

Please visit our website DS18.com for more information on our warranty policy. We reserve the right to change products and specifications at any time without notice. Images may or may not include optional equipment.

WARNING: Cancer and Reproductive Harm. www.P65Warning.ca.gov

MORE INFORMATION

FOR MORE INFORMATION PLEASE VISIT [DS18.COM](https://www.ds18.com)

FAQs

- **Q: Where can I find more information about the warranty?**
 - A: Please visit our website at [DS18.com](https://www.ds18.com) for detailed information regarding our warranty policy.
- **Q: How can I prevent potential harm from the product?**
 - A: Follow all safety instructions provided in the manual and avoid prolonged exposure to loud sounds.

Documents / Resources

	DS18 PRO-TW750C-8/BK Super Bullet Tweeter [pdf] Owner's Manual PRO-TW750C-8, PRO-TW750C-8-BK, PRO-TW750C-8-SL, PRO-TW750C-8 BK Super Bullet T weeter, PRO-TW750C-8 BK, Super Bullet Tweeter, Bullet Tweeter
---	--

References

-  [Official DS18 Pro Audio Store - Speakers, Subwoofers, Amps & More!](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.