



# Dwyer IEF Series Insertion Electromagnetic Flow Transmitter Instructions

[Home](#) » [Dwyer](#) » Dwyer IEF Series Insertion Electromagnetic Flow Transmitter Instructions

Dwyer IEF Series Insertion Electromagnetic Flow Transmitter



## Contents [ [hide](#) ]

- [1 INSERTION ELECTROMAGNETIC FLOW TRANSMITTER](#)
- [2 DIMENSIONS](#)
- [3 BENEFITS/FEATURES](#)
- [4 APPLICATIONS](#)
- [5 SPECIFICATIONS](#)
- [6 MODEL CHART](#)
- [7 ACCESSORIES](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

## INSERTION ELECTROMAGNETIC FLOW TRANSMITTER

- Shown with A-IEF-VLV-BR\*\* accessory valve kit




- -LCD option shown



- A-IEF-KIT



## DIMENSIONS

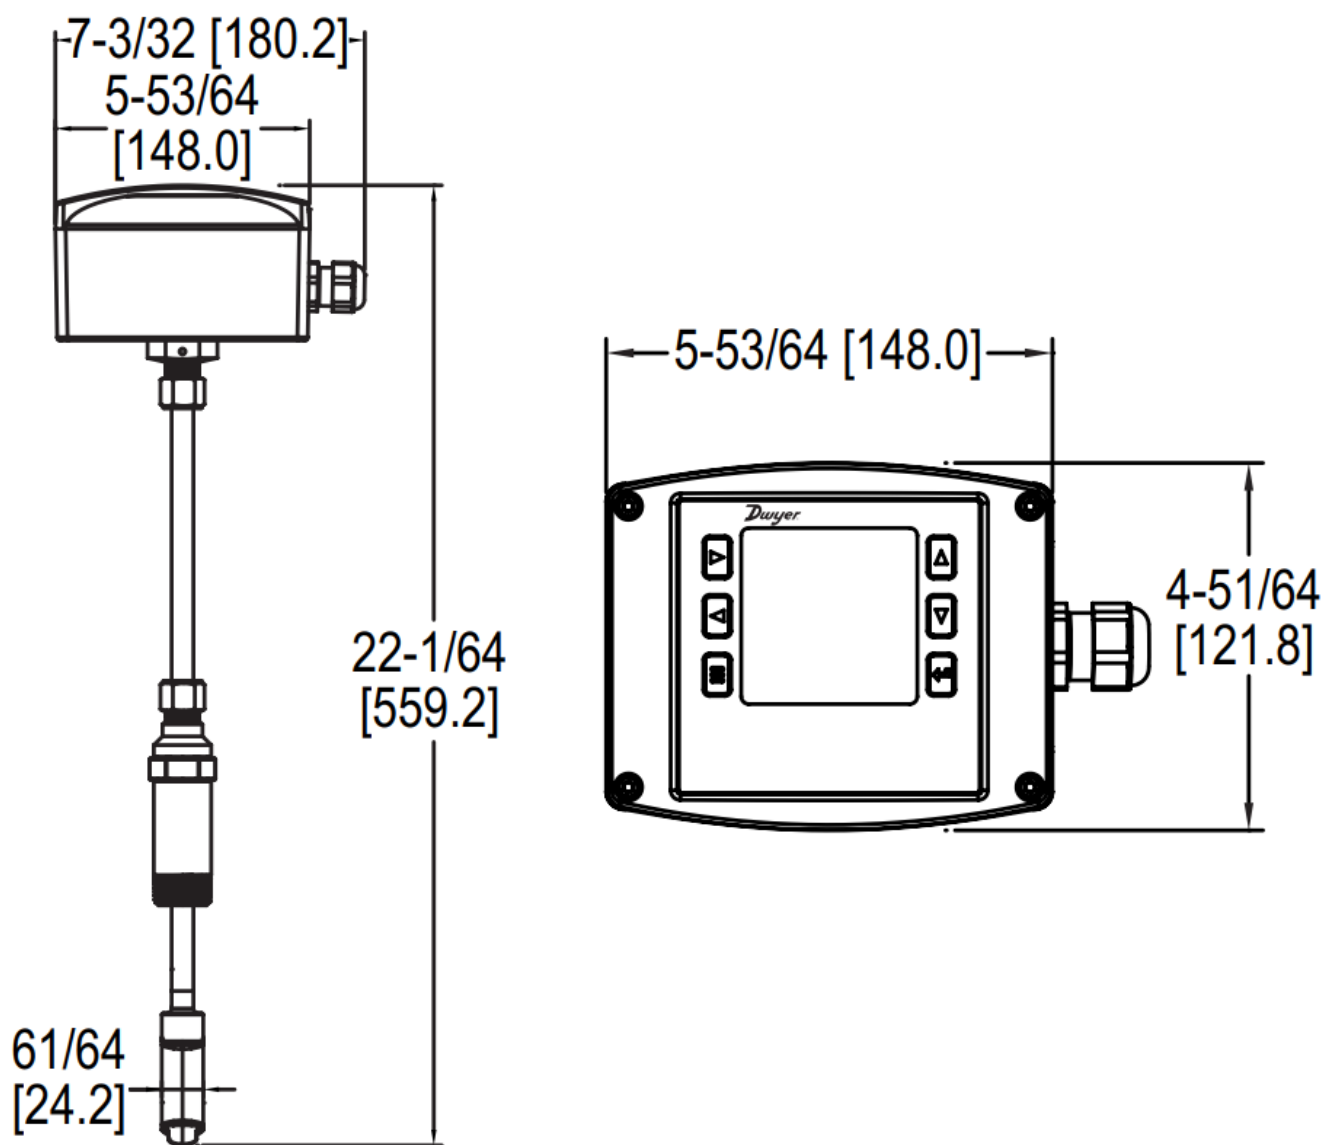

The Series IEF Insertion Electromagnetic Flow Transmitter is an adjustable insertion flowmeter featuring electromagnetic technology that accurately and reliably measures fluid velocity in addition to providing several continuous signal outputs. This series is specifically designed to offer superior performance paired with simple installation and use. One unit is adjustable to fit pipe sizes from 4 to 36" (102 to 914 mm), and offers several output options including selectable BACnet MS/TP or Modbus® RTU communications protocol over 2-wire RS-485 in addition to the standard analog, frequency and alarm outputs.

## BENEFITS/FEATURES

- Meet application requirements with field configurable setup displays (-LCD integral option or remote accessory A-IEF-DSP), which accommodate a variety of application configurations with one model through multiple display configurations i.e. pipe size, pipe material, liquid type, analog output, pulse/frequency output, alarm outputs, communication outputs, damping, and calibration factor
- Maintain system efficiency with high performance accuracy that is maintained through changes in temperature, density or viscosity
- Quick and easy ordering and set up with Setup Wizard and installation tool that are simple to use and allow for precise installation
- Save time with accessory setup kit A-IEF-KIT that ensures exact installation application depth with included thickness gage and measuring tape

- Reduced costs, long product life, and minimal maintenance requirements with no moving parts to wear or break and electrodes that discourage fouling
- Minimize installation costs with isolation valve accessory options to allow for installation in operational systems via hot-tap kit or easy removal without system downtime
- Required documents included with NIST traceable pass/fail verification certificate included standard for Carbon Steel Schedule 40 pipes sized 4" (102 mm), 6" (150 mm), 8" (200 mm)

## **APPLICATIONS**

- Boiler feed water
- Chilled water
- Open and closed loop condenser water
- Irrigation system
- Municipal water distribution
- Process and coolant flow
- Ground water remediation
- Chemical processing
- Pump protection
- Wastewater
- Mining

## **SPECIFICATIONS**

**Service:** Compatible clean or dirty non coating, conductive liquids.

**Range:** 0 to 20 ft/s (0 to 6 m/s).\*

**Wetted Materials:** Body shaft/fitting: 316 SS; Electrodes: 316 SS; Electrode cap: Polymer/Polystyrene; O-ring: Silicon.

**Accuracy:** High accuracy units:  $\pm 0.5\%$  of reading at calibrated velocity;  $\pm 1\%$  of reading from 2 to 20 ft/s (0.6 to 6 m/s);  $\pm 0.02$  ft/s ( $\pm 0.006$  m/s) at  $< 2$  ft/s (0.6 m/s); Standard accuracy units:  $\pm 1\%$  FS.

**Temperature Limits:** Ambient: -20 to 160°F (-29 to 71°C); Process: 15 to 250°F (-9 to 121°C); **Storage:** -40 to 185°F (-40 to 85°C).

**Process Connection:** 1" NPT or BSPT with accessory full port ball valve options.

**Pressure Limits:** 400 psi (27.6 bar) @ 100° F (37.8°C).

**Pressure Drop:**  $< 0.1$  psi at 12 ft/s in 4" (101.6 mm) and larger pipe.

**Outputs:**

(1) **Analog:** 4-20 mA, 0-5 V, 0-10 V or 2-10 V (display selectable);

(1) **Pulse/Frequency:** 0-15 V peak pulse, 0 to 500 Hz or scalable pulse output (display selectable);

(2) **Alarm:** (1) Empty pipe detection or minimum/maximum velocity, (display selectable); (1) Reverse flow output indication.

**Power Requirements:** 12-42.4 VDC, .25 A @ 24 VDC; 12-36 VAC.

**Electrical Connection:** Removable terminal blocks, model selectable 1/2" female NPT conduit connection, PG 16 gland or PG 16 gland with (2) 10 ft (3 m) 9 conductor 22 AWG plenum rated cables, accessory cable lengths up to 200 ft (61 m) optional.

**Display (-LCD option):** 2" (5.08 cm) x 2" (5.08 cm) graphic LCD with backlight.

**Conductivity:**  $> 20$  microsiemens.

Enclosure Material: Powder coated die cast aluminum.

**Enclosure Ratings:** NEMA 6P (IP68) (Non display models); NEMA 4X (IP66) (-LCD option).

Compliance: BTL, CE, NSF/ANSI 61 and 372.

**COMMUNICATIONS (-COM OPTION)**

**Type:** BACnet MS/TP or Modbus® RTU communication protocol (default disabled, display selectable).

Supported Baud Rates: 9600, 19200, 38400, 57600, 76800, or 115200 bps (display selectable).

Device Load: 1/8 unit load.

**ADDITIONAL SPECIFICATIONS**

Applicable Pipe Material: Most popular plastic and metal pipes; i.e. Carbon steel, SS, copper, UPVC/PVDF, galvanized steel, mild steel, and brass.†

**Applicable Pipe Size:** 4-36" (101 to 914 mm), model dependent. See model chart.

**Diameter Length Requirements:**  $> 10$  upstream;  $> 5$  downstream. Glycol: 0 to 100% display selectable.

\*For max flowrates  $> 10$  ft/s (3 m/s) order option -CC.  
Brass fittings and pipe are not to be used with NSF Certified models.

## MODEL CHART

Example	IEF	-H	N	-CND	-LCD	IEF-HN-CND-LCD
Series	IEF					Insertion electromagnetic flow transmitter

<b>Accuracy</b>		LG SF ET H				<p>Standard accuracy 4 to 10" (200 to 250 mm) pipe; 1% FS</p> <p>Standard accuracy &gt; 10 to 36" (250 to 900 mm) pipe; 1% FS</p> <p>Standard accuracy 4 to 36" (100 to 900 mm) pipe; 1% FS High accuracy 4" (100 mm) pipe; 1% of reading</p> <p>High accuracy 6" (150 mm) pipe; 1% of reading High accuracy 8" (200 mm) pipe; 1% of reading High accuracy 10" (250 mm) pipe; 1% of reading</p> <p>High accuracy 4 to 10" (100 to 250 mm) pipe; 1% of reading</p>
<b>Process Connection</b>			N B			1" male NPT 1" male BSPT
<b>Housing Electrical Connection</b>				CND PG 10		<p>1/2" female NPT conduit connection without cable PG gland without cable</p> <p>PG gland with 10' (3 m) cable</p>
<b>Options</b>					CC C OM FC L CD N IST NW	<p>Custom configured for specific installation</p> <p>BACnet or Modbus® communication protocol (display selectable) Factory calibration certificate for 0.5% of reading at single point Integral LCD display</p> <p>Six point NIST traceable calibration certificate NSF certified</p>

**Note:** For CC option, must provide completed configuration paperwork.

**Note:** For maximum performance select -LCD option or setup display accessory.

## ACCESSORIES




Model	Description
<b>A-IEF-CBL-50 A-IEF-DSP</b>  <b>A-IEF-KIT</b>  <b>A-IEF-PA</b>  <b>A-IEF-VLV-BR A-IEF-VLV-SS</b>	Plenum rated cable 50 ft (15.2 m) Setup display Setup kit (includes setup display, thickness gage and measuring tape), and universal power adaptor AC wall adaptor 1-1/4" full port isolation valve brass kit** 1-1/4" full port isolation valve 316 SS kit
**Brass fittings and pipe are not to be used with NSF Certified models. Brass valves are non-RoHS compliant.	

Modbus® is a registered trademark of Schneider Electric USA, Inc.  
A-IEF Remote Display now available: See page 293  
[dwyer-inst.com](http://dwyer-inst.com)



Documents / Resources

	<a href="#">Dwyer IEF Series Insertion Electromagnetic Flow Transmitter</a> [pdf] Instructions IEF Series Insertion Electromagnetic Flow Transmitter, IEF Series, Insertion Electromagnetic Flow Transmitter, Electromagnetic Flow Transmitter, Flow Transmitter
---	---

References

- 
[Dwyer Home](#)