

dyson V12 Slim Detect Total Clean User Manual

Home » dyson » dyson V12 Slim Detect Total Clean User Manual



Contents

- 1 dyson V12 Slim Detect Total Clean
- 2 In the box
- 3 Getting started
- 4 Charging your machine
- 5 Changing your click-in battery
- 6 Caring for your floors
- 7 The LCD screen
- 8 Emptying your bin
- 9 Cleaning your bin
- 10 Washing your filter
- 11 Clearing blockages
- 12 Washing your Laser Slim Fluffy™ brush bar
- 13 Clearing blockages from your Hair screw tool
- 14 Cleaning your tools
- 15 Looking after your machine
- 16 Documents / Resources
 - 16.1 References
- 17 Related Posts



dyson V12 Slim Detect Total Clean




In the box


Your machine will come with one or more of these cleaner heads – not all will be included.

Vacuum cleaner	Laser Slim Fluffy™ cleaner head A precisely-angled laser makes invisible dust visible on hard floors.	The direct-drive cleaner head Deep cleans carpets and hard flo ors.	Additional clic Not all models an additional of teries at www
Wand		Charger Charges your vacuum with or wit hout a dock.	Wall dock The Dyson co ng dock, read

Some tools may not be included.

You can buy additional tools at www.dyson.com.sg

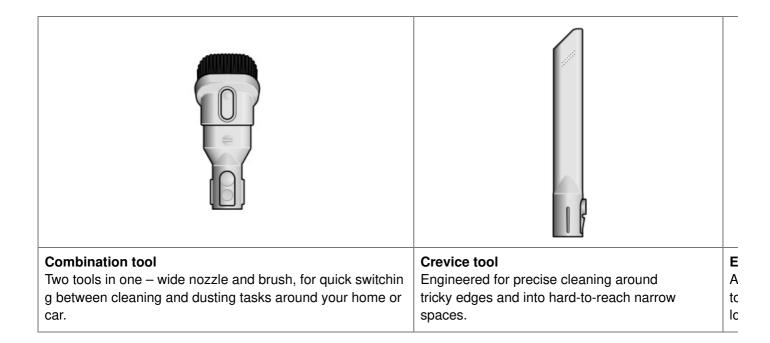

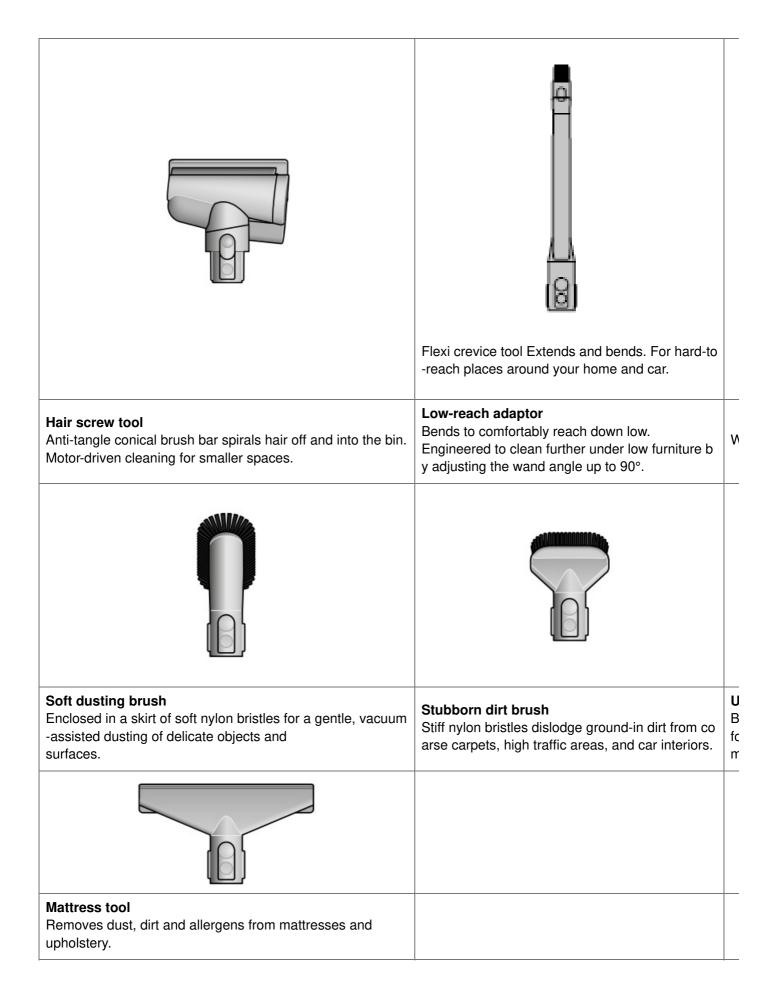


Getting started

Fully charge your machine before using for the first time

Power modes

Your machine has three power modes for different tasks. Change power modes quickly using a single button.



Eco-mode

Maximum run time for longer cleans all around your home.



The screen shows the machine set to Eco mode with a full battery in green to show that this will give the longest battery life of the three modes.

Auto and Med mode

The optimum balance of power and run time.

Attach your cleaner head or Hair screw tool to activate the Auto mode. Suction power automatically adapts to dust levels.





Two screens show the machine set to Auto mode and Med mode with a blue battery showing that this will give a medium length of battery life.

Boost mode

Designed for intensive spot cleaning of ground-in dirt




Turn your laser on and off

Turn your laser on or off with the slider switch on your cleaner head.

Class 1 laser product – safe for pets and humans. Avoid looking directly into the beam.

Location of the Selection button on the screen on the filter end of the machine.

Diagram showing the connection of the wand onto the main body, with the wand release button aligned with the top of the main body.

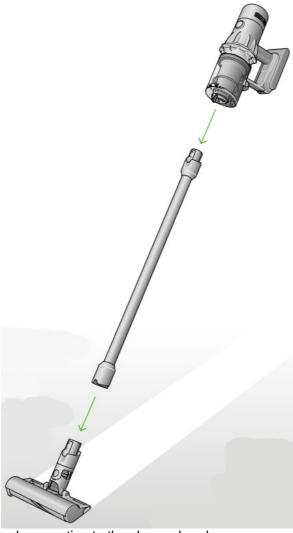

Arrow showing the end of the wand connecting to the cleaner head.


Charging your machine

• It's important to fully charge your new machine before using it for the first time and after every clean. This is because the battery and monitoring system's algorithm 'learns' over time, and fully charging your machine

helps it to more accurately calculate and display the remaining run time.

- Connect to the charger either directly or in the dock.
- The blue LEDs on either side of the battery will flash during charging.
- When the battery is fully charged, both LEDs will light for 5 seconds.
- Your battery is fully charged when the display shows 100%.
- Your machine won't operate or charge if the ambient temperature is below 5°C(41°F). This is designed to protect both the motor and battery.

The charger is connected to the power supply using the wall dock.

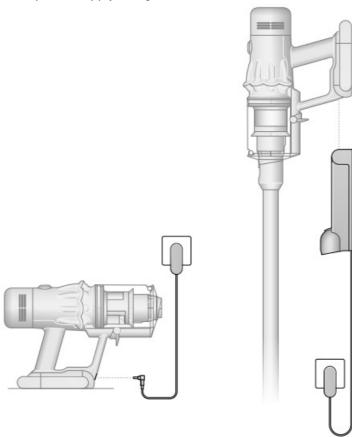

The charger is connected from the power supply directly to the front of the battery.

Changing your click-in battery

If you have additional click-in batteries, we recommend that you alternate the batteries to maintain even performance.


Removing your battery


Push the battery release button on the handle and slide the battery off your machine. Charge the battery.

Refitting your battery

Align your battery with the handle and slide it in. Push firmly until it clicks into place.

Arrows show the location of the battery release button and the battery coming off the handle when the button is pressed. The battery is then shown being replaced on the base of the handle, clicking into place.





Caring for your floors

Check that the underside of the cleaner head or tool is clean and free from any objects that may cause damage. Before vacuuming your flooring, rugs, and carpets, check the manufacturer's recommended cleaning instructions. The brush bar on your machine can damage certain carpet types and floors.

Some carpets will fuzz if a rotating brush bar is used when vacuuming. If this happens, we recommend vacuuming without the motorized floor tool and consulting with your flooring manufacturer.

The LCD screen

The LCD screen shows your particle count information and performance, including the cleaning mode selected, remaining run time, filter maintenance and blockage information.

Settings menu

Control the settings on your machine using the button.

To enter the settings menu, press and hold the button until the menu screen appears. Tap to scroll through the options available.


Particle count and graph

Select to turn the measuring and counting of particles on and off. Turn off the measuring and counting of particles to stop your machine from automatically adjusting suction power and turn off the graph.

Adjust reactive suction power sensitivity

Use the selection button to change how sensitive the particle count is. This will change how your machine automatically reacts to the dust particles.

For more information and support for your machine go online: https://www.dyson.com.sg/products/vacuum-cleaners/dyson-v12-detect-slim/owners



The Selection button on the screen is pressed.

Change language

- To change the language on your screen, press the button and hold until the language list appears. Release the
- Tap the button to scroll through the language list to your preferred language.
- Press and hold the button until the countdown ends.
- A green tick will appear on the screen to show your language selection is complete.
- To cancel your selection, release the button during the countdown.



Two screens, the first with the language list and then the tick screen to show that the language has been successfully changed.

Change alert settings

- You can turn the alert motor pulse off. Your motor will no longer pulse but run time alert information will continue to be displayed on the LCD screen when your machine needs your attention.
- Turning off alerts will not turn off the blockage alert pulsing. This is to ensure you clear any blockages, preventing damage to your machine.
- Tap to scroll through the settings menu. Select the 'Alerts' option.
- Scroll to select on or off. Hold the button until the countdown ends and a tick appears on the screen. To cancel your selection, release the button during the countdown




The screen with an amber warning triangle demonstrates an alert.

Run time countdown

• When the battery needs charging, your machine will pulse three times and a low run time icon will appear on

the screen.

- When your battery is empty, a red warning icon will appear on the screen.
- When Particle count and graph are turned on, the low run time will be in amber and red when in Boost mode.

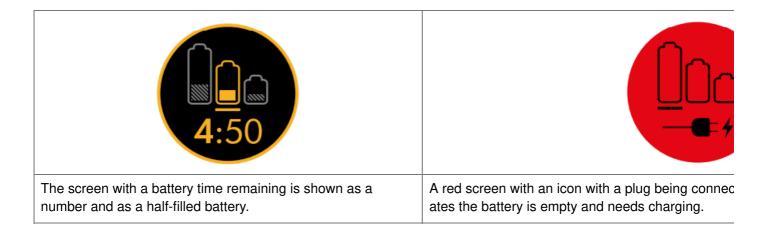

Battery health

To get the best performance and life from your battery, use Eco or Auto/Med mode.



The battery health is shown on the batteries on the screen.

Alerts

- The alerts you might see are:
- Filter the filter isn't fitted correctly or needs cleaning.
- Blockage your machine has a blockage that needs removing.

Alert icon with Fully charged before first use wording.	Alert icon with Airways blocked wording.
Fully charge before first use	
Alert icon with Filter not sealed wording.	Alert icon with The filter needs cleaning wording.
Filter not sealed	

Exit settings menu

To exit the settings menu. Tap to scroll through the selection menu. Select 'Exit menu'.




Screen with Exit menu wording and return icon.

Emptying your bin

Empty as soon as the dirt reaches the MAX level – don't overfill. Using your machine when the dirt is above the MAX line may affect the performance and require more frequent filter washing.

Overfilling your bin could result in inaccurate readings on the particle graph.



The MAX mark on the bin of the machine shows that the dirt should not be filled over the Max mark when the machine is at the angle of normal use.

Remove your wand

Press the red wand release button, on the top of the wand, and pull the wand away from the bin.




Illustration of the bin being emptied into a bag with images demonstrating to take care not to press the trigger when emptying the bin.

Release the dirt

- Hold the machine over the bin, pointing downwards.
- Firmly push the red bin release button. The bin will slide down, cleaning the shroud as it goes, and the bin base will open.
- The bin base won't open if the red bin release button isn't pushed down all the way.


Minimize dust contact

Cover your bin tightly in a dust-proof bag while you empty. Remove the bin carefully, seal the bag tightly and

dispose of it.

Close your bin

Push the bin base upwards until the bin and bin base click into place.

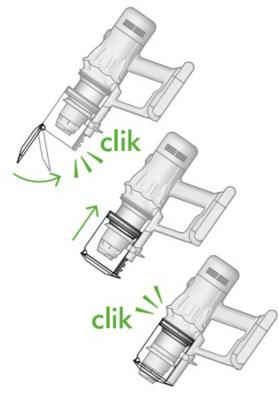


The bin lid closes with an audible click and the bin is pushed upwards with another click once it is fully in place.

Cleaning your bin

Remove your bin


- If it is necessary to clean your bin, empty it as shown in the 'Emptying your bin' section.
- Press the red button located on the bin runner to release the bin and slide your bin off the runner.
- Only clean your bin with a damp cloth.
- Make sure that the bin and seals are completely dry before replacing.

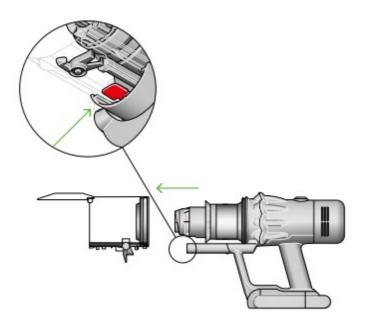

The bin is being removed and the location of the bin release lever is on the underside of the bin runner.

Refit your bin

- Insert the spine onto the bin runner.
- Close your bin by pushing the bin base upwards until the bin and bin base click into place.
- Your bin isn't dishwasher safe and the use of detergents, polishes, or air fresheners to clean your bin isn't recommended, as it may damage your machine.



The bin is being pushed back into position on the bin runner.

Washing your filter

Wash your filter at least once a month to maintain optimum suction power.

For more information and support for your machine go online:

https://www.dyson.com.sg/products/vacuum-cleaners/dyson-v12-detect-slim/owners


Important: your filter must be completely dry before you put it back into the machine. Your machine could be damaged if used with a damp filter.

Twist off your filter

Twist your filter anti-clockwise and pull it away from your machine.

Tap your filter

Before washing your filter, tap it gently over a bin to remove any loose dust and debris.

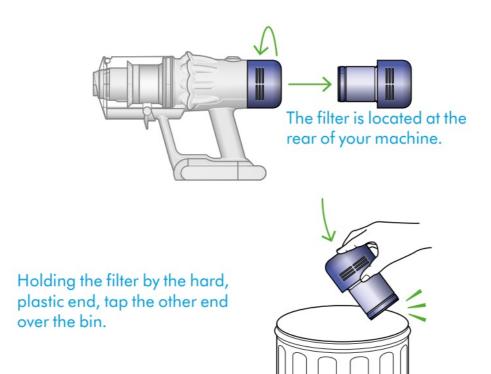

Wash your filter

Wash with warm, running tap water – gently rub your filter with your fingers to remove the dirt.

Fill and shake


- Place your hand over one end of your filter.
- Fill the filter with warm tap water.
- Place your hand over the open end of the filter and shake it firmly to remove trapped dirt and debris.
- Repeat these steps until the water runs clear.

Shake out the water

- Empty the filter and shake firmly to remove excess water.
- Shake with the filter in both an upward and downward position.
- Keep shaking until there's no water coming from the filter.

Dry your filter


- Leave your filter to dry for at least 24 hours in a well-ventilated, warm place.
- Don't dry your filter in a tumble dryer, microwave, or near a naked flame.
 Important: your filter must be completely dry before you put it back into the machine. Your machine could be damaged if used with a damp filter.

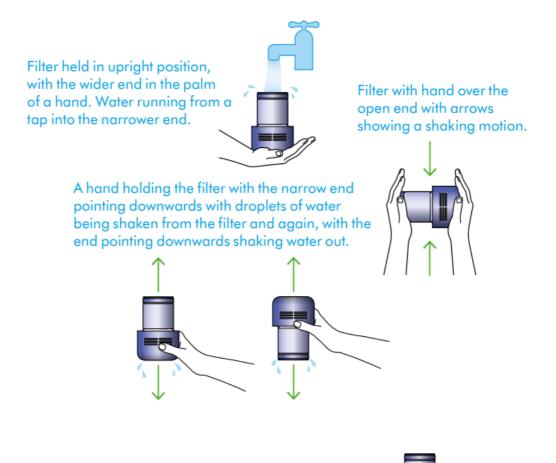

The filter is left to dry with the pleated filter end facing upwards.

Clearing blockages

- Disconnect your machine from the charger before looking for blockages.
- Be careful not to touch the trigger and be aware of sharp objects.
- Leave your machine to cool down before looking for blockages.
- Don't use your machine when looking for blockages as this could cause injury.

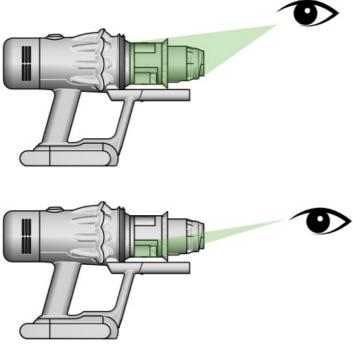

With the bin removed, check for blockages, paying particular attention to the air inlet, located at on the right–hand side of the machine just below the point where the bin joins the main body of the machine.


- Remove the bin and check for blockages in the main body of your machine.
- Make sure any blockages are completely cleared and all parts are fitted before using your machine.
- If your machine detects a blockage, the motor will pulse and you won't be able to use your machine until the blockage has been cleared.
- If you try to use your machine when the motor is pulsing, it will automatically cut out.

To check for blockages in the main body of the machine, remove the bin following the instructions in the Cleaning your bin section and remove the blockage.

If you cannot clear an obstruction, you may need to remove the brush bars.

- Refit all parts securely before using your machine.
- Clearing blockages isn't covered by your guarantee

With the wand removed from the machine, check for blockages at both ends of the wand.





Turn the cleaner's head over to check for obstructions on the brush bar and air inlet.


Washing your Laser Slim Fluffy™ brush bar

Your Laser Slim Fluffy™ cleaner head has a washable brush bar. To maintain optimum performance, check and wash your brush bar regularly.

Make sure your machine is disconnected from the charger and take care not to touch the trigger.








Remove your brush bar

- Don't put any part of your machine in a dishwasher or use detergents, polishes, or air fresheners.
- Press the cleaner head release button on the end of the wand. Place the cleaner head upside down.
- Push the end cap up fully and pull the brush bar out of the cleaner head.

Wash and dry your brush bar

- Hold your brush bar under running water and gently rub to remove any lint or dirt.
- Stand your brush bar upright as shown. Leave to dry completely for at least 24 hours.

The brush bar an open end and a closed end. Stand upright, with the closed end facing upwards, to dry.




Replace your brush bar

- Before replacing, check that your brush bar is completely dry.
- Reattach the end cap to your brush bar.
- Slide your brush bar into the cleaner head. Push the end cap back down to the closed position.

Cleaning your laser lens

To maintain optimum performance, keep your laser lens clean. Only clean the lens when the cleaner head is not attached to your machine.

Use a soft, dry, lint-free cloth to wipe the lens.




The end cap should be attached to the cleaner head at an angle less than 90°, any angle greater than this will not allow the end cap to close.



Clearing blockages from your Hair screw tool

Your Hair screw tool doesn't have a washable brush bar. To maintain optimum performance, check your brush bar regularly and clear any obstructions.

Make sure your machine is disconnected from the charger and take care not to touch the trigger.

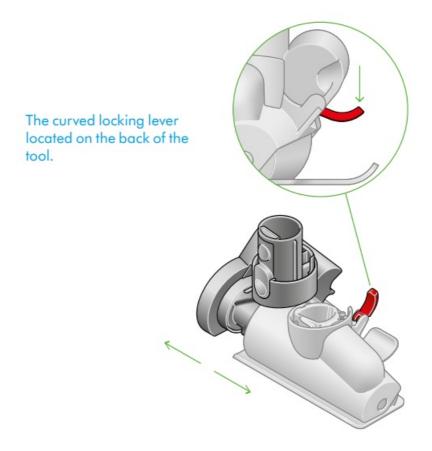


Remove the cover and brush bar

- Remove the Hair screw tool from the wand or machine.
- Push the base plate open. Press the red lever down to release the cleaner head cover.
- Pull the cleaner head cover off the main body of the tool.

Look for obstructions


- Pull your brush bar firmly to remove it from the main body.
- Check and remove any obstructions from all three parts of your Hair screw tool.
- Your Hair screw tool isn't washable. Wipe over with a damp lint-free cloth.
- Don't put any part of your machine in a dishwasher or use detergents, polishes, or air fresheners.

Reassemble Hair screw tool

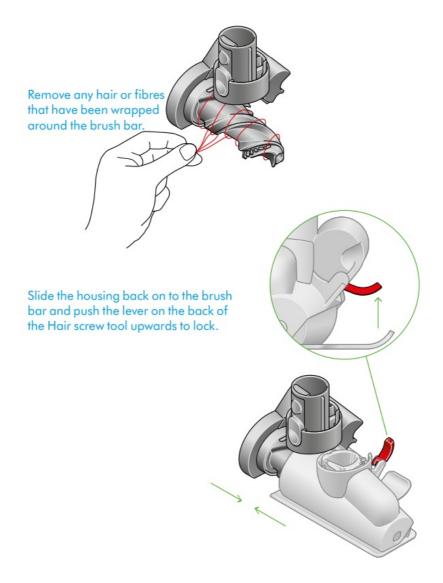

Cleaning your tools

- Don't put any part of your machine in a dishwasher or use detergents, polishes or air fresheners.
- Wipe with a damp, lint-free cloth, without touching the connector end.
- · Make sure your tools are completely dry before using.

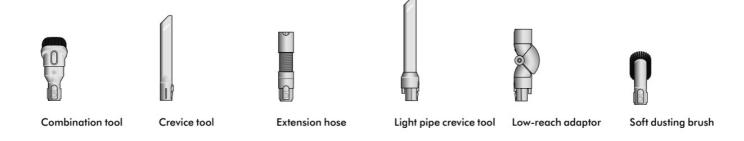



Looking after your machine

To always get the best performance from your machine, it's important to clean it regularly and check for blockages.

Look after your machine

- If your machine is dusty, wipe with a damp lint-free cloth.
- Check for blockages in the cleaner head, tools, and main body of your machine.
- Wash your filter regularly and leave it to dry completely.
- Don't use detergents or polishes to clean your machine.

Look after your battery

- To get the best performance and life from your battery, use Eco or Auto/Med mode.
- Your machine won't operate or charge if the ambient temperature is below 5°C(41°F).
- This is designed to protect both the motor and battery.

Your serial numbers

- You can find your serial numbers on your machine, battery, and charger.
- · Use your serial number to register.

Documents / Resources



dyson V12 Slim Detect Total Clean [pdf] User Manual V12 Slim Detect Total Clean, V12 Slim, Detect Total Clean, Clean

References

- d Dyson vacuum cleaners, hair dryers and stylers, fans, humidifiers, hand dryers and lighting | Dyson
- Support | Customer Service | Dyson

Manuals+,