

First Alert 3040DF Digital Security Box with Cable Installation Guide

Home » First Alert » First Alert 3040DF Digital Security Box with Cable Installation Guide 🖫

Contents

- 1 First Alert 3040DF Digital Security Box with Cable
- **2 Product Information**
- **3 Product Usage Instructions**
- 4 Overview
- **5 Getting Started**
- **6 Programming your Personal Passcode**
- 7 Closing and Securing your Security Box
- 8 Troubleshooting
- 9 Security Cable
- **10 Customer Support**
- 11 Replacement Keys
- 12 Appropriate Use of Your Security Box
- 13 Home and Office Security Safes
- 14 Documents / Resources
 - 14.1 References
- **15 Related Posts**

First Alert®

First Alert 3040DF Digital Security Box with Cable



Product Information

Product Name	Deluxe Security Box with Digital Electronic Lock
Model Number	MFCB3035DF40DF30809
Manufacturer	Unknown

Product Usage Instructions

Getting Started

1. Locate the override keys and batteries. Remove them from the packing material.

2. To open the security box using the override key:

- Remove the cover from the key lock.
- Insert the override key into the key lock and turn it counter-clockwise one quarter turn to the unlocked position.
- Turn the knob counter-clockwise one quarter turn to the unlocked position.
- Lift the lid from the outer edge to open.

3. To install batteries:

- · Locate the battery cover on the back side of the lid.
- Slide off the cover of the battery compartment.
- Properly insert batteries, making sure to note the correct direction.
- · Replace the cover and close the security box lid.
- Return the override key and knob to the locked position.
- Note: Clean the battery contacts in the battery compartment and on the batteries before installing new batteries.

4. To open the security box using the pre-set factory code:

- The pre-set factory code is 3.
- Open the security box with the override key or with the pre-set factory code.

Programming your Personal Passcode

- 1. On the inside of the lid, find and press the red button located to the side of the battery compartment.
- 2. The LED light above the keypad will flash orange.
- 3. Enter your personal passcode, up to 5 digits, followed by the button and then repeat a second time. You must enter the number twice.
- 4. For example: 1 2 3 4 5 1 2 3 4 5
- 5. After the first entry, the LED will flash orange. After the second entry, the LED will flash green and then go out.
- 6. Your personal passcode is now saved. Write it down and store it in a secure place away from the security box.
- 7. Close the lid of your security box and return the knob to the locked position.
- 8. If the override key was used, turn it to the locked position, remove and replace the lock cover.
- 9. Note: The factory pre-set code is no longer active and cannot be used to open the security box.

Closing and Securing your Security Box

- Be careful not to overfill the security box or obstruct the door from completely closing.
- Make sure the knob is in the unlocked position.
- Make sure the lid is closed completely.
- Turn the knob from the unlocked position one quarter turn clockwise to the locked position.
- Your security box should now be secured.

Important

Welcome to the First Alert® Family of Products


Along with peace of mind, your First Alert® Digital Security Box will provide many years of secure storage for your valuables.


• For security, you should:


- Immediately set your own personal combination.
- Store the keys and personal combination away from the security box.

The pre-set factory code for your safe is: 3 *

Overview

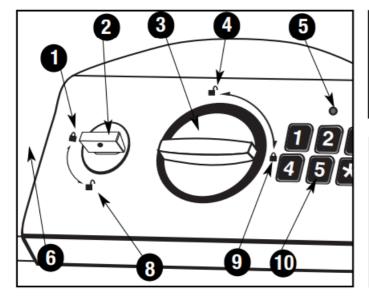





- 1. Locked override key icon
- 2. Override key lock
- 3. Rotating knob or latching handle
- 4. Unlocked knob icon
- 5. LED Indicator light
- 6. Security box lid
- 7. Red code setting button (see diagram to the right)
- 8. Unlocked override key icon
- 9. Locked knob icon
- 10. Digital keypad buttons
- 11. Security cable attachment hole plug

Your Security Box Includes

- (4) "AA" Batteries
- (1) Foam pad providing added protection for your valuables
- (2) Override keys
- (1) Key lock cover
- (1) 4 foot steel secure cable (3040DF, 3040DEF)
- (1) Security cable attachment hole plug (3040DF, 3040DEF)

Getting Started

STEP 1: Locate Override Keys

Keys and batteries are stored in the packing material. Remove them before discarding the box.

- STEP 2: Opening your Security Box using your Override Key
 - Remove cover from key lock.
 - Insert Override Key into key lock and turn the key counter clockwise one quarter turn to the unlocked position.
 - Turn the knob counter-clockwise one quarter turn to the unlocked position. (fig.1)
 - To open, lift from the outer edge of the lid. (fig.2)





Fig. 2

• STEP 3: Installing Batteries

- Locate the battery cover on the back side of the lid. (fig.4)
- Slide the cover off the battery compartment.
- Properly insert batteries, noting correct direction, replace cover and close the Security Box lid.
- Return the Override Key and the knob to the locked position.

NOTE: Clean the battery contacts in the battery compartment and on the batteries before installing new batteries



STEP 4: Opening your Security

- Box using the pre-set factory code
- THE PRE-SET FACTORY CODE IS 3 *
- Using the keypad, enter the factory pre-set code. The LED will flash a green light and stay green for 10 seconds after the button is pressed. You will hear the Security Box unlock.

NOTE: You have 10 seconds to open the Security Box. If the green light goes out, you will have to reenter the code.

- To open, turn the knob from the locked position to the unlocked position, one quarter turn counterclockwise. To open, lift from the outer edge of the lid. (fig.2)
- If the LED light flashes red after you enter the code, this means the code was entered incorrectly and the Security Box will not open.

NOTE: If an incorrect code is entered 3 times in a row, the Security Box will automatically shut down for 4 minutes before it can be opened again using the correct code. During this delay, the Override Key can be used to open the Security Box.

Programming your Personal Passcode


NOTE: For your security, immediately re-program the digital lock to your Personal Passcode. Open your Security Box with the Override Key or with the pre-set factory Passcode.

- On the inside of the lid, find and press the red button located to the side of the battery compartment (Fig.3).

 The LED light above the keypad will flash orange.
- Enter your personal Passcode, up to 5 digits, followed by the button and then repeat a second time. You must enter the number twice.
- For example: 1 2 3 4 5 1 2 3 4 5 After the first entry, the LED will flash orange. After the second entry, the LED will flash green and then go out.
- Your Personal Passcode is now saved. Write it down and store it in a secure place away from the Security Box.
- Close the lid of your Security Box and return the knob to the locked position (Fig. 6). If the override key was used, turn to the locked position, remove and replace the lock cover.

NOTE: The factory pre-set code is no longer active and cannot be used to open the Security Box.

Fig. 3

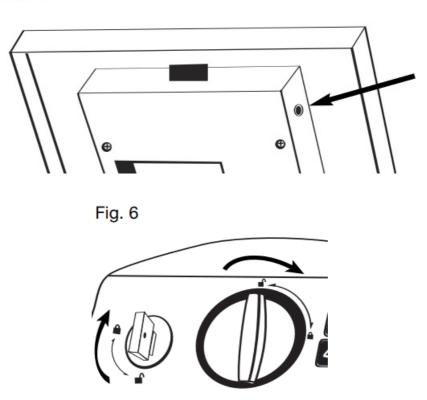


Closing and Securing your Security Box

- Be careful not to overfill your Security Box or obstruct the door from completely closing.
- · Make sure knob is in the unlocked position.
- Make sure lid is closed completely. (Fig. 5)
- Turn the knob from the unlocked position one quarter turn clockwise to the locked position. Your Security Box should now be secured.

NOTE: While the override key is in the unlocked position you can open and close the Security Box by turning the knob from the locked to the unlocked position and back again without entering your personal code. To secure your Security Box, make sure that you have turned the override key to the locked position and have stored the key away from the Security Box in a safe place.

Fig. 5



Troubleshooting

• No light from LED: This indicates that the batteries are expired and need to be replaced. To change the batteries, see Getting Started STEPS 2 & 3.


NOTE: Replacing batteries does not erase your personal code.

- The LED is blinking a red light: This means that your batteries are low. To change your batteries, see Getting Started STEPS 2 & 3.
- Warning: DO NOT FORCE THE KNOB If forced, the knob will break and your Security Box will be damaged.
 When operated correctly, the knob will function so that it can be turned easily into the opened position.
 If you have additional questions while operating your Security Box, please call BRK / SISCO Consumer Affairs at 1-800-223-8566. Please call our Consumer Affairs line prior to returning your Security Box to the retailer.

Security Cable

Models 3040DF / 3040DEF include security cable.

- 1. Remove the plug from security cable attachment hole.
- 2. Loop cable around desired object and then through itself.
- 3. Depress cable release button and while holding down, insert security cable into the hole as shown in diagram, then release button.

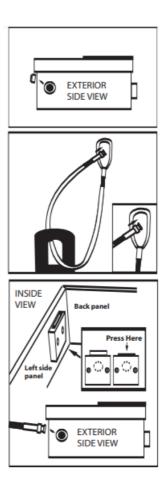

Customer Support

How to Contact Us

• Phone: 1-800-223-8566

- Monday through Friday, 7:30 am to 4:30 pm
- · Pacific Standard Time
- In addition to the required information regarding your Security Box, you must include the best time and proper telephone number to reach you during our normal Consumer Affairs hours. You should receive a reply response via e-mail or phone within 24 business hours or the following business day.
- Attn: Consumer Affairs Dept. BRK / SISCO 2835 E. Ana Street Rancho Dominguez, CA 90221

• Internet: www.FirstAlert.com

Replacement Keys

Ordering Replacement Keys:

If a key becomes misplaced or you would like additional keys for your Security Box, you may conveniently purchase them from our Consumer Affairs Department.

Payment and Delivery:

- In the US, replacement keys are available for a fee and credit card orders are accepted by telephone and through our website. Checks or money orders are required for orders received by mail and should be made payable to SISCO.
- You must supply the following information to assure accurate and prompt processing:

- Name / Address / Telephone
- Security box Model Number
- E-mail address (if available)
- Number of keys requested
- Key number (located on the lock)

Appropriate Use of Your Security Box

Your steel Security Box is designed to provide minimal security against theft and is insulated with fire retardant material. For safes that provide maximum protection from fire or water damage, see your Security retailer, or visit our First Alert® web site: www.FirstAlert.com

Limited warranty

- Your steel Security Box is designed to provide minimal security against theft and is insulated with fire retardant material. For safes that provide maximum protection from fire or water damage, see your Security retailer, or visit our First Alert® web site: www.FirstAlert.com BRK / SISCO warrants its Steel Boxes to be free of defects in material and workmanship for a period of 90 days from the date of purchase. If your Steel Box should fail to work during the first 90 days due to any factory defects, it will be repaired or replaced free of charge. Return the defective Steel Box in its original carton, freight prepaid, using a traceable method along with an explanation of the problem to the address listed below. Upon examination, the unit will either be repaired or replaced and shipped back to you prepaid. This warranty is void if the item has been misused in any way. This warranty only applies to the original purchaser. Please allow 2-4 weeks for the reshipment to arrive.
- BRK / SISCO
- 2835 E. Ana Street
- Rancho Dominguez, CA 90221

Home and Office Security Safes

US/Canada

2835 East Ana Street Rancho Dominguez, CA 90221-5601 USA

• US/Canada Toll Free:

800-223-8566

- US/Canada
 - 。 310-638-1182
 - Fax 310-638-6489
- Europe email: <u>customerserviceeurope@siscoproducts.com</u>

Documents / Resources



<u>First Alert 3040DF Digital Security Box with Cable</u> [pdf] Installation Guide 3040DF Digital Security Box with Cable, 3040DF, Digital Security Box with Cable, Security Box with Cable, Box with Cable

References

- MH_Search Manual-Hub.com
- © Carbon Monoxide and Fire Safety Products | Fire Safety Education | The Most Trusted Brand in Fire Safety
- M_H Search Manual-Hub.com

Manuals+,