


FOREST
DRAPERY HARDWARE
Klick System

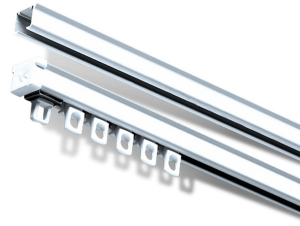

FOREST Klick System Installation Guide


[Home](#) » [FOREST](#) » FOREST Klick System Installation Guide 

Contents

- [1 FOREST Klick System](#)
- [2 Specifications](#)
- [3 PRODUCT INFORMATION](#)
- [4 OVERVIEW](#)
- [5 SPECIAL WINDOW DECORATION](#)
- [6 APPLICATIONS](#)
- [7 MOUNTING BRACKETS](#)
- [8 PART LIST](#)
- [9 FAQ](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)

FOREST
DRAPERY HARDWARE

FOREST Klick System

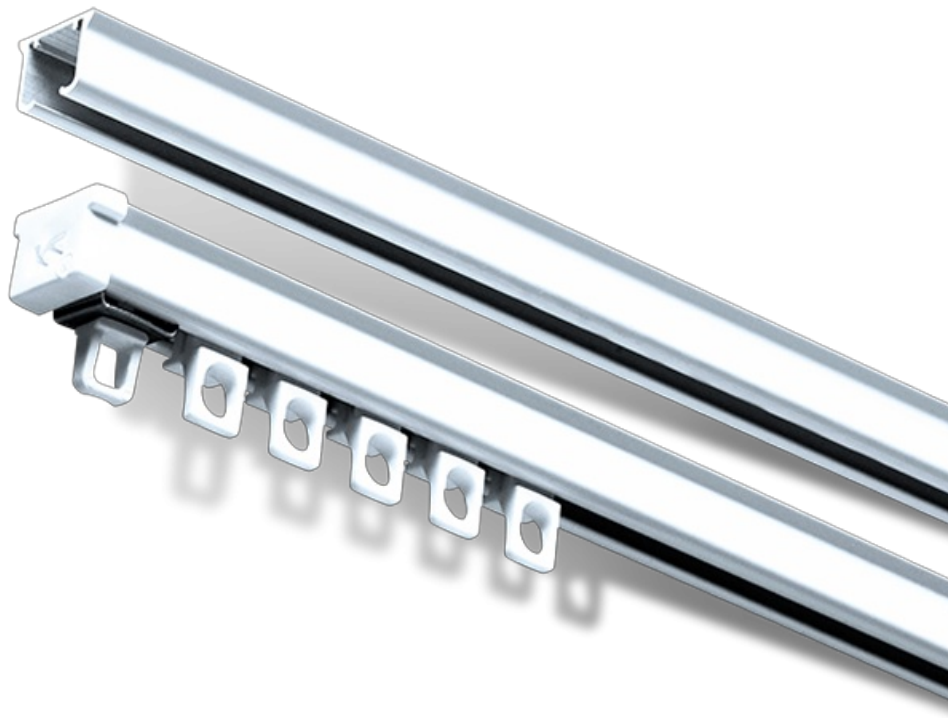

Specifications


- **Profile:** 20 mm (0.8) x 15 mm (0.7)
- Track can be curved with a 10 cm (4) radius
- Mounting Brackets available for wall and ceiling applications
- **Various color options:** White, Grey, Gold, Brown, Black, and more

PRODUCT INFORMATION


- Highly efficient hand drawn system for all types of medium weight draperies.
- Quick installation with “Smart Klick” brackets for wall and ceiling applications with cover caps that conceal the screws.
- Bendable; it can be bent and reversed bent using a 10 cm (4”) radius or continuous curve.
- Suitable for special window decoration as circular, arch and triangle window models.
- Heavy duty clickable carriers, UV-protected, for smooth and easy traversing.
Offset shape for straight hanging pleats.
- Can also be used for Forest Easyfold System and accordiafold drapery systems.
- Maximum fabric weight: 8 kg per meter (6 LBS per ft.).
- Colours available: white, gold, grey, brown, black, cream, & beige.
- Special colours: available on request.
- Available lengths: 3 meter (9’10”),
4 meter (13’1”), 5 meter (16’4”),
6 meter (19’8”), 7 meter (23’).
- Track finish: High quality aluminium, powder coated with a factory applied patented dry lubricant.

PROFILE

- Shown actual size 1:1.
- Aluminium Extrusion.
- **Weight:** 150 grams per meter (1.62 ounce per ft.).
- **Dimensions:** 14 mm x 20 mm (0,6" x 0,8").
- **KS Recess:** 12,5 mm x 21 mm (0,5" x 0,8")

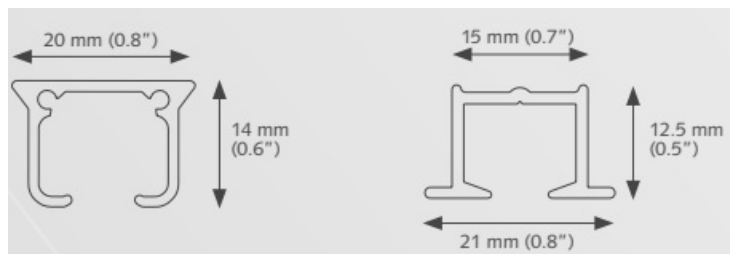


OVERVIEW

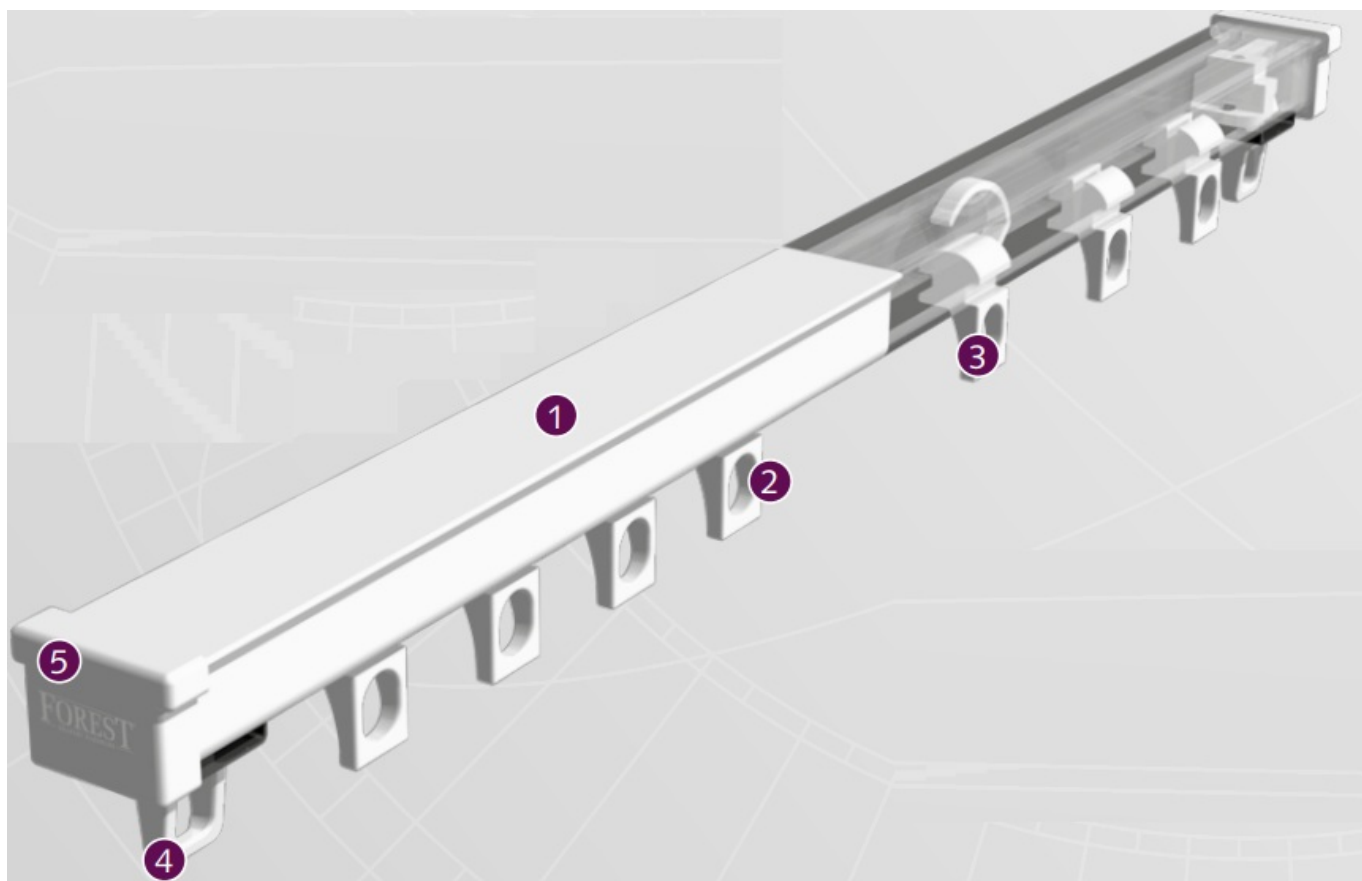

1. KS track
2. Carrier
3. Stop Carrier
4. Twist End Stop
5. Twist End Stop with cap


FOR USE IN

Hotels – offices – schools – healthcare – residences – boats – campers – planes or at any location where an efficient hand drawn system is required.

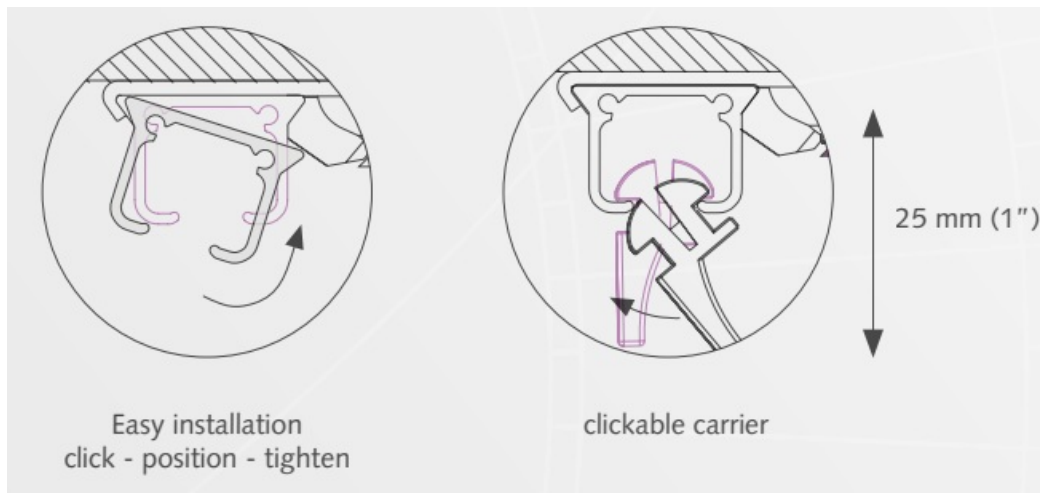


BENDING / CURVING

The track can be curved and reversed curved using a 10 cm (4") radius. Additionally there is a curving possibility for special windows like arches, bows and circles. Bending instructions available on request.

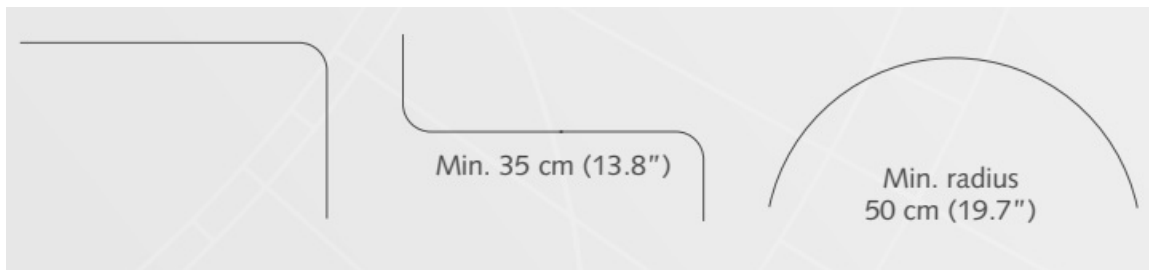


SPECIAL WINDOW DECORATION

Special bends

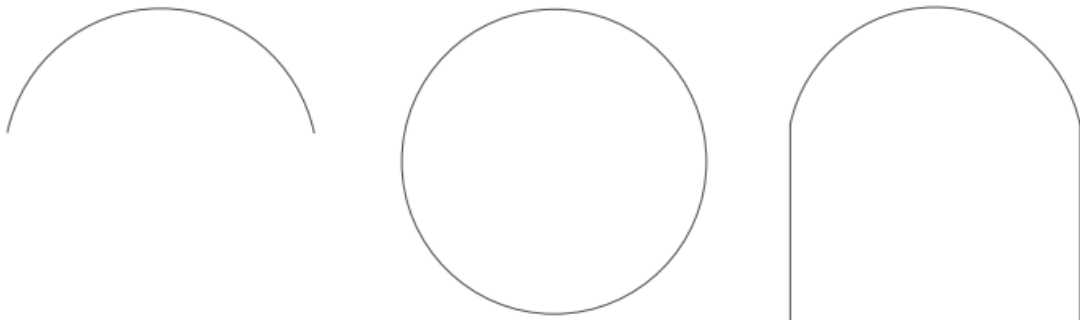


APPLICATIONS

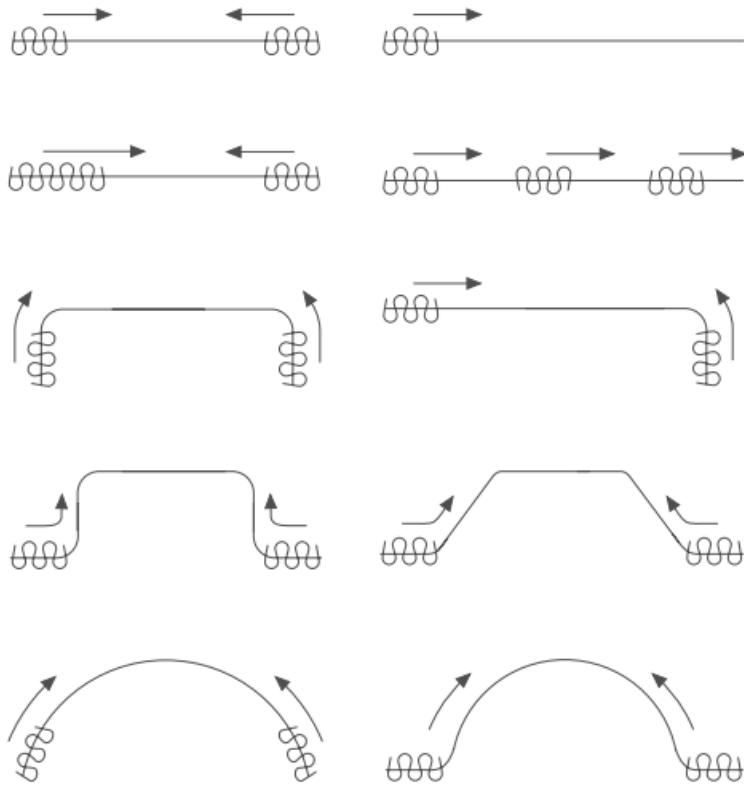


MOUNTING BRACKETS

- Wall bracket
- 3.5 cm (1.4")
- 6 cm (2.4")

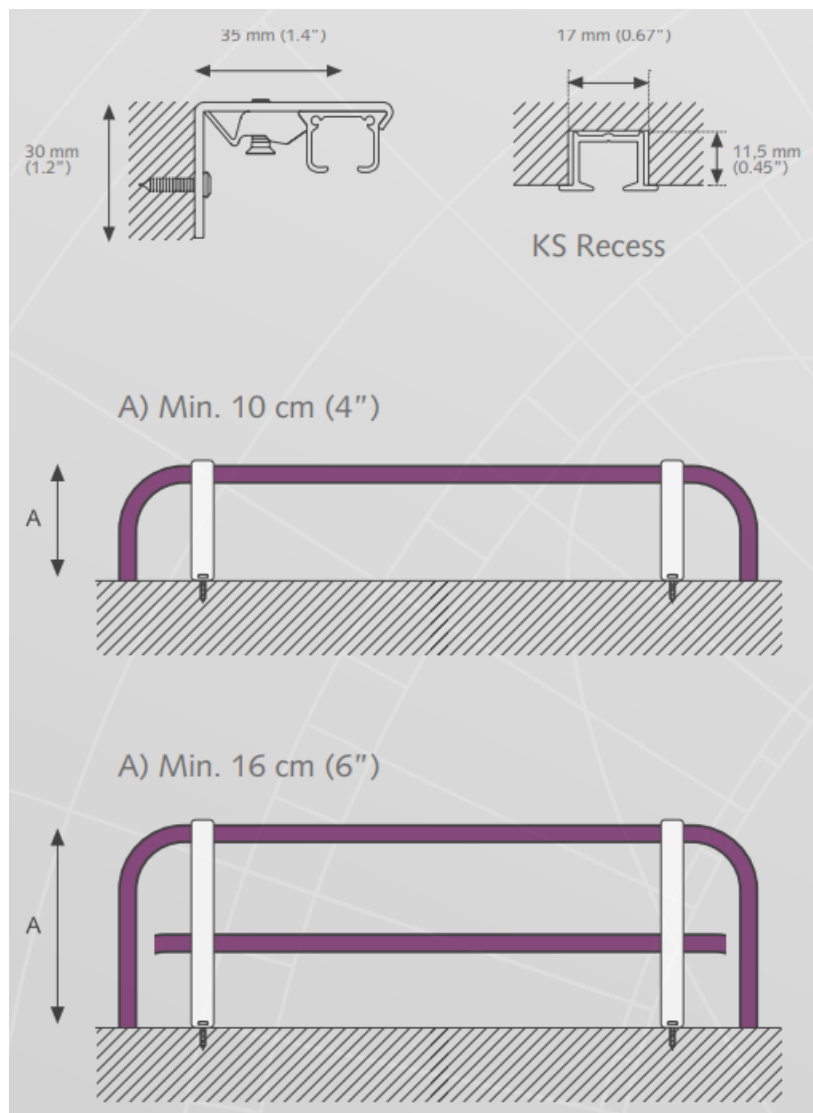


Other brackets are available. Brackets need to be placed every 60 cm (24").
Smart Click Ceiling Bracket

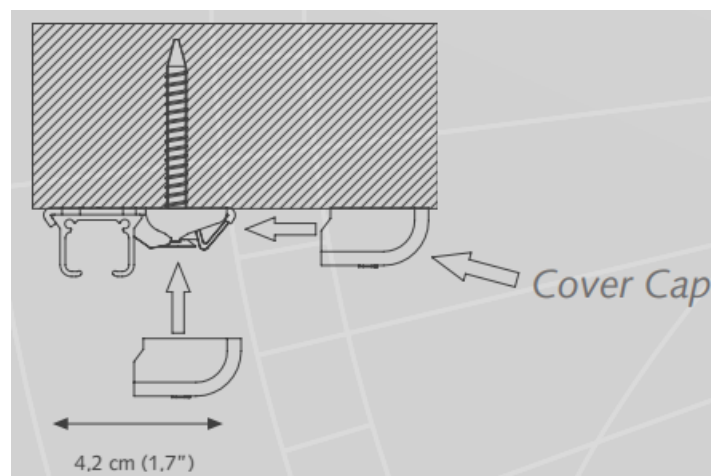


Aluminium Wall bracket single

- A) 7.5 cm (3") B) 6.3 cm (2.5")
- A) 10 cm (4") B) 8.8 cm (3.5")

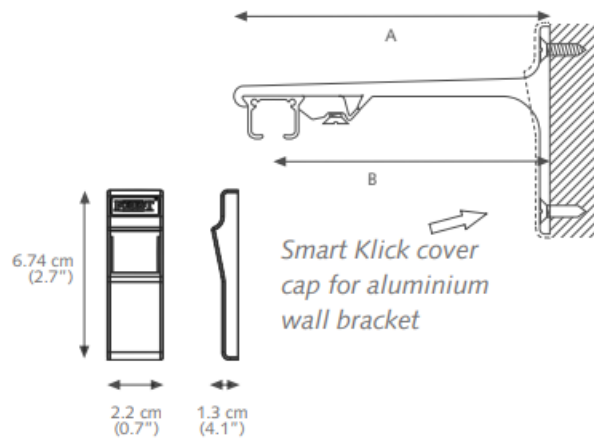


Aluminium Wall bracket double

- A) 15 cm (6") B) 9.2 cm (3.6") C) 4.5 cm (1.8")
- A) 20 cm (8") B) 9.2 cm (3.6") C) 9.5 cm (3.7")

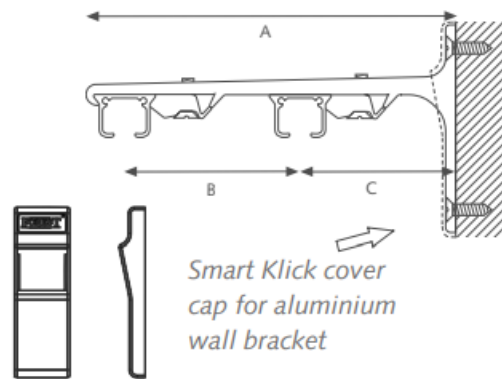







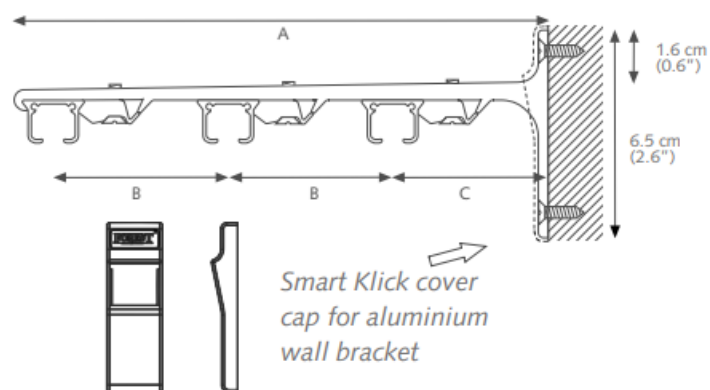





















Aluminium Wall bracket triple













- A) 25 cm (10") B) 9.3 cm (3.7") C) 5 cm (2")














PART LIST

KS	KS RECESS	ARTICLE	PACKING UNIT		ART.NR
●		KS TRACK WHITE Aluminium extrusion, powder coated, lubricated.	60 mtr/bundle 80 mtr/bundle 100 mtr/bundle 120 mtr/bundle 140 mtr/bundle	3 mtr (9'8") 4 mtr (13'1") 5 mtr (16'4") 6 mtr (19'8") 7 mtr (23')	1001001300 1001001400 1001001500 1001001600 1001001700
		KS TRACK GREY Aluminium extrusion, powder coated, lubricated.	120 mtr/bundle 140 mtr/bundle	6 mtr (19'8") 7 mtr (23')	1001003600 1001003700
		KS TRACK GOLD Aluminium extrusion, powder coated, lubricated	120 mtr/bundle	6 mtr (19'8")	1001002600
		KS TRACK BROWN Aluminium extrusion, powder coated, lubricated.	120 mtr/bundle	6 mtr (19'8")	1001005600
		KS TRACK BLACK Aluminium extrusion, powder coated, lubricated.	100 mtr/bundle 120 mtr/bundle 140 mtr/bundle	5 mtr (16'4") 6 mtr (19'8") 7 mtr (23')	1001006500 1001006600 1001006700
		KS TRACK MORE COLOUR OPTIONS Aluminium extrusion, powder coated, lubricated. off-white sand	100 mtr/bundle	5 mtr (16'4") 5 mtr (16'4")	1001011500 1001012500
	●	 KS RECESS TRACK 6 Mtr (19'8") Aluminium extrusion, powder coated, lubricated and pre-drilled.	6 mtr/length	white black	1031011600 1031016600
	●	 MTS FLEXIBLE DUST STRIP. To seal the curtain track opening of the ks recess track during finishing phase.	50 mtr/roll		4518501000
●		 KS TRACK CONNECTORPIN STAINLESS 2X20 MM For a firm and seamless connection between two pieces of KS track.	10/box		9900000012
●		 KS/DS/CKS TRACK CONNECTOR	10/box	white grey black	1018401010 1018403010 1018406010
●		 KS PLASTIC TRACK CONNECTOR Can be inserted in the track, but still allows the carrier to run over.	50/box		1018400000
	●	 KS RECESS INTERNAL CONNECTOR	50/box		1030000001
		MOUNTING SET FOR INTERNAL TRACK CONNECTOR (set consists 200 screws & 2 drill bits)	1/set		8880000001
●	●	 KS AS CARRIER "Klickable", offset, constructed of UV-resistant plastic. 10 Carriers on a break-away strip. Can be clicked in after installation.	500/box	white grey brown black	1010001000 1010003000 1010005000 1010006000
●	●	 KS SYMMETRICAL CARRIER	500/box	white	1010101000
●		 KS STOPCARRIER Prevents slide back, "klickable", constructed of UV-resistant plastic. Not in combination with KS plastic track connector & KS recess connector.	250/box	white grey black	1010201000 1010203000 1010206000
●	●	 KS SHIRRTAPE CARRIER Carrier and hook in one "klickable" unit, constructed of UV-resistant plastic. For sew on drapery tape.	500/box	white grey black	1010401000 1010403000 1010406000
●	●	 KS AS CARRIER WITH METAL HOOK "Klickable", offset, with stainless steel hook, constructed of UV-resistant plastic. For use with grommets.	100/box	white black	1010501000 1010506000

●			MASTER CARRIER/REVERSIBLE Reversible overlap carrier, "Klicks" into track, constructed of UV-resistant plastic. For straight track only. Colours: 01.	25/box		1010301000
●	●		EASYFOLD PLASTIC MASTER UNDERLAP The Plastic Master is reversible. There are also snaps on the back of the Master.	25/box	white transparent grey black	4815201010 4815201000 4815203010 4815206010
●	●		EASYFOLD PLASTIC MASTER STRAIGHT The Plastic Master is reversible. There are also snaps on the back of the Master.	25/box	white transparent grey black	4815101010 4815101000 4815103010 4815106010
●	●		KS TWIST ENDSTOP "Twists" into track, with metal plate, constructed of UV-resistant plastic.	100/box	white grey black	1016201000 1016203000 1016206000
●			KS TWIST ENDSTOP WITH CAP "Twists" into track, with metal plate and end cap, constructed of UV-resistant plastic.	100/box	white grey black	1016301000 1016303000 1016306000
	●		KS RECESS PUNCH ENDSTOP To cover the slot	100/box	white black	1060601000 1060606000
●			KS ENDCAP + SCREW SHORT To be used for a single draw curtain.	100/box	white grey black	1006001000 1006003000 1006006000
●			EASYFOLD KS UNIVERSAL ENDCAP WITH SCREW To be screwed with an Easyfold carrier, made of UV-resistant plastic.	100/box	white grey brown black	4816001000-A 4816003000-A 4816005000 4816006000-A
●			KS WALL SUPPORT RIGHT 2,5 x 5 cm (1"x2") return plate, powder coated.	25/box	white grey	1016601000 1016603000
			KS WALL SUPPORT LEFT 2,5 x 5 cm (1"x2") return plate, powder coated.		white grey	1016701000 1016703000
●			STRAIGHT RETURN R/L 5 x 5 cm (2 x 2") reversible return plate, powder coated.	25/box	white brown	1016501000 1016505000
●			MTS SUSPENSION CEILING BRACKET INCL TUBE Ceiling Bracket for KS. To be used in combination with the Suspension Ceiling Bracket. Length: 10 cm (4") - 100 cm (40") Complete with MTS Insert Screw and MTS Top Piece	1/each	white	4518201000
			MTS SUSPENSION CEILING BRACKET 1,50 MTR WHITE Length: 100 cm (40") - 150 cm (59") Complete with MTS insert screw and MTS Top Piece	1/each	white black	4518201500 4518206150
			MTS SUSPENSION CEILING BRACKET 2,00 MTR WHITE Length: 200 cm (78") Complete with MTS insert screw and MTS Top Piece	1/each	white	4518202000
●			SUSPENSION BRACKET CLIP FOR KS For KS, to be used in combination with the MTS Suspension Ceiling Bracket.	50/box	white black	1016901000 1016906000
●			KS CEILING BRACKET Slides onto the track, powder coated. Regular duty.	100/box	white grey brown black	1018001000 1018003000 1018005000 1018006000
●			KS CEILING BRACKET WITH SLOT Slides onto the track, powder coated. Regular duty.	100/box	white gold grey brown black	1018101000 1018102000 1018103000 1018105000 1018106000
●			KS SMART KLICK CEILING BRACKET "Klicks" onto track, powder coated.	100/box	white grey black	1018201000 1018203000 1018206000

●		KS SMART KLICK CEILING BRACKET INCL COVER CAP "Klicks" onto track, powder coated.	100/box	white grey black	1018201001 1018203001 1018206001
●		KS SMART KLICK COVER CAP Fits on Smart Klick Wall and Ceiling bracket.	100/box	white grey brown black	1019201000 1019203000 1019205000 1019206000
●		FALSE CEILING BRACKET (METAL) For installation on to a suspended ceiling. The track can be fixed in any angle.	25/box	white	4519001000
●		KS SMART KLICK CEILING BRACKET DOUBLE LONG Distance between two tracks: 90 mm (3,5")	30/box	white grey black	1018601000 1018603000 1018606000
		KS SMART KLICK CEILING BRACKET DOUBLE SHORT Distance between two tracks: 60 mm			1018611000
●		FSS MOUNTING BRACKET For concealed installation or ceiling installation in narrow spaces. Heavy Duty.	100/box		7160001000
●		KS CEILING SPLICE BRACKET For ceiling installation only, powder coated.	50/box	white black	1018501000 1018506000
●		KS KLICK-ON CEILING BRACKET WHITE For concealed installation without visible brackets, light weight use only. Use with countersunk screw 3x25mm	100/box	wit grey black	1018301000 1018303000 1018306000
●		KS SK WALL BRACKET 3,5 cm "Klicks" onto track, powder coated. One screw attachment. For light weight use only.	50/box	white grey black	1020201035 1020203035 1020206035
		KS SK WALL BRACKET 6 cm "Klicks" onto track, powder coated. One screw attachment. For light weight use only.		white grey black	1020201060 1020203060 1020206060
●		KS SK WALL BRACKET 7,5 cm	30/box	white grey black	1020201075 1020203075 1020206075
		KS SK WALL BRACKET 10 cm	20/box	white grey black	1020201100 1020203100 1020206100
		KS SK WALL BRACKET 12,5 cm	20/box	white grey	1020201125 1020203125
		KS SK WALL BRACKET 15 cm	15/box	white grey black	1020201150 1020203150 1020206150
		KS SK WALL BRACKET 20 cm KS SK WALL BRACKET 25 cm KS SK WALL BRACKET 30 cm	15/box 10/box 10/box	white white white	1020201200 1020201250 1020201300
●		KS SMART KLICK WALL BRACKET DOUBLE 10 cm For light weight use only.	15/box	white	1020601100
		KS SMART KLICK WALL BRACKET DOUBLE 15 cm For light weight use only.	15/box	white	1020601150
		KS SMART KLICK WALL BRACKET DOUBLE 20 cm For light weight use only.	15/box	white	1020601200
●		KS ADJUSTABLE WALL BRACKET, SINGLE	100/box	white grey	1020801115 1020803115
●		KS ADJUSTABLE WALL BRACKET, DOUBLE	50/box	white	1020801195

●		KS SMART KLICK ALUMINIUM WALL BRACKET 7,5 cm	20/box	white grey brown black	1020301075 1020303075 1020305075 1020306075
		KS SMART KLICK ALUMINIUM WALL BRACKET 10 cm	20/box	white grey black	1020301100 1020303100 1020306100
		KS SMART KLICK ALUMINIUM WALL BRACKET 15 cm	15/box	white grey brown black	1020301150 1020303150 1020305150 1020306150
		KS SMART KLICK ALUMINIUM WALL BRACKET 20 cm	15/box	white grey black	1020301200 1020303200 1020306200
		KS SMART KLICK ALUMINIUM WALL BRACKET 25 cm	10/box	white grey	1020301250 1020303250
●		COVER CAP FOR KS SMART KLICK ALUMINIUM WALL BRACKET	50/box	white grey black	1021301000 1021303000 1021306000
●		KS FLICKSTICK FIBERGLASS	50/box	92 cm 122 cm 152 cm	1065101092 1065101122 1065101152
		KS FLICKSTICK TRANSPARENT	50/box	92 cm 122 cm 152 cm	1065102092 1065102122 1065102152
		KS FLICKSTICK WHITE ALUMINIUM	50/box	92 cm 122 cm 152 cm 202 cm	1065111092 1065111122 1065111152 1065111202
		KS FLICKSTICK Grey ALUMINIUM	50/box	92 cm 122 cm 152 cm	1065113092 1065113122 1065113152
		KS FLICKSTICK BLACK ALUMINIUM	50/box	92 cm 122 cm 152 cm	1065116092 1065116122 1065116152
		KS FLICKSTICK ANTIQUE ALUMINIUM	50/box	92 cm 122 cm 152 cm	1065119092 1065119122 1065119152
●		COMPACT BENDING TOOL For KS / KS RECESS / CKS	1/each		1050000000
		KS BENDING WHEEL ALL-IN incl. strips + wedges KS RECESS BENDING WHEEL ALL-IN incl. strips + wedges			1050100000 1030000000
●		CONTINUOUS CURVER Add on tool for the Compact Bending Tool. Designed to create continuous curves and arches in any radius. Includes KS bending strip. For KS and CKS Track only.	1/each		1060200000
●		ELECTRIC POWERED BENDER Available in 230V or 115V To create continuous curves and arches minimum radius 50 cm (20")	1/each		1060500000
		CHANNEL PROTECTOR with bit	1/set	purple	1070600000
		KS RECESS PUNCH PINCHER	1/each		1060600000
●		KS BENDING STRIP For Compact Bending Tool.	1/each		1060100000
		KS RECESS BENDING STRIP Length of strip: 60 cm (23,6"). 2 strips	1/each		8500000000-A 1030000000-D
		FOR CONTINUOUS CURVER/ELECTRIC BENDER. KS Length of strip: 7 mtr. (23"). KS RECESS Length of strip: 7 mtr. (23").	1/each		1060300000 8500000010
●		KS/CKS BENDING WHEELS For Electric Powered Bender. Complete set of 3 wheels.	1/set		1060700000
		KS RECESS BENDING WHEELS For Electric Powered Bender. Complete set of 3 wheels.	1/set		1030700000
●		ELECTRIC POWERED RAILCUTTER 230 Volt EU	1/each		1061100000
		BLADE FOREST CUTTER NEW MODEL	1/each		1061200001

FAQ

• Q: Can the track be curved for special window shapes?


- A: Yes, the track can be curved using a 10 cm (4") radius. Special bends are also possible for windows like

arches, bows, and circles.

- **Q: How often should mounting brackets be placed?**

- A: Mounting brackets need to be placed every 60 cm (24) along the track for secure installation.

Documents / Resources



[FOREST Klick System](#) [pdf] Installation Guide

KS TRACK WHITE, KS TRACK GREY, KS TRACK GOLD, KS TRACK BROWN, KS TRACK BLACK, KS TRACK MORE COLOUR OPTIONS, Klick System, Klick, System

References

- [F Home | ForestGroup.com](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.