

HOWDENS LEAFWICLTP Corner Walk In Larder Unit Instruction Manual

Home » Howdens » HOWDENS LEAFWICLTP Corner Walk In Larder Unit Instruction Manual



Contents

- 1 HOWDENS LEAFWICLTP Corner Walk-In Larder Unit
- **2 Product Information**
- **3 Product Usage Instructions**
- 4 Components overview
- **5 Planning considerations**
- 6 Cutting the top panel
- 7 Assembly & Installation
- 8 Documents / Resources



HOWDENS LEAFWICLTP Corner Walk-In Larder Unit



Product Information

The Corner Walk-in Larder Unit (LEAFWICLTP) is a versatile storage unit designed for kitchen installations. It is recommended to construct this unit with supporting cabinets on at least one side to ensure rigidity. The unit can be filled with additional cabinets to maximize storage space. The product comes with a rail pack that can be cut to fit different application sizes. The components include wall battens, top panels, range-specific side panels, rail packs, doors, plinth sections, and other necessary hardware

Important Notes:

- Dispose of packaging in an environmentally friendly way.
- Refer to the kitchen installation manual for hinge and door fitting/adjustment information.
- Re-edge visible cut panels.
- Scan the QR code with your smart device to access a digital copy of the kitchen installation manual.

Planning Considerations:

- For tower/larder units on both sides or base & wall cabinets with worktops on each side, the worktops should be chamfered at the ends to enable larder doors to open correctly.
- In an 800mm opening application, wall cabinets can be 450mm using a 62mm spacer/infill requirement on each side.

Product Usage Instructions

Assembly & Installation:

- 1. Start by assembling the basic construction of the unit using the provided components, including the wall battens, top panel, range-specific side panels, rail pack, doors, and plinth sections.
- 2. Secure the cabinets to the wall and together as shown in the wall cabinet section of the kitchen installation manual.
- 3. Refer to the kitchen installation manual for foot-fixing instructions to attach the cabinet legs to the underside of the wall cabinets.

Additional Inside Options:

You can customize the interior of the larder tower by adding additional cabinets. Follow these steps:

- 1. Secure the additional cabinets to the wall and together as shown in the wall cabinet section of the kitchen installation manual.
- 2. Use the SKU suffix codes provided to select the required cabinets.
- 3. In an 800mm opening application, wall cabinets can be 450mm using a 62mm spacer/infill requirement each side.

Cutting the Top Panel:

If you are using a 600mm opening, follow these steps to cut the top panel:

- 1. Locate the guidelines pre-marked on the panel.
- 2. Using a circular saw with a sharp saw blade, cut the panel along the guidelines to fit the 600mm opening.

Note: Always refer to the kitchen installation manual for detailed instructions and specific information related to your installation.

Important Notes:

- Ensure packaging is disposed of in a safe environmentally friendly way
- We recommend this unit is constructed with supporting cabinets on at least one side to ensure rigidity See planning considerations below
- The kitchen installation manual should be used for information on hinge and door fitting/adjustment Cut panels (where visible), should be re-edged
- The interior of the corner larder can be filled with cabinets, see additional unit information


Rail pack supplied at 2055mm for tall applications. Cut to 1875mm for standard applications.

Use the top panel to create a ceiling for your larder unit. This is supplied for an 800mm opening but should be cut down for 600mm opening application.

Components overview

basic construction


Larder Rail Pack x1 (**855)** Range Specific Tower Decor End x2 (std/tall) 155°Hinge Pack x5 (HKC0029) Jointing Plate x2 (HKC0061 or HKC0062) Range Specific Wall Decor End x1

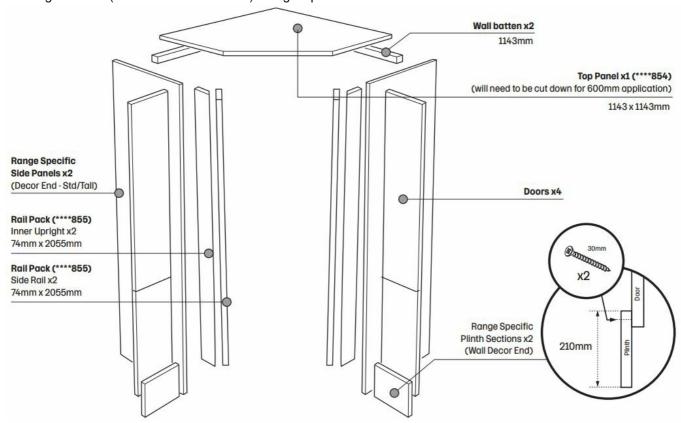

Scan the QR code with your smart device to access a digital copy of the kitchen installation manual




Planning considerations

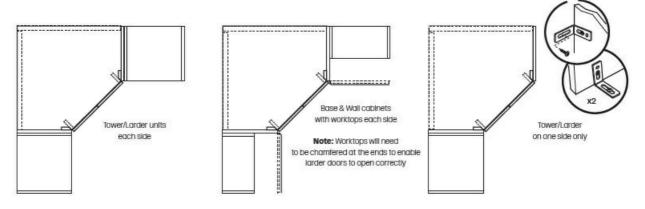

Components overview – additional inside options (Example only)


Additional cabinets can be used inside the larder tower as shown below. Cabinets should be secured to the wall and together as shown in the wall cabinet section of the kitchen installation manual. SKU suffix codes are shown below for the cabinets required.

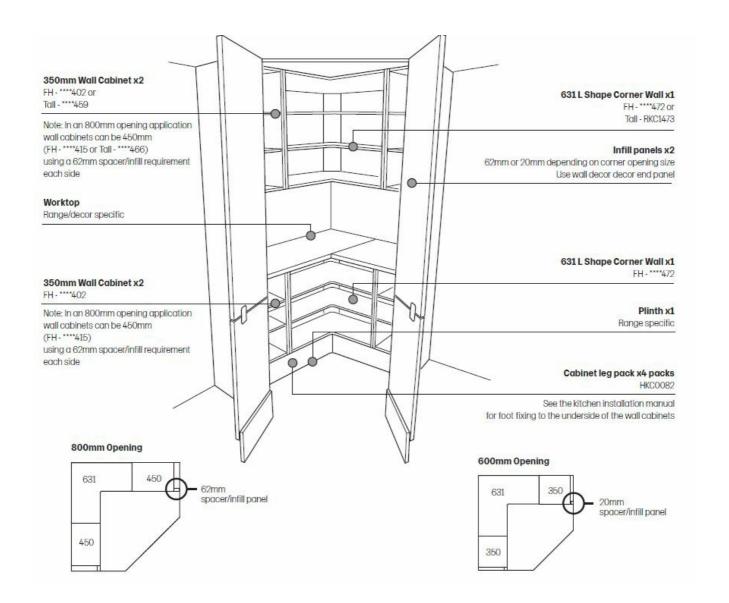


Cutting the top panel

for 600mm opening option only

The top panel has been provided to service an 800-door opening (x2 400 doors). If you're using a 600mm opening, cut the panel along the guidelines pre-marked on the panel, using a circular saw with a sharp saw blade

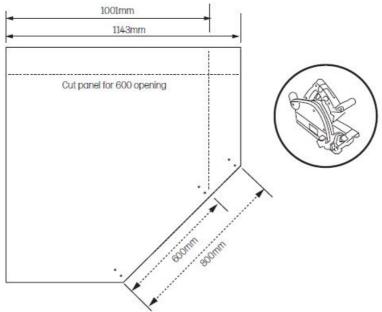

Assembly & Installation

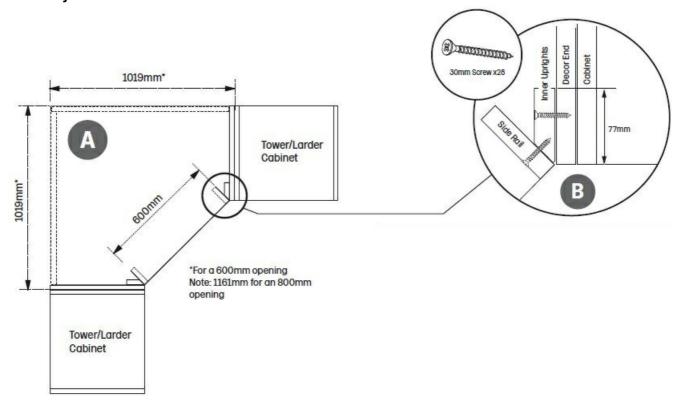

Step-by-Step Guide

- 1. Position the adjoining cabinets to the wall, spacing them 1019mm from the corner* (image A). Secure the cabinets in place using wall fixing brackets, following the kitchen installation manual section 5.
- 2. Fit decor end panels to the cabinets, fitting them flush with the front edge. Scribe to the wall as required (image A).
- 3. Secure the decor ends from inside the adjoining cabinets.

Note: If one side of the corner pantry does not have an adjoining cabinet, the decor end should be secured using metal brackets on the inside back edge and to the floor (see planning considerations on page 1).

4. RAIL PACK APPLICATION (****855)

Cut all four rails to the required length (if applicable)


Important: Rail pack side rails (C) have an identified A face & B face.

- A face = Double door opening application
- B face = Single door opening application
- 5. Fit the inner uprights to the decor end with the angled edge to the front. Secure using 30mm screws in four positions (image B).

Note: Ensure the upright is flush to the top of the decor end.

6. Fit the side rails to the angled edge of the uprights securing with screws (image B).

Note: Position the screws behind where the hinge plates will be located.

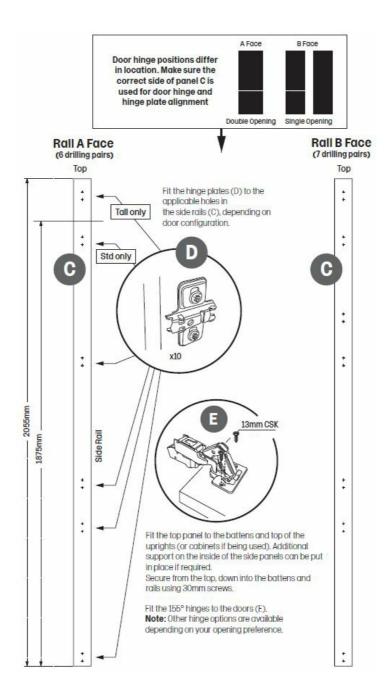

If you are not putting cabinets into your corner larder unit, other interior options can be fitted such as shelving. Use decor end panels and battens to achieve your bespoke shelving options.

Fit the top panel to the battens and top of the uprights (or cabinets if being used). Additional support on the inside of the side panels can be put in place if required. Secure from the top, down into the battens and rails using 30mm screws.


Fit the 155° hinges to the doors (E).

Note: Other hinge options are available depending on your opening preference

Top Panel fixing

- Fit battens to the wall, 18mm below the top edge of the decor end panels. Secure into the wall using suitable wall fixings.
- Fit the top panel to the assembly, resting the panel on the battens and the rails.

Note: If fitting wall cabinets to the inside of the unit, the battens will not be required as the top panel will fit/secure to the top of the cabinets.

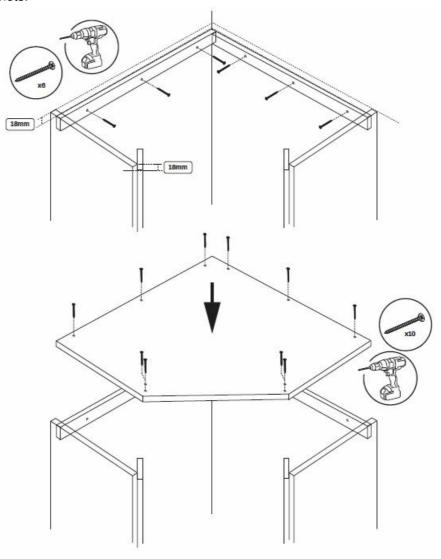

Documents / Resources



HOWDENS LEAFWICLTP Corner Walk In Larder Unit [pdf] Instruction Manual LEAFWICLTP Corner Walk In Larder Unit, LEAFWICLTP, Corner Walk In Larder Unit, Walk In Larder Unit, Larder Unit, Unit

Manuals+,