




ITOONER GNT-P9828V6 AI PoE Switch Owner's Manual

[Home](#) » [iTOONER](#) » ITOONER GNT-P9828V6 AI PoE Switch Owner's Manual 

ITOONER GNT-P9828V6 AI PoE Switch Owner's Manual

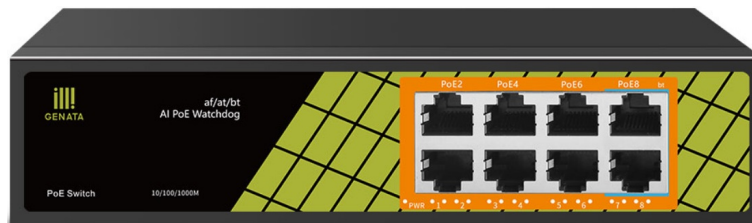


Contents

- [1 Product Features](#)
- [2 Ports Description](#)
- [3 Dimension \(mm\)](#)
- [4 Installation Diagram](#)
- [5 Specifications](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)

Product Features


- Total 120W Power Supply
- 8 ports PoE
- 2 ports Uplink
- AI Watchdog Function
- 6KV Lightning & 8KV ESD Protection
- Support bt 60W High Power

Ports Description

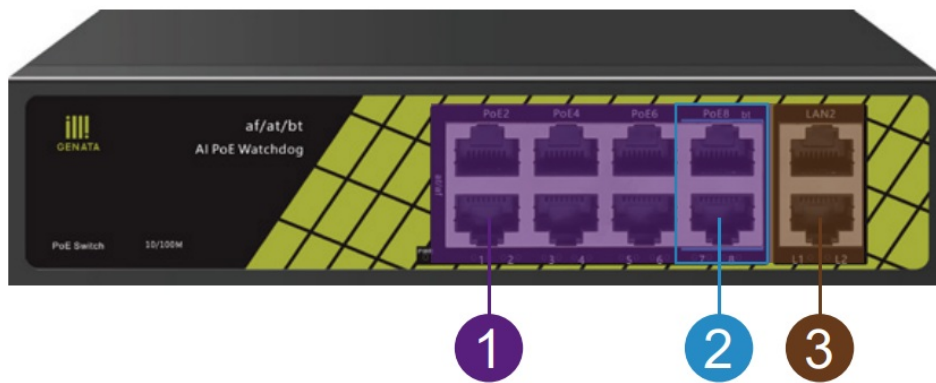

1. 100Mbps PoE Ports
2. bt 60W Power Ports
3. 100Mbps Uplink Ports

Dimension (mm)

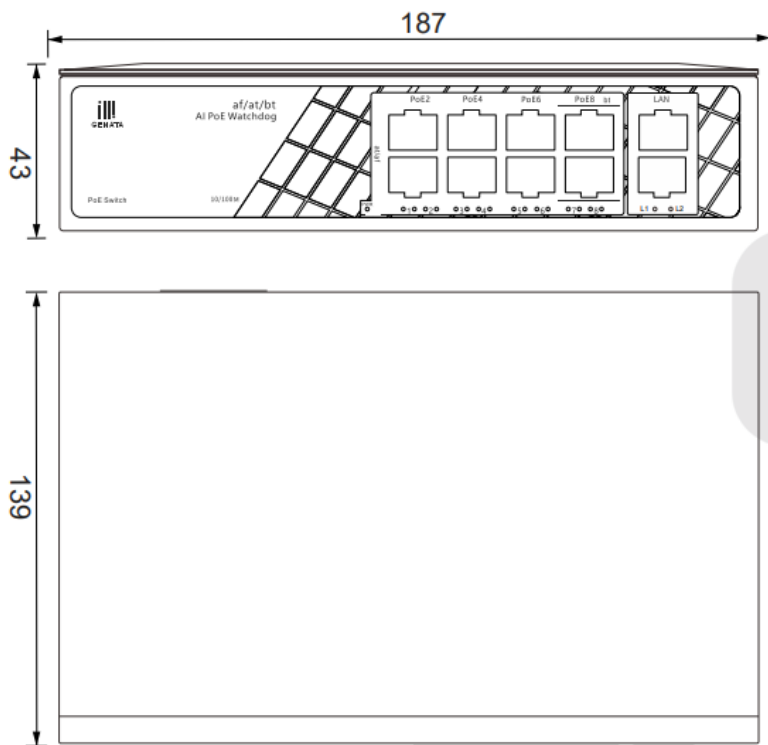

Installation Diagram

- Wall Mounted



- Rack Mounted



- Desktop Mounted



Specifications

Model	GNT-P9828V6
Ports	PoE (1~6):10/100Mbps PoE ports (RJ45) PoE (7~8):10/100Mbps PoE ports (RJ45) ,Support bt 60W High Power LAN(1~2):10/100Mbps uplink ports (RJ45)
Transmission Rate	200Mbps Full Duplex; 10 or 100Mbps Half Duplex
Transmission Distance	130m
Performance Specification	Bandwidth: 2.0Gbps
	Network Latency (10 to 100Mbps): $\leq 16\mu s$ (use the 64byte package size)
	MAC address table: 2K
	The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port
Networking Standard	IEEE 802.3i 10BASE-T
	IEEE 802.3u 100BASE-TX
	IEEE 802.3x Flow Control
	IEEE 802.3af/at/bt Power over Ethernet
Power Support	Power Input: AC 90~240V Total$\leq 120W$ Watchdog: Port 1~8 Power Output: PoE 1~6 Port:1/2(+52V),3/6(GND)$\leq 30W$ PoE 7~8 Port: 1245(+53V),3678(GND) Compatible 1/2(+52V),3/6(GND)$\leq 60W$
Protection Level	Lightning Protection: 6KV ESD Protection: 8KV
Physical Specifications	Size(L*W*H): 187mm*139mm*43mm, Weight: 1.0KG
Working Environment	Operating Temperature: -30°C~60°C
	Storage Temperature: -40°C~70°C
	Operating Humidity: 10%~90% Non-condensing
	Storage Humidity: 5%~90% Non-condensing
Certification	CE Mark
	FCC Part15,Class B
	RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	AC Power Cable,User Manual

※Specifications subject to change without notice.



Documents / Resources



[ITOONER GNT-P9828V6 AI PoE Switch](#) [pdf] Owner's Manual
GNT-P9828V6, GNT-P9828V6 AI PoE Switch, AI PoE Switch, PoE Switch, Switch

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.