


# **Keychron V2 Max Wireless Custom Mechanical Keyboard User Guide**

Home » Keychron » Keychron V2 Max Wireless Custom Mechanical Keyboard User Guide 🖺



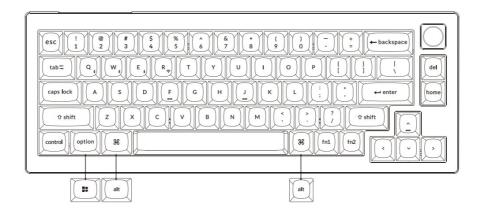


#### Contents

- 1 V2 Max Wireless Custom Mechanical Keyboard
- 2 Documents / Resources
  - 2.1 References
- 3 Related Posts


# **V2 Max Wireless Custom Mechanical Keyboard**


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.


Connect 24GHz Receiver
Connect the 2.4GHz receiver to the device USB Port.



# Switch toggle to 2.4GHz mode









**Note:** For the best wireless experience, we recommend using the extension adapter for receiver and putting the 2.4GHz receiver somewhere on your desk close to your keyboard for a low rate of latency and fewer signal interferences.

#### 2. Connect Bluetooth







# Switch toggle to Bluetooth



Press fn1 + Q (for 4 seconds) and pair with device named Keychron V2 Max.




# 3. Connect Cable.



# 4. SwitchTo The Right System

Please make sure the system toggle on the top left comer has been switched to the same system as your computer's operating system.



# 5. The VIA Key Remapping Software

Please vist useviaapp to use the online VIA software to remap the keys.

If the VIA cannot recognize your keyboard, please reach our support to get the instruction.



- \* The online VIA software can only run on the latest version of Chrome, Edge, and Opera browsers yet.
- \* VIA only works when the keyboard is connected by wire to the computer.

#### 6. The Layers

There are five layers of key settings on the keyboard.


The layer 0 is for the Mac system.

The layer 1 is for the Windows system.

The layer 2 is for the Mac Multimedia keys.

The layer 3 is for the Windows Multimedia keys.

The layer 4 is for function keys.



If your system toggle is switched to Mac, then the layer 0 will be activated.





If your system toggle is switched to Windows, then the layer 1 will be activated.



#### 7. The Backlight


Press fn1 + A to change the lighting effect






# 8. Adjust The Backlight Brightness

Press fn1 + S to increase the backlight brightness



Press fn1 + X to decrease the backlight brightness




#### 9. Warranty

The keyboard is highly customizable and easy to be rebuilt.

If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



#### 10. Factory Reset

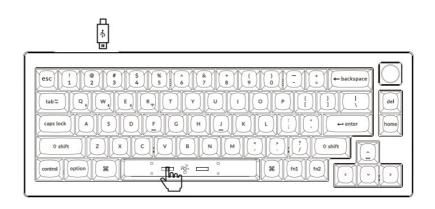

Troubleshooting? Don't know what's going on with the keyboard?

- 1. Download the right firmware and QMK Toolbox from our website.
- 2. Unplug the power cable and switch the keyboard to Cable mode.
- 3. Remove the space bar keycap to find the reset button on the PCB.
- 4. Hold the reset key first, then plug the power cable into the keyboard.

Release the reset key after 2 seconds, and the keyboard will now enter DFU mode.

- 5. Flash the firmware with the QMK Toolbox.
- 6. Factory reset the keyboard by pressing fn2 + J + Z (for 4 seconds).
- \*Step by step guide can be found on our website.



#### **Documents / Resources**



Keychron V2 Max Wireless Custom Mechanical Keyboard [pdf] User Guide V2 Max Wireless Custom Mechanical Keyboard, V2 Max, Wireless Custom Mechanical Keyboard, Custom Mechanical Keyboard, Mechanical Keyboard, Keyboard

#### References

User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.