



[Home](#) » [KTC](#) » **KTC H27P6 LCD Monitor User Guide** 



LCD Monitor
KTC H27P6
Display User Guide



Please read the Use Guide carefully and keep it properly. The pictures involved in the User Guide are for reference only, please refer to the actual product for details.

Contents [[hide](#)]

- 1 Important Safety Precautions
- 2 Product Introduction
- 3 Keys And Interfaces
- 4 Base And Wall Mount
- 5 Mounting Location
- 6 Safety Protection
- 7 Power Management System
- 8 Product Technical Specifications
- 9 Simple Problems Disposal
- 10 Product Warranty Card
- 11 Documents / Resources
 - 11.1 References

Important Safety Precautions

1. Please read all the instructions carefully before using the product.
2. When cleaning the display, please unplug the power cord. Please wipe the display with a soft wet cloth instead of liquid or spray cleaner. Please use LCD screen cleaner in case of a stubborn stain.
3. DO not use accessories that are not recommended by the manufacturer, or there may be dangerous.
4. When unplugging the power cord of the display or the power adapter, please hold the power plug with your hand rather than directly pull the power cord to unplug it.
5. DO not place the display near water, such as bathtub, washbasin, kitchen sink, or washing machine. Do not place the display on the wet ground, or near the swimming pool. Do not use fingers or hard objects to press the surface of the LCD screen.
6. The grooves and holes on the shell or at the back and bottom of the display are designed for the ventilation and heat dissipation of the components to ensure reliable operation. So, do not put the display on the bed, sofa, carpet, or similar surfaces of other objects to prevent the heat dissipation holes from blocking and do not place the display near or above the radiator or heater. In addition, do not place the display in an embedded device unless adequate ventilation is provided.
7. Only the power supply type shown on the nameplate can be used for the display.

Please feel free to consult the display dealer or the local power supply administration, if you have any doubts about your power supply type.

8. For safety, the display or the power adapter uses a power cord with a three-prong plug, whose third prong can only be properly grounded when used with a properly grounded socket. If your socket cannot match with the plug, please contact an electrician to replace your original socket so that the plug can give full play to ensuring safety.
9. As you may face high voltage or other dangers after removing the shell, do not repair the display by yourself. You can have it repaired by qualified maintenance personnel.
10. Please unplug the power cord of the display or the power adapter from the socket, and contact qualified maintenance personnel for repairing the display, when following cases occur:
 - a. The power cord or the plug is damaged or worn out.
 - b. The display has been dropped from high or the shell is damaged.
 - c. Any obvious abnormality.
11. Please place the display in a well-ventilated environment, which is away from strong light, high temperature, or humidity.
12. The temperature for the display store is $-20^{\circ}\text{C}\sim 55^{\circ}\text{C}$, or it may be permanently damaged.
13. The monitor screen is fragile, so please be careful when moving or handling it!

Product Introduction

It is a kind of high-performance intelligent multiple frequency scanning display, which adopts active matrix thin film transistor LED-backlit LCD. The display is controlled through the microcomputer MCU digital technology. It is compact and lightweight, which is suitable for narrow working spaces.

Before installation, please check whether the following accessories are complete in the packing box:


- LCD×1
- Basex1
- DP Signal linex1
- Power Adapter×1
- Power cord x1

– User Guidex1 (including warranty card)

If any of above accessories are missing, please contact with product distributor immediately.

Notice: Specific accessories in order to prevail in kind. Please keep packing materials for future movement.

Keys And Interfaces

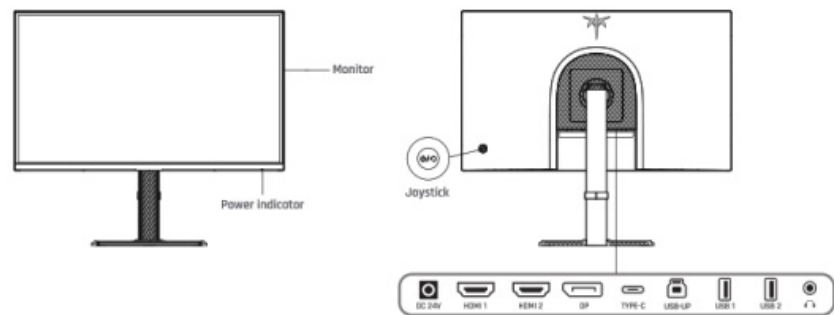

	Initial Shortcut Keys	Enter the Function Menu
↑	Signal Source Input	Move Up
↓	Brightness	Move Down
←	Shortcut Key for Gaming Assistance	Exit and Return Previous Menu
→	Shortcut Key for Preset	Open Sub-menu and Select an Option
⦿	Turn on the display by short-pressing. Turn off the display by pressing and holding for 3 seconds.	Turn off the display by pressing and holding for 3 seconds

Signal Cable Connection

Connect the signal cable to the HDMI or DP signal output port on the PC, then connect the other end of the signal cable to the corresponding signal input port on the LCD.

Headset Connection


After connecting the headset, there will be audio output, and it also supports external

loudspeakers.


USB Upgrade USB3.0: 5V \equiv 0.9A

Connect the USB3.0 Type-B cable to the USB uplink port of the monitor and the USB port of the chassis or connect the Type-C cable to the Type-C port of the monitor and the Type-C port of the chassis respectively, and switch the corresponding KVM interface through the joystick button, and the USB port on the display has the data transmission function.

Base And Wall Mount

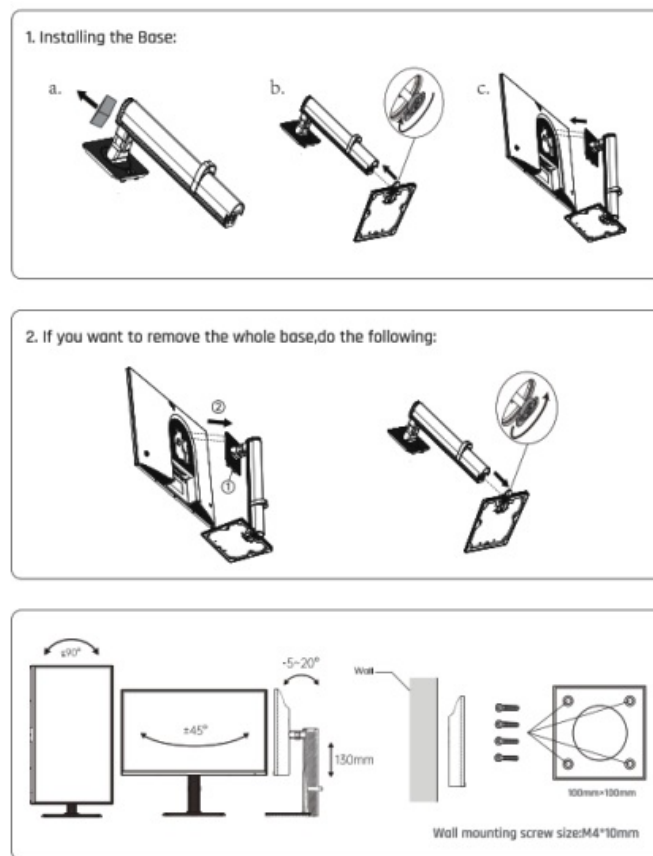

Mounting Location

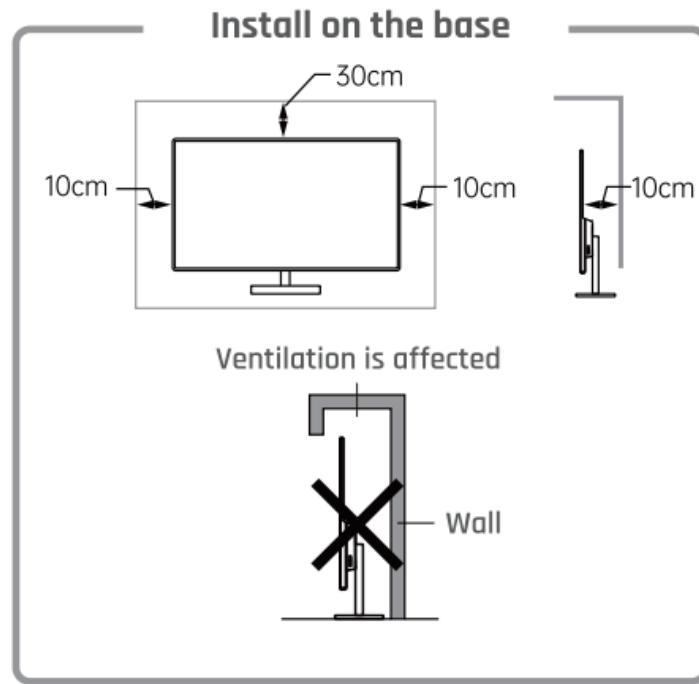

Ventilation

- please leave the space around the display with the size of least shown in the figure.
- DO not cover the ventilation holes or insert anything into the shell,
- Unless there are proper ventilation conditions and adequate ventilation space around the display, do not place the display within a limited space, such as a book cabinet or a built-in closet.

Installation Guide

- The display should be installed near an AC power socket that can be easily pluggable.
- It is recommended to use suitable base for safety purpose.
- To prevent injury, the display should be placed on a smooth horizontal plane.
- Do not place the display where it may be suffered from mechanical vibration.
- Do not place the display where insects may enter.
- Do not place the display directly facing an air conditioner, or the internal panel may condense, leading to faults.
- Do not place the display where there is a strong electromagnetic field, or it will be interfered and damaged by the electromagnetic waves.

Safety Protection

When the PC video signal exceeds the frequency range of the display, the display will disable the line and field synchronizing signals to protect the display. Under this

circumstance, you must set the output frequency of the PC to an acceptable range for the display to work properly.

Power Management System

Mode	Power Consumption
Normal Operation	≤168W
Standby	≤0.5W

Remark: All technical specifications in the User Guide and on the external packing are allowed to change without prior notice. If there is a subtle difference between the User Guide and the actual operation, the latter shall prevail.

Product Technical Specifications

Panel Dimension	27"
Best Operating Resolution Ratio	3840×2160@160hz/ 1920×1080@320hz (Dual mode switching)
Power Input	DC 24V / 7A
Contrast	1000:1(TYP)
Visible Area	596.16mmx335.34mm
Pitch size for wall mount	100mmx100mm

Working Environment Requirements Maximum altitude Operating temperature and humidity Storage temperature and humidity	5000m 0 C ~40C 30% ~ 90 % (Non -20 C~55 C 20%~ 93%(Non-condensing)
---	--

Simple Problems Disposal

Symptoms	Disposal Methods
1.Blank screen /Power indicator does not work	Check whether the power supply is in good contact with the display and the power socket; and check whether the display is turned off.
2.Dark screen	Enter the “Display” menu to regulate the contrast and the brightness of the display.
3.Display overheating	Leave at least 10cm of ventilated space around the display. Do not place articles on the display.
4.Dork/light spots when powered on	It is normal. Because of the temperature difference in the environment, the backlit tube emits uneven light of the initial stage after the display turns on. However, the backlit tube will emit normal light after 20 minutes, and the dark/light spots will be eliminated at that time.
5.Image distortion, flashing, shaking	Check your computer configuration, choose the correct resolution, and reset your refresh rate.
6.Noisy signal when powered off	During the power-off of the display, there may be some noisy signals on the screen caused by the normal discharge.



<https://en.ktcplay.com/>

More Information

Please scan QR code or visit [EN.KTCPLAY.COM](https://en.ktcplay.com/)

Any question or comments. Please contact:

support@ktcplay.com

support.eu@ktcplay.com [Europe]

To care for and protect the earth better, please send it to a local manufacturer with nationally recognized qualification for recycling according to the national applicable laws and regulations on recycling of waste electrical and electronic products when you no longer need this product or at the end of its service life.

HDMI™ The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

Product Warranty Card

Customer Name	
Tel	
Address	
Model	
Device Number	
Purchase Date	

Warranty Rules

1. We provide you with a three-year free warranty from the date of purchase or as agreed in the contract.
2. The following cases are not covered by the warranty:
 - Failure or damages caused by artificial or natural disasters.
 - Failure caused by not following the operation method and precautions written in the User Guide.
 - Failure caused by user disassembly.
3. The liability scope of the warranty card is limited to the maintenance of the product,

without covering any other liability.

4. If you are not sure about the repair and warranty of the machine after the warranty period, please visit the website EN.KTCPLAY.COM for the warranty policy.



Notice: Please fill out the card and return it to us, when you apply for a warranty.



Documents / Resources

	KTC H27P6 LCD Monitor [pdf] User Guide H27P6 LCD Monitor, H27P6, LCD Monitor, Monitor
--	--

References

- [User Manual](#)

💎 H27P6, H27P6 LCD Monitor, KTC, LCD Monitor,

📁 KTC Monitor

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.