

Lenovo Chelsio 10GbE Adapters for IBM System Cluster 1350 and IBM iDataPlex Owner's Manual

Home » Lenovo Chelsio 10GbE Adapters for IBM System Cluster 1350 and IBM iDataPlex Owner's Manual ♣



Chelsio 10GbE Adapters for IBM System Cluster 1350 and IBM iDataPlex Owner's Manual (withdrawn product)

Contents

- 1 Chelsio 10GbE Adapters for IBM System Cluster 1350 and IBM iDataPlex
- 2 Part number information
- 3 Features
- **4 Specifications**
- **5 Supported servers**
- 6 Related publications
- 7 Notices
- 8 Documents / Resources
 - 8.1 References
- 9 Related Posts

Chelsio 10GbE Adapters for IBM System Cluster 1350 and IBM iDataPlex

Chelsio single-port and dual-port adapters for IBM System Cluster 1350 and IBM iDataPlex are 10 Gigabit Ethernet adapters with PCI Express host bus interface optimized for virtualization, high performance computing, and storage applications. The third generation technology from Chelsio provides the highest 10GbE performance that is available and dramatically lowers host system CPU communications overhead.

With on-board hardware that off-loads TCP/IP, iSCSI, and iWARP RDMA processing from its host system, these adapters free up host CPU cycles for business applications and result in increased bandwidth, lower latency, and lower power. This combination makes it practical to converge other networks that traditionally used niche technologies onto 10GbE. High bandwidth and extremely low latency make 10GbE with protocol offload the best technology for high-performance cluster computing (HPCC) fabrics.



Figure 1. Chelsio dual-port 10GbE adapters: The S320E (left) and the 10GbE Expansion Card (CFFh) for BladeCenter (right)

Did you know?

These Chelsio adapters enable the concept of unified wire, the convergence of server networking, storage networking, and cluster computing interconnects onto a single platform and a single fabric.

These Chelsio adapters are part of the IBM System Cluster 1350 solution. The Cluster 1350 is your key to a fully integrated HPC solution. IBM clustering solutions include servers, storage, and industry-leading interconnects that are factory-integrated, fully tested, and delivered to your door, ready to plug into your data center, all with a single point of contact for support.

Click here to check for updates

Part number information

Table 1. Ordering part number and feature code

Description	IBM part num ber	Feature co de	Chelsio part num ber	
Chelsio S310E Single-port 10GbE PCle x8 Adapter	59Y1952	5761	S310E-CR	
Chelsio S310E Single-port 10GbE PCIe x8 Adapter (SFP+ connector)	46M1809	5493	S310E-SR+	
Chelsio S310E Single-port 10GbE PCIe x8 Adapter (CX4 c onnector)	46M1813	5494	S310E-CXA	
Chelsio S320E Dual-port 10GbE PCIe x8 Adapter	59Y1956	5762	S320E-CR	
Chelsio 10GbE Expansion Card (CFFh) for BladeCenter	46M1817	5495	S320EM-BCH	



Figure 2. Chelsio S310E Single-port 10GbE PCIe x8 Adapter, 59Y1952

Features

These Chelsio single-port and dual-port adapters for IBM System 1350 and iDataPlex have following features:

- Unified Wire interconnect solution for server networking, storage networking, and clustering on asingle platform
- · Very low latency Ethernet
- Reduces host CPU utilization by up to 90% compared to NICs without full offload capabilities
- PCI Express 1.1 x8 host bus interface
- Line-rate 10Gbps full-duplex performance
- · Integrated traffic manager, QoS, and virtualization capabilities
- TCP sockets, SCSI, RNIC-PI, kDAPL, and Open Fabrics 1.3 software interfaces
- · Ideal fit for scale up servers and NAS systems
- · Consolidate LAN, SAN, and cluster networks
- Enable high performance NAS systems and Ethernet-based IP SANs
- Deploy Ethernet-only IP SANs throughout the enterprise beyond the data center
- · Develop shared-storage systems providing both file- and block-level services
- Deploy Ethernet-only networking for cluster fabric, LAN, and SAN
- Full TCP offload, iSCSI, and iWARP RDMA plus direct data placement (DDP)
- Increase cluster fabric bandwidth and deploy Ethernet-only networking for cluster fabric, LAN, and SAN

Table 2 compares the adapters.

Table 2. Comparison of the adapter cards

Feature	Single-port CR	Single-port SR+	Single-port CX A	Dual-port CR	Dual-port CFF h	
Part number	59Y1952	46M1809	46M1813	59Y1956	46M1817	
Form factor	Low profile PCIe card	Low profile PCIe card	Low profile PCIe card	Half-length PCle card	BladeCenter C FFh	
Ports	1	1	1	2	2	
Connector(s)	SFP+ cage*	SFP+	CX4	SFP+ cage*	CFFh connecto	
Power consum ption	16.7W	17W	16W	21.7W	16W	

^{*} These cards support the use of SFP+ transceivers or twinax direct-attach cables (DACs)



Figure 3. Chelsio S310E Single-port 10GbE PCle x8 Adapter (CX4 connector), 46M1813

Specifications

The Chelsio single-port and dual-port adapters for Cluster 1350 and iDataPlex have the following features: **Network Interfaces:**

- 10GBASE-SR short-reach optics (850nm)
- 10GBASE-LR long-reach optics (1310nm)
- 10GBASE-CX short-reach copper

Ethernet:

- IEEE 802.3ae (10GbE)
- IEEE 802.1p Priority and 802.1Q VLAN tagging
- IEEE 802.3x flow control
- IEEE 802.3ad link aggregation
- Ether II and 802.3 encapsulated frames
- Multiple MAC addresses per interface

• Jumbo Frames up to 9.6 KB

Stateless Offloads:

- TCP checksum offload for IPv4 & IPv6
- TCP Segmentation Offload (TSO) for IPv4 & IPv6
- Large Receive Offload (LRO) for IPv4 & IPv6
- Large Send Offload (LSO) for IPv4 & IPv6
- UDP checksum offload for IPv4 & IPv6
- · Receive Side Scaling and packet steering
- · Line rate packet filtering and attack protection

TCP/IP Full Offload:

- Full TCP implementation including exceptions
- · High performance even during packet loss
- · Extensive RFC compliance, fully featured stack
- · Zero copy on Tx and Rx
- Direct Data Placement (DDP)
- Up to 64 K simultaneous connections capacity

Integrated Traffic Manager:

- Multiple Tx & Rx queues with QoS
- · Simultaneous low latency and high bandwidth
- Per-connection and per-class rate control
- · Packet loss avoidance

Virtualization and Firewall:

· Rule-based packet steering and filtering capability

iSCSI Acceleration:

- Full iSCSI initiator and target mode stack
- · Header and Data Digest (CRC) generation and checking
- · PDU recovery
- Direct Data Placement (DDP)

High Performance RDMA:

- Ultra-low latency, line rate bandwidth
- IETF RDDP and RDMAC iWARP compliance
- APIs: RNIC-PI, kDAPL and OpenFabrics 1.3

Physical specifications

The three single-port adapters have the following physical specifications:

Width: 168 mm (6.60 in)Height: 64 mm (2.52 in)Depth: 18 mm (0.69 in)

The S320E dual-port 10GbE adapter has the following physical specifications:

Width: 168 mm (6.60 in)Height: 107 mm (2.52 in)Depth: 18 mm (0.69 in)

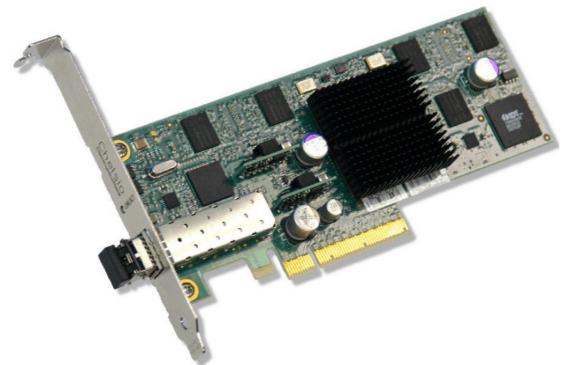


Figure 4. Chelsio S310E Single-port 10GbE PCIe x8 Adapter (SFP+ connector), 46M1809

Operating environment

This adapter is supported in the following environment:

• Temperature (operating): 0° to 55° C (32° to 131° F)

• Humidity (operating): 5 to 95%, non-condensing

· Airflow: 200 lf/m

Supported servers

The Chelsio single-port and dual-port adapters are supported in the IBM servers that are listed in Table 3. Table 3. Supported servers in the 1350 program

		x355 0 M 2	x365 0 M 2	x375 5	iDat aPle x dx 360 M2	HS2 2	LS2 2	LS4 2	JS23 /JS4 3
Chelsio S310E Single-port 10GbE P Cle x8 Adapter	59Y1952	Y	Υ	Υ	Υ	N	N	N	N
Chelsio S310E Single-port 10GbE P Cle x8 Adapter (SFP+ connector)	46M1809	Y	Υ	Y	Υ	N	N	N	N
Chelsio S310E Single-port 10GbE P Cle x8 Adapter (CX4 connector)	46M1813	Y	Υ	Υ	Υ	N	N	N	N
Chelsio S320E Dual-port 10GbE PCI e x8 Adapter	59Y1956	Y	Υ	Υ	Υ	N	N	N	N
Chelsio 10GbE Expansion Card (CF Fh) for BladeCenter	46M1817	N	N	N	N	Υ	Υ	Υ	Υ

Supported operating systems

The Chelsio adapters support the following operating systems (including support for both TOE and NIC mode, unless otherwise stated):

- FreeBSD
- Kernel.org Linux-2.6.9, 2.6.12, and 2.6.20
- Red Hat Enterprise Linux 3 base kernel (NIC only, no TOE support).
- Red Hat Enterprise Linux 4 U3, U4, U5, U6, U7, and U8
- Red Hat Enterprise Linux 5 base, U1, U2, U3, and U4
- · Solaris and Open Solaris
- SUSE Linux Enterprise Server 9 SP3 (NIC only, no TOE support)
- SUSE Linux Enterprise Server 10 base, SP1, SP2 and SP3
- SUSE Linux Enterprise Server 11 base
- Microsoft Windows Server 2003 SP2 (x64)
- Microsoft Windows Server 2008 R2 (x64)
- VMware ESX/ESXi 3.5
- VMware ESX/ESXi 4.0

See Chelsio driver README file for the latest information about the specific versions and service packs that are supported, available from: http://www.chelsio.com/support

Related publications

For more information, refer to these resources:

- Chelsio Adapters driver download, Installation, Configuration, troubleshooting, support http://service.chelsio.com/ibm.html
- IBM iDataplex and Cluster 1350 Drivers, Firmware, and Software (Red Hat 5.3)
 http://ibm.com/support/entry/portal/docdisplay?Indocid=MIGR-5082806

IBM Announcement Letter

http://ibm.com/common/ssi/cgi-bin/ssialias?infotype=dd&subtype=ca&&htmlfid=897/ENUS108-880

• IBM Announcement Letter

http://ibm.com/common/ssi/cgi-bin/ssialias?infotype=dd&subtype=ca&&htmlfid=897/ENUS109-722

• IBM System Cluster 1350 Information Center

http://publib.boulder.ibm.com/cluster/

Related product families

Product families related to this document are the following:

- 10 Gb Ethernet Connectivity
- Ethernet Adapters

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications

covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.

8001 Development Drive

Morrisville, NC 27560

U.S.A.

Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2022. All rights reserved.

This document, TIPS0767, was created or updated on March 26, 2010.

Send us your comments in one of the following ways:

• Use the online Contact us review form found at:

https://lenovopress.lenovo.com/TIPS0767

• Send your comments in an e-mail to:

comments@lenovopress.com

This document is available online at https://lenovopress.lenovo.com/TIPS0767.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at https://www.lenovo.com/us/en/legal/copytrade/.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

BladeCenter®

iDataPlex®

The following terms are trademarks of other companies:

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Microsoft®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.



Documents / Resources



<u>Lenovo Chelsio 10GbE Adapters for IBM System Cluster 1350 and IBM iDataPlex</u> [pdf] Ow ner's Manual

Chelsio 10GbE Adapters for IBM System Cluster 1350, and IBM iDataPlex, Adapters for IBM S ystem Cluster 1350 and IBM iDataPlex, System Cluster 1350 and IBM iDataPlex, 1350 and IB M iDataPlex

References

- ^ø IBM Support
- <u>A</u> The Linux Kernel Archives
- Page Redirection
- Support | Chelsio Communications
- Lenovo Press
- Ethernet Adapters > Lenovo Press
- Chelsio 10GbE Adapters for IBM System Cluster 1350 and IBM iDataPlex Product Guide (withdrawn product) > Lenovo Press
- Copyright and Trademark Information | Lenovo US | Lenovo US

