



LUMASCAPE LS9030 Linealux L3 High Performance Linear Grazer Instruction Manual

[Home](#) » [LUMASCAPE](#) » LUMASCAPE LS9030 Linealux L3 High Performance Linear Grazer Instruction Manual



Contents

- [1 LUMASCAPE LS9030 Linealux L3 High-Performance Linear Grazer](#)
- [2 SPECIFICATION](#)
- [3 Tools Required](#)
- [4 Included Components](#)
- [5 Assembly Instructions](#)
- [6 Wiring Designations](#)
- [7 Dimensions](#)
- [8 Luminaire Rotation](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)



LUMASCAPE LS9030 Linealux L3 High-Performance Linear Grazer




Please read and follow all safety instructions carefully. Failure to do so will void warranty

WARNING – Product Warranty is void if a product is not installed as per installation instructions and in compliance with all local and provincial codes.

- Ensure installation complies with local electrical rules and regulations.
- All electrical work must be performed by a licensed electrician.
- Protective earth; protective ground (symbol 7).
- All luminaires may become hot. Use discretion on where the luminaire is mounted. Take care when setting the luminaire as it may become hot.
- Luminaire should only be used complete with a protective shield. If the protective shield is cracked, immediately stop using the luminaire. Isolate the light source, keep it dry and immediately contact Lumascope for the replacement of the protective shield (symbol 10).
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by Lumascope or their service agent in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by Lumascope or its service agent.
- Do not stare at the operating light source. The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 46' (14 m) is not expected (symbol 13)
- Basic insulation has been maintained between line voltage and the control conductors. To reduce the risk of strangulation, the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- Ensure mains input power is surge protected.
- Never make or break connections while the circuit is energized.
- Do not make modifications or alter the product.
- Keep luminaire clean and free of debris.
- Only clean with warm water.
- Do not use chemicals or abrasives to clean the luminaire as this may void the product warranty.
- Connections are to be kept clean and dry at all times.
- Suitable for use indoors or outdoors.

Legend Key:

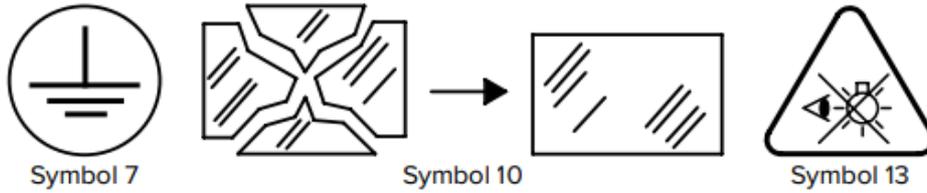


CAUTION Risk of Electric Shock


SPECIFICATION

- **MODEL** LS9030
- **PART NUMBER** LS9030 – xxx xxx xx xx x x 01 xx xx xxx LS9030 – xxx xxx xx xx x x 09 xx xx xxx
- **INSTALLATION-TYPE** LINEAR FACADE
- **IP RATING** IP66/67 (Passes IP68 Test)
- **SUPPLY VOLTAGE** 220-240 ~Vac, 50 Hz 120/277 ~Vac, 60 Hz
- **INSTRUCTIONS COVER** POWERSYNC
- **DIMENSIONS** (LxWxH) 47.5" x 1.7" x 2.4" (1,206 x 42 x 60 mm) for 4 ft section
- **WEIGHT** 6.2 lbs (2.8 kg) for a 4 ft section
- **MAX. PROJECTED AREA** 0.6 ft² (0.05 m²) for 4 ft section

Tools Required

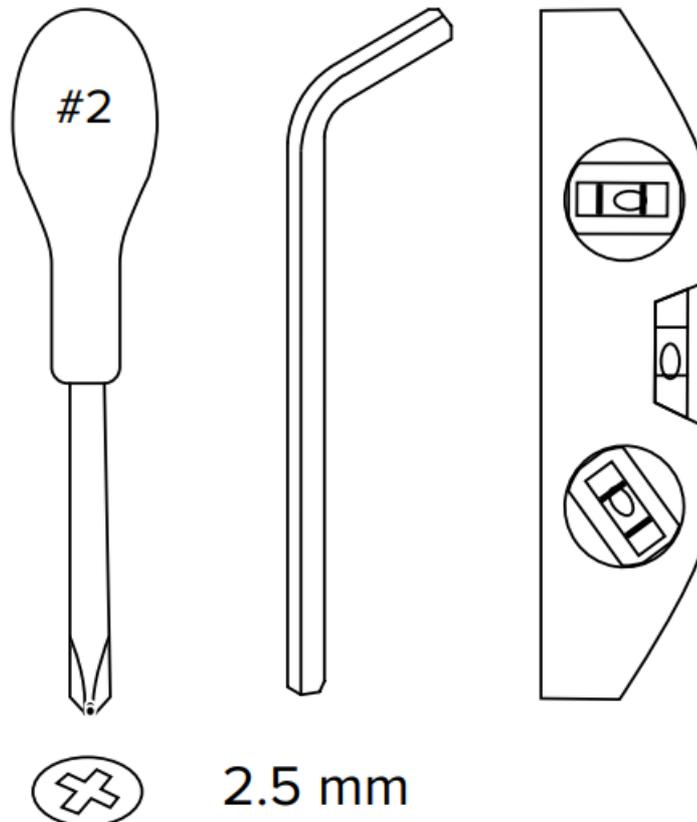

Included Components

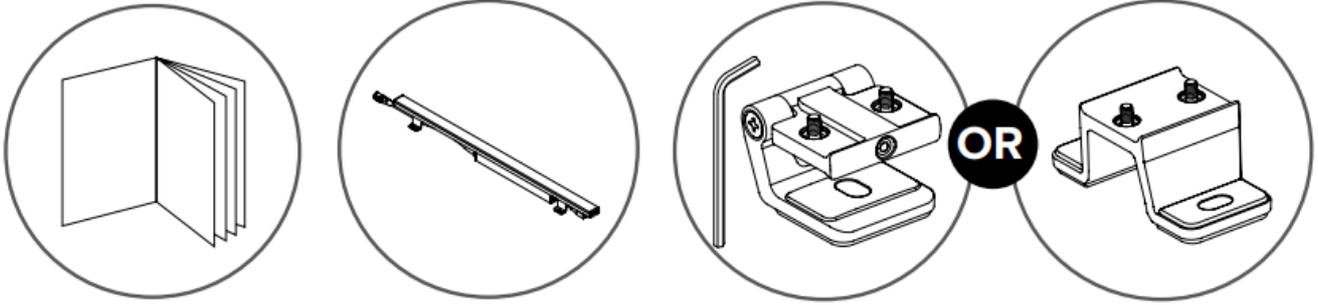

- Instructions
- Luminaire
- Adjustable Bracket
- Fixed Bracket
- Do Not Use Power Tools on Screws
- Keep Electronics Free From Dirt and Moisture










- Keep Away from Flammable Materials
- Do Not Hose or Pressure Clean



- Do Not Use Silicone On the Outside Surface
- Do Not Cut Cable to the Luminaire



Assembly Instructions

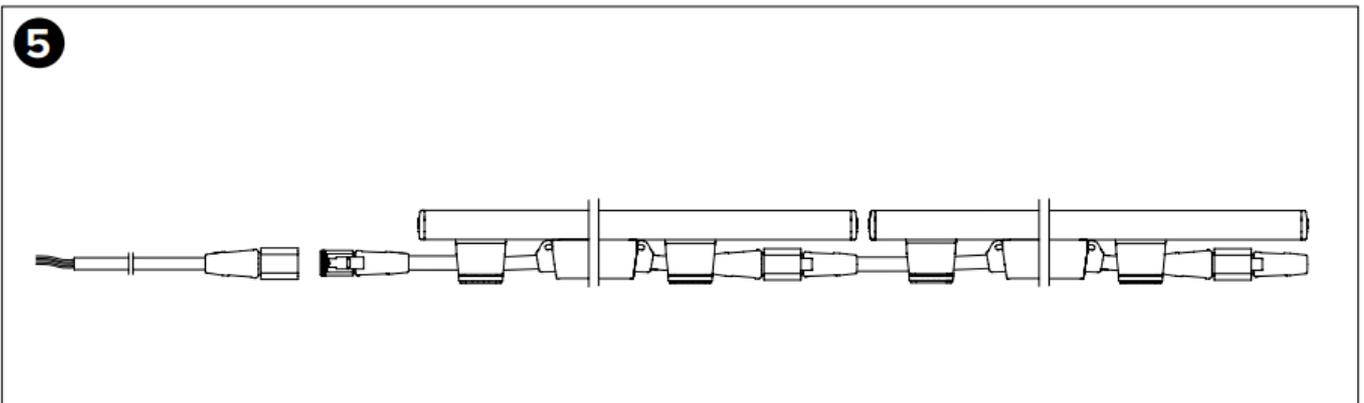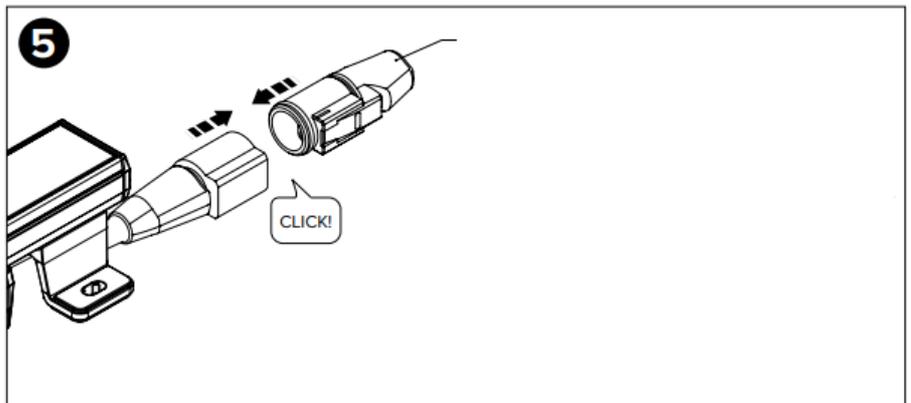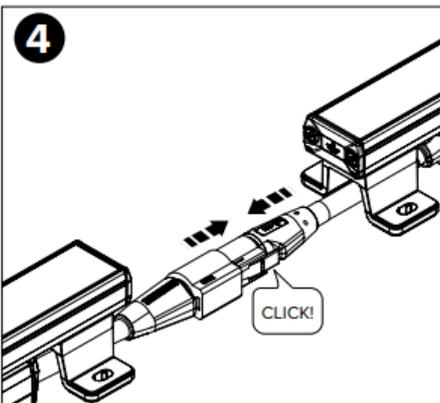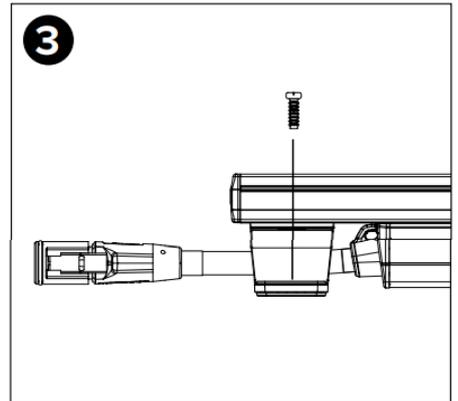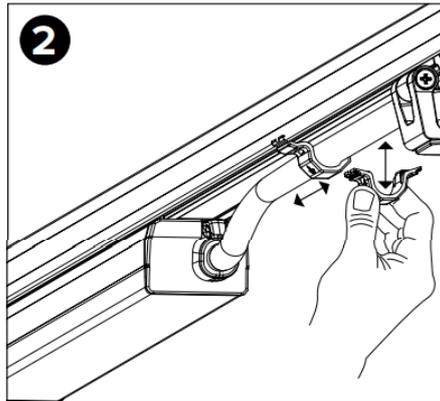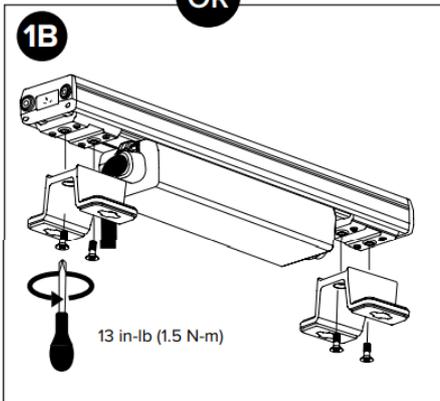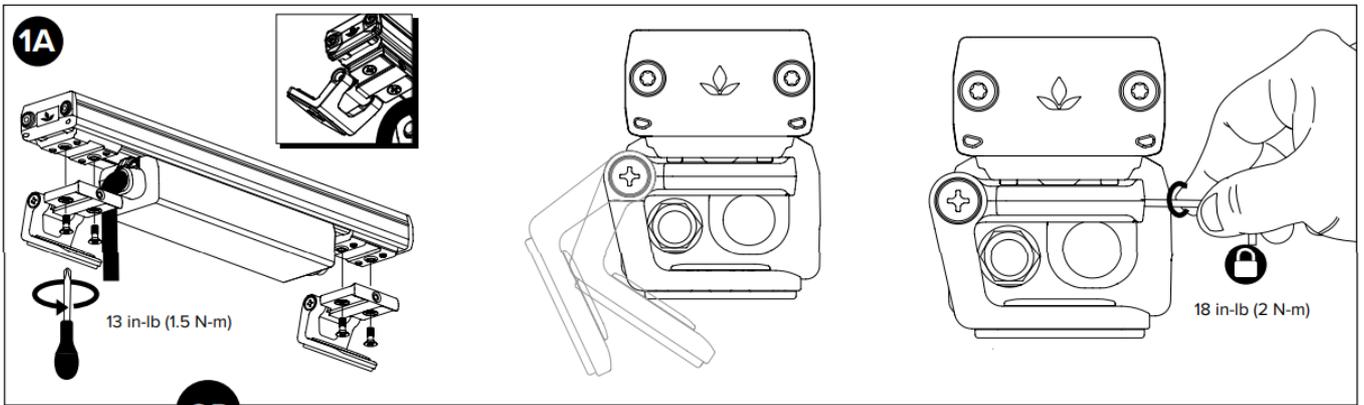

- A Terminator plug must be installed on the last fixture.
- One terminator ships with every leader cable

Wiring Designations


- **Designation** Color
- **Active** Brown
- **Neutral** Blue

- **Earth Green / Yellow**
- **Data Black**
- Do not Hi-Pot tes


PowerSync (4-Core) – North America

- **Designation Color**
- **Active Black**
- **Neutral White**
- **Earth Green / Yellow**
- **Data Grey or Red**
- Do not Hi-Pot test

Dimensions

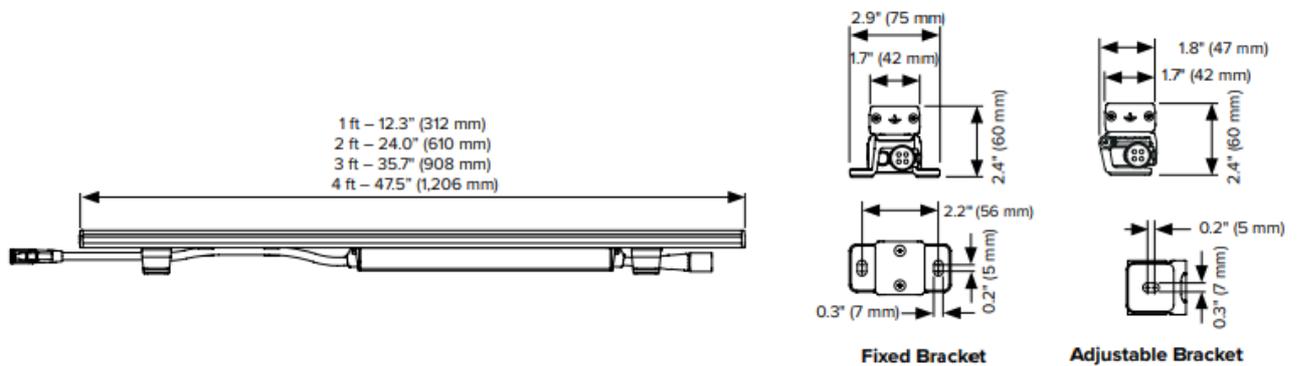

Luminaire Rotation

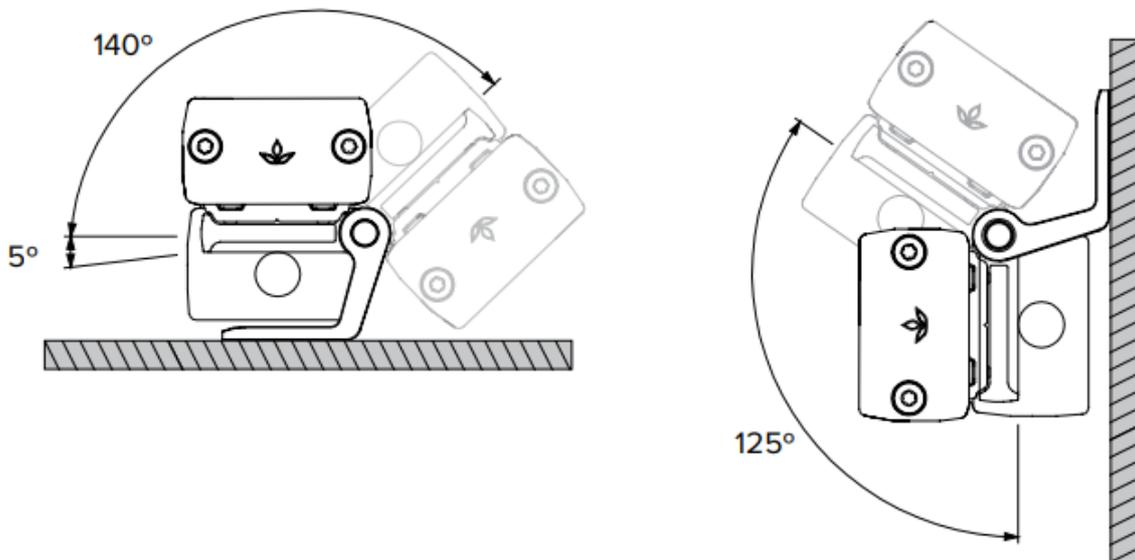

- Find more product resources at lumascape.com

Documents / Resources



[LUMASCAPE LS9030 Linearlux L3 High Performance Linear Grazer](#) [pdf] Instruction Manual
LS9030, Linearlux L3 High Performance Linear Grazer, High Performance Linear Grazer, Linear
Grazer, Grazer, LS9030

[Manuals+](#)