STRATUS ISOLA SS



A BEAUTIFUL NEW CEILING MOUNTED HOOD WITH ADVANCED FEATURES. THE STRATUS HOOD FEATURES A STAINLESS STEEL MOUNTED PANEL THAT FITS IN THE CEILING ABOVE YOUR COOKING, QUIETLY DOING ITS JOB.



AVAILABLE MODELS

model #	size / color	cfm*
STRTIS36SSNB	36 Stainless Steel	choose
STRTIS48SSNB	48 Stainless Steel	choose

* choose a blower	cfm	sones
IB300	300	1.0 - 3.0
IB400	400	1.0 - 4.0
IB600	600	1.0 - 7.0
RB900	900	
RB1200	1200	
AXP250	735	

KEY FEATURES



Perimetric Filter System Stainless panel increases efficiency and decreases noise levels




Remote Control (included) Control all features of the hood from the convenience of a wireless remote control



Pro Motor

The motor in this hood is surrounded in metal with all metal impellers for top performance



Installation Flexibility
Mounting flexibility above the
cooktop 35"- 72" height off
the stove




STRATUS ISOLA SS



SPECIFICATIONS

DIMENSIONS

min / max ceiling height	5' 11" - 9' (up to 72" above the stove)
convertible to ductless / recirculating	yes - kit sold separately
hood width depth (36")	35 7/16" w 18 1/2" d
hood width depth (48")	47 1/4" w 27 9/16" d
controls	4 Speed LED Digital Touch Control
lighting	4 X 1 (W) LED
ducting	6" round -4 Way side Vent / 10" top only
grease filters	dishwasher safe mesh
Perimetric Filter/ SilentKit	yes
24 hour anti-pollution mode	yes
10 minute intensive speed	yes
30 minute auto shut off	yes
filter wash alarm	yes
ADA compliant	yes (with included remote control)
AC power	400 watts / 3.2 amps

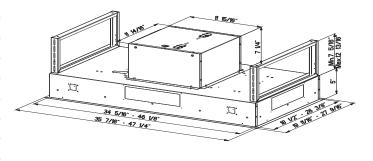

Overall

PERFORMANCE (IB600)

_	-		•	
SPEED	1	2	3	BOOST
CFM	150	300	450	560
Sones	3.9	5	6.0	7.3

ACCESSORIES

FILTER1-**Charcoal Filter Kit**

High quality charcoal filter for use when recirculating the air back into the kitchen. Filters out odor and should be replaced every 6 months

FILTER1LL2 -**Long Lasting Charcoal Filter Kit**

New washable charcoal filter can be recharged and washed up to 8 times. For use when recirculating the air back into the kitchen. Filters out odor and can last up to 4 years

FLANGE10-10" Plate for Remote **Blower**

A 10" plate for connecting the remote blower to 10" round ducting. This is required for AXP250 & non-Faber remote blowers

MUDAMPER6 / MUDAMPER8 / MUDAMPER10 -

Universal Make-Up Air Damper Satisfies make-up air requirements,


this kit uses an air switch to activate the make-up air damper to open and bring fresh air into the home when the hood fan is on. It then closes tightly when the hood is off. The CFM level is not reduced with this accessorv.

FLANGE3 - 3 1/4" x 10" Rectangular Flange **Transition**

For ceiling or downdraft hoods with an external blower that requires a 10" round duct, this transition turns the duct into a 3 1/4" x 10" rectangular duct. Transition back to 10" round once inside the basement, ceiling, attic. wall etc.

35 7/15" - 47 1/4" ķ i.

Bottom/Side

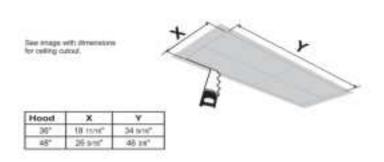

Ceiling Cut Out

WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this range hood. * Check local make up air codes for auidelines.

















