

Airflow control**11093497**
RPC REDUCER GALVA - D450/355

The RPC joins two galvanised ducts of different diameters together over a minimum length.

**Product description**

The concentric flat reducer connects two galvanised ducts of different diameters together over a minimum length. For air supply purposes, prefer a conical reducer due to the pressure losses generated by the flat reducer.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Concentric flat reducer used to connect a duct diameter 450 mm to a duct diameter 355 mm over a minimum length
- Not for use on supply ducts, generates high pressure losses

Description:

- Concentric flat reducer galvanised steel diameter 450/355 mm

Main characteristics

- available in diameters from 80 to 630,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

General data

Variants	Main material
11093497	Galvanised steel


Airflow control

11093497

RPC REDUCER GALVA - D450/355

Dimensional data

Variants	Ø A (mm)	Ø B (mm)
11093497	450	355

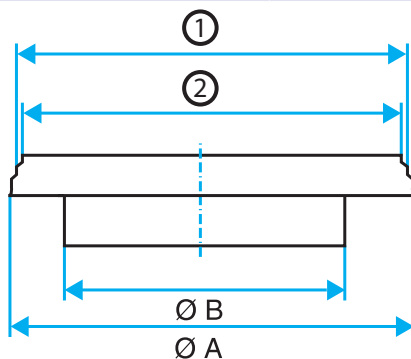

Regulatory data

Variants	Fire protection rating
11093497	M0