


Item#
Model# FP11074

HAMPTON BAY®

USE AND CARE GUIDE

29in Square Fire Column

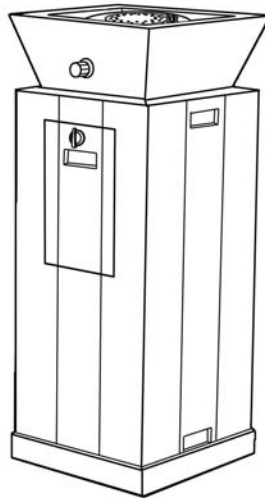

Questions, problems, missing parts? Before returning to the store,
call Hampton Bay Customer Service
8 a.m. - 7 p.m., EST, Monday – Friday, 9 a.m. – 6 p.m., EST, Saturday

1-855-HD-HAMPTON

HAMPTONBAY.COM

THANK YOU

We appreciate the trust and confidence you have placed in Hampton Bay through the purchase of this fire pit. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Hampton Bay!

Table of Contents

Table of Contents	2	Operation	8
Safety Information	2-4	Care and Maintenance	8
Pre-Assembly	5	Limited Warranty	8
Assembly	6-7	Troubleshooting	9
Leakage Test	6-8		

Safety Information

WARNING

Do not store or use gasoline or other flammable vapors and liquids, in the vicinity of this or any other appliance. An LP-cylinder not connected for use shall not be stored in the vicinity of this or any other appliance.

DANGER

FIRE OR EXPLOSION HAZARD

If you smell gas:

1. Shut off the gas to the appliance.
2. Extinguish any open flame.
3. If the odor continues, leave the area immediately.

4. After leaving the area, call your gas supplier or fire department.

Failure to follow these instructions could result in fire or explosion, which could cause property damage, personal injury, or death.

WARNING

If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury, or loss of life.



DANGER

This appliance can produce carbon monoxide which has no odor.
Using it in an enclosed space can kill you
Never use this appliance in an enclosed space such as a camper, tent, car or home.

INSTALLER:

Leave this manual with the appliance.

CONSUMER:

Retain this manual for future reference.

WARNING

When the Fire Pit is not in use — disconnect the Propane Tank.

If Fire Pit is stored indoors — remove the Propane Tank.

WARNING

This Fire Pit must be attended at all times!

WARNING

USE PROPANE GAS ONLY.

For use with tanks marked propane only.
DO NOT connect to a remote gas supply.
Propane Tanks are sold separately.

WARNING

FOR OUTDOOR USE ONLY!

Installation and service must be performed by a qualified installer, service agency, or the gas supplier.



Safety Information (continued)



WARNING

Read and follow all the instructions and warnings in this Owner's Manual thoroughly before installing, operating, or servicing this fire pit. Improper installation, use, maintenance, adjustment or storage can cause fire or explosion, resulting in serious injury or property damage.

Prepare for use:

Keep away from combustible/flammable items

- Do not put any other fireplace cover or anything flammable on or beneath the fire pit.
- Combustible materials should never be within 1.83 m/6 ft of the top, or within 1.22 m/4 ft of the back or the sides of the fire pit.
- For use on noncombustible floor material only.
- Keep the fire pit area clear and free from combustible materials, gasoline, and other flammable vapors and liquids.

Inspect for leaks, wear and damage

- Check for gas leaks before use - See the Leakage Test instructions on how to check for gas leaks.
- Inspect the burner and the hose before use. Replace if there is evidence of excessive abrasion, wear, or damage.
- Inspect the hose before each use. The hose assembly must be replaced prior to use if there is evidence of excessive abrasion or wear, or if the hose is damaged. Use a manufacturer-specified replacement hose only.

Prepare the area, and ensure the proper use of the fire pit cover

- Make sure the ventilation openings on the sides of the fire pit body are open and clear of debris.
- Do not lay the nylon fire pit cover over the fire pit for at least 4 hours after it is turned OFF and has completely cooled down.
- Do not use the fire pit if any part has been under water. Immediately call a qualified service technician to inspect the fire pit and to replace any part of the control system and any gas control that has been under water.
- Remove the nylon fire pit cover from the fire pit before operating.

When in use:

Do's

- Use propane cylinders with the following required measurements only: 10.16 cm/4 in (diameter) x 20.32 cm/8 in (tall) with a capacity of 0.45 kg/1 lb.
- If the flame goes out while operating, turn the gas valve OFF. Wait five minutes before attempting to relight.
- Due to high surface temperatures always keep a safe distance to avoid burning or clothes catching fire.
- Keep the fuel supply hose away from any heated surfaces.


Don'ts

- Never lean over the open fire pit or place your hands or fingers on the upper portion while in use.
- Do not use the fire pit for cooking.
- Do not burn any other materials other than what is supplied with and intended for use in the fire pit.
- Solid fuels shall not be burned in this fire pit.
- Do not pour water into the fire pit.
- Do not move the fire pit while in operation.
- The fire pit should never be operated by children. Children must be supervised when they are anywhere near the fire pit.
- Do not rest your feet on the fire pit.
- Do not use the fire pit on vehicles or boats. Always operate the fire pit on flat ground outdoors.

When not in use:

- The cylinder must be disconnected when the fire pit is not in use.

Safety Information (continued)

	<p>2 inches to 10 inches.</p>	<p>Observe the flame color and the flame height in the fire pit after being lit:</p> <ol style="list-style-type: none">1.) The flame color should be yellow.2.) The flame height burns at 2 - 10 inches high.
---	-----------------------------------	--

THIS PRODUCT USES PROPANE ONLY

- Use propane cylinders with the following required measurements only: 10.16 cm/4 in (diameter) x 20.32 cm/8 in (tall) with a capacity of 0.45 kg/1 lb.
- Max gas supply 28 cm/11 in. w.c.(2.74kpa).
- Only cylinders marked "propane" may be used.
- If you see, smell, or hear the hiss of escaping gas from the propane cylinder:
 1. Turn off the gas supply and get away from the gas cylinder and the fire pit at once.
 2. Do not attempt to correct the problem yourself.
 3. Call your gas supplier and / or the fire department for help.
- A dented or rusty propane cylinder may be hazardous and should be cleared by your gas supplier prior to use.
- Do not attempt to disconnect the gas regulator or any gas fitting while the fire pit is in operation.
- The gas pressure regulator provided with the fire pit must be used.
- Do not use a propane cylinder with a damaged valve and any other worn out parts.
- Transport and store empty propane cylinders carefully and properly.


Children and adults should be alerted to the hazards of high surface temperatures and should stay away to avoid burns or clothes catching fire.

- Young children should be carefully supervised when they are in the area of the fire pit.
- Clothing or other flammable materials should not be hung from the fire pit or placed on or near the fire pit.

Propane-gas supply cylinders to be used must be:

- constructed and marked in accordance with the U.S. Department of Transportation (DOT) Specifications for LP-Gas Cylinders, or the Standard for Cylinders, Spheres and Tubes for Transportation of Dangerous Goods and Commission, CAN/CSA-B339, as applicable.
- provided with a listed overfilling prevention device.
- provided with a cylinder connection device compatible with the connection for the appliance.

When storing fire pit:

	<p>WARNING! Improper installation, adjustment, alteration, service, or maintenance can cause injury or property damage. Refer to the owner's information manual provided with this appliance. For assistance or additional information, consult a qualified installer, service agency, or the gas supplier.</p>
---	--

Storage of the fire pit indoors is permissible only if the cylinder is disconnected and removed from the fire pit. Cylinders must be stored outdoors in a well-ventilated area out of reach of children. Disconnected cylinders must have threaded valve plugs tightly installed and must not be stored in a building, garage, or any other enclosed area.

The propane-gas supply cylinder must be disconnected when this appliance is not in use.

Any guard or other protective device removed for servicing the appliance shall be replaced prior to operating the appliance.

Installation and repair should be done by a qualified service person. The appliance should be inspected before use and at least annually by a qualified service person. More frequent cleaning may be required as necessary. It is imperative that the control compartment, burners, and circulating air passageways of the appliance are kept clean.

FOR YOUR SAFETY: Surfaces of the fire pit can remain extremely hot for a period after use. Allow 45 minutes to cool down before touching or moving the fire pit.

Pre-Assembly

Before beginning assembly of the fire pit, make sure all the parts are present.


Compare the parts with the package contents list. If any part is missing or damaged, do not attempt to assemble the fire pit.

Estimated Assembly Time: 10 minutes

NOTE: You must follow all the steps to properly assemble the fire pit. Make sure the gas valve is turned OFF before assembling. Do not attempt to assemble without the proper tools.

PACKAGE CONTENTS AND COMPONENTS

PART	DESCRIPTION	QTY
A	Fire Pit Body	1
B	Door	1
C	Door Knob	1
D	Control Knob	1
E	Burner	1
F	Gas Screen	1
G	Valve and Regulator Combination	1
H	Lava Rocks(1.76lbs)	1 box
I	Touch Up Pen	1
J	Protective Cover	1

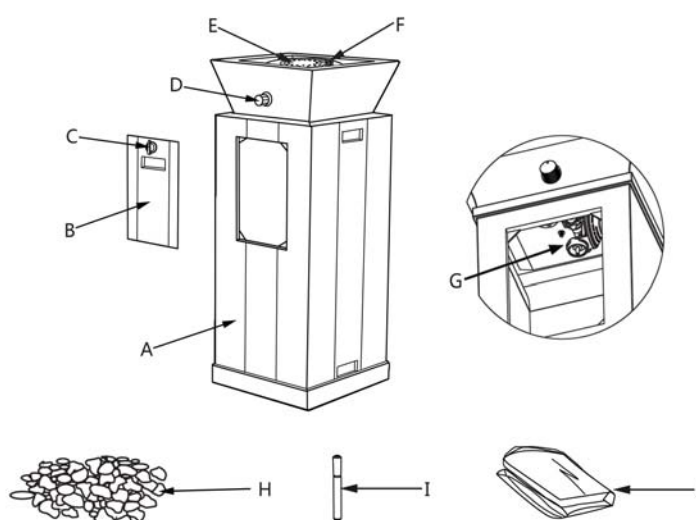

WARNING

Failure to position the parts in accordance with these diagrams or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.

Assembly


1 Connecting the Propane Tank



WARNING

This fire pit requires air flow under the unit. Do not place on an uneven surface or on grass, turf, or carpet.



- Make sure the control knob (D) in the "OFF" position and turn door knob(C) to remove the door(B)

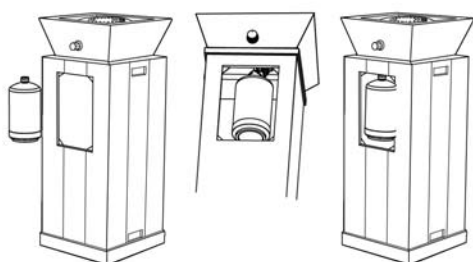

- Place the 1LB propane tank (not included) into the tank chamber and screw tightly onto the outlet of valve and regulator.



- Before lighting, check the connections by spraying soap and water mixture to make sure there is no gas leaking (See checking for leaks in operating instructions)




- Replace the door (C) onto the body (B) and turn the door knob (C) to secure. Place the lava rock(H) into the pan evenly. Do not cover the gas screen(F).


Assembly (continued)

2 Installing the Lava Rock


a



b

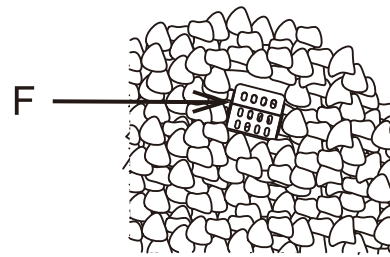


c



INCORRECT

Note that the burner (E) is visible.



CORRECT

The burner (E) is completely covered (except for the gas screen (F)).



WARNING

Keep the lava rock (H) and other objects off of the gas screen (F). Holes in the screen must be exposed in order to allow gas to escape.

A blocked screen can cause gas to build inside the fire pit and ultimately cause an explosion and risk of serious injury.

- Place the lava rock (H) evenly in the fire bowl.
- Use caution when handling the lava rock (H) as it is sharp. See Figure a.
- Do not place any lava rock (H) over the gas screen (F). See Figure b.
- Completely cover the entire burner (E) with the lava rock (H). See Figure c.

Failure to completely cover the burner (E) with the lava rock (H) will cause the flame to extinguish occasionally.



WARNING: FUELS USED IN LIQUEFIED PROPANE GAS APPLIANCES, AND THE PRODUCTS OF COMBUSTION OF SUCH FUELS, CAN EXPOSE YOU TO CHEMICALS INCLUDING BENZENE, WHICH IS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND CAUSE BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM. For more information go to :www.P65Warnings.ca.gov.

ADVERTENCIA: LOS COMBUSTIBLES USADOS EN EQUIPOS PARA LICUAR GAS PROPANO, ASÍ COMO LOS PRODUCTOS DE SU COMBUSTIÓN, PUEDEN EXPONERTE A SUSTANCIAS QUÍMICAS, ENTRE ELLAS EL BENCENO, QUE EL ESTADO DE CALIFORNIA RECONOCE COMO CAUSA DE CÁNCER Y DE MALFORMACIONES CONGÉNITAS Y OTROS DAÑOS AL SISTEMA REPRODUCTOR.

Para más información, visite www.P65Warnings.ca.gov


Leakage Test

Before performing a leak test, be sure that no sparks can occur and you are in a spacious outdoor area. Connect the propane gas cylinder to the regulator and turn the control knob on the unit to the "OFF" position. Spray a soap and water mixture on all connections. Turn the gas supply on. If bubbles occur on any connection there may be a leak. If you smell gas or a leak is discovered, turn the gas valve off. Disconnect propane gas cylinder and do not use the appliance until the leak is repaired.

Operation

To Light

1. Read instructions before lighting.
2. Control knob must be in the "OFF" position.
3. Connect propane cylinder(See Manual).
4. Push and turn control knob counter clockwise to High.
5. Use a match or a lighter to light the fire column. Once the burner is lit,Continue to hold the control knob for another 10 seconds and release.
6. Adjust the flame to desired flame height with the control knob. **CAUTION:** Disconnect Propane cylinder when this appliance is not in use.



Note:

Lava rocks could pop up and strike someone in the face during the process of lighting this unit. Stand away from the unit for the first 20 minutes after igniting. Flame height should be a yellow/blue color between 1-6 inches in height.

To Extinguish

1. Turn and push the control knob clockwise to the "OFF" position.
2. Disconnect propane cylinder.
If ignition does NOT immediately take place in seconds, push and turn the control knob clockwise to "OFF", wait 5 minutes, and then repeat the lighting procedure as above.

Care and Maintenance

- Store the fire pit in a cool dry place away from direct sunlight.
- The propane tank must be disconnected and removed from the fire pit before the fire pit can be stored indoors.
- Use manufacturer approved or supplied replacement parts and accessories only. Use of unauthorized replacement parts may void the warranty.
- Keep the fire pit free and clear from combustible materials.
Visually inspect the burner ring for blockages (spider webs, dirt, etc.). Keep the fire pit free and clear from debris.
- After the burner ring and lava rock are completely cooled down, use a soft brush to get rid of mild stains, loose dirt and soil. Wipe with a soft cloth.

Limited Warranty

The manufacturer's warranty will be voided by, and the manufacturer disclaims any responsibility for the following actions:

- Modification of the fire bowl and/or components including the gas valve assembly.
- Use of any component part not manufactured or approved by the manufacturer.
- Use and installation other than as instructed in this manual.

Troubleshooting

Problem		Cause	Solution
There is no spark between the ignition wire and the burner's hole while pushing the igniter button.	The ignition wire does not conduct electricity.	The ignition wire is loose or disconnected to the igniter.	Reinsert the ignition wire.
		There is electricity leakage in the ignition wire or the needle of the ignition wire cannot aim at the hole of the burner while lighting.	Call customer service for a replacement part.
There is no gas or short of gas.	The gas cylinder was not switched on.	The gas cylinder switch is not turned to On.	Turn on the valve of the gas cylinder.
	There is no connection between the regulator and the gas cylinder.	The regulator is loose or disconnected from the gas cylinder.	Check and reconnect the regulator to the gas cylinder.
	There is no gas in the gas cylinder.	There is no gas or short of gas.	Check if the gas cylinder is empty, and if yes, replace it.
	The excess flow safety valve has been activated.	Turn on the switch of the tank and at the same time, turn on the control knob (J) which caused the excess flow safety valve to activate.	Turn the control knob to "OFF". Switch off the valve of the gas cylinder and disconnect the regulator hose from the valve of the gas cylinder. Turn the control knob to "LOW" and wait 30 seconds. Turn the control to "OFF", and reconnect the regulator hose to the gas cylinder. Light the appliance as indicated in the "To Light" section of manual.
		There was an obvious gas leakage in the gas system caused by excess gas and the flow safety valve was activated.	Check the gas system to see if there is gas leakage, and if yes, call customer service for help.
	There are bends or kinks in the regulator hose (if used the extension regulator hose).	The regulator has bends or kinks that cause the poor flow of gas inside of hose.	Straighten the regulator hose to remove all bends or kinks.
The flame has blown out.	There is no gas or short of gas.	See "There is no gas or short of gas" above.	See "There is no gas or short of gas" above.
	There are high or gusting winds.	The flame was blown out by high or gusting winds.	Move the appliance to a place without high or gusting winds.
	There is a loose connection to the thermocouple.	A loose connection exists between the thermocouple and the valve.	Call customer service for help.
	The inside of the gas screen is blocked by debris.	Debris fell inside the gas screen and blocked the flow of oxygen.	Open and clean the gas screen.
		Debris fell inside the gas screen and covered the flame in the burner hole which also caused the low temperature during conduction.	
	The guard is covered by debris.	The gas screen was covered by debris which caused improper burning.	Remove the debris from the gas screen as indicated in the manual.
	Too much carbon deposit is on the inside of the gas screen.	Carbon deposits will occur if gas can not sufficiently burn when using the appliance.	Use a pincer to open the top of the gas screen and clean the carbon deposited in screen, thermocouple, ignition wire, and burner. Cover the top of the gas screen.

HAMPTON BAY®

Questions, problems, missing parts? Before returning to the store,
call Hampton Bay Customer Service
8 a.m. – 7 p.m., EST, Monday – Friday, 9 a.m. – 6 p.m., EST, Saturday

1-855-HD-HAMPTON

HAMPTONBAY.COM

Retain this manual for future use.