

NB-IoT Module N510-GL



Support Release 14


Low power consumption

LCC: 22.2x20.2x2.1mm

Rich network protocol

N510-GL is a high-performance IoT module product, tailor-made for the global IoT market, and is packaged in LCC+LGA. Compatible with Fibocom 510 series module, easy for future upgrading

Support global frequency band, global certification, integrate multiple network protocols, support eDRX, PSM low power consumption mode, especially suitable for IoT industry applications with low power consumption and ultra-small size as core requirements, such as smart meter, smart home, smart Parking, wearable devices, asset tracking, smart cities, etc.

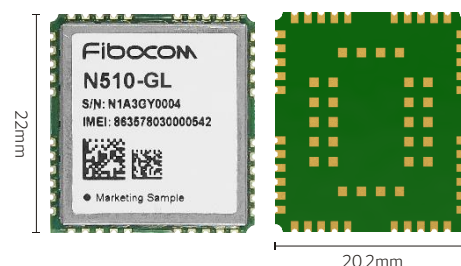

Copyright©FibocomWirelessInc. | Subject to changes in technology, design and availability | E-mail: market@fibocom.com | Tel: +86 755-2673 3555

fibocom.com



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

PERFECT WIRELESS EXPERIENCE

NB-IoT Module N510-GL



Basic Features

- Cat NB2:B1/2/3/4/5/8/12/13/17/18/19/20/25/26/28/66/71/85
- LCC+LGA 22.2x20.2x2.1mm
- Operating temperature:-40 °C~+85 °C
- Storage temperature:-40 °C~+90 °C
- Operating Voltage:3.3V~5.0V
- AT Command Set: 3GPP TS 27.007 and 27.005, proprietary FIBOCOM AT commands
- TX Power: 23dBm±1dB

Data Transmission

- NB1
- Multi-tone: 62.5Kbps (UL)/ 26.15Kbps (DL)
- Single-tone: 15.6Kbps (UL)
- NB2
- Multi-tone: 158.5Kbps (UL)/ 126.8Kbps (DL)
- Single-tone: 18.1Kbps (UL)

Features

- TCP/UDP/HTTP(S)/LwM2M/MQTT/SSL/TLS/IPV4/IPV6/NTP/NITZ/Cell ID/LBS*
- DFOTA
- 2.7uA @PSM
- 180uA @eDRX
- 2.1mA @DRX

Interfaces

- UART
- USIM 1.8V/3V
- System Indicator
- Antenna
- ADC
- GPIO
- I2C
- SPI

OS Drivers

- Linux/Windows

Certifications

- CE/ NCC/ FCC/ RoHS/HF/
- PTCRB/GCF/VDF*/DT/Verizon*/TMO

Note: * = Planning ** = Developing

Copyright©FibocomWirelessInc. | Subject to changes in technology, design and availability | E-mail: market@fibocom.com | Tel: +86 755-2673 3555

fibocom.com



PERFECT WIRELESS EXPERIENCE