3156/3157 XPR White LED Bulb

DD0378S (Single) & DD0378P (Pair)

DIODE DYNAMICS PERFORMANCE LIGHTING TECHNOLOGY



FEATURES





- Direct replacement for factory-installed 3156/3157-size incandescent bulbs
- Brightest self-contained bulb on the market!
- Built-in resistor for error-free operation
- Plug and play, simple installation
- 800 lumens per bulb

GENERAL SPECIFICATIONS

Function	Voltage Range	Current Draw*	Wattage	CTT/ Wavelength**	Lumen Output
Initial Output	9-16V	1.8A	23W	6000K	3000 lm
Steady-State Output	9-16V	335 mA	4.4W	6000K	800 lm

^{*}Current Draw @13.2v **+/-500 Tolerance

Color: White

Connector Type: 3156/3157 Base Connector LED Type/Count: 3030 LED White / 40 Total Operating Temperature: -40°C to 85°C Compliance Rating: J575 Durability Test Length: 4.5" Width: 2.75" Height: .5"

Weight: 1.2oz

What's Included:

• One (1) or Two (2) 3156/3157 XPR LED Bulb(s)

All data and specifications are nominal values and may vary.





PUBLISHED: 2-18-2021

DIODE DYNAMICS


PERFORMANCE LIGHTING TECHNOLOGY

COLORIMETRIC SPECIFICATIONS





PRODUCT DIMENSIONS

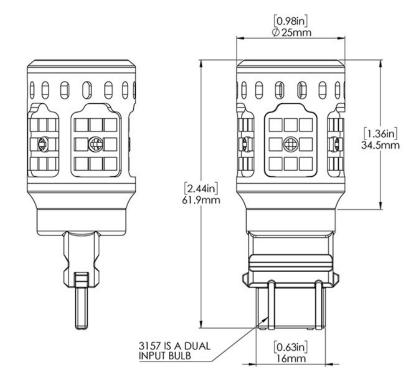

PUBLISHED: 2-18-2021