

Operating and installation instructions Built-in coffee machine



To avoid the risk of accidents or damage to the appliance, it is **essential** to read these instructions before it is installed and used for the first time.

Caring for the environment

Disposal of the packing material

The transport and protective packaging has been selected from materials which are environmentally friendly for disposal, and can normally be recycled.

Recycling the packaging reduces the use of raw materials in the manufacturing process and also reduces the amount of waste in landfill sites. Ensure that any plastic wrappings, bags etc. are disposed of safely and kept out of the reach of babies and young children. Danger of suffocation.

Disposing of cleaning and descaling cartridges

Dispose of the Miele cleaning and descaling cartridges in the household waste after use.

Disposing of your old appliance

Electrical and electronic appliances often contain valuable materials. They also contain specific materials, compounds and components, which were essential for their correct function and safety. These could be hazardous to human health and to the environment if disposed of with your domestic waste or if handled incorrectly. Please do not, therefore, dispose of your old appliance with your household waste.



Please dispose of it at your local community waste collection / recycling centre for electrical and electronic appliances. You are also responsible for deleting any personal data that may be stored on the appliance prior to disposal. Please ensure that your old appliance poses no risk to children while being stored prior to disposal.

Caring for the environment	2
Warning and Safety instructions	7
Guide to the appliance	16
Operating principles	18
Touch display	18
Operating actions	19
Symbols in the display	22
Miele@home	23
Before using for the first time	24
Before using for the first time	24
Switching on for the first time	24
Setting up the bean system	26
Bean system	29
Changing bean system settings (Type of beans)	29
Renaming type of beans	29
Changing the allocation of the bean containers	30
Filling the water container	31
Switching on and off	32
Spout adjustment	33
Making drinks	34
Making coffee drinks with and without milk	34
Milk preparation	35
Making a coffee drink	36
Cancelling preparation	36
DoubleShot	37
Making two portions ☐	37
Coffee pot	38
Tea	38
TeaTimer	39
Making tea	40
Teapot	40
Preparing warm and hot water	40
Expert mode	41
Grinder setting	42

Contents

Parameters	43
Displaying and changing parameters.....	43
Amount of coffee.....	43
Brewing temperature.....	43
Pre-brewing ground coffee.....	43
Type of beans.....	44
Portion size	45
Resetting drink settings	46
User profiles	47
Creating a profile	47
Processing profiles.....	47
Setting change of profile	47
Profiles: creating and processing drinks	48
MyMiele	49
MobileStart 	50
Settings	51
Displaying and changing settings	51
Language.....	51
Time of day.....	51
Date	51
Start screen	51
Timer	52
Appliance timer	52
Maintenance timer.....	52
TeaTimer.....	52
Volume.....	53
Display.....	53
Display brightness.....	53
Colour scheme	53
QuickTouch	53
Lighting.....	53
Info (display information)	53
Altitude	53
Performance mode.....	53
Eco mode	53
Barista mode	53
Latte mode	53
Party mode.....	54

Water hardness	54
Proximity sensor	55
System lock 	56
Miele@home	56
Remote control	56
SuperVision	56
RemoteUpdate	57
Software version	57
Legal information	58
Showroom programme (Demo mode)	58
Factory default settings	58
Cleaning and care	59
Cleaning intervals - Quick guide	59
Cleaning by hand or in the dishwasher	60
Unsuitable cleaning agents	61
Cleaning the drip tray and waste container	62
Cleaning the drip tray cover	64
Cleaning the water container	64
Cleaning the central spout	65
Cleaning the cup rim sensor	67
Cleaning the milk flask with lid	67
Cleaning the milk valve (daily)	68
Removing and cleaning the milk valve (once a month)	68
Cleaning the bean containers	71
Removing the brew unit and cleaning by hand	72
Cleaning the interior, the inside of the appliance door and the drip catcher	74
Cleaning the appliance front	74
Maintenance programmes	75
Rinsing the appliance	75
Rinsing the milk pipework	75
Maintenance programme – Clean the milk pipework	75
Degreasing the brew unit and cleaning the interior	76
Descaling the appliance	79
Automatic cleaning and descaling	81
What to ensure before and during automatic maintenance programmes	81
Automatic cleaning	82
The Miele cleaning cartridge	82
Replacing the cleaning cartridge	83
Automatic descaling	84
The Miele descaling cartridge	84
Maintenance timer	86

Contents

Cancelling automatic cleaning and descaling.....	86
Problem solving guide	87
Messages in the display	87
Unusual performance of the coffee machine	90
Faults with automatic cleaning and/or descaling	93
Unsatisfactory results.....	95
After sales service and warranty	98
Contact in case of fault	98
Warranty	98
Accessories	99
Installation	100
Electrical connection	100
Installation dimensions.....	101
Building in the coffee machine	103
Door opening limiters	104
Technical data	105
Copyright and licences	106

Warning and Safety instructions

This coffee machine complies with all current local and national safety requirements. However, inappropriate use can lead to personal injury and damage to property.

Read the Operating instructions carefully before using the coffee machine. They contain important information on the safety, installation, use and maintenance of the appliance. Familiarity with these instructions will help to prevent personal injury and damage to property.

In accordance with standard IEC 60335-1, Miele expressly and strongly advises that you read and follow the instructions in “Installation”, as well as in the “Warning and Safety instructions”. Miele cannot be held liable for damage caused by non-compliance with these instructions.

Keep these instructions in a safe place and pass them on to any future owner.

Warning and Safety instructions

Correct application

- ▶ The coffee machine is intended for use in private households.
- ▶ The coffee machine is not suitable for outdoor use.
- ▶ This coffee machine must not be used at altitudes above 2,000 m.
- ▶ The machine is intended only for the preparation of drinks such as espresso, cappuccino, latte macchiato, tea etc. Any other usage is at the owner's risk.
- ▶ This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning its use by a person responsible for their safety, and are able to recognise the dangers of misuse.

Safety with children



Danger of burning and scalding on the dispensing spouts.

Children's skin is far more sensitive to high temperatures than that of adults.

Ensure children do not touch hot surfaces of the coffee machine or place parts of their body under the dispensing spouts.

- ▶ Install the coffee machine out of reach of children.
- ▶ Young children must not be allowed to use this appliance.
- ▶ Older children may only use the coffee machine if its operation has been clearly explained to them and they are able to use it safely. They must be aware of the potential dangers caused by incorrect operation.
- ▶ Children should be supervised when they are near the coffee machine. Do not allow them to play with it or to use the controls.
- ▶ Young children must not be allowed to clean the coffee machine. Cleaning may only be carried out by older children under the supervision of an adult.
- ▶ Remember that coffee and espresso are not suitable drinks for children.
- ▶ Danger of suffocation! Whilst playing, children may become entangled in packaging material (such as plastic wrapping) or pull the packaging material over their head, presenting the risk of suffocation. Keep packaging material away from children.

Warning and Safety instructions

Technical safety

- ▶ Repairs and installation work by unqualified persons could be dangerous. The manufacturer cannot be held liable for unauthorised work. Installation work and repairs to electrical appliances must only be carried out by a Miele approved service technician.
- ▶ A damaged appliance is dangerous. Check it for any visible damage. Never install or attempt to use a damaged appliance.
- ▶ Before connecting the appliance to the mains supply, make sure that the rating on the data plate corresponds to the voltage and frequency of the household supply. This data must correspond in order to avoid the risk of damage to the appliance. Consult a qualified electrician if in any doubt.
- ▶ The electrical safety of this appliance can only be guaranteed when continuity is complete between it and an effective earthing system. It is most important that this basic safety requirement is present and tested regularly and, where there is any doubt, the household wiring system should be inspected by a qualified electrician.
- ▶ Reliable and safe operation of the coffee machine can only be guaranteed if it is connected to the mains electrical supply.
- ▶ Do not connect the machine to the mains electricity supply by a multi-socket adapter or an extension lead. These do not guarantee the safety of the appliance (e.g. danger of overheating).
- ▶ This appliance must not be installed and operated in mobile installations (e.g. on a ship).
- ▶ For safety reasons, this appliance may only be used when it has been built in.
- ▶ If the coffee machine is to be built in above another appliance, there must be a full-width, closed shelf between them (except in combination with a built-in warming drawer).

Warning and Safety instructions

- ▶ Only use the coffee machine in rooms where the ambient temperature is between +16 °C and +38 °C.
- ▶ A minimum installation height of 850 mm must be maintained.
- ▶ This coffee machine must not be installed behind a closed furniture door. Heat and moisture can build up behind the closed furniture door. This can result in damage to the appliance and/or furniture unit.
- ▶ Before any repair work is carried out, the appliance must be completely disconnected from the electricity supply.
The appliance is only completely isolated from the electricity supply when:
 - it is switched off at the circuit breaker, or
 - the mains connection cable is disconnected from the power supply.
Pull the plug, not the cord, to disconnect the appliance from the power supply.
- ▶ The manufacturer's warranty will be invalidated if the appliance is not repaired by a Miele approved service technician.
- ▶ Never open the outer casing of the machine. Tampering with electrical connections or components and mechanical parts is highly dangerous to the user and can cause operational faults or electric shock.

Warning and Safety instructions

Correct use

 Danger of burning and scalding on the dispensing spouts. The liquids and steam dispensed are very hot.

Keep well away from the area underneath the spouts when hot liquids and steam are being dispensed.

Do not touch hot components.

Hot liquid or steam could spatter from the spouts. Ensure that the central spout is clean and fitted correctly.

If there is a cup or container underneath the central spout, make sure that you remove this before opening the appliance door.

Water in the drip tray can also be very hot. Take care when emptying it.

 Risk of injury to the eyes!

Never look directly at the lighting or use optical instruments (magnifying glass or similar) to look at it.

► Please note the following regarding water:

- The water quality must conform to the requirements for drinking water in the country in which the coffee machine is being used.
- Only use cold, fresh tap water to fill the water container. Hot or warm water or other liquids can damage the coffee machine.
- Change the water every day to prevent a build-up of bacteria.
- Do not use carbonated water.

► Only put roasted coffee beans in the bean container. Do not put coffee beans containing additives or ground coffee in the bean containers.

► Do not fill the bean container with any type of liquid.

Warning and Safety instructions

- ▶ Do not use green (unroasted) coffee beans or mixtures of coffee beans which contain green coffee beans. Green coffee beans are very hard and still contain residual moisture. These can damage the coffee machine grinder as soon as grinding begins.
- ▶ Do not use coffee beans which have been treated with caramel, sugar or other substances. Sugar will damage the coffee machine.
- ▶ If decaffeinated coffee beans are used after dispensing a drink with caffeinated beans, there may still be residues from the caffeinated beans in the grinder or brew chamber. Discard the first coffee drink when using decaffeinated coffee.
- ▶ Only use milk without additives. Additives in milk usually contain sugar and this will stick to the milk pipework.
- ▶ If using cow's milk, only use pasteurised milk to prevent a build-up of bacteria in the appliance.
- ▶ When making tea, please follow the instructions on the packaging.
- ▶ Do not place flaming alcohol mixtures underneath the central spout. The flames could ignite plastic components and cause them to melt.
- ▶ Do not swing from or hang anything on the appliance door when it is open as this could damage the hinges on the coffee machine.
- ▶ The machine must not be used for cleaning objects.

Warning and Safety instructions

Accessories and spare parts

- ▶ Miele can only guarantee the safety of the appliance when original Miele spare parts are used. Faulty components must only be replaced by original Miele spare parts.
- ▶ Only use original Miele spare parts and accessories. If other spare parts and accessories are used, warranty, performance and/or product liability claims will be invalidated and Miele cannot accept liability.
- ▶ Miele will guarantee to supply functional spare parts for a minimum of 10 years and up to 15 years following the discontinuation of your coffee machine.

Cleaning and care


- ▶ Clean the coffee machine and the milk flask daily, particularly before using for the first time.
- ▶ All parts of the milk system need to be cleaned thoroughly and regularly. Milk contains bacteria which proliferate rapidly with inadequate cleaning.
- ▶ Avoid spillage on appliance connectors.
- ▶ If you do not utilise automatic descaling and cleaning, you will need to carry out the maintenance programmes for cleaning the milk pipework, the brew unit and descaling the coffee machine manually on a regular basis. Miele cannot be held liable for damage resulting from not cleaning and/or descaling the machine, using the wrong cleaning/descaling agent or an unsuitable concentration.
- ▶ Do not clean the machine with a steam cleaner or immerse it in water as this will damage the machine. Steam or water could reach the electrical components and cause a short circuit.
- ▶ Used coffee grounds should be disposed of with the organic rubbish or on the compost heap. Do not empty them down the sink, as they could block it.

The following applies to appliances with stainless steel surfaces:

- ▶ Do not adhere stickers, adhesive tape or any other adhesive materials to stainless steel surfaces. The coating on the stainless steel surfaces will become damaged and lose its protective properties against soiling.
- ▶ Stainless steel scratches very easily and even magnets can cause damage to the surface.


Guide to the appliance

Exterior view

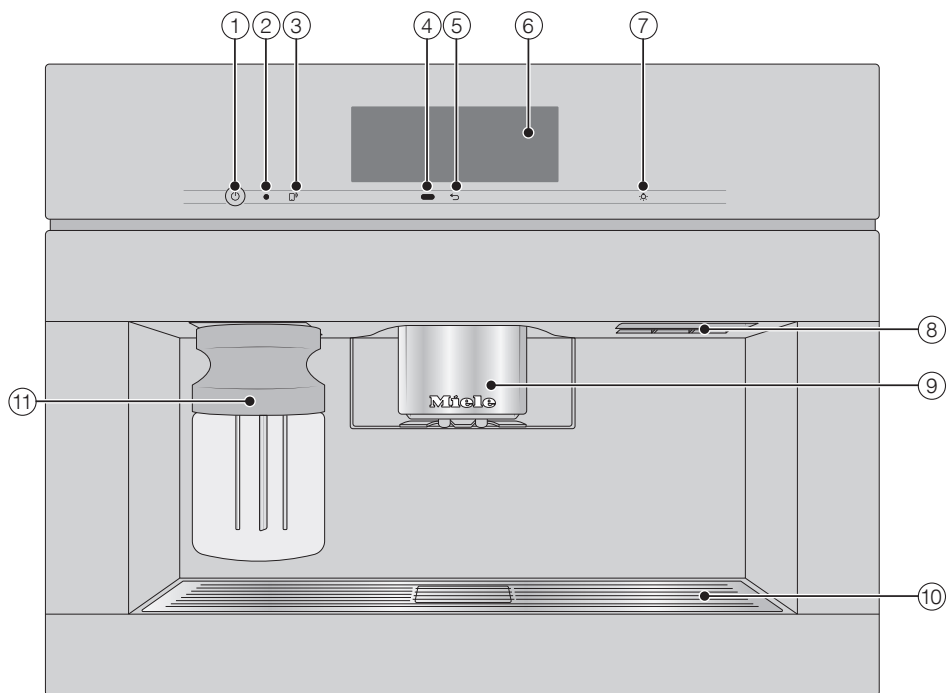

- ① On/Off ① sensor
- ② Optical interface (for Miele Service technicians only)
- ③ MobileStart  sensor control
- ④ Proximity sensor
- ⑤ "Back"  sensor
- ⑥ Touch display
- ⑦ "Lighting"  sensor control
- ⑧ Door handle
- ⑨ Automatic height-adjustable central spout with lighting
- ⑩ Drip tray cover
- ⑪ Milk flask

Interior view

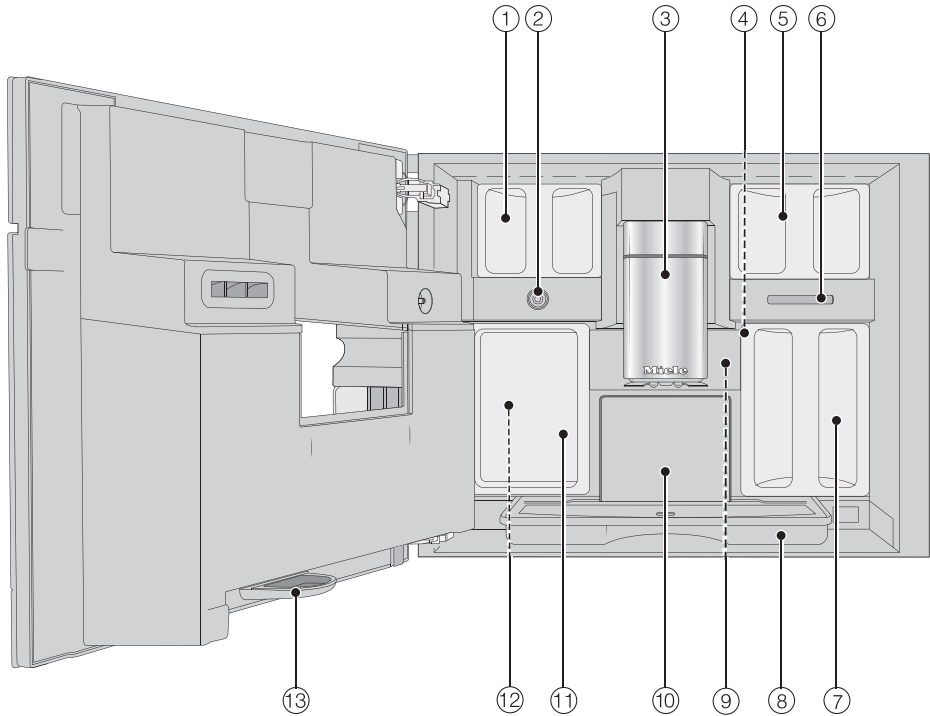

- ① Bean container 1
- ② Milk valve
- ③ Automatic height-adjustable central spout with lighting
- ④ Grinder setting
- ⑤ Bean containers 2 and 3
- ⑥ Fan outlet
- ⑦ Water container
- ⑧ Drip tray with lid
- ⑨ Brew unit
- ⑩ Waste container
- ⑪ Maintenance container
- ⑫ Holders for cleaning and descaling cartridges (including plug)
- ⑬ Drip catcher


Operating principles

Touch display

The sensitive touch display can be scratched by pointed or sharp objects, e.g. pens.

Only touch the display with your fingers.

The touch display is divided into multiple areas.

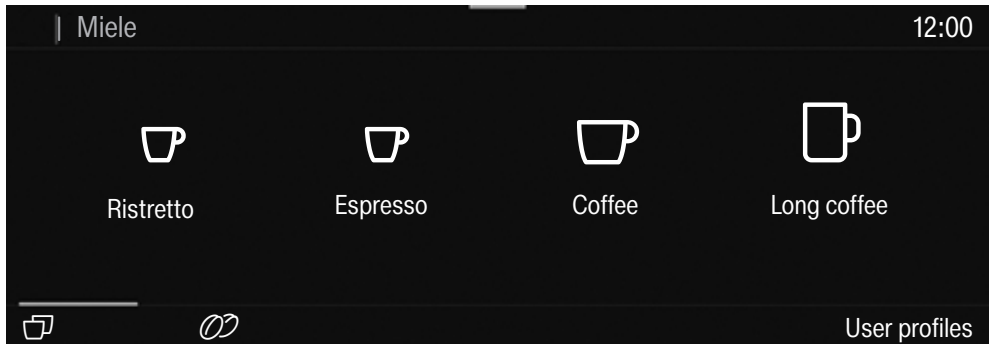

The menu path appears on the left of the **header**. If you touch a menu name in the header, the display will switch to that menu. To switch to the start screen, touch .

The time of day is shown on the right of the header. Additional symbols may also appear, e.g. TeaTimer .

The current menu and menu options are shown in the **centre**. You can scroll to the right or left by swiping your finger across the display to the right or left.

Depending on the menu, various operating options appear in the **footer**, e.g. DoubleShot , Save or OK.

Operating actions

All selectable options are displayed in either white or black, depending on which colour scheme has been selected.

Each touch of a possible selection colours the relevant character (word and/or symbol) **orange**.

Selecting the menu option

- Touch the desired field or value in the touch display.

Scrolling

You can scroll left or right.

- Swipe across the screen. To do this, place your finger on the touch display and swipe it in the direction you want.

The bar at the bottom of the display shows you your position in the current menu.

Exiting a menu

- Touch the ↩ sensor. Alternatively, you can touch the upper level menu name in the menu path.

Entries made before this which have not been confirmed with *OK* will not be saved.

Useful tip: If you touch the ↩ sensor three times in succession, you will return to the drinks menu.


Entering numbers with the roller.

- Swipe the roller up or down until the number you want is located in the centre and coloured orange. Confirm with *OK*.

Entering numbers using the numerical keypad

- Touch the orange coloured value in the centre until the numerical keypad appears.

Operating principles

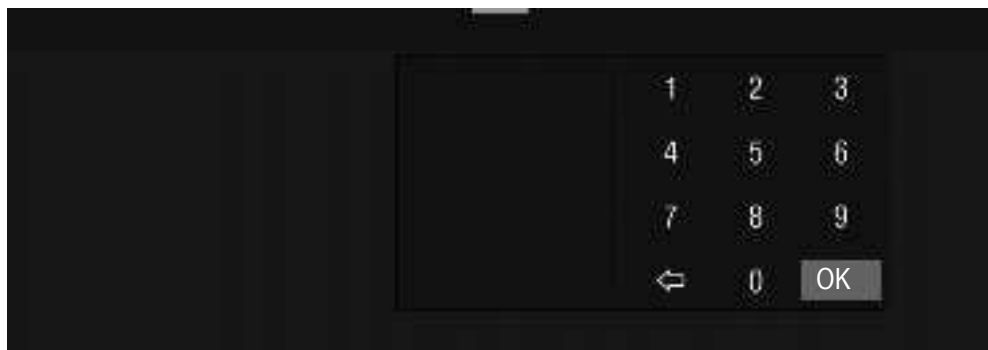

- Select the desired value: as soon as a valid value has been entered, *OK* is highlighted green. Use the ⇐ arrow to delete the last entered number.
- Confirm with *OK*.

Entering a name

Letters are entered using a keyboard. It is best to select short, memorable names.

- Touch the letters or characters you want.

Useful tip: Use the ⇐ arrow to delete the last entered character.

- Touch *Save*.

Displaying a context menu

In some menus you can display a context menu, e.g. to configure drinks.

- Touch and keep your finger on a drink name, for example, until the context menu opens.
- Touch the touch display outside of the menu window to close the context menu.

Moving entries

You can change the order of the entries in the drinks menu to *User profiles* and *MyMiele*.

- Touch and hold an entry until the context menu appears.
- Select *Move*.

An orange frame will appear around the entry.

- Touch the highlighted entry and hold your finger on the display. Drag the entry to the required position.


Help

Context-sensitive help is available for certain functions. Help appears on the bottom line.

- Touch **Help** to display information in text and pictures.
- Touch **Close** to return to the previous menu.

Pull-down menu

In the pull-down menu you will find, for example, the schematic representation of the bean containers and the **Expert mode**.

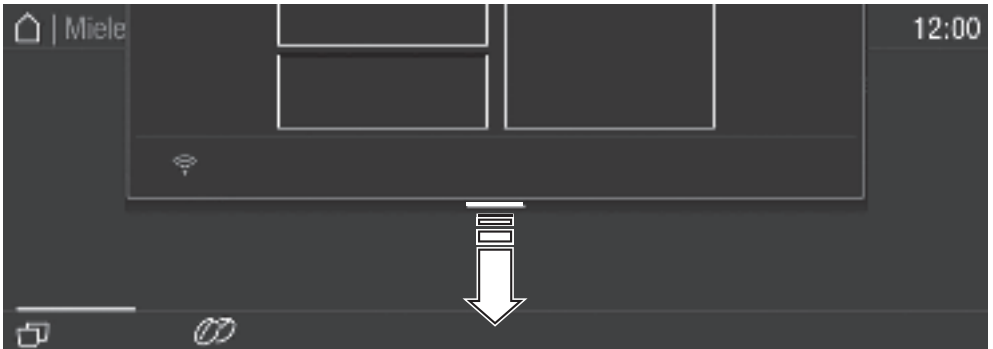

- Touch the top edge of the screen on the orange line and drag down with your finger.

Active settings are highlighted in orange.

- To close the pull-down menu, touch the display outside of the menu window or slide the pull-down menu up.

Operating principles

Symbols in the display

In addition to text, symbols are shown in the display, e.g. symbols for the various drinks. Some symbols are explained below.

Symbol	Explanation
	This symbol indicates that there is additional information and advice about using the coffee machine. Select OK to confirm the information.
	This symbol indicates the “Settings” menu and the “Language” menu option.
	This symbol appears if the system lock is activated. Operation is locked.
	This symbol and the desired switching on time appear in the display up to 23:59 hours before the coffee machine is due to switch on if the On at timer and the time display are activated (see “Settings - Timer”).
	This symbol appears during the Clean the milk pipework maintenance programme and during automatic cleaning. (This symbol can also be found on the water container: fill up to this mark with water.)
	This symbol appears while the appliance is being descaled. (This symbol can also be found on the water container: fill up to this mark).
	This symbol and a fault code will appear if a fault occurs.
	If Miele@home is activated for the coffee machine, the Wi-Fi connection is indicated with these symbols. The symbols indicate the strength of the Wi-Fi connection in gradations from strong to not connected.
	The “Remote control” symbol appears if Miele@home has been set up for the coffee machine and the Remote control On setting has been selected.
	The “SuperVision” symbol appears if Miele@home has been set up for the coffee machine and the SuperVision SuperVision display On setting has been selected.

Your coffee machine is equipped with an integrated Wi-Fi module.

To use this feature, you will need:

- a Wi-Fi network
- the Miele App
- a Miele user account. You can create a user account via the Miele App.

The Miele App will guide you through the process of connecting your coffee machine to your home Wi-Fi network.

Once your coffee machine is connected to your Wi-Fi network, you can use the App, for example, to carry out the following activities:

- Call up information on the operating status of your coffee machine
- Change the settings of your coffee machine
- Operate your coffee machine remotely

Connecting your coffee machine to your Wi-Fi network will increase energy consumption, even when the coffee machine is switched off.

Before installing the coffee machine in its final location, ensure the signal strength of your Wi-Fi network is sufficient.

Availability of the Wi-Fi connection

The Wi-Fi connection shares a frequency range with other appliances (including microwave ovens and remote control toys). This may result in sporadic or even complete connection

failures. Therefore, a constant availability of featured functions cannot be guaranteed.

Miele@home availability

The ability to use the Miele App depends on the availability of the Miele@home service in your country.

The Miele@home service is not available in every country.

For information about availability, please visit www.miele.com.

Miele App

You can download the Miele App from the Apple App Store® or the Google Play Store™ free of charge (only functional in selected countries).



Before using for the first time

Before using for the first time

- Connect the coffee machine to the mains electricity supply.
- Install the coffee machine.
- Remove any protective foil and stickers from the machine. Exception: Please do not remove any labels (e.g. the data plate) which are visible when you pull out the lower panel.
- Remove the protective foil from the drip tray cover.
- Clean the water container, the bean containers and the central spout.

Before using the appliance for the first time, you will need:

- Miele cleaning cartridge
- Miele descaling cartridge

Switching on for the first time

- Touch the On/Off ① sensor.

Selecting the display language

- Select the required display language.

You might also be asked for your location.

The choice of location determines how the time of day is displayed, e.g. in the 12 or 24-hour format, as well as how units are displayed and so on.

Setting up the network (Miele@home)

You can connect your coffee machine to your local Wi-Fi network.

The following appears in the display during set-up: Set up Miele@home?

Useful tip: You can also set up Miele@home for your coffee machine at a later time. In this case, select Skip.

- Make sure that the signal of your Wi-Fi network is sufficiently strong in the place where you want to set up your coffee machine.
- Touch Continue.
- Select the connection method you wish to use.
- Follow the instructions provided in the coffee machine display and in the Miele App.

Connection successfully established appears in the display.

- Touch Continue to continue with the set-up.

Setting the date

- Enter the current date and touch OK.

Setting the time of day

- Enter the current time of day and touch OK.

If the coffee machine has been connected to a Wi-Fi network and is signed into the Miele App, the time will be synchronised based on the location setting in the Miele App.

Setting the water hardness level

Contact your local water supplier to find out your local water hardness range if necessary.

See “Settings - Water hardness” for more information.

- Enter the local water hardness level (in °dH) and confirm with OK.

Before using for the first time

Setting up automatic cleaning and descaling


Information about automatic cleaning and descaling is shown in the display.

- Confirm with *OK*.


Useful tip: Touch *Help* to get illustrated instructions in the display.

Fitting the cleaning cartridge


You will now be prompted to fit a cleaning cartridge.

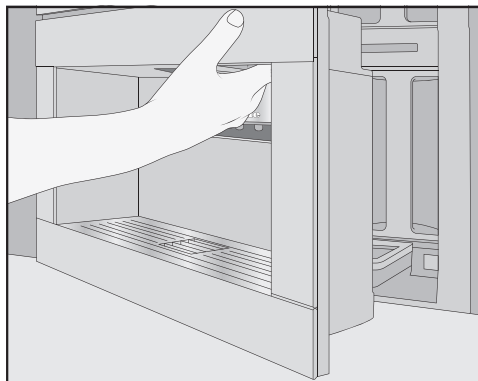

- Open the appliance door of the coffee machine.

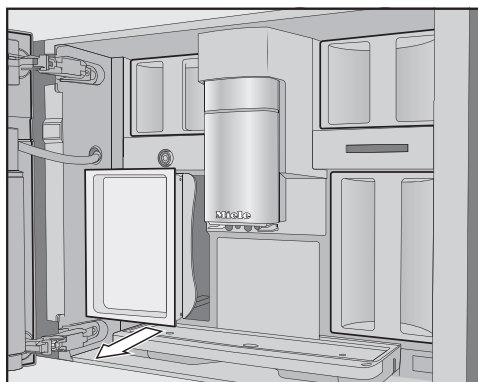

- Remove the maintenance container on the left.

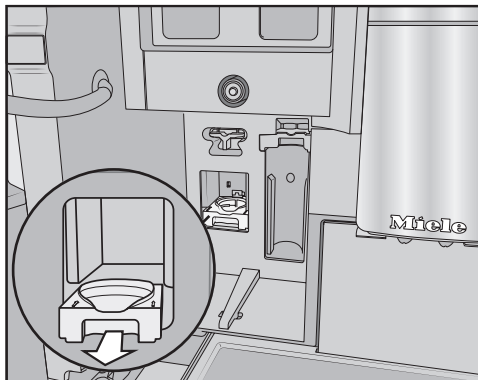

- Pull the cleaning cartridge holder forwards and take it out.
- Remove the cleaning cartridge from its packaging and unscrew the cap. The cap is no longer required.




- Screw the cleaning cartridge into the holder upside down.
- Push the holder with the cartridge into the coffee machine until it clicks into place.

Fitting the descaling cartridge

- Remove the descaling cartridge from its packaging.

Before using for the first time

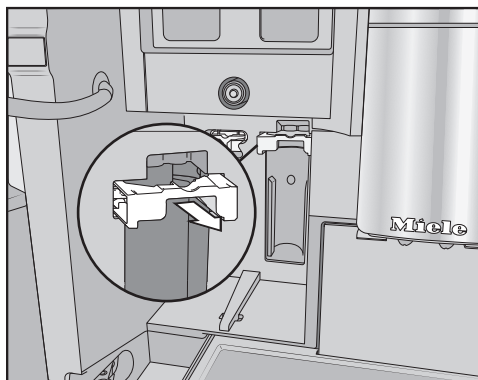

- Pull the descaling cartridge holder forwards.
- Fit the descaling cartridge and push it upwards as far as it will go.
- Push the descaling cartridge holder back in.
- Insert the maintenance container and close the appliance door.

The descaling cartridge will fill with water the next time the machine is switched off.

Wait until the coffee machine switches itself off. Do not force the machine to switch off.

If the cleaning and descaling cartridges are fitted, a message about the set start time of automatic cleaning and descaling will appear.

- If you want to change the start time, touch **Timer** and select the required time.
- Confirm with **OK**.

You can also set the start time for automatic cleaning and descaling at a later time.

Selecting Performance mode

Select the most suitable mode depending on your coffee preferences (see “Settings - Performance mode”).

- **Eco mode:** This is an energy saving mode.
 - **Barista mode:** This mode is optimised for perfect coffee enjoyment.
 - **Latte mode:** In this mode drinks with milk can be made significantly faster.
- Select the required mode.

The coffee machine is now successfully set up for use. You can now fill the bean system.

Setting up the bean system

After setting up the coffee machine, you will be prompted to set up the bean system. The coffee machine will assist you when first filling and naming the bean containers.

- Touch **Yes**.


If you select **No**, the assistant for setting up the bean system will not be shown again.

Filling the bean containers

There are two bean container drawers at the top right and left of the coffee machine.

- Open the appliance door.

Before using for the first time

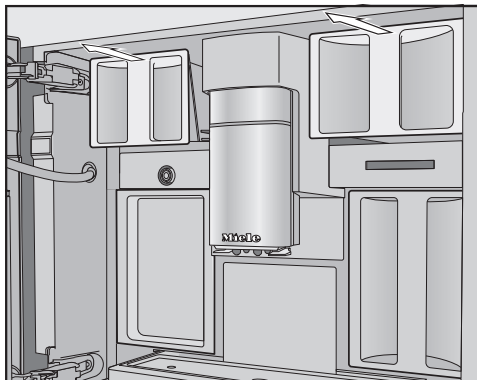


- Pull out the coffee bean containers and remove their lids.
- Fill the containers with roasted coffee beans.
- Close the bean containers with their respective lids.
- Push the coffee bean containers back into the coffee machine. Close the appliance door.

Useful tip: Make a note of each type of bean.

After filling the bean containers, you can now name the types of beans.

Naming the types of beans

The 3 bean containers are shown in the display as follows and are pre-named.

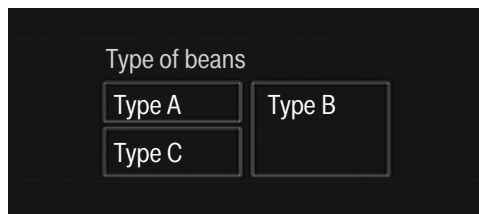

If you rename the bean containers, please note the following:

- It is best to select short, memorable names.
- If you are using the same type of beans in two or three bean containers at the same time (for instance, because you only use one type of bean), make sure you name them in the same way exactly.

Name type of beans for bean container? appears in the display and Type A is highlighted orange.

- Touch Yes.

The editor will open in the display.

- Enter the name you want for the bean container and then touch Save.
- Now name the other two bean containers.

Allocate "" <Type XY> appears in the header line.

Allocating bean types

Bean types are now allocated to coffee drinks. Selected drinks are highlighted orange.

- Now select the drinks that are to be prepared with this type of bean. Confirm your selection with OK.

The next type of bean is now allocated and any unallocated coffee drinks are displayed.

- Select the drinks that are to be prepared with this type of bean. Confirm with OK.

Any remaining drinks which have not been selected will be allocated to the third bean type.

Before using for the first time

You have set up the bean system and you can now prepare drinks.

Useful tip: All coffee drinks are highlighted if you touch *All drinks*. Unwanted drinks can be deselected.

If you do not allocate bean containers to the drinks, you will be asked during drink preparation which type of bean you want to use.

To ensure that any coffee residues from the factory testing process are removed from the brewing system, please throw away the first two cups of coffee when using the coffee machine for the first time.

Coffee or espresso can be made from whole roasted coffee beans which are freshly ground for each portion. Your coffee machine has a bean system with three bean containers which can be filled with different types of beans or even just one type. You can allocate bean types to individual coffee drinks as you wish. Alternatively, you can create profiles with your own coffee drinks and allocate other bean types to these drinks which are different to the Miele profiles.



Risk of damage to the grinder due to incorrect operation.

The coffee machine will be damaged if the bean container is filled with unsuitable substances such as liquids, ground coffee or coffee beans treated with sugar, caramel or similar.

In addition, green (unroasted) coffee beans or mixtures of coffee beans which contain green coffee beans can damage the grinder. Green coffee beans are very hard and still contain residual moisture. These can damage the coffee machine grinder as soon as grinding begins.

Only put roasted coffee beans in the bean container.

If decaffeinated coffee beans are used after dispensing a drink with caffeinated beans, there may still be residues from the caffeinated beans in the grinder or brew chamber.

Please be aware that minimal residues of caffeinated beans may be present in the next drink that you make.


Changing bean system settings (Type of beans)

The drinks menu is displayed.

■ Touch the ↩ sensor.

■ Select **Settings** and then **Type of beans**.

The schematic representation of the bean containers will be displayed.

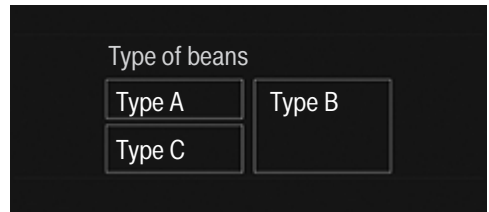

■ Select a bean type.

You can now change the name of the type of bean or change the allocation.

Useful tip: If you want to allocate another type of bean to a coffee drink, you can also do this under “Change parameters” (see “Parameters - Type of beans”).

Renaming type of beans

■ Touch **Change name**.

The editor will open in the display.

If you rename the type of beans, please note the following:

- It is best to select short, memorable names.
- If you are using the same type of beans in two or three bean containers at the same time (for instance, because you only use one type of bean), make sure you name them in the same way exactly.

Bean system

- Enter the name you want and then touch **Save**.

If you give identically named types of beans different names, you will then need to allocate coffee drinks to the newly named beans.

Changing the allocation of the bean containers

If you have created additional Profiles with coffee drinks to the Miele standard profile, the bean types can be individually allocated to individual drinks in each Profile.

- Touch **Change allocation**.

If you have set up one or more profiles and at least one coffee drink, first select the profile.

- Select the profile for which you want to allocate the type of beans.

All coffee drinks will be listed. The already allocated drinks will be highlighted orange.

- Change the allocation as required and then confirm with **OK**.

Useful tip: If you touch **All drinks**, you will have highlighted all coffee drinks and you can deselect the ones you do not want.

If you do not allocate a type of bean, you will be asked what type of bean you want to use for the coffee as you make it.

Filling the water container

⚠ Risk to health due to contaminated water.

Bacteria can develop in water which has been sitting in the water container for too long and is a risk to your health.

Change the water in the water container **every day**.


Pour out the water from the water container if a drink has not been prepared for a long time.

⚠ Risk of damage due to incorrect operation.


Unsuitable liquids such as hot or warm water or other liquids can damage the coffee machine.

Carbonated water leaves too much limescale in the coffee machine.

Only use cold, fresh tap water to fill the water container.

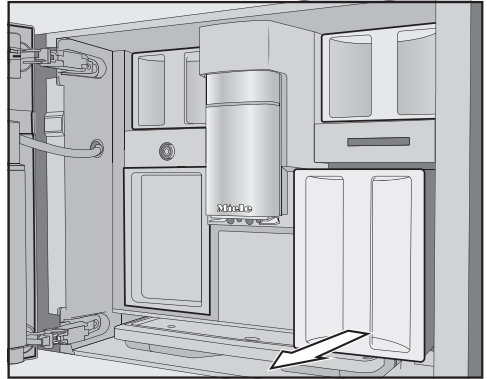

- Pull the water container out to remove it.
- Fill the water container with fresh, cold drinking water up to the *max.* mark.
- Insert the water container in the machine and close the appliance door.

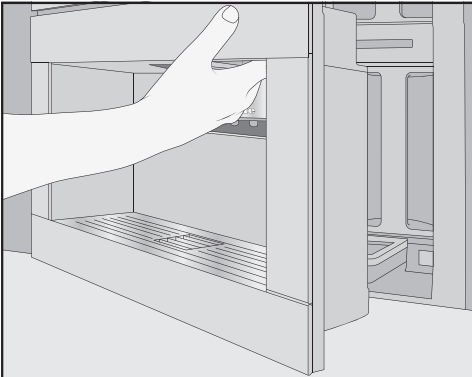

- Open the appliance door.

Switching on and off

Switching the coffee machine on

- Touch the On/Off ① sensor.

The coffee machine heats up and rinses the pipework. Hot water will run out of the central spout.

You can now make drinks.

If the coffee machine is already at operating temperature, rinsing will not take place.

Switching the coffee machine off

- Touch the On/Off ① sensor.

If coffee has been dispensed, the coffee machine will rinse the coffee pipework automatically before switching off.

While dispensing a drink or during maintenance processes, moisture builds up in the coffee machine. Once a drink has been dispensed or the machine has been switched off, the internal fan will continue to run until the interior is sufficiently dehumidified. You will hear an accompanying noise.

Switching off for longer periods of time

If the coffee machine is not going to be used for a longer period of time, e.g. if you are going on holiday, please do the following:

- Empty the drip tray, the waste container and the water container.
- Clean all parts thoroughly, including the brew unit and the interior of the machine.
- Switch the coffee machine off.

The height of the central spout **cannot** be manually adjusted.

Before making the drink, the central spout moves down and the cup sensor stops it at the optimum height for the cups or glasses being used.

When the coffee machine is switched off, the central spout moves to a medium height.

When a maintenance programme is being carried out, the central spout will move to the height of the cleaning container or into a lower maintenance position.

Ensure the central spout is in either the upper or middle position before opening the door.

Making drinks

 Danger of burning and scalding on the dispensing spouts.

The liquids and steam dispensed are very hot and can cause scalding.

Keep well away from the area underneath the spouts when hot liquids and steam are being dispensed.

Do not touch hot components.

Making coffee drinks with and without milk

The following drinks can be made:

- **Ristretto** is a strong, concentrated espresso. It is prepared with the same amount of coffee as for an espresso but with much less water.
- **Espresso** is a strong aromatic coffee with a thick hazelnut brown coloured froth - known as the crema - on top. We recommend using espresso roasted coffee beans to make an espresso.
- **Coffee** differs from espresso by the increased amount of water and the roast of the beans. We recommend using coffee beans with the appropriate roast to make the coffee.
- **Long coffee** is a coffee with considerably more water.
- **Long black** is made with hot water and two shots of espresso.
- **Caffè Americano** consists of equal proportions of espresso and hot water. The espresso is made first, then the hot water is dispensed.

- **Cappuccino** consists of approx. 2/3 milk froth and 1/3 espresso.
- **Latte macchiato** consists of 1/3 each of hot milk, milk froth and espresso.
- **Caffè latte** consists of hot milk and espresso.
- **Cappuccino Italiano** has the same proportions of milk froth and espresso as a cappuccino. The difference is that the espresso is added first and then the milk froth.
- **Espresso macchiato** is an espresso with a small amount of milk froth on top.
- **Flat white** is a special variation of the cappuccino: a much greater amount of espresso compared to milk froth creates an intensive coffee aroma.
- **Café au lait** is a French coffee speciality made from coffee and milk froth. Café au lait is normally served in a bowl.

Hot milk or milk froth can also be made separately.

Milk preparation

Additives containing sugar or milk alternatives, e.g. soy milk, can clog the milk pipework and milk carrying parts. Residues from unsuitable liquids may adversely affect correct preparation.

Do not use milk with additives.


Use only pasteurised cow's milk.

Useful tip: Using cold cow's milk ($< 10\text{ }^{\circ}\text{C}$) with a protein content of at least 3% will produce the perfect milk froth.

You can select milk with a fat content according to preference. With full cream milk (at least 3.5% fat), the milk froth will be slightly creamier than with low-fat milk.

Milk flask

Milk is **not** cooled in the milk flask. Use cold milk ($< 10\text{ }^{\circ}\text{C}$) to produce a good quality milk froth.




- ① Lid
- ② Milk suction tube
- ③ Milk level sensor rod
- ④ Glass milk flask

Making drinks

Filling and fitting the milk flask

- Fill the milk flask with milk up to a maximum of 2 cm below the rim. Seal the milk flask with the lid.

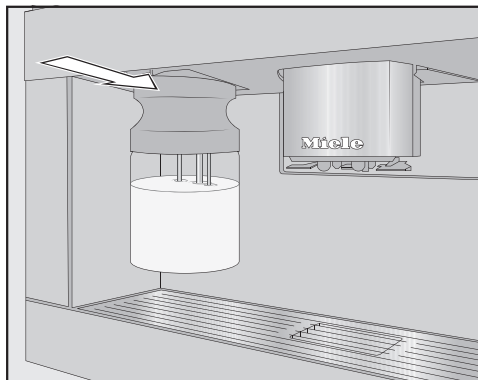


- Push the milk flask into the coffee machine until it clicks into place.

Useful tip: The milk flask is easier to remove with two hands.



Making a coffee drink

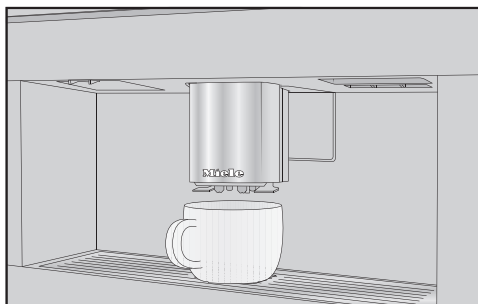

- Place a suitable cup or glass underneath the central spout.
- Select a coffee drink.

Preparation will begin and the coffee will be dispensed into the cup or glass from the central spout.

Cancelling preparation

- Touch Stop or Cancel.

DoubleShot

Select the DoubleShot  function to make a particularly strong and aromatic coffee. In this case, more coffee beans will be ground and brewed halfway through brewing. Due to the reduced extraction time, fewer unwanted aromas and bitter substances are released.

DoubleShot can be activated for all coffee drinks except "Ristretto" and "Long black".

Making a DoubleShot of coffee


The  symbol is displayed during preparation of coffee drinks.

- Touch the  symbol immediately before or after you have started making a drink.

Preparation starts and the  symbol is highlighted orange in the display. Two portions of coffee beans will be ground and brewed.

Making two portions

You can also dispense two portions of a drink into one large cup or dispense two portions into two cups at the same time.

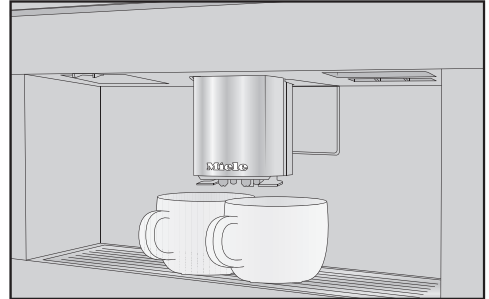

- Place one cup under each of the coffee spouts.
- Touch the  symbol immediately before or after you have started making a drink.

Preparation starts and the  symbol is highlighted orange in the display. Two portions of the desired drink will be dispensed.

Making drinks

Coffee pot

You can make several cups of coffee one after the other automatically with the Coffee pot function (max. 1 litre).

The drinks menu is displayed.

Useful tip: Before starting Coffee pot, ensure the bean containers and the water container are sufficiently filled.

- Place a sufficiently large container under the central spout.
- Select Coffee pot.

Useful tip: You will find Coffee pot at the end of the drinks menu.

- Select the number of portions you want to dispense (3 to 8).
- Follow the instructions in the display.

Each cup of coffee will be brewed and dispensed individually. The display will inform you about the progress.

You can interrupt preparation at any time.

- Touch Cancel.

Tea

This coffee machine is not intended for commercial or scientific purposes. Temperatures given are approximate and can vary according to ambient conditions.

To make tea, you can select from the following options:

- **Japanese tea** is a high quality green tea and has a delicate, fresh, “green” flavour.
Dispensing temperature: approx. 65 °C; brewing time: approx. 1.5 minutes
- **White tea** is a green tea where only the young buds of the tea plant, which are still white, are used and processed very gently. White tea has a particularly mild flavour.
Dispensing temperature: approx. 70 °C; brewing time: approx. 2 minutes
- **Green tea** gets its green colour from the leaves of the tea plant. The tea leaves are processed gently in different ways – either roasted or steamed – depending on the region. Green tea can be infused multiple times.
Dispensing temperature: approx. 80 °C; brewing time: approx. 2.5 minutes
- **Black tea** gets its dark colour and typical flavour from the fermentation of the tea leaves. Black tea can be drunk with a little lemon or with milk.
Dispensing temperature: approx. 97 °C; brewing time: approx. 3 minutes

- **Chai latte** has its origins in the traditional Ayurveda medicine as a black tea with typically Indian spices and milk. The milk mellows the spices and tops off the flavour experience.
Dispensing temperature:
approx. 97 °C; brewing time:
approx. 3 minutes
- **Herbal tea** is an aromatic infusion drink made up of dried leaves or fresh parts of plants.
Dispensing temperature:
approx. 97 °C; brewing time:
approx. 8 minutes
- **Fruit tea** consists of dried pieces of fruit and/or parts of plants, e.g. rose hip. The flavour varies depending on the plants used and their blend.
Many fruit teas are also flavoured.
Dispensing temperature:
approx. 97 °C; brewing time:
approx. 8 minutes

The type of tea determines the preset temperature.

The respective dispensing temperatures are recommended by Miele for making these types of tea.

You can change the dispensing temperatures of individual teas by changing the brewing temperature for a particular tea (see "Parameters - Brewing temperature"). Temperatures given are approximate and can vary according to ambient conditions.

Whether you use loose tea leaves, blended tea or tea bags depends on your own personal preferences.

Follow the instructions for making tea on the tea packaging.

The amount of tea to use varies from one type of tea to the next. Always follow the recommendations of the manufacturer on the packaging or of the supplier. The amount of hot water used can be adjusted depending on the type of tea and the size of the cup (see "Portion size")

TeaTimer

You can use the **TeaTimer** function to start a minute minder when making tea. A specific brewing time is preset for the selected type of tea. You can change the preset brewing time (max. 14:59 minutes).

The machine has two **TeaTimers** that can be started independently from one another. The **TeaTimers** are displayed in the top right of the display with their relevant brewing time.

While the brewing time is counting down, you can continue to use the coffee machine as normal. An audible tone will sound and the ⌚ symbol will flash after the brewing time has elapsed.

Setting the TeaTimer

You can select from the following options:

- **Automatic:** The **TeaTimer** starts automatically when tea dispensing has finished.
- **Manual:** When tea dispensing has finished, you have the option of starting the **TeaTimer**.

Making drinks

The drinks menu is displayed.

- Touch the ↩ sensor.
- Select Settings | Timer | TeaTimer.
- Select the setting you want.

Making tea

The drinks menu is displayed.

- Pour loose tea into a tea filter or similar or take a tea bag from the packet.
- Place the tea filter or the tea bag in the tea cup.
- Place the tea cup under the central spout.
- Select the type of tea you want from the display.

Hot water will be dispensed into the cup.

If you have selected TeaTimer | Automatic, the minute minder for the brewing time will start after dispensing the water for the tea.

Starting the TeaTimer manually

- Touch TeaTimer.

The editor will open with a suggested time.

- Change the brewing time if necessary and confirm with OK.

An audible tone will sound and the ⌚ symbol will flash after the brewing time has elapsed.

- Now remove the tea leaves or the tea bag.

Teapot

You can use the Teapot function to dispense a larger quantity of water for making tea (max. 1 litre). The selected type of tea determines the preset temperature.

The drinks menu is displayed.

Useful tip: Before you start making a teapot, ensure the water container is sufficiently filled.

- Place a sufficiently large container under the central spout.
- Select the teapot option you want.
- Select the number of portions you want to dispense (3 to 8).

You can interrupt preparation at any time.

- Touch Cancel.

Preparing warm and hot water

You can select from the following options:

- Hot water (approx. 90 °C)
- Warm water (approx. 65 °C)

The drinks menu is displayed.

- Place a suitable cup or glass underneath the central spout.
- Select warm or hot water.

Dispensing will start.

In Expert mode you can allocate a type of bean for one time and change the portion size while the drink is being made. The setting will **not** be saved and will only apply for the current drink.

Activating and deactivating Expert mode

Expert mode is located in the pull-down menu at the top edge of the screen.

- Touch the top edge of the screen in the middle and drag down with your finger to open Expert mode.

The schematic representation of the bean containers will be displayed.

- Touch Expert mode.

Expert mode is active when Expert mode is highlighted orange.

- To exit the pull-down menu, slide the menu window up or touch the screen outside of the pull-down menu.

Expert mode: temporarily allocating bean containers

- Touch the top edge of the screen and open the Expert mode pull-down menu.
- Now select the bean container whose beans are to be used for the current drink.
- Slide the menu window back up to close it.
- Switch to the drinks menu if necessary.
- Now start making a drink.


Expert mode: changing the portion size

The drinks menu is displayed.

If you select DoubleShot ☺ or two portions ☞, Expert mode cannot be used to change the portion size.

- Select a drink.

Dispensing will start. You can adjust the portion size while it is being dispensed, e.g. individually change the amount of hot milk, milk froth and espresso for Latte macchiato.

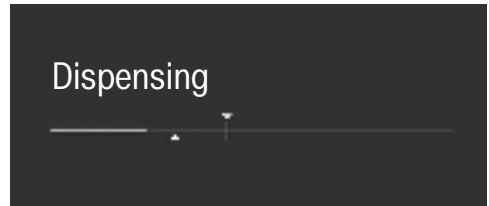

- Touch the segments and adjust the indicator (small triangle) as you wish.

Grinder setting

The grinder setting determines the contact time between the ground coffee and the water, known as the extraction time. When the ideal grinder setting is selected, the machine dispenses a perfect cup of coffee with a fine, hazelnut-brown crema.

The grinder setting you select will be used for all coffee drinks.

There are various ways to tell whether the coffee grinder is set correctly.

The grinder setting is **too coarse** if the coffee or espresso is watery and tastes acidic. The crema is very pale.

Set a finer grinder setting.

The grinder setting is **too fine** if the coffee or espresso tastes too bitter and the crema is dark brown.

Set a coarser grinder setting.

Only adjust the grinder one setting at a time.


Start making a drink to grind beans again. Adjust the grinder setting one setting at a time again.

Adjusting the grinder setting

The slide control for the grinder setting is located at the top left behind the water container.

The grinder setting is set for all bean types.

- Open the appliance door.
- Remove the water container.

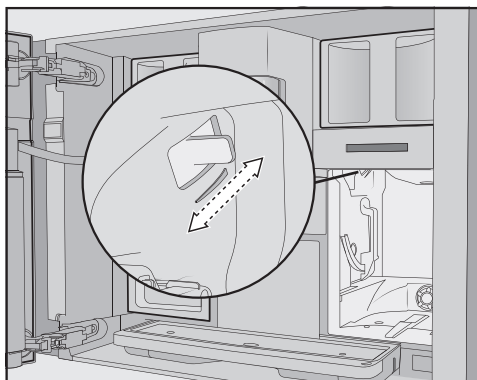

- Push the slide control a maximum of one setting to the front (for finer grinding) or to the back (for coarser grinding).
- Push the water container back into the machine.
- Close the appliance door.
- Make one cup of coffee.

Then you can adjust the grinder setting again.

Displaying and changing parameters

You can individually adjust the following parameters for each drink:

- Bean type
- Amount of coffee
- Brewing temperature
- Pre-brewing

You can adjust the brewing temperature for tea drinks, warm water and hot water.

The drinks menu is displayed.

- Touch and hold the required drink name until the context menu for this drink appears.

- Select Parameters.

The Parameters menu is shown in the display.

- Select the required parameters.

The current setting will be displayed.

- Change the setting as required.

Amount of coffee

The coffee machine can grind and brew 7.5–12.5 g of coffee beans per cup. The greater the quantity, the stronger the coffee.

The quantity of coffee is **too low** if the espresso or coffee lacks body.

Increase the amount of coffee so that more ground coffee is brewed.

The quantity of coffee is **too high** if the espresso or coffee tastes bitter.

Decrease the amount of coffee so that less ground coffee is brewed.

Brewing temperature

The brewing temperature must be adapted to the beans you are using and how they are roasted. It also varies depending on whether you are making espresso or coffee.

Some bean types are sensitive to high brewing temperatures, resulting in an impaired taste. If your coffee tastes bitter, the brewing temperature you have selected might be too high.

Espresso is usually brewed at higher temperatures.

You can also adjust the brewing temperature for tea drinks, warm water and hot water.

Pre-brewing ground coffee

When the pre-brewing function is switched on, the ground coffee is first moistened with a little hot water. The ground coffee swells a little. The remaining amount of water is then pressed through the moistened coffee grounds shortly after. If your coffee tastes too bland and you want to add some spice and richness, try the “Pre-brewing” function. Depending on the type of coffee used, pre-brewing can intensify the taste.

You can set a short or long duration for pre-brewing or turn the “Pre-brewing” function off completely.

Useful tip: We particularly recommend using the “Pre-brewing” function to make coffee.

Parameters

Type of beans

You can display which type of bean is being used at the moment for this coffee drink or even the allocation of the bean container for the selected drink.

You can adjust the amount of water for all coffee drinks, hot water and types of tea.

The strength of the coffee is determined by the ratio between the amount of ground coffee and water. If the coffee is brewed with more water but with the same quantity of coffee, the coffee will taste milder and thinner. If you reduce the amount of water, you will get a stronger and more powerful coffee.

If you significantly increase or decrease the portion size and therefore the amount of water for a coffee, you should adjust the quantity of coffee accordingly.

For coffee drinks with milk, you can also set the amount of milk or milk froth to suit your personal taste. Additionally, you can set the portion sizes for hot milk and milk froth alone.

The changed portion size is always saved in the current profile. The name of the current profile is shown in the top left of the display.

If the water container becomes empty during the preparation of a drink, the programming of the portion size will be cancelled. The portion size will **not** be saved.

The drinks menu is displayed.

- Place the desired cup under the central spout.
- Touch and hold the required drink until the context menu opens.
- Touch Portion size.

The drink will be made. **Save** will appear in the display as soon as the minimum dispensing amount is reached.

- When the cup is filled up to the level you want, touch **Save**.

If the maximum amount is reached, preparation stops and the maximum possible amount is saved.

If you want to change the portion size for coffee drinks made with milk or hot water, the ingredients (components) which make up the drink will be saved one after the other while the drink is being made.

The programmed combination of ingredients and portion sizes will now be dispensed every time that particular drink is selected.

Resetting drink settings

You can reset portion sizes and parameters individually or for all drinks back to their factory default settings.

The drinks menu is displayed.

- Touch and hold the required drink entry until the context menu opens.
- Select **Reset** and confirm with **Yes**

The portion size and parameters will be reset to the factory default settings. The allocation of the type of bean remains saved.

In addition to the Miele drinks menu (Miele profile), you can create individual profiles to cater for different tastes and preferences.

The portion quantities and parameters for all drinks can be adjusted in each profile.

The name of the current profile is shown in the top left of the display.

- **After each use:** The Miele profile is displayed after every drink.
- Select the desired option.

Creating a profile

The drinks menu is displayed.

- Touch User profiles.

The User profiles menu opens.

- Touch Create profile.

The editor will open in the display.

- Enter the name you want and then touch Save.

The profile is created. You can now create drinks (see “Profiles: creating and processing drinks”).

Processing profiles

When you have created at least one profile, you can rename, delete or move profiles with the context menu in the User profiles menu.

- Touch and hold the profile name until the context menu appears.
- Process the entry as required.

Setting change of profile

You can select from the following options:

- **Manual:** The selected profile remains active until you select another profile.

Profiles: creating and processing drinks

You can save frequently made drinks in a profile with your own individual settings (see “User Profiles”).

You can also change the names of your drinks and delete any unwanted drinks from your profile. You can save a maximum of 9 drinks in a profile.

- Touch and hold the drink name until the context menu appears.
- Process the entry as required.

Creating a drink

You can create new drinks based on existing drinks.

The drinks menu is displayed.

- Open the required profile: touch **User profiles** and select the profile.

The name of the profile is shown in the top left of the display.

- Touch **Create drink**.
- Now select a drink.
- Change the portion size or drink parameters for this drink.

Drink preparation will begin and you can save the portions of each component as desired.

- Enter a name for the new drink and touch **Save**.

The new drink will appear in the current profile.

Renaming, moving or deleting an entry

If you have already created drinks, you can process these entries in the context menu.

The desired profile with the newly created drinks will appear in the display.

You can display drinks you make frequently, drinks from profiles and maintenance programmes in the MyMiele screen.

Useful tip: You can also set menu options that you have entered into MyMiele to appear on the start screen (see “Settings – Start screen”).

The main menu is displayed.

■ Touch MyMiele.

You can now configure MyMiele.

MyMiele: Adding an entry

■ Touch Add entry.

You can now add entries from the following menus:

- Drinks
- User profiles
- Maintenance

■ Select an entry.

■ Confirm the message with *OK*.

A box will appear next to the selected entry together with the menu it comes from.

MyMiele: Deleting or moving an entry

If you have already created entries, these can be moved or deleted in the context menu in the MyMiele screen.

■ Touch and hold the entry until the context menu appears.

■ Move or delete the entry as required.

MobileStart

With MobileStart  you can, for example, start making a drink via the Miele App.

You can only use MobileStart if Miele@home is set up for your coffee machine.

 **Danger of burning and scalding** on the dispensing spouts.

If liquids or steam are dispensed while the machine is unsupervised, persons may burn themselves if they place body parts under the central spout or touch hot components.

Ensure that no one, especially children, can be harmed if the machine is operated without supervision.

Automatic cleaning and automatic descaling cannot be carried out if MobileStart  is activated. The pipework is not pre-warmed when the machine is switched on either so that the cup under the central spout is not filled with rinse water.

Milk is not cooled in the milk flask. If you want to start making a drink with milk using the App, make sure that the milk is sufficiently cold ($< 10\text{ }^{\circ}\text{C}$).

If the coffee machine is being operated manually, it cannot be operated via the App. Operation on the appliance takes precedence.

To start making drinks remotely, MobileStart  must be activated. Make sure that the coffee machine is ready to use, for example check that the water

container is sufficiently filled. Place a sufficiently large, empty cup or glass under the central spout.

MobileStart will be deactivated after 24 hours.

If you are making a drink with MobileStart , you will be notified of drink dispensing with acoustic and optical signals. These signals cannot be changed or switched off.

Switching MobileStart on and off

If you want to use MobileStart , the Remote control option must be switched on.

The drinks menu is displayed.

■ Touch the  sensor.

The  sensor lights up. You can now start making a drink via the App. Follow the prompts for doing this.

You can personalise your coffee machine by adapting the factory default settings to your requirements.

Displaying and changing settings

The drinks menu is displayed.

- Touch the ↩ sensor.
- Select Settings.
- Select the option you want to change.
- Change the setting.

If necessary, confirm the selection with **OK**.

Some settings which can be found in the **Settings** menu are described in their separate sections in the operating instructions.

Language

You can select a language and location variant for all display texts.

Useful tip: If you select the wrong language by mistake, you can find the "Language" option again via the  symbol.

Time of day

Display (time display)

Select how you want the time of day to appear in the display when the coffee machine is switched off:

- **On:** The time is always visible in the display.
- **Off:** The time is not displayed.

- **Night dimming:** To save energy, the time is displayed from 5:00 to 23:00 only.

Clock type

You can choose to show the time in an **analogue** (clock face) or **digital** (hours:minutes plus date) form when the coffee machine is switched off.

Clock format

- 24-hour display (24 h)
- 12-hour display (12 h)

Setting

Set the hours and then the minutes.

Useful tip: By touching the time of day in the top right of the display, you can set the time without opening the **Settings** menu.

If the coffee machine has been connected to a Wi-Fi network and is signed into the Miele App, the time will be synchronised based on the location setting in the Miele App.

Date

Set the date.

The date only appears in the Time | Clock type | Digital setting.

Start screen

You can choose which menu appears when the coffee machine is switched on. For example, you can display a personalised menu with MyMiele (see "MyMiele").

The modified start screen will be displayed after switching on again.

Settings

The drinks menu is set as the start screen at the factory.

Timer

Appliance timer

You can set various timer periods for the weekend (Sat. and Sun.) and/or Monday to Friday (Monday-Friday). Alternatively, you can select **Daily** if you want to activate the timer for every day.

Useful tip: If the timer cannot be set and the screen is greyed out, touch **On** to activate the timer setting.

Select **Accept all** to save and activate the timer function.

Select **Switch all off** to deactivate the timer function.

With **Delete** you can deactivate timers individually. -- -- then appears in the display.

Switch on at (On at)

The coffee machine switches on at a particular time, e.g. in the morning for breakfast.

The coffee machine will **not** switch on at the required time if you have activated the system lock.
The timer settings are deactivated.

If the coffee machine has switched itself on automatically **three times** at the specified time and no drinks have been dispensed, the machine will not switch itself on again automatically. This prevents the coffee machine from switching itself on unnecessarily, for example, whilst you are away on holiday.

The programmed times will, however,

remain in memory and will be reactivated after manually switching the machine on again.

If you have switched on the time display for the switched off appliance (Display | On or Night dimming) and the digital clock type has been selected (Clock type | Digital) the  symbol and the desired switch-on time will appear in the display up to 23:59 hours ahead of time.

Switch off at (Off at)

The coffee machine switches off at a particular time.

Switch off after (Switch off after)

The coffee machine switches off after a particular length of time if no sensors have been touched.

Under the default settings the coffee machine switches off after 20 minutes.

You can change this preset to a time of between 20 minutes and 9 hours.

If you deactivate the timer functions with **Switch all off**, the coffee machine will switch off after the last selected time.

Maintenance timer

Use the Maintenance timer to select any start time you like for the automatic maintenance programmes (see “Automatic cleaning and descaling - Maintenance timer” section).

TeaTimer

You can use the TeaTimer to start a minute minder when making tea (see “Making drinks - TeaTimer”).

Volume

You can set the volume of buzzer and keypad tones using a segment bar.

Display

Display brightness

The display brightness is set using a segment bar.

Colour scheme

Select whether the display is to be shown with a bright or dark colour scheme.

QuickTouch

Set whether the ☼ sensor control and the proximity sensor react when the coffee machine is switched off and the time of day appears in the display (Time | Display | On or Night dimming).

Lighting

Lighting intensity is set using the segment bar.

You can use the ☼ sensor to switch the lighting on or off at any time as long as the coffee machine is switched on.

If the coffee machine is switched off, you can switch the lighting on or off at any time if you select the following settings:

- Time | Display | On or Night dimming (time is not displayed)
- Display | QuickTouch | On

Info (display information)

In the Info menu option, you can display the number of drinks and the fill levels of the cartridges (provided they are fitted).

Altitude

If the coffee machine is installed at high altitudes, the lower air pressure will cause the water to boil at a lower temperature. You can set the local altitude of the machine to ensure that the correct temperatures are achieved.

Performance mode

You can select the most suitable performance mode for your type of use. Eco mode is set as standard.

Eco mode

Eco mode is an energy-saving mode. The system heats up only once drink preparation has started.

Barista mode

This Performance mode is optimised for perfect coffee enjoyment. Coffee drinks can be prepared without any delay as the coffee machine remains heated to the brewing temperature. This mode consumes more energy than Eco mode.

Latte mode

This mode is optimised for preparing drinks containing milk. Milk-based drinks can be prepared much faster. This mode consumes more energy than Eco mode and Barista mode

Settings

Party mode

This Performance mode is designed for **infrequent**, intensive use of the coffee machine, e.g. for family parties.

Empty the drip tray and fill the water container before switching off the coffee machine to ensure scheduled maintenance programmes can be carried out.

After intensive use, clean the coffee machine, and particularly the milk pipework, thoroughly. If necessary, descale the machine manually and degrease the brew unit.

Please note the following information about Party mode:

- The pipework is rinsed much less frequently or not at all. The milk pipework is not rinsed until around 1 hour after the last drink with milk was dispensed.
- Any messages on the maintenance status, or maintenance prompts, are suppressed and delayed until the next time the machine is switched on.
- The Off at and Switch off after timer are deactivated. The coffee machine switches off 6 hours after the last sensor has been touched.
- Cup lighting on the central spout is switched on permanently at the maximum brightness level for as long as the coffee machine is switched on.

Water hardness

Programme the coffee machine to the water hardness level of your area so that it functions correctly and does not get damaged.

Contact your local water supplier to find out your local water hardness range if necessary.

If you are using bottled drinking water, e.g. mineral water, select settings according to the calcium content. The calcium content is given on the label of the bottle in mg/l Ca^{2+} or ppm (mg Ca^{2+} /l).

Do not use carbonated water.


The water hardness is preset at the factory to 21° dH (3.8 mmol/l).

Water hardness		Calcium content mg/l Ca^{2+} or ppm (mg Ca^{2+} /l)	Setting
°dH	mmol/l		
1	0.2	7	1
2	0.4	14	2
3	0.5	21	3
4	0.7	29	4
5	0.9	36	5
6	1.1	43	6
7	1.3	50	7
8	1.4	57	8
9	1.6	64	9
10	1.8	71	10
11	2.0	79	11
12	2.1	86	12
13	2.3	93	13

Water hardness		Calcium content	Setting
°dH	mmol/l	mg/l Ca ²⁺ or ppm (mg Ca ²⁺ /l)	
14	2.5	100	14
15	2.7	107	15
16	2.9	114	16
17	3.0	121	17
18	3.2	129	18
19	3.4	136	19
20	3.6	143	20
21	3.8	150	21
22	3.9	157	22
23	4.1	164	23
24	4.3	171	24
25	4.5	179	25
26	4.6	186	26
27	4.8	193	27
28	5.0	200	28
29	5.2	207	29
30	5.4	214	30
31	5.5	221	31
32	5.7	229	32
33	5.9	236	33
34	6.1	243	34
35	6.3	250	35
36	6.4	257	36
37-45	6.6-8.0	258-321	37-45
46-60	8.2-10.7	322-429	46-60
61-70	10.9-12.5	430-500	61-70

Useful tip: If your water hardness is >21 °dH (3.8 mmol/l), we recommend instead to use bottled drinking water (< 150 mg/l Ca²⁺). This will mean your coffee machine will need to be descaled less often and there will be less impact on the environment because less descaling agent will be used.

Proximity sensor



The proximity sensor detects when your hand or body comes close to the touch display. You can activate the following functions separately:

- **Switch the light on:** You can decide whether the light switches on when the coffee machine is switched on or off.
- **Acknowledge buzzer:** Buzzer tones are suppressed, e.g. with the Fill and replace the water container message.
- **Switch the appliance on:** The start screen is displayed.

The proximity sensor is deactivated as standard.

If you want the proximity sensor to react even if the coffee machine is switched off, switch on QuickTouch as well (Display | QuickTouch | On).

If the system lock is activated, the functions of the proximity sensor are deactivated.

Settings

System lock

You can lock the coffee machine to prevent it being used without your knowledge, for example by children.

When the system lock is activated, the settings for the **On at timer** and the proximity sensor are deactivated. The coffee system will **not** switch on at the time set and/or does not react on approach.

Overriding the system lock

- Touch and hold the display for 6 seconds.

The system lock is activated the next time the machine is switched off.

Miele@home

The following points may appear under Miele@home:

- **Set up:** This option only appears if the coffee machine has not previously been connected to a Wi-Fi network or if the network configuration has been reset.
- **Deactivate*/Activate*:** The settings for the Wi-Fi network are retained, but the network is switched on or off.
- **Connection status*:** Information about the Wi-Fi connection is displayed. The symbols indicate the strength of the connection.
- **Set up again*:** The settings for the current Wi-Fi network will be reset. The Wi-Fi connection will be set up again.
- **Reset*:** The settings for the current Wi-Fi network will be reset.

The network configuration should be reset whenever the coffee machine is being disposed of or sold, or if a used coffee machine is being put into operation. This is the only way to ensure that all personal data has been removed and, in the case of the latter, the previous owner will no longer be able to access the coffee machine.

* This option appears if Miele@home has been set up and the coffee machine has been connected to your Wi-fi network.

Remote control

Remote control appears when the coffee machine is connected to a Wi-Fi network.

You can change the coffee machine settings, for example, in the Miele App when remote control is switched on. To start making a drink via the App, MobileStart must be additionally activated.

Remote control is switched on as standard.

SuperVision

SuperVision appears when the coffee machine is connected to a Wi-Fi network.

SuperVision can be used to monitor other appliances within the Miele@home system.

SuperVision display

If SuperVision is switched on (SuperVision | On), the  symbol appears in the display.

Standby display

SuperVision is also available in standby if the time display is switched on (Settings | Time | Display | On or Night dimming).

Appliance list

All household appliances signed on to the Miele@home system are listed.

You can switch SuperVision on or off for the signed on appliances. If you switch off SuperVision for one of your appliances, any faults will still be displayed for this appliance.

Buzzer tones for the listed appliances can also be switched on or off.

RemoteUpdate

The RemoteUpdate menu option is only displayed and can only be selected if the requirements for using Miele@home have been met.

The RemoteUpdate function is used for updating the software in your coffee machine. If an update is available for your coffee machine, this will be downloaded by the machine automatically. Updates will not be installed automatically. They must be initiated manually.

If you do not install an update, you can continue to use your coffee machine in the usual way. However, Miele recommends installing updates.

Switching on/Switching off

RemoteUpdate is switched on as standard. Available updates will be downloaded automatically and will only be installed if you initiate it.

Switch off RemoteUpdate if you do not wish any updates to be downloaded.

Running a RemoteUpdate

Information about the content and scope of an update is provided in the Miele App.

A message will appear in your coffee machine display if a software update is available.

You can install the update immediately or postpone this until later. When the coffee machine is switched on again, you will be reminded about the update.

Deactivate RemoteUpdate if you do not want to install the update.

The update may take several minutes.

Please note the following information about the RemoteUpdate function:

- You will only receive a message when an update is available.
- Once an update has been installed, it cannot be undone.
- Do not switch off the coffee machine while an update is being downloaded or installed. Otherwise, the update will be aborted and will not be installed.
- Some software updates can only be carried out by a Miele service technician.

Software version

The "Software version" menu option is intended for Miele service technicians. You do not require this information for your own use.

Settings

Legal information

You will find the Open Source Licences used under this menu option.

Showroom programme (Demo mode)

Do not activate this setting for domestic use.

The Showroom programme | Demo mode function enables the coffee machine to be demonstrated in stores or showrooms. In this mode, the machine lights up but drinks cannot be prepared and no maintenance programmes can be carried out.

You can activate Demo mode without commissioning the appliance. Switch the coffee machine on and off again. Then immediately touch and hold the  sensor for 5 seconds. Demo mode is active.

Factory default settings

You can reset the settings back to the ones which were set when the coffee machine was delivered - the factory default settings.

MyMiele can be reset separately.

The following will **not** be reset:

- The number of drinks and the appliance status (No. of uses until appliance needs descaling, ... brew unit needs degreasing)
- Language
- Time and date
- Profiles and their associated drinks (the allocation of bean types to drinks is reset)
- Miele@home

The Maintenance timer is reset to 2:00.



Risk to health due to inadequate cleaning.

Heat and moisture inside the coffee machine can cause coffee residues to become mouldy and/or milk residues to go off and pose a risk to health.

Carefully clean the coffee machine regularly.

Cleaning intervals - Quick guide

Recommended frequency	What do I have to clean/maintain?
Every day (at the end of the day)	Milk flask and lid
	Milk valve
	Water container
	Drip tray cover
	Drip tray and waste container
Once a week (more often if heavily soiled)	Central spout
	Cup rim sensor
	Interior
	Brew unit
	Drip catcher
	Appliance front
Once a month	Bean container
	Remove and clean the milk valve
As required / When prompted by display	Milk pipework (using the Miele Cleaning agent for milk pipework)
	Degrease the brew unit (using the cleaning tablets)
	Descale the appliance

Cleaning and care

Cleaning by hand or in the dishwasher

The brew unit is **not** dishwasher-safe.

Clean the brew unit by hand only under warm running water. **Do not use washing-up liquid or any other cleaning agent.**

The following must be cleaned **by hand only**:

- Central spout stainless steel cover
- Brew unit
- Coffee bean container and lid

 Risk of damage as a result of excessively high dishwasher temperatures.

Components may be rendered unusable (e.g. deformed) if washed in a dishwasher at a temperature of more than 55 °C.

For dishwasher-safe parts, the maximum temperature of the dishwashing programme selected must not exceed 55 °C.

Contact with natural dyes such as those found in carrots, tomatoes and ketchup may discolour the plastic parts in the dishwasher. This discolouration does not affect the stability of the parts.

The following components are **dishwasher safe**:

- Drip tray with lid and waste container
- Drip tray cover
- Central spout (without stainless steel cover)
- Milk flask with lid
- Cup sensor
- Drip catcher
- Maintenance container
- Water container

 **Danger of burning and scalding** on hot components or by hot liquids. Components can become very hot during operation. Touching hot components can cause burning. The liquids and steam dispensed are very hot and can cause scalding. Keep well away from the area underneath the spouts when hot liquids and steam are being dispensed. Always allow the coffee machine to cool down before cleaning it. Please be aware that water in the drip tray can also be very hot.

 **Risk of damage due to moisture ingress.** The steam from a steam cleaner could reach electrical components and cause a short circuit. Do not use a steam cleaner to clean the coffee machine.

It is important to clean the machine regularly, as the used coffee grounds will soon go mouldy. Milk residues can go off and can block the milk pipework.

Unsuitable cleaning agents

Contact with unsuitable cleaning agents can alter or discolour all surfaces. All surfaces of this appliance are susceptible to scratching. Scratches on glass surfaces could cause a breakage in certain circumstances.

Remove any residual cleaning agent immediately. To protect the machine and surrounding surfaces from damage, make sure you remove any spillages or splashes of descaling agent immediately.

To avoid damaging the surfaces of your appliance, do not use:

- cleaning agents containing soda, alkalines, ammonia, acids or chlorides
- solvent-based cleaning agents
- cleaning agents containing descaling agents (unsuitable for cleaning the appliance front)
- stainless steel cleaning agents
- dishwasher cleaners (unsuitable for cleaning the appliance front)
- glass cleaning agents
- cleaning agents for ceramic cooktops
- oven cleaner
- abrasive cleaning agents, e.g. powder cleaners and cream cleaners
- hard, abrasive brushes or sponges, e.g. pot scourers, brushes or sponges which have been previously used with abrasive cleaning agents
- dirt erasers

Cleaning and care

- sharp metal scrapers
- steel wool or stainless steel wire scourers

Cleaning the drip tray and waste container

 Danger of burning and scalding on hot components or by hot liquids. Components can become very hot during operation. Touching hot components can cause burning. The liquids and steam dispensed are very hot and can cause scalding.

If the pipework has just been rinsed, wait a while before removing the drip tray as the water used for rinsing will still run out of the coffee spouts.

Please be aware that water in the drip tray can also be very hot.


Do not touch hot components.

Clean the drip tray and waste container **every day** to avoid unpleasant smells and mildew.

A prompt will appear in the display when the drip tray and/or the waste container is full and needs to be emptied. Empty the drip tray **and** the waste container. The lid of the drip tray does not need to be removed for emptying.

Useful tip: If the drip tray is very dirty, clean it with a brush prior to placing it in the dishwasher.


- Open the appliance door.

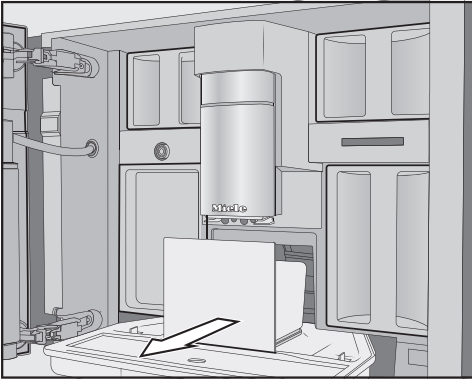

- Remove the drip tray with the waste container from the appliance.
- Remove the waste container from the drip tray and empty the waste container.

Apart from coffee grounds, there may also be some water in the waste container.

Dismantling the drip tray

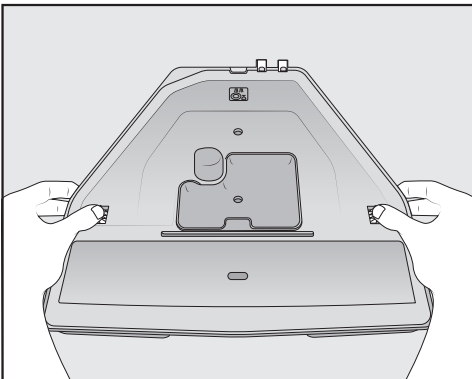


The orange latches are not removable.

- Remove the lid from the drip tray: push the orange latches on either side outwards and undo the lid. Take the lid off.

- Clean the drip tray, the lid and the waste container in the dishwasher, or by hand using warm water and a mild solution of washing-up liquid.
- Dry all parts afterwards.
- Clean the interior of the coffee machine underneath the drip tray.

Cleaning the contacts

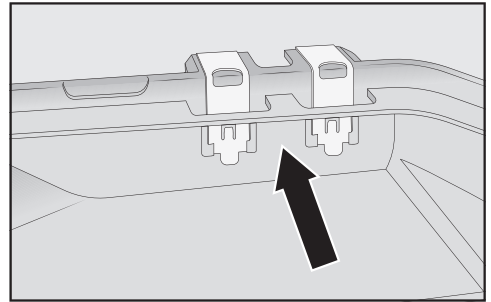


- Clean the contacts (metal discs) and the space between them carefully, e.g. with a soft brush. Dry all parts thoroughly.


The contacts will not be able to detect that the drip tray is full if they are damp or dirty. Check the contacts and the area around them once a week.

Cleaning and care

Assembling the drip tray

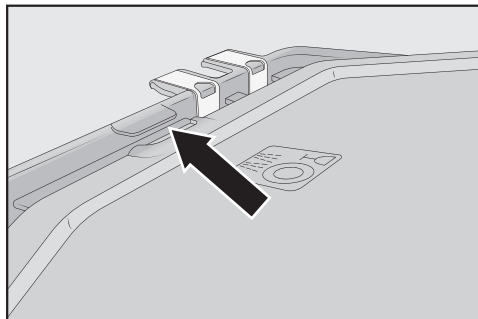


- Refit the lid of the drip tray: push the lid in under the lip next to the contacts and press down on the lid until the latches click into place.

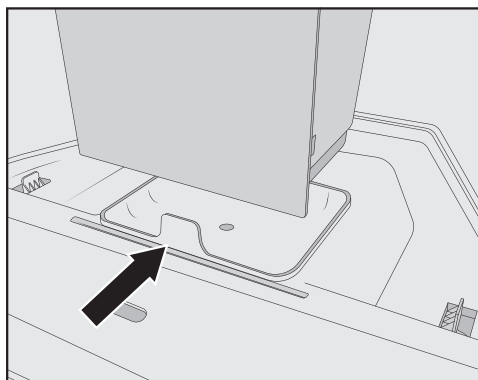

- Place the waste container on top of the lid.
- Push the drip tray, together with the waste container, back into the coffee machine. Close the appliance door.

Cleaning the drip tray cover

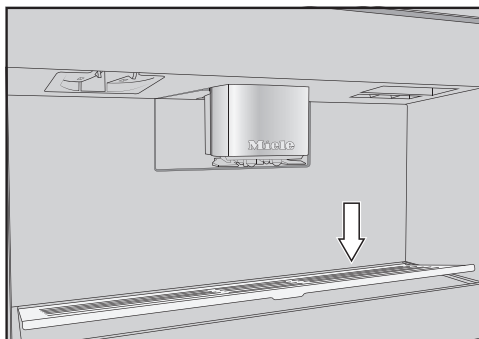


- Remove the drip tray cover: to do this, push down on the rear edge of the cover so that the front lifts up and can be easily removed.
- The drip tray cover can be cleaned in the dishwasher, or by hand using warm water, a little washing up liquid, and a soft cloth.
- Dry the drip tray cover.
- Refit the drip tray cover.

Cleaning the water container

Clean the water container daily by hand with warm water and a little washing-up liquid. You can clean the water container in the dishwasher once a week.

- Open the appliance door.
- Remove the water container.
- Clean the water container and rinse it with clean water to remove any dishwashing liquid residues. Dry the outside of the water container.

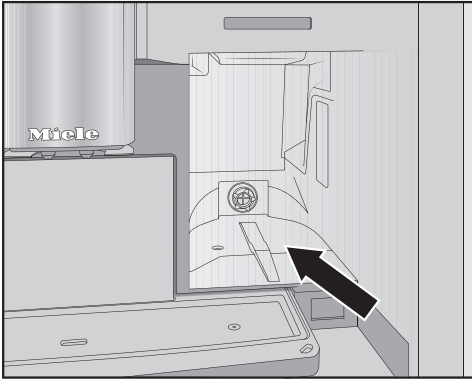

- Clean and dry the surface that the water container sits on.
- Fill the water container with cold, fresh tap water.
- Push the water container all the way into the coffee machine. Close the appliance door.


Please note that the automatic maintenance programmes will only work if the water container has been adequately filled and correctly fitted in the machine.

Cleaning the central spout


Clean the central spout stainless steel cover by hand only using warm water and a little washing-up liquid.

With the exception of the stainless steel cover, all parts of the central spout should be cleaned in the dishwasher at least **once a week**. This will remove coffee deposits and milk residues effectively.

- Open the appliance door.
- Carefully pull the stainless steel cover off and then clean it.

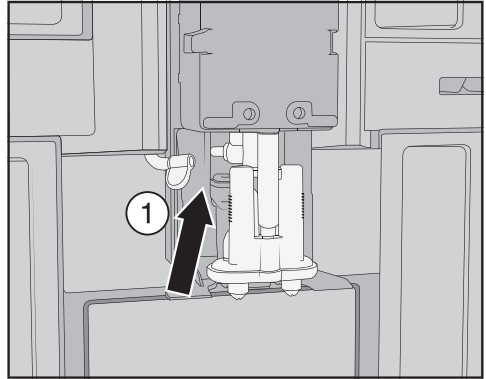


- Release the milk pipework from the dispensing unit: to do this, pull the lug ① to the left.

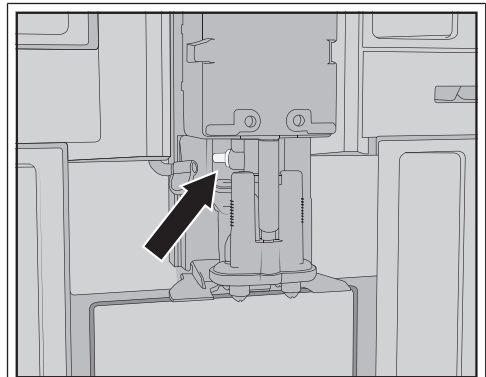


The connection piece in the milk pipework should not be removed. Clean the connection piece, if necessary, with the cleaning brush.


Cleaning and care

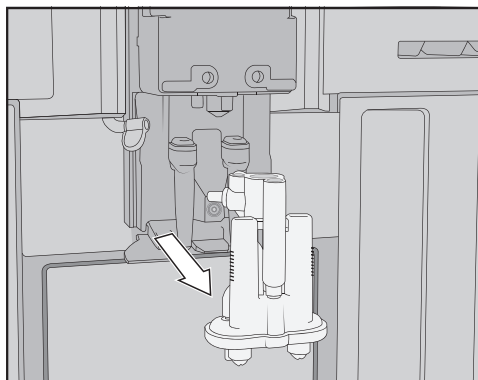

- Hold the dispensing unit on either side and pull down to remove it.

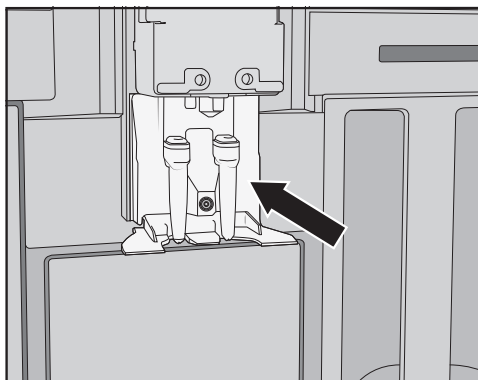

- Clean the area surrounding the central spout with a damp cloth.

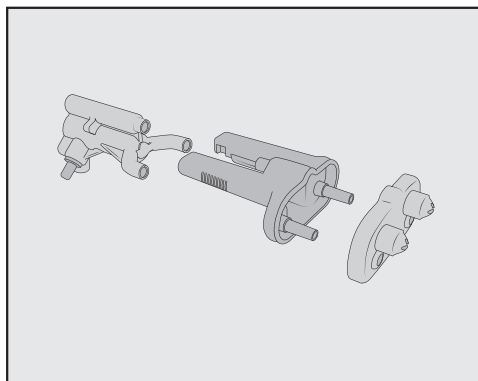


- Dismantle the dispensing unit into three pieces: disconnect the Y-shaped piece, the dispensing spouts and the holder from one another.
- Clean all parts thoroughly.

Reassembling the central spout

The dispensing unit is easier to reassemble if the individual parts are dampened with water beforehand.

Make sure that all parts are tightly connected to one another.

- Reassemble the dispensing unit. Press firmly to connect the dispensing spouts correctly to the holder.

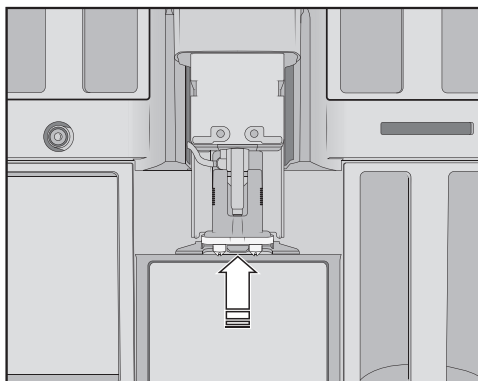

- Insert the dispensing unit in the coffee machine and connect the milk pipework.

- Refit the stainless steel cover.
- Close the appliance door.


Fit cover to central spout **appears** in the display.

- Confirm the message with **OK**.

Cleaning the cup rim sensor

The cup rim sensor is located underneath the central spout.

Clean the cup rim sensor at least once a week and more often if heavily soiled.

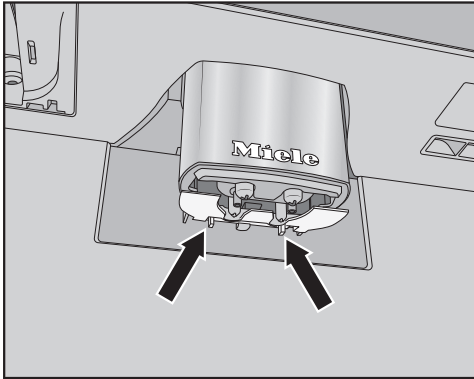

- Push the two locking catches together (see arrows).

The cup rim sensor will be released.


- Clean the cup rim sensor in the dishwasher, or by hand using warm water and a little washing-up liquid applied with a soft cloth.
- Push the cup rim sensor from underneath into the holder on the central spout to refit it.

Cleaning the milk flask with lid

The milk flask should be taken apart and cleaned every day after use.


Clean the lid and the glass by hand using warm water and a little washing-up liquid applied with a soft cloth.

- Remove and empty the milk flask.

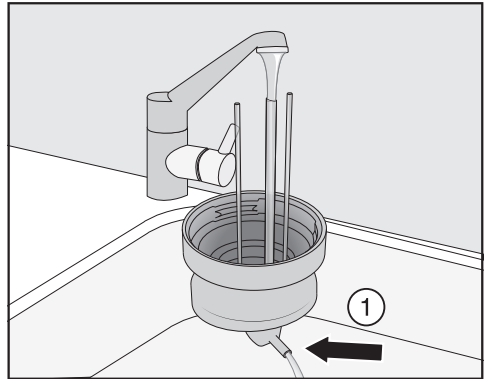

- Rinse the milk pipework in the lid under running water before placing the lid of the milk flask in the dishwasher.
- If water does not run out of the connection piece ①, clean it with the cleaning brush.
- Clean the glass flask.
- Dry all parts and especially the threads on the lid and on the glass with a clean cloth. Reassemble the milk flask.

Cleaning and care

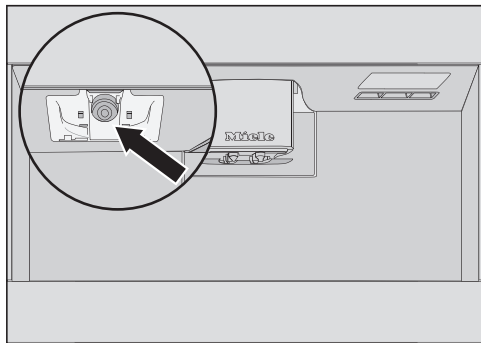


- Clean the milk flask holder on the coffee machine with a damp cloth.

Cleaning the milk valve (daily)

The seal of the milk valve can be damaged by sharp-edged objects or similar.

Do not use any sharp-edged objects (such as knives) to clean the milk valve.

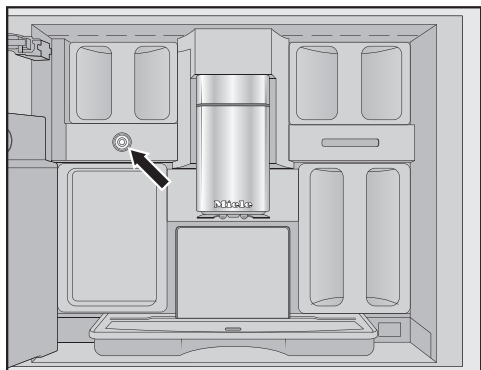

The milk valve is located under the bean container on the left-hand side.

Milk residues can accumulate on the stainless steel stem and dry on. These crusty deposits are difficult to remove. Therefore, it is important to carry out regular cleaning after preparing milk.

- Open the appliance door.
- Clean the milk valve with a damp sponge or microfibre cloth.
- Close the appliance door.

Removing and cleaning the milk valve (once a month)

When preparing milk, if hot milk is dispensed instead of milk froth, or the milk sputters when dispensed, the milk valve may be blocked. Clean the milk valve more often if necessary.


Clean the milk valve cover **by hand** only.

- Open the appliance door.
- Remove the bean container on the left and the maintenance container.
- Remove the central spout's stainless steel cover.




- Remove the milk valve cover: press on the recessed grip to unlock the cover.

On the top right-hand side of the cover there is a pin which enables you to swing open the cover.

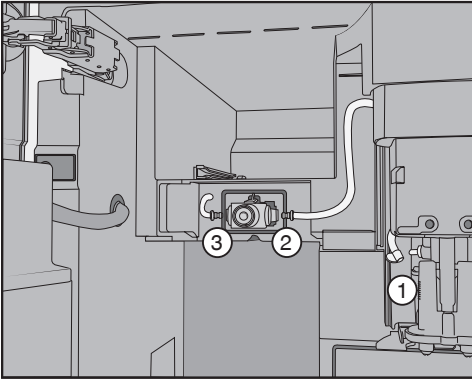


- Detach the milk pipework from the dispensing unit on the central spout ① and from the milk valve silicone seal (② and ③).
- Remove the milk pipework ① that connects the milk valve to the central spout.
- Disconnect the angular moulded hose and the curved hose from one another. Rinse the hoses thoroughly under running water.


Do **not** remove the connection pieces from the hoses.

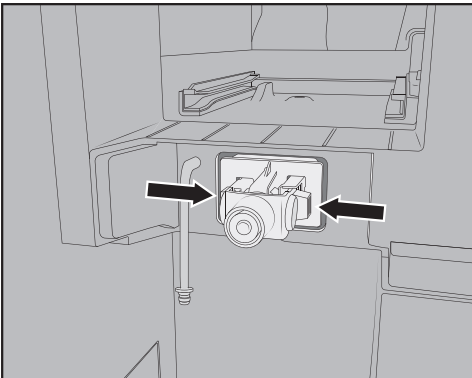

- Press the catches on the left and right of the milk valve holder and pull the holder forwards to remove it.

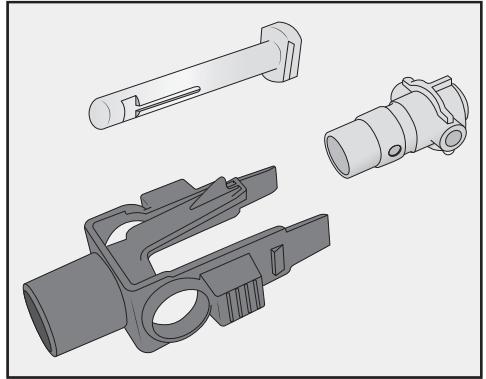

- Dismantle the holder and the silicone seal.

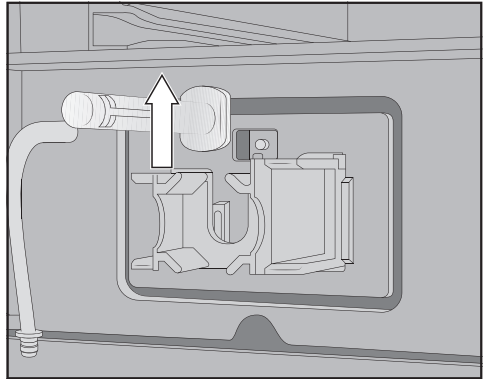


- Lift out the stainless steel stem.
- Clean the individual parts of the milk valve in the dishwasher.

Useful tip: If there are any dry milk residues on the front, soak the stainless steel stem in warm water and a little washing-up liquid.


Fitting the milk valve

- Slide in the stainless steel stem from above.
- Fit the silicone seal in the milk valve holder.


Cleaning and care

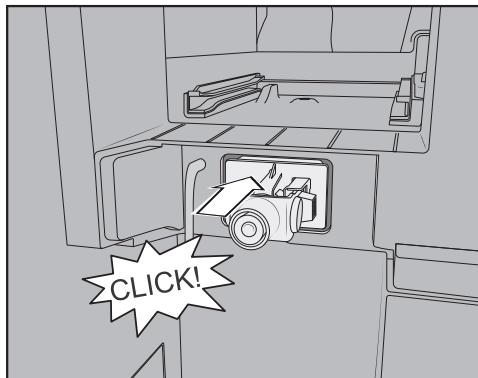


- Fit the holder with the silicone seal until it clicks into position.

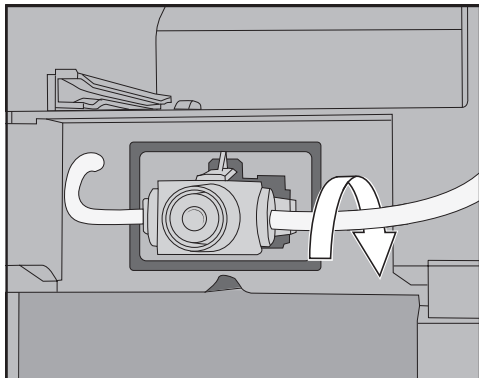

Useful tip: If necessary, turn the milk pipework on the right connection piece towards the back.

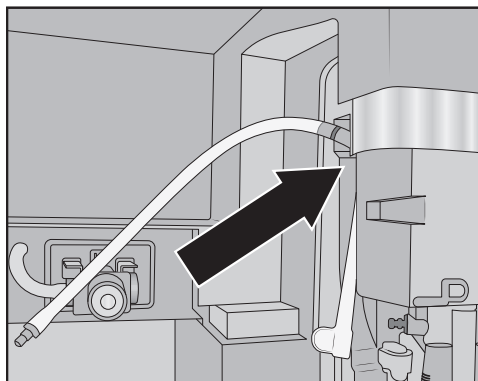

- Connect the angular moulded hose to the longer milk pipework. Firstly fit the moulded hose at the top on the central spout. The black connection piece should point towards the rear.
- Then, connect the bottom end of the moulded hose to the dispensing unit.
- Insert the milk pipework into the milk valve on the left and right-hand sides. Push the connecting pieces into the silicone seal as far as they will go.
- Check whether the milk pipework sits comfortably against the housing and the cover is easy to refit.

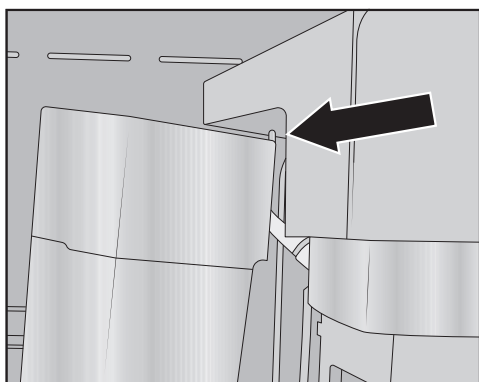

- Fit the milk valve cover: to do this, place the pin in the top right corner and swing the cover towards the rear until it closes flush.
- Refit the bean container on the left and the maintenance container in the coffee machine. Refit the central spout stainless steel cover.
- Close the appliance door.


Cleaning the bean containers

 Damage due to incorrect use and cleaning.

If the bean containers are immersed in water, it may result in malfunctions. Parts may break off during dismantling or mechanical components may not function correctly after reassembly.

Do not dismantle the bean containers.

Do not immerse the bean containers in liquids, e.g. washing-up liquid solution.

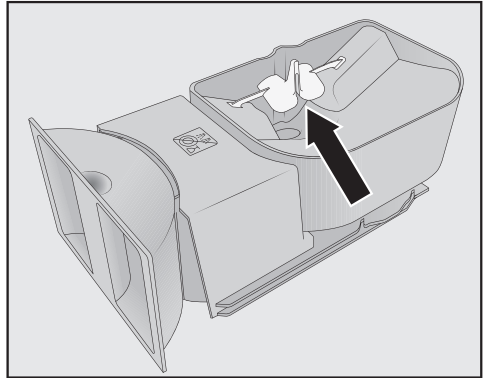

Do not remove the components which assist the flow of beans (see arrow).

Coffee beans contain oils which can deposit on the walls of the bean containers and hinder the flow of the beans. Therefore, clean the bean containers regularly with a soft cloth.

If required, you can clean the lids of the bean containers **by hand** with warm water and a little washing-up liquid. Dry the lids thoroughly before refitting them on the bean containers.

- Open the appliance door.
- Remove the bean containers on the left and right from the coffee machine.
- Clean the bean container chutes in the machine.

Useful tip: Use a vacuum cleaner to remove any coffee grounds from the interior of the machine.

- Remove the lids and empty the bean containers.

- Clean the bean containers and their lids **by hand** with a slightly damp cloth. Dry all parts thoroughly before filling the bean containers with coffee beans again.
- Refit the lids and push the bean containers back into the coffee machine.
- Close the appliance door.

Cleaning and care


Removing the brew unit and cleaning by hand

The moving parts of the brew unit are lubricated. Cleaning agents will damage the brew unit.


Clean the brew unit by hand only under warm running water. **Do not use washing-up liquid or any other cleaning agent.**

Remove and clean the brew unit **once a week**. Also clean the area underneath the brew unit once a week.

- Open the appliance door.
- Remove the water container.

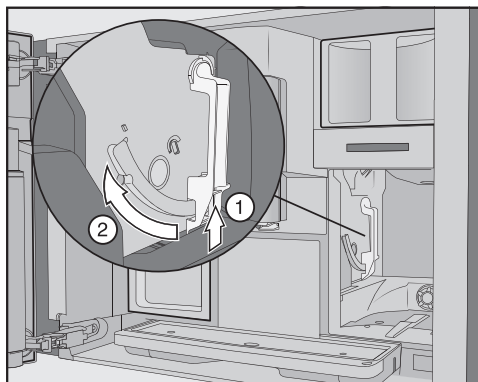

- Press the button under the handle of the brew unit ① and, whilst doing so, turn the handle to the front ②.

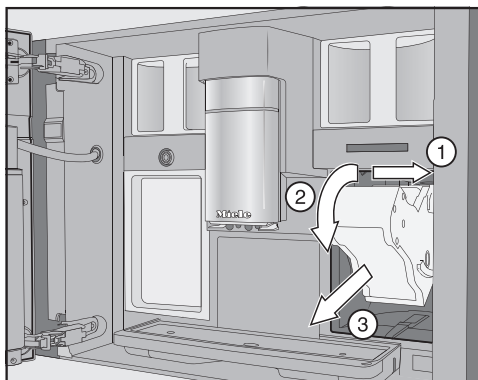


- Pull the brew unit to the side ① first and then pull out to the front ③. Tilt the brew unit forwards ②.

If you cannot remove the brew unit or can only do so with difficulty, the brew unit is not in the correct position (See "Problem solving guide").

When you have removed the brew unit, do **not** change the position of the handle on the brew unit. Otherwise the brew unit cannot be refitted.


- Clean the brew unit **by hand under warm running water** without using washing-up liquid or any other cleaning agent.

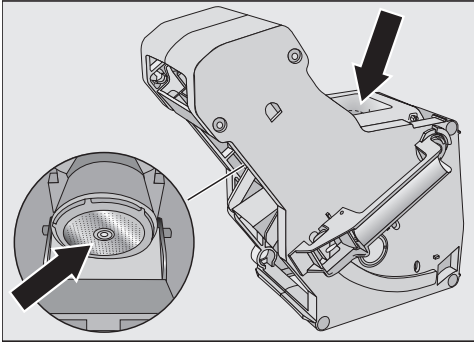

- Wipe any remaining coffee residues from the filters. One filter is located in the funnel. The other filter is located to the left of the funnel.
- Dry the funnel to prevent ground coffee sticking to it the next time a coffee is prepared.

Cleaning the interior of the machine


- Use your vacuum cleaner to remove dry coffee grounds.

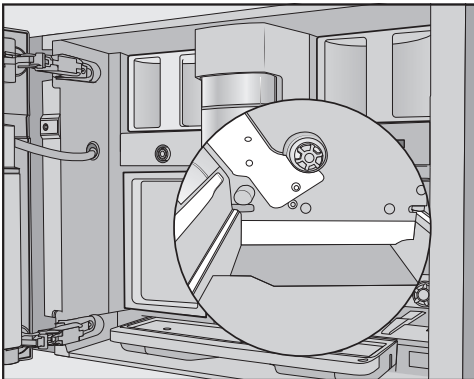

- Clean the niche of the brew unit with a damp, clean cloth. Clean the areas marked in white in the illustration, e.g. around the drive shaft, especially well.

Refitting the brew unit

- Proceed in the reverse order: push the brew unit back into the coffee machine. Tilt the brew unit forwards a little when doing this.

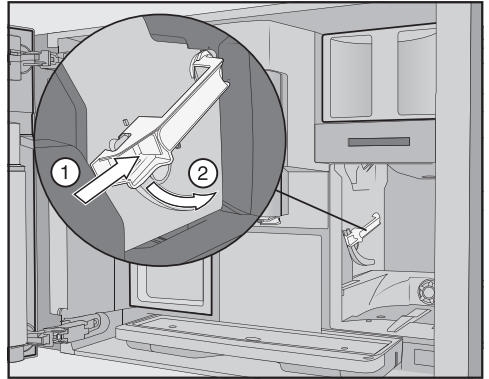

- Press the button under the handle of the brew unit ① and, whilst doing so, turn the handle to the rear ②.

Useful tip: If the handle of the brew unit cannot be turned, press firmly on the side of the brew unit.

- Push the water container into the coffee machine.


Coffee powder falls onto the drip tray when the brew unit is removed and refitted.

- Remove the drip tray and clean the lid.
- Push the drip tray back into the coffee machine and close the door.

Cleaning and care

Cleaning the interior, the inside of the appliance door and the drip catcher

Clean the interior and the appliance front during normal cleaning. For example, clean the area underneath the water container when the water container has been removed.

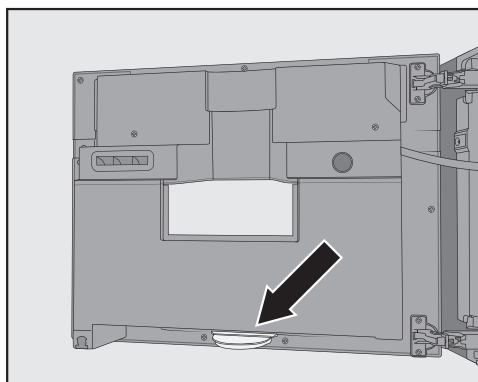

At the bottom of the inside of the appliance door there is a drip catcher.

Remove and empty the drip catcher regularly. The drip catcher is dishwasher-safe.

- Open the appliance door.
- Remove and clean the drip catcher.
- Remove all parts from the interior of the machine:
 - Water container
 - Drip tray
 - Maintenance container
 - Brew unit
 - Bean container

Useful tip: Use your vacuum cleaner to remove dry ground coffee residues.

- Clean the interior and the inside of the appliance door by hand with a slightly damp, clean sponge or microfibre cloth. Then dry the interior and the appliance door with a soft cloth.
- Refit all parts, including the drip catcher.
- Close the appliance door.

Cleaning the appliance front

If soiling is not removed promptly, it could cause the surface to alter or discolour.

Remove any soiling from the front of the appliance straight away.

Make sure that water cannot get behind the display.

Clean the appliance front after manual descaling. Wipe up any spillages of descaling agent as soon as possible.

Useful tip: Open the appliance door before cleaning the control panel. This will avoid operating errors.

- Clean the appliance front with a slightly damp, clean sponge or a microfibre cloth. After cleaning, wipe the surfaces dry using a soft cloth.

Useful tip: You can also clean the appliance front with the Miele all purpose microfibre cloth.

Maintenance programmes

The coffee machine has the following maintenance programmes:

- Rinse the appliance
- Rinse the milk pipework
- Clean the milk pipework*
- Degrease the brew unit*
- Descale the appliance*

* If you have not fitted a cleaning and/or descaling cartridge and automatic cleaning has been switched off, you will need to carry out the maintenance programmes manually.

In addition, depending on usage patterns and the water used, the pipework of the coffee machine will need to be descaled manually at regular intervals, even if a descaling cartridge is fitted.

Opening the Maintenance menu

The drinks menu is displayed.

- Touch the ↩ sensor.
- Select Maintenance.

You can now start the required maintenance programme.

Rinsing the appliance

If coffee has been dispensed, the coffee machine will rinse the coffee pipework automatically before switching off. You can also start Rinse the appliance manually.

Rinsing the milk pipework

If you have prepared a drink using milk, the coffee machine will automatically rinse the milk pipework after a few minutes. You can also start Rinse the milk pipework manually.

Maintenance programme – Clean the milk pipework

You can carry out the maintenance programme using the Miele cleaning cartridge or the Cleaning agent for milk pipework (cleaning powder sachets). The maintenance programme lasts for approx. 20 minutes.

If you have switched on automatic cleaning and fitted a ready-to-use cleaning cartridge, Clean the milk pipework will be carried out using the cleaning cartridge.

Cleaning the milk pipework with the cleaning cartridge

In addition to automatic cleaning, you can start the maintenance programme, for example, to clean the milk pipework after intensive use.

The Maintenance menu is shown in the display.

- Touch Clean the milk pipework.
- Follow the instructions in the display.

Cleaning the milk pipework with the cleaning agent for milk pipework (sachets)

If automatic cleaning is switched off, the milk pipework must be cleaned after 15 days at the latest. Messages appear in the display to prompt you to clean.

Cleaning and care

For optimum cleaning results, we recommend Miele Cleaning agent for milk pipework.

The Cleaning agent for milk pipework has been specially developed for use with Miele coffee machines and prevents subsequent damage.

You require 2 sachets of the Cleaning agent for milk pipework for each cleaning process.

It is available to order from the Miele online shop or directly from Miele (see the end of this booklet for contact details).


Clean the milk pipework **appears** in the display.

- Confirm the message with **OK**.
- Follow the instructions in the display.

When Fill water container with lukewarm water and cleaning agent up to the  symbol and insert. Close the door. **appears** in the display, proceed as follows.

Making a cleaning solution

- Open **2** sticks of the Cleaning agent for milk pipework and empty the contents into the water container.

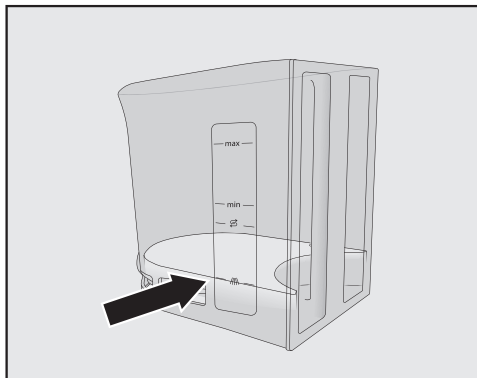

- Fill the water container to the  marker with lukewarm water and stir the solution.

Follow the instructions for the mixing ratio. Do not fill the water container with too little water. Cleaning will otherwise not be completed.

- Insert the water container and close the appliance door.
- Follow the instructions in the display.
- If prompted in the display, carefully rinse out the water container with clean water. Ensure that **no** cleaning agent is left in the water container. Fill the water container with clean tap water.

The cleaning process is finished when **Process finished** appears in the display.

Degreasing the brew unit and cleaning the interior

Depending on the natural oil content of the coffee used, the brew unit can become blocked quite quickly. It must be degreased regularly in order to ensure aromatic coffee and trouble-free operation of the coffee machine.

You can carry out the maintenance programme using the Miele cleaning cartridge or the cleaning tablets for degreasing the brew unit. The maintenance programme lasts for approx. 10 minutes.

If you have switched on automatic cleaning and fitted a ready-to-use cleaning cartridge, Degrease the brew unit will be carried out using the cleaning cartridge.

If a Miele cleaning cartridge has not been fitted, Degrease the brew unit appears in the display after 200 portions.

- Confirm the message with *OK*.

This message will appear repeatedly until the brew unit is degreased.

Degreasing the brew unit

The Maintenance menu is shown in the display.

- Touch Degrease the brew unit.

The maintenance programme will start.

- Follow the instructions in the display.

Remove the water container and the brew unit. Rinse the brew unit by hand and clean the interior of the machine. **appears in the display.**


Cleaning the brew unit and the interior

The moving parts of the brew unit are lubricated. Cleaning agents will damage the brew unit.

Clean the brew unit by hand only under warm running water. **Do not use washing-up liquid or any other cleaning agent.**


To ensure good tasting coffee and to prevent the formation of microbes in the machine, remove and clean the brew unit under running water once a week.

- Open the appliance door.
- Remove the water container.

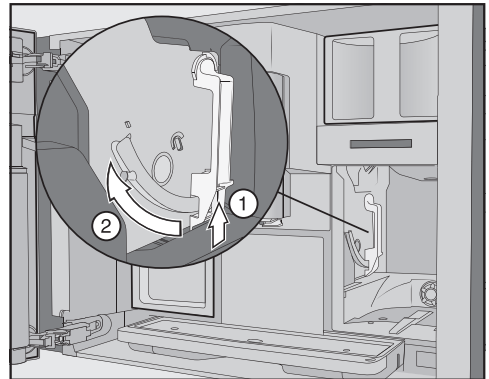

- Press the button under the handle of the brew unit ① and, whilst doing so, turn the handle to the front ②.

Cleaning and care

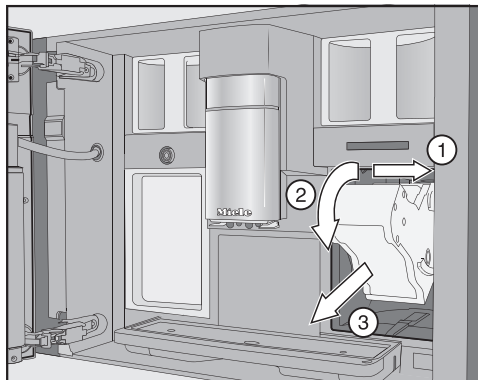


- Pull the brew unit to the side ① first and then pull out to the front ②. Tilt the brew unit forwards ③.

If you cannot remove the brew unit or can only do so with difficulty, the brew unit is not in the correct position (See "Problem solving guide").

When you have removed the brew unit, do **not** change the position of the handle on the brew unit. Otherwise the brew unit cannot be refitted.

- Clean the brew unit **by hand under warm running water** without using washing-up liquid or any other cleaning agent.

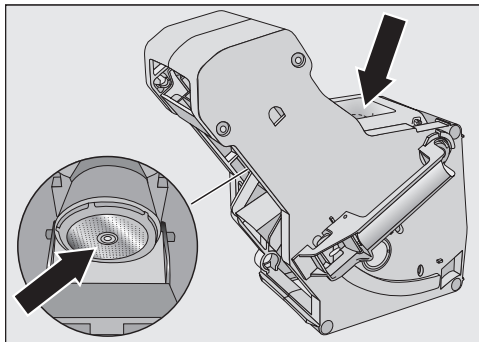


- Wipe any remaining coffee residues from the filters. One filter is located in the funnel and the other to the left of the funnel.

Coffee powder falls onto the drip tray when the brew unit is removed.


- Remove the drip tray and clean the lid.
- Clean the interior of the coffee machine (see also "Cleaning and care – Removing the brew unit and cleaning it by hand"). Use your vacuum cleaner to remove dry ground coffee residues.

Adding a cleaning tablet to the brew unit

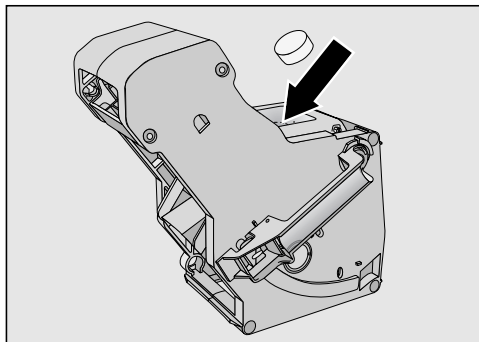

- Drop a cleaning tablet into the top of the brew unit (arrow).

- Push the brew unit with cleaning tablet back into the coffee machine.

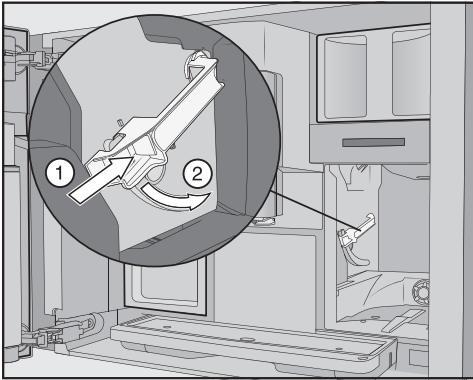

- Press the button under the handle of the brew unit ① and, whilst doing so, turn the handle to the rear ②.
- Push the water container and the drip tray, together with the waste container, back into the coffee machine.
- Close the appliance door.
- Follow the further instructions given in the display.

The cleaning process is finished when the drinks menu appears in the display.

Descaling the appliance

Risk of damage from spilt descaling solution.

Sensitive surfaces and/or natural floors can suffer damage.

Wipe up any spillages of descaling agent immediately.

Limescale builds up in the coffee machine through use. How often the appliance needs to be descaled will

depend on the water hardness level in your area. Limescale must be removed regularly.

The appliance will guide you through the descaling process. Various messages will appear in the display, e.g. you will be prompted to empty the drip tray or fill the water container.

The descaling process is **essential** and takes approx. 35 minutes.

Even if you use automatic descaling, the pipework must be descaled at regular intervals using the *Descal the appliance maintenance programme*, depending on usage patterns.

If you have not fitted a descaling cartridge, you will also be reminded via the display to descale the coffee machine.

No. of uses until appliance needs descaling: 50 will appear in the display. The remaining number of drinks that can be made before descaling will appear in the display after each drink.

- Confirm the message with **OK**.

When the number of remaining portions reaches 0, the appliance will lock out.

You can switch the coffee machine off if you do not want to carry out the descaling programme at this point. However, you cannot make any drinks until the machine has been descaled.

Descaling after prompt appears in the display

Descal the appliance appears in the display.

- Confirm the message with **OK**.

Cleaning and care

The process will start.

- Follow the instructions in the display.

When Place 2 descaling tablets in the water container and fill it with lukewarm water up to the  symbol and insert it **appears in the display**, proceed as follows.

Preparing the descaling solution


For optimum descaling results, we recommend using the Miele descaling tablets provided.

The descaling tablets have been specially developed for Miele coffee machines.

Other descaling agents, which contain other acids besides citric acid and/or other undesirable substances, such as chlorides, may cause damage to the appliance. Moreover, the descaling result required cannot be guaranteed if the descaling solution was not of the appropriate concentration.

Miele descaling tablets are available to order via the Miele webshop or directly from Miele (see the end of this booklet for contact details).

You will need **2** descaling tablets for the descaling process.

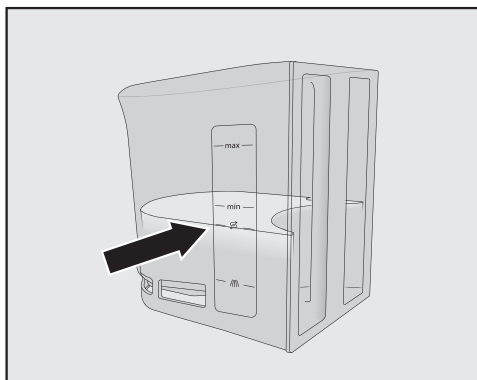

- Add **2** Miele descaling tablets to the water container.
- Fill the water container to the marker  with lukewarm water.

Follow the instructions for the mixing ratio carefully. It is important that you do not fill the water container with too much or too little water. Otherwise the descaling process will be cancelled prematurely.

Carrying out descaling

- Push the water container back into the machine.
- Follow the further instructions given in the display.

When Rinse and refill the water container appears in the display:

- Remove the water container and rinse it thoroughly with clean water. Ensure that **no** descaling solution residue remains in the water container. Fill the water container with tap water.

The descaling process has finished when the drinks menu appears in the display.

Automatic cleaning and descaling

Risk of damage from spilt cleaning and descaling solutions.

Sensitive surfaces and/or natural floors can suffer damage.

You can place the maintenance container under the central spout before switching off to collect the cleaning and descaling solutions.

Wipe up any spillages of cleaning and descaling agent.

When handling a descaling cartridge which has already been filled with water, ensure that the descaling solution does not come into contact with sensitive surfaces.

The coffee machine has automatic maintenance programmes for cleaning the milk pipework and the brew unit, as well as for descaling the machine. This is why the Miele cleaning cartridge and descaling cartridge are fitted in the coffee machine. If both types of maintenance programme are due to run on the same day, automatic cleaning will always be performed before automatic descaling (total time: approx. 35 minutes).

You can set the time for daily cleaning and descaling to start using the Maintenance timer.

The coffee machine will automatically determine the days when to carry out automatic descaling based on the usage pattern.

With automatic cleaning the milk pipework is cleaned and/or the brew unit is degreased. The coffee machine also determines the concentration of the cleaning solution and type of

cleaning programme for automatic cleaning based on the number and type of drinks prepared.

If you do not make any drinks, the automatic maintenance programmes will not start.

Water is mixed with cleaning agent to form a solution for automatic maintenance programmes and this is then pumped through the pipework of the coffee machine. After a specific activation phase, the solution is rinsed out of the pipework and the machine can then be used as normal for making drinks.

During automatic cleaning and descaling you will hear rinsing noises, for example, at frequent intervals even though the appliance is switched off.

What to ensure before and during automatic maintenance programmes

The coffee machine must be ready to use and the following conditions must be met:

- Ready-to-use cleaning and descaling cartridges are fitted.
- The coffee machine must **not** be disconnected from the mains power supply during the automatic maintenance programmes.
- The drip tray, brew unit and central spout are fitted.
- The water container is inserted and is filled with water at least up to the  mark.

Automatic cleaning and descaling

- Carry out the instructions which appear in the display before switching off, e.g. Empty and refit the drip tray and the waste container.
- The appliance door is closed at time of starting.
- The coffee machine is switched off.

Automatic cleaning

If you have made a drink containing milk, the milk pipework will be cleaned 4 days later at the latest.

If you have made a coffee, the brew unit will be degreased 15 days later at the latest.

Automatic cleaning takes approx. 25 minutes.

Switching automatic cleaning on and off

Automatic cleaning is usually switched on when setting up the machine. However, you can switch the Automatic cleaning on or off at any time.

The drinks menu is displayed.

- Touch the ↩ sensor.
- Select Settings and then Automatic cleaning.
- Select the setting you want and confirm with OK.

If automatic cleaning is switched on and coffee drinks and/or milk have already been prepared, the coffee machine will need to be manually cleaned once. This will remove milk residues and coffee oils and the counter will be reset.

The Miele cleaning cartridge

For automatic cleaning, only use the Miele cleaning cartridge. These have been developed specifically for use in this coffee machine.

Please note that the Miele cleaning cartridge has a storage life of approx. one year after it has been placed in the machine for the first time.

Critical for the one-year storage life is the date on which the cleaning cartridge was fitted.

Do not fill the cleaning cartridge with other fluids or substances.

The Miele cleaning cartridge contains a cleaning agent that effectively removes milk residues and coffee oils.

The cleaning cartridge is sufficient for up to 3 months' cleaning, depending on usage. If you carry out manual cleaning more frequently, or prepare a lot of drinks, the time will reduce accordingly.

You can display the fill level of the cartridge as a segment bar under Settings | Info | Fill levels. As the fill level of the cartridge drops, various messages are displayed at regular intervals to remind you to purchase a new cartridge.

The first message appears when the cartridge is approx. 25% full.

Replacement cleaning cartridges are available to order from the Miele online shop or directly from Miele (see back cover for contact details).

Automatic cleaning and descaling


If a cleaning cartridge is **not** fitted, an **empty** cartridge is fitted or an **expired** cartridge is fitted, the milk pipework and the brew unit need to be cleaned/degreased manually. To do this, the appropriate cleaning agent is required (see “Cleaning and care - Cleaning the milk pipework” and “Degreasing the brew unit”).

The cleaning cartridge can remain fitted even if it is not used for a long time or while being transported.

Replacing the cleaning cartridge

You will need a new Miele cleaning cartridge. Replacement cleaning cartridges are available to order from the Miele online shop or directly from Miele (see back cover for contact details).

- Open the appliance door and remove the maintenance container.

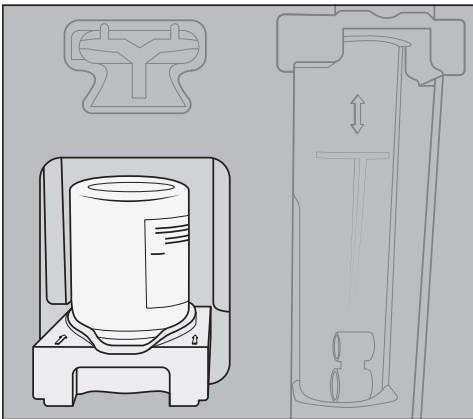

- Pull the holder with the cartridge forwards and remove both.

- Unscrew the cleaning cartridge from the holder. Dispose of the used cartridge with your household waste.

Sometimes cleaning agent residues dry on the holder in the form of white deposits. These cleaning agent residues will not affect the automatic cleaning programme. If necessary, you can wipe the deposits off with a damp cloth or clean the holder in the dishwasher.

- Remove the new cartridge from its packaging and unscrew the cap. The cap is no longer required.



- Screw the cleaning cartridge into the holder upside down.
- Push the holder with the cartridge into the coffee machine until it clicks into place.
- Insert the maintenance container and close the appliance door.

Automatic cleaning and descaling

Automatic descaling

Automatic descaling takes approx. 12 minutes.

To ensure the longevity of components and a consistent environment free of limescale, the coffee machine needs to be manually descaled from time to time. The intervals are determined by your usage patterns and the water hardness level of your area. If you make a lot of coffees with milk, for example, you will need to descale the coffee machine more frequently with the descaling tablets.

The Miele descaling cartridge

Only use the Miele descaling cartridge for the automatic descaling programme.

Please note that the Miele descaling cartridge has a storage life of approx. one year after it has been placed in the machine and filled with water for the first time. Critical for the one-year storage life is the date on which the descaling cartridge was fitted and filled with water.

Do not use a descaling cartridge which has already been used in another Miele coffee machine. Your coffee machine will have no information about the fill level of this cartridge. The descaling effect may be insufficient and damage your coffee machine.

Do not fill the descaling cartridge with other fluids or substances.

The descaling agent comes in the form of tablets in the descaling cartridge. The cartridge is filled with water when it is placed in the machine. The tablets gradually dissolve over time.

The descaling cartridge will last for up to 12 months of automatic descaling, depending on how often the coffee machine is used.

You can display the fill level of the cartridge as a segment bar under Settings | Info | Fill levels. As the fill level of the cartridge drops, various messages are displayed at regular intervals to remind you to purchase a new cartridge.

The descaling cartridge is available to order from the Miele online shop or directly from Miele (see back cover for contact details).

If a descaling cartridge is **not** fitted, an **empty** cartridge is fitted or an **expired** cartridge is fitted, the machine needs to be descaled using the **Descal the appliance maintenance** programme. To do this, the appropriate descaling agent is required (see “Cleaning and care - Descaling the appliance”).

The descaling cartridge can remain fitted even if the machine is not used for a long time. Remove the cartridge before transporting the coffee machine. Please note:

- Once filled with water, the descaling cartridge has a maximum storage life of three weeks outside of the machine.


Automatic cleaning and descaling

- It should be transported with care and upright. Avoid shaking it. Shaking or turning upside down reduces the storage life and damages the cartridge.
- The cartridge should be stored upright, in a dark place and at room temperature (16 – 38 °C).


Replacing the descaling cartridge

Removing the descaling cartridge

- Open the appliance door and remove the maintenance container.

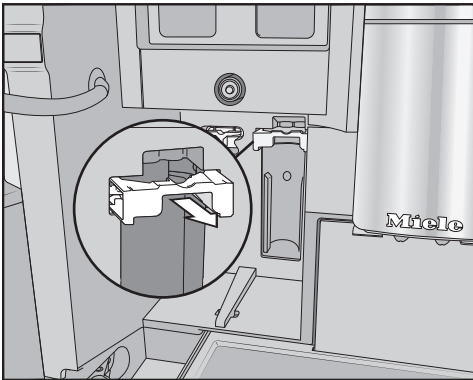

- Pull the cartridge holder forwards.
- Remove the cartridge.

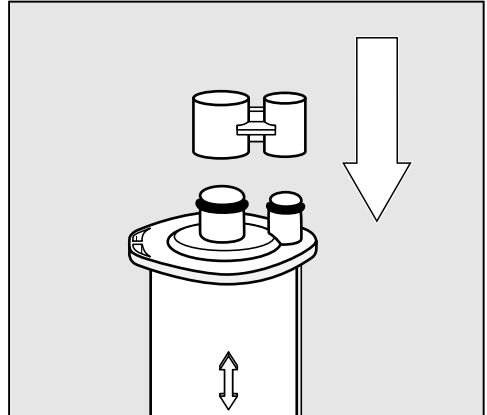

Useful tip: You can seal the descaling cartridge with the cap located on the cylinder of the cartridge. The cap can easily be released by snapping it off.

- Dispose of the empty cartridge with your household waste.

Fitting the descaling cartridge


- Insert the cartridge and push it upwards as far as it will go.
- Push the cartridge holder back in and fit the maintenance container.
- Close the appliance door.
- Follow the instructions in the display.

The next time the coffee machine is switched off, the new descaling cartridge will also fill with water when the machine is rinsed. You will hear water being pumped into the cartridge at frequent intervals.

Wait until the coffee machine switches itself off. Do not force the machine to switch off.

Automatic cleaning and descaling

If you do not want to fit a descaling cartridge, the system must be sealed with the plug.

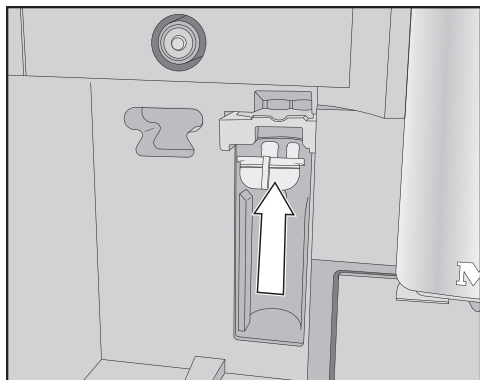

- Insert the plug in place of the cartridge.

Maintenance timer

You can select the start time for the automatic maintenance programmes under Maintenance timer.

Please note that the automatic maintenance programmes can take a maximum of around 35 minutes to run.

You can set various start times for the weekend and the week from Monday to Friday.

Setting the Maintenance timer

The drinks menu is displayed.

- Touch the ↩ sensor.
- Select Settings and then Timer.
- Select Maintenance timer.
- Change the settings as required and confirm with OK.

The start time is saved. The automatic maintenance programmes will start at the required start time from now on.

Cancelling automatic cleaning and descaling

You can cancel the automatic cleaning programme during the activation phase.

If the automatic cleaning programme is not performed **five times** in a row, the dispensing of drinks is blocked. You will only be able to make drinks again once the brew unit has been degreased and/or the milk pipework has been cleaned.

- Touch the On/Off ① sensor.

The time left in hours is shown in the display.

Cancelling automatic maintenance

- Touch Cancel.

The cleaning or descaling solution is rinsed out of the pipework. Rinsing can take up to 5 minutes. You can now make drinks.

With the help of the following guide, minor faults in the performance of the appliance, some of which may result from incorrect operation, can be remedied without contacting Miele. This will save you time and money because you won't need a service call.

Please note that a call-out charge will be applied to unnecessary service visits where the problem could have been rectified as described in these operating instructions.

Messages in the display


Error messages must be confirmed with **OK**. Otherwise the message may reappear in the display even though the problem has been remedied.

Follow the instructions which appear in the display to remedy the problem.

If the fault message appears again in the display, contact Miele.

Problem	Possible cause and remedy
F1, F2, F80, F82, F353, F354	There is an internal fault. ■ Switch the coffee machine off. Wait for approximately one hour before switching the machine back on again.
F74, F77 F225, F226 F235, F353, F354	There is an internal fault. ■ Switch the coffee machine off. Wait for approximately 2 minutes before switching the machine back on again.

Problem solving guide

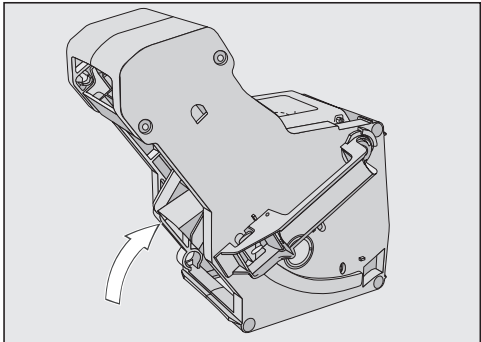Problem	Possible cause and remedy
F73 or Check the brew unit	The brew unit cannot be positioned correctly or it is dirty. Coffee powder cannot be pressed. ■ Check whether you can remove the brew unit. ■ When you are able to remove the brew unit, rinse it under running water.  ■ Push the coffee ejector of the brew unit into the correct position (see diagram). ■ Do not insert the brew unit. Insert the water container and close the appliance door. Switch the coffee machine on. This will initialise the brew unit motor and put it back into the start position. ■ When Insert the brew unit appears in the display, open the appliance door and put the brew unit back in the machine. ■ If you are unable to remove the brew unit, switch off the coffee machine. Wait for approximately 2 minutes before switching the machine back on again.
A manual maintenance programme is cancelled early and Push the water container in until it engages appears in the display.	The water container was not correctly filled and refitted. ■ Check that you have filled to the correct marker. The symbols on the water container indicate the required water level for the Descale the appliance: ☞ and Clean the milk pipework: ☞ maintenance programmes. ■ Fill the water container to the marker and start the process again.

Problem solving guide

Problem	Possible cause and remedy
F233	The cup rim sensor is not inserted or is incorrectly inserted. If the central spout is moving upwards and the cup rim sensor is bumped, e.g. with a cup, the cup rim sensor loses its reference position. ■ Confirm the message with OK. ■ Refit the cup rim sensor. Cup detection is deactivated until the next time the coffee machine is switched on and the central spout remains in the highest position. Cup detection is initialised again the next time the machine is switched on.
F355, F357– F362	The bean system must be set up again, e.g. coffee beans have possibly got jammed. ■ Open the appliance door and remove both bean containers from the coffee machine. ■ Close the appliance door. The bean system will be initialised. ■ Follow the instructions in the display.
F 307 or Remove the milk valve and clean it	The milk valve is faulty. ■ Remove and clean the milk valve (see “Cleaning and care – Removing and cleaning the milk valve”).

Problem solving guide

Unusual performance of the coffee machine

Problem	Possible cause and remedy
The display remains dark when the coffee system is switched on with the On/Off ① sensor.	The On/Off ① sensor was not touched for long enough. ■ Touch and hold the On/Off ① sensor for at least 3 seconds.
	The plug is not properly inserted into the socket. ■ Insert the plug into the socket correctly.
	The mains fuse has tripped because the coffee machine, mains voltage or another appliance is defective. ■ Switch off at the wall socket and remove the plug. ■ Contact a qualified electrician or Miele.
The lighting remains off after the coffee machine is switched on.	The lighting has been switched off. ■ Switch the lighting on (see “Settings - Lighting”).
	The lighting is faulty. ■ Call Miele.
The time of day is displayed, but the ☀ sensor and the proximity sensor do not react.	This is not a fault. The QuickTouch function is switched off. Select the Display QuickTouch On setting for the ☀ sensor and the proximity sensor to react even if the coffee machine is switched off.
The coffee machine does not react to operating the display.	There is a fault. ■ Touch and hold the On/Off ① sensor until the display switches off and the appliance restarts.
The coffee machine switches off suddenly.	The factory set switch-off time (20 minutes) or the switch-off time you have programmed has been reached. ■ If required, you can select a new switch-off time (see “Settings - Timer”).
	The plug is not properly inserted into the socket or the socket is not switched on. ■ Insert the plug into the socket correctly and switch on.

Problem solving guide

Problem	Possible cause and remedy
The sensors do not respond to touch. The appliance cannot be operated.	There is an internal fault. ■ Disconnect the electricity supply by switching off at the wall socket and withdrawing the plug, or switching off the mains circuit breaker.
A fan can be heard even though no drinks are being prepared and the coffee machine is switched off.	This is not a fault. Once a drink has been dispensed or the machine has been switched off, the internal fan will continue to run until the interior is sufficiently dehumidified.
The brew unit cannot be removed.	The brew unit is not in the correct position. ■ If necessary, move the handle on the brew unit back to the start position. Close the appliance door. ■ Switch the coffee machine off. ■ Wait approx. one minute before switching on the coffee machine. This will initialise the brew unit motor and put it back into the start position. ■ If necessary, repeat these steps.
Drink preparation is cancelled prematurely even though a cup or glass is located under the central spout.	This is not a fault. If the opening of the cup or glass is so wide, e.g. as with a large mug, that the cup rim sensor cannot detect the rim, the drink is cancelled. Use a different cup or glass, or position it in such a way that its rim can be detected.

Problem solving guide

Problem	Possible cause and remedy
The coffee machine does not switch itself on, although the On at setting has been activated for the timer.	The system lock has been activated. ■ Deactivate the system lock.
	The current day of the week has not been selected. ■ Check the timer settings and change these if necessary.
	The machine was not used after being switched on automatically three times in succession (holiday mode). ■ Switch the machine on and dispense a drink.
	The coffee machine does not switch on with the On at timer while automatic descaling is being carried out. This is not a fault. Select a different timer setting.
You are preparing hot water or tea and instead of water, steam is dispensed.	The altitude is possibly set incorrectly. ■ Change the altitude setting (Settings Altitude). ■ You can also change the temperature settings if necessary (Drink parameters).
The display is hard to see or not able to be read.	The display brightness is set too low. ■ Change this setting.
The display lights up but the coffee machine does not heat up and no drinks are made.	The Demo mode of the coffee machine for Miele Experience Centres and Chartered Agents has been activated. ■ Deactivate Demo mode (see “Settings”).

Faults with automatic cleaning and/or descaling

Problem	Possible cause and remedy
After switching on, a message appears informing you that automatic cleaning and/or descaling could not be carried out.	The coffee machine was not ready for operation: all removable parts, such as the water container, drip tray, brew unit and central spout, must be installed. The water container was not filled with drinking water at least up to the descaling symbol . The appliance door was not closed. ■ Confirm the message with OK. ■ Make sure that the coffee machine is ready to use before the next automatic cleaning and/or descaling process.
	The coffee machine was not switched off at the start time. The automatic maintenance programmes are only started if the coffee machine is switched off. ■ Confirm the message with OK. ■ Change the start time if necessary.
Descal the appliance appears in the display even though a descaling cartridge which is ready to use is fitted. Drinks cannot be made.	Depending on the water hardness level in your area and your usage patterns, the coffee machine needs to be descaled using the maintenance programme occasionally. For this you will need to use Miele descaling tablets. ■ Descale the coffee machine using the maintenance programme (see “Cleaning and care - Descaling the appliance”).

Problem solving guide


Problem	Possible cause and remedy
After switching on, one of the following messages appears: Automatic cleaning could not be carried out. Start automatic cleaning (duration min.) now? Otherwise automatic cleaning will be permanently switched off. Or: Automatic maintenance could not be carried out. Carry out the automatic cleaning part of the automatic maintenance programme (duration min.) now? Otherwise the automatic cleaning part of the automatic maintenance programme will be permanently switched off. Drinks cannot be made.	Automatic cleaning could not be carried out five times. If you still want the coffee machine to clean the milk pipework and degrease the brew unit automatically: ■ Make sure that the coffee machine is ready to use for automatic maintenance (see "Automatic cleaning and descaling"). ■ Touch OK to start automatic cleaning. If you select No and therefore switch off automatic cleaning, you must manually clean the milk pipework and degrease the brew unit (see "Cleaning and care"). To do this, you require the Cleaning agent for milk pipework and tablets for degreasing the brew unit.

Unsatisfactory results

Problem	Possible cause and remedy
The coffee is not hot enough.	The cup has not been pre-heated. The smaller the cup and the thicker its walls, the more important it is to pre-heat it. ■ Pre-heat the cup, for example with hot water.
	The brewing temperature has been set too low. ■ Set a higher brewing temperature.
	The filters in the brew unit are blocked. ■ Remove the brew unit and clean it by hand. ■ Degrease the brew unit.
The coffee grinder makes a louder noise than usual.	The coffee bean container has become empty during the grinding process. ■ Fill the coffee bean container with fresh beans.
	There may be foreign objects such as plastic or stones in amongst the coffee beans. ■ Switch the coffee machine off immediately. Call Miele.
The coffee flows too quickly into the cup.	The coffee is too coarsely ground. ■ Set the grinder to a finer setting.
The coffee drink is dispensed too slowly into the cup.	The brew unit is blocked. ■ Degrease the brew unit (see "Cleaning and care - Degreasing the brew unit and cleaning the interior").
There is no crema on the coffee or espresso.	The coffee beans are no longer fresh. If roasted coffee beans are stored open for too long, the carbon dioxide gradually escapes from the coffee beans. The crema is therefore no longer formed during dispensing. Of course, you can still use the coffee beans.

Problem solving guide

Problem	Possible cause and remedy
The coffee tastes weak. The coffee grounds in the waste container are sludgy and grainy.	Insufficient coffee beans are getting into the grinder and less coffee is being brewed. Have you used a dark roast? This type of coffee bean is often oily. These oils can cling to the inside of the coffee bean containers and hinder the flow of beans. Are you using a type of coffee with very large beans or different sized beans? The beans are possibly getting wedged or jammed and forming “bean bridges”. ■ Clean the coffee bean containers more often if you are using darker, more oily coffee beans. ■ Pull the bean containers out a little and shake them if you are using coffee with very large beans or different sized beans. ■ Trying using a different type of coffee.
Coffee is not being dispensed from both spouts evenly. Milk may be sputtering when being heated up.	Coffee deposits in the central spout are obstructing dispensing. ■ Dismantle the central spout and clean the parts - except for the stainless steel cover - in the dishwasher. This cleaning process should be carried out once a week.
The consistency of the milk froth is unsatisfactory.	The milk temperature is too high. Good milk froth can only be achieved with cold milk (below 10 °C). ■ Check the temperature of the milk in the milk flask. The milk pipework is blocked and/or the milk valve is dirty. ■ Remove and clean the milk valve.

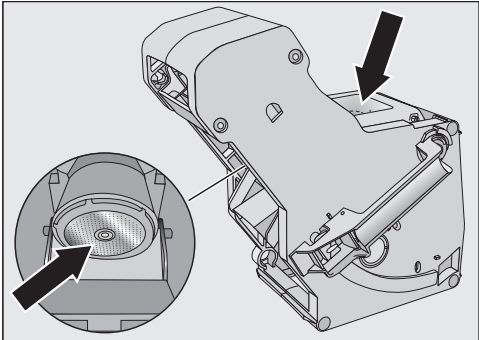Problem	Possible cause and remedy
Coffee flows very slowly or even drips from the central spout.	The brew unit is blocked because the coffee machine has been used very intensively and/or the brew unit was not removed regularly and cleaned by hand. ■ If a cleaning cartridge is fitted, first switch off Automatic cleaning (Settings Automatic cleaning). ■ Carry out the Degrease the brew unit maintenance programme using one cleaning tablet (see “Cleaning and care - Degreasing the brew unit and cleaning the interior”).  ■ Clean the brew unit filters in particular very carefully. ■ Switch on Automatic cleaning, if necessary, before starting drink preparation again. Otherwise the Clean the milk pipework and Degrease the brew unit maintenance programmes must be started again.

After sales service and warranty


Contact in case of fault

In the event of any faults which you cannot remedy yourself, please contact Miele.

You can book a Miele customer service call-out online at www.miele.com.au/service or www.miele.co.nz/service.

Contact information for Miele can be found at the end of this booklet.

Please quote the model and serial number of your appliance when contacting Miele. This information can be found on the data plate.

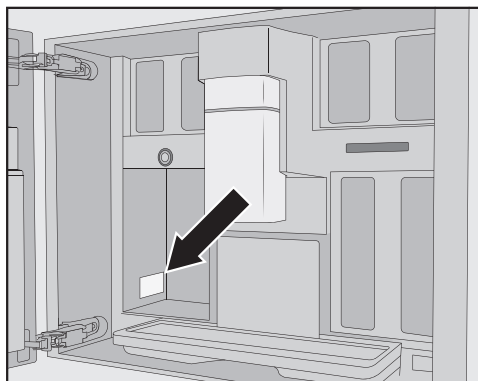

Warranty

The manufacturer's warranty for this appliance is 2 years.

For further information, please refer to your warranty booklet.

These products and other useful accessories can be ordered via the Miele webshop or directly from Miele (see back cover for contact details).

- **Original Miele all purpose microfibre cloth**
For removing finger marks and light soiling
- **Cleaning agent for milk pipework**
For cleaning the milk system
- **Cleaning tablets**
For degreasing the brew unit
- **AutoCleaner**
for automatically cleaning the milk pipework and brew unit
- **Descaling cartridge**
for automatic descaling
- **Descaling tabs**
For manual descaling

Installation

Electrical connection

Before connecting the appliance, make sure that the connection data on the data plate (voltage and frequency) matches the mains electricity supply. This data must correspond in order to avoid the risk of damage to the appliance. If in any doubt, consult a qualified electrician.

The necessary connection information is given on the data plate inside your appliance.

The fuse rating must be at least 10 A.

The socket must be easily accessible. If the socket is no longer accessible after installation, an additional means of disconnection must be provided for all poles. Suitable means of disconnection include switches with an all-pole contact gap of at least 3 mm. These include isolator switches, circuit breakers and relays.

Do not connect the machine solely to a **stand-alone inverter**. Inverters are used for autonomous power supply, e.g. a solar power system. When switched on, peak loads in the system can cause the safety switch-off mechanism to be triggered. This may damage the electronic unit.



The machine must not be used with so-called **energy saving plugs**. These reduce the amount of energy supplied to the machine, causing it to overheat.

Installation dimensions

Installation in a tall unit

A minimum installation height of 850 mm must be maintained.

All dimensions are given in mm.

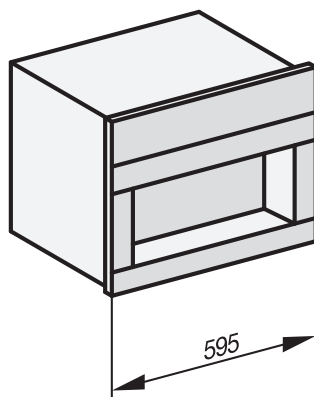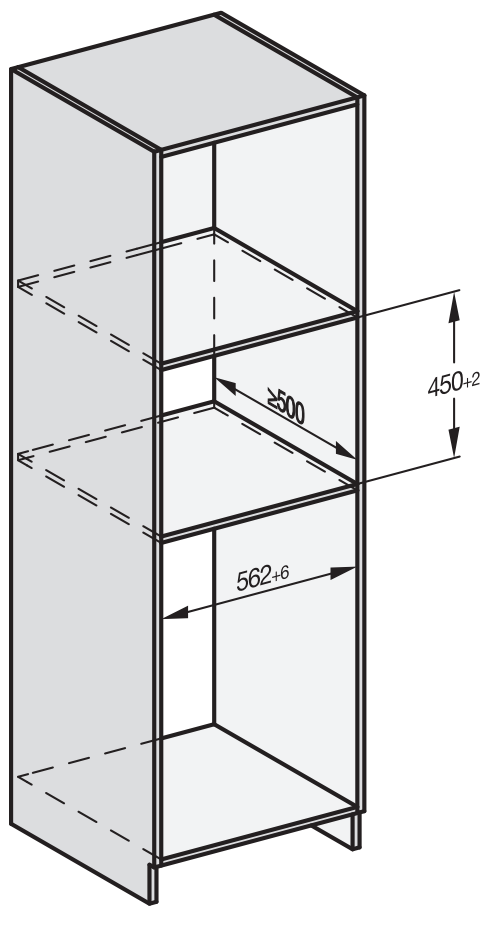


Combination with other Miele built-in appliances is possible. If the coffee machine is to be built in above another appliance, there must be a full-width, closed shelf between them. When built in above a warming drawer, a closed shelf is not needed.

Installation

Installation and connections

All dimensions are given in mm.

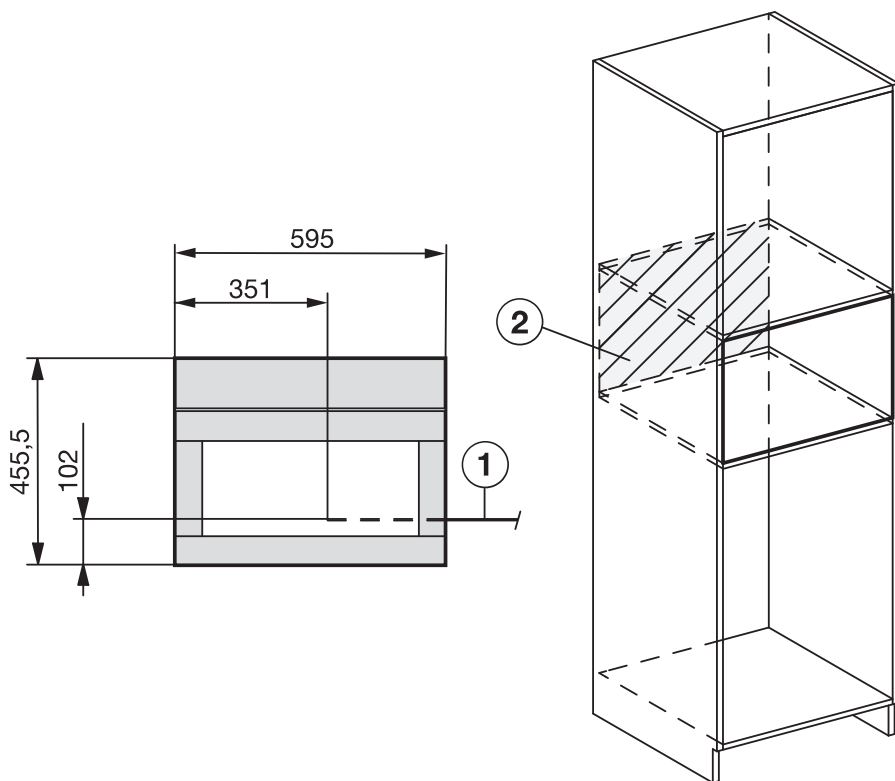

① Mains connection cable

② Do not place electrical connection in this area

Building in the coffee machine

⚠ Danger of injury due to incorrect installation.

Personal injury can result from an incorrectly installed, and therefore unsecured, appliance.

The coffee machine can only be operated once it has been built in.


⚠ Risk of damage to property due to incorrect operation.

If the ambient temperature range is not complied with, the coffee machine may not function correctly.

The coffee machine may only be operated in an ambient temperature range between +16 °C and +38 °C.

A minimum installation height of 850 mm must be maintained.

Ensure that a door opening angle of 120° is present so that the bean container on the left can be removed.

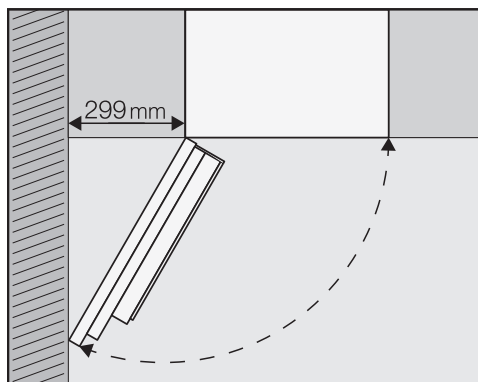

Check whether there is a gap of at least 299 mm between the wall or similar and the coffee machine so that the door can

be opened wide enough to remove the bean container on the left (minimum door opening angle of 120°).

A TX 20 screwdriver is required for installation.

Useful tip: We recommend providing a place to sit the coffee machine which is the same height as the building-in niche. This will make it easier to connect the machine to the electricity supply.

Connecting to the mains electricity supply

Observe the instructions in “Electrical connection”.

- Connect the coffee machine to the mains electricity supply.

Pushing in and levelling the coffee machine

Ensure the mains connection cable does not get jammed or damaged when pushing the appliance into the niche.


- Push the coffee machine all the way into the building-in niche.
- Check the height of the coffee machine to make sure that it is sitting centrally in the niche and that it is level. Align the appliance if necessary.

Do not adjust the door hinges to align the coffee machine. This could result in the milk flask not being able to be fitted correctly and milk preparation may not function properly.

Installation

Now screw the coffee machine into the furniture unit.

- Open the appliance door.

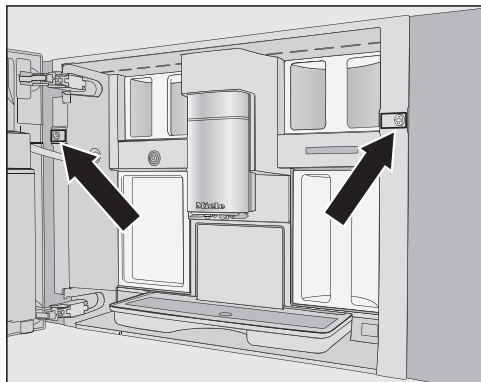

2 TX20 screws (25 mm) are supplied.

- Secure the coffee machine to the side walls of the housing unit using the screws supplied. Tighten the screws by hand.


Useful tip: You can remove the door opening limiters and increase the door opening angle to 170° so that the screw on the left can be screwed in more easily. (see "Door opening limiters"). Check whether there is enough room and that the appliance door does not hit an adjacent wall.

- Check the operation of the coffee machine.

Door opening limiters


The door hinges of the coffee machine are equipped with door opening limiters that limit the opening angle of the appliance door to approx. 120°. These prevent the appliance door from hitting an adjacent wall when opened and being damaged.

You can remove the door opening limiters to increase the opening angle to approx. 170°. This allows the bean containers to be removed more easily, for example.

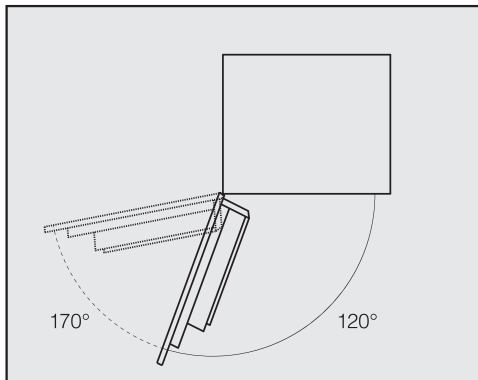

Removing the door opening limiters

Check whether there is enough room and that the appliance door does not hit an adjacent wall when the door opening angle is increased.

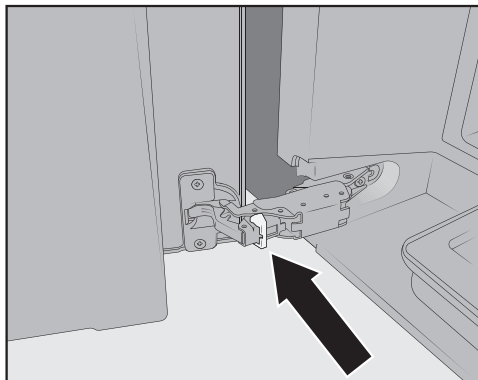

- Remove the door opening limiters from the hinges by levering them out with a screwdriver, for example.

The door opening angle is now increased to approx. 170°.

Electricity consumption in standby:	< 1.0 Watt
-------------------------------------	------------

Electricity consumption in networked standby:	< 1.4 Watt
---	------------

Frequency band of the Wi-Fi module	2.4000 GHz – 2.4835 GHz
------------------------------------	-------------------------

Maximum transmission power of the Wi-Fi module	< 100 mW
--	----------

Copyright and licences

For the purpose of operating and controlling the appliance, Miele uses proprietary or third-party software that is not covered by open source licensing terms. These items of software/software components are protected by copyright. The copyright powers of Miele and third parties must be respected.

In addition, the appliance contains software components which are distributed under open source licensing terms. You can access these open source components along with the associated copyright notices, copies of the valid licensing terms and any further information in the appliance under [Settings | Legal information | Open source licences](#). The liability and warranty arrangements for the open source licences displayed at this location only apply in relation to the respective rights holders.

The appliance contains, in particular, software components which are licensed by the rights holders under the GNU General Public License, version 2, or the GNU Lesser General Public License, version 2.1. For a period of at least 3 years following the purchase or delivery of the appliance, Miele shall provide you or third parties with a machine-readable copy of the source code for the open source components contained in the appliance, which are licensed under the terms of the GNU General Public License, version 2, or the GNU Lesser General Public License, version 2.1. The source code shall be made available on a data carrier (CD-ROM, DVD or USB stick). To obtain this source code, please contact us, specifying the product name, serial number and purchase date, by sending us an e-mail (info@miele.com) or writing to the following address:

Miele & Cie. KG
Open Source
GTZ/TIM
Carl-Miele-Straße 29
33332 Gütersloh, Germany

We wish to draw your attention to the limited warranty for the benefit of rights owners under the terms of the GNU General Public License, version 2, and the GNU Lesser General Public License, version 2.1:

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY, without even the implied warranty of MERCHANTABILITY of FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License and GNU Lesser General Public License for more details.

Miele Australia Pty. Ltd.

ACN 005 635 398

ABN 96 005 635 398

Miele Head Office Melbourne:

1 Gilbert Park Drive
Knoxfield, VIC 3180

Miele Experience Centre Doncaster:

1136/7 Doncaster Shopping Centre
619 Doncaster Rd, Doncaster, VIC 3108

Miele Experience Centre South Melbourne:

206-210 Coventry Street
South Melbourne, VIC 3205

Miele Experience Centre and Office Sydney:

3 Skyline Place
Frenchs Forest, NSW 2086

Miele Experience Centre and Office Brisbane:

Tenancy 4C, 63 Skyring Terrace
Newstead, QLD 4006

Miele Experience Centre Gold Coast:

131 Ferry Road
Southport, QLD 4215

Miele Experience Centre and Office Adelaide:

83-85 Sir Donald Bradman Drive
Hilton, SA 5033

Miele Experience Centre and Office Perth:

205-207 Stirling Highway
Claremont, WA 6010

1300 464 353 (1300 4 MIELE)

www.miele.com.au

Miele New Zealand Limited

IRD 98 463 631

**Miele Experience Centre
and Head Office Auckland:**

8 College Hill
Freemans Bay, Auckland 1011

**Miele Experience Centre
Wellington:**

183 Featherston Street
Wellington 6011

0800 464 353 (0800 4 MIELE)

www.miele.co.nz

**Miele Global Headquarters
Germany****Miele & Cie. KG**

Carl-Miele-Straße 29
33332 Gütersloh
Federal Republic of Germany

CVA 7840

en – AU, NZ

M.-Nr. 11 860 180 / 01