


#### Assembly Instructions 1/2

#### **IMPORTANT**

- Use a soft cloth between these parts and the floor.
- Do not use power tools above 8 volts to assemble.
- Do not tighten all the bolts until each part is properly assembled.
- The unit must be level to work properly. Use the included adjustable levelers to level.
- Keep Wrench as the bolts may need to be tightened in the future.

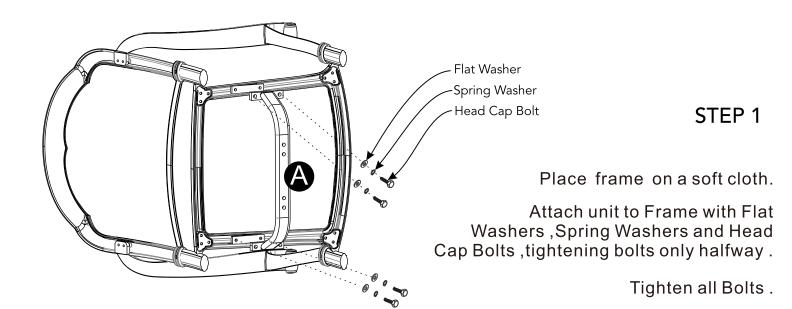


#### Assembly Instructions 2/2

#### STEP 2

Attach unit to Connerctor (B) with Bolts, Flat Washers, Spring Washers and Nuts, tightening bolts and nuts only haflway. (See Figure 1)


Tighten all Bolts and Nuts.

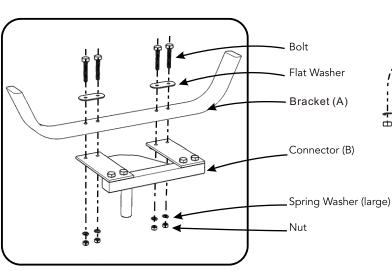



### STEP 3

Place unit onto Base (C).

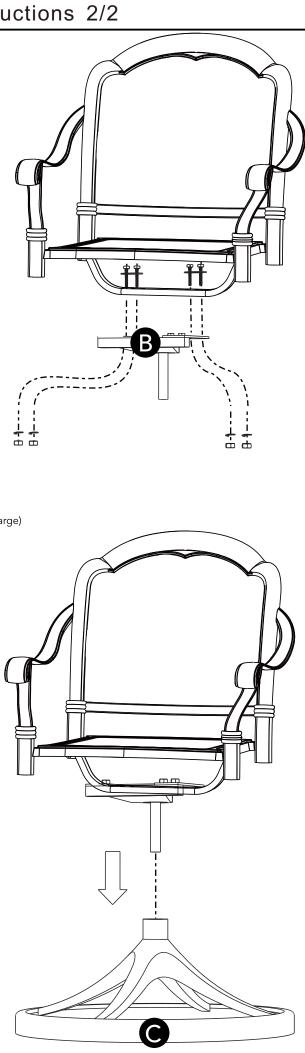

# **ASSEMBLY INSTRUCTION**


### Note:


- 1.Before fixing all screws, tighten each screw to 50% using an Allen wrench instead of an electric drill. If any screws are fully tightened during assembly, it is likely that the others will not align with their respective holes. Additionally, the holes are intentionally designed to be relatively larger to allow for adjustment of the screws.
- 2.Place the item on a flat surface to ensure stability during adjustment.
- 3. Gradually tighten all screws using appropriate tools.
- 4.If screws are not aligned with their respective holes during assembly, loosen all other screws to 50% and then continue the assembly process.
- 5.If the item is unstable, loosen all screws, adjust it on a flat surface, and then retighten all screws.


## **Hardware Fittings**


ltem No.	Reference Image	Description	Qty.	Extra Spare Parts Oty.
A	0	screw M6*16	20	1
В	(0)	washer M6	20	1

Item No.	Reference Image	Description	Qty.	Extra Spare Parts Oty.
С		allen key M6	1	1
D		foot pads	4	1

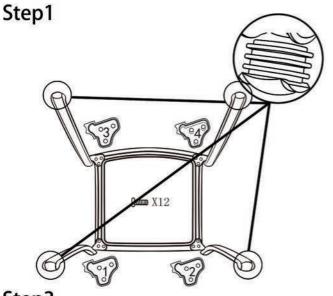

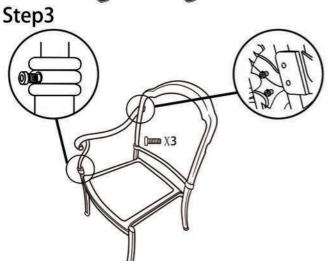

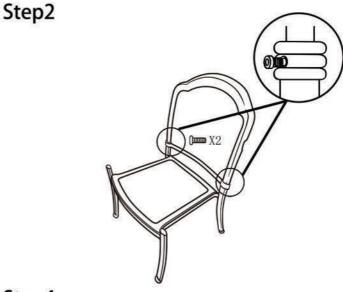

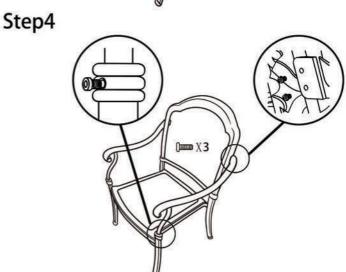

# **ASSEMBLY INSTRUCTION**

#### Note:

- 1.Before fixing all screws, tighten each screw to 50% using an Allen wrench instead of an electric drill. If any screws are fully tightened during assembly, it is likely that the others will not align with their respective holes. Additionally, the holes are intentionally designed to be relatively larger to allow for adjustment of the screws.
- 2.Place the item on a flat surface to ensure stability during adjustment.
- 3. Gradually tighten all screws using appropriate tools.
- 4.If screws are not aligned with their respective holes during assembly, loosen all other screws to 50% and then continue the assembly process.
- 5.If the item is unstable, loosen all screws, adjust it on a flat surface, and then retighten all screws.

### **Hardware Fittings**

Item No.	Reference Image	Description	Qty.	Extra Spare Parts Qty.
А	0	screw M6*25	12	1
В	0	washer Mó*16	12	1
С		spring washer M6	12	1
D		allen key M4	1	1
E		Adjustable foot pads	4	1
F				

Item No.	Reference Image	Description	Qty.	Extra Spare Parts Qty.
G				
Н				
Ī				
J				
К				
L				

