

SIEMENS



Gigaset C470 - C475


Issued by
Gigaset Communications GmbH
Schlavenhorst 66, D-46395 Bocholt
Gigaset Communications GmbH is a trademark licensee of Siemens AG

© Gigaset Communications GmbH 2008
All rights reserved.
Subject to availability. Rights of modifications reserved.

www.gigaset.com

Gigaset

The handset at a glance

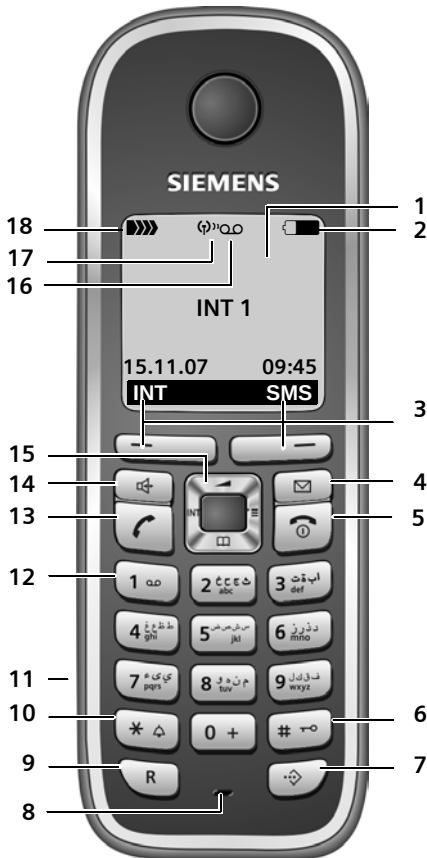


- 1 **Display** (screen) in idle status
- 2 **Charge status of the batteries**
 (flat to full)
 flashes: batteries almost flat
 flashes: batteries charging
- 3 **Display keys** (page 11)
- 4 **Message key**
 Access to calls and message lists;
 Flashes: new message or new call
- 5 **End call key, On/Off key**
 End call, cancel function, go back one menu level (press briefly), back to idle status (press and hold), activate/deactivate handset (press and hold in idle status)
- 6 **Hash key**
 Keypad lock on/off (press and hold in idle status);
 Toggle between upper/lower case and digits (press and hold)
- 7 **Call-by-call list key**
 Open call-by-call list
- 8 **Microphone**
- 9 **Recall key**
 - Confer (flash)
 - Insert a dialling pause (press and hold)
- 10 **Star key**
 Ringer tones on/off (press and hold);
 With an open connection: switch between dial pulsing/touch tone dialling (press briefly);
 Open special characters table
- 11 **Connection socket** for headset
- 12 **Key 1**
 Dial answer machine (C475 only)/network mailbox (press and hold)
- 13 **Talk key**
 Answer a call, open last number redial list (press briefly), start dialling (press and hold);
 When writing an SMS: send SMS
- 14 **Handsfree key**
 Switch between earpiece and handsfree mode;
 Lights up: handsfree activated
 Flashes: incoming call
- 15 **Control key** (page 11)
- 16 **Answer machine icon** (C475 only)
 Answer machine switched on
 Flashes: answer machine is recording a message or is being operated by another internal party
- 17 **Eco mode** activated (page 13)
- 18 **Signal strength**
 (high to low)
 flashes: no reception

The base station at a glance

You can use the keys on the base station to register handsets to the base station, search for handsets ("paging", see page 42) and operate the integrated answer machine (Gigaset C475 only).

Gigaset C475 base station

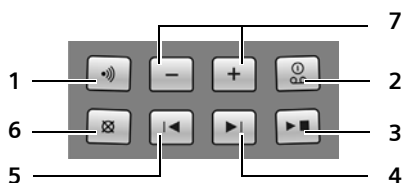

- 1 Registration/paging key
Press briefly: search for handsets "paging", see page 42.
Press and hold: register handsets and DECT devices, see page 41.
- 2 On/Off key: activate/deactivate answer machine.
LED lights up: answer machine is activated.
LED flashes: at least one new message is present.

During message playback:

- 3 Play/stop key:
Play back new messages from the answer machine or cancel the playback (press briefly).
Play back new and old messages (press and hold).
- 4 Skip to next message (press once) or next message but one (press twice).
- 5 Skip back to beginning of message (press once) or to previous message (press twice).
- 6 Delete current message.
- 7 Adjust volume during message playback:
[-] = quieter; [+] = louder.
While an external call is being signalled: adjust ringer tone volume.

Please note:

- ◆ If the answer machine is being operated from a handset or if it is recording a message, it cannot be operated from the base station.
- ◆ If the LED flashes although the answer machine is switched off, it means that there is still at least one new message that has not been played back yet.

Gigaset C470 base station



Registration/paging key:

- Press briefly: search for handsets "paging", see page 42.
- Press and hold: register handsets and DECT devices, see page 41.

Contents

The handset at a glance	1	SMS mailboxes	29
The base station at a glance	2	Setting SMS centres	30
Safety precautions	5	SMS on a PABX	31
Gigaset C470/C475 – More than just a telephone	7	Activating/deactivating muting for the first ringer tone	31
First steps	7	Activating/deactivating SMS function	31
Pack contents	7	SMS troubleshooting	32
Installing the base station	7	Operating the answer machine of the Gigaset C475	33
Setting up the handset for use	8	base station	33
Operating the handset	11	Operation via the handset	33
Control key	11	Activating/deactivating call screening	36
Display keys	11	Setting up the answering machine	37
Reverting to idle status	12	Resetting fast access for the answer machine using key 1	37
Menu guidance	12	Operating when on the move (remote control)	38
Correcting incorrect entries	12	Using the network mailbox	40
ECO DECT	13	Configuring fast access for the network mailbox	40
Menu tree	14	Viewing the network mailbox report	40
Making calls	16	Using several handsets	41
Making an external call	16	Registering handsets	41
Ending a call	16	Deregistering handsets	42
Accepting a call	16	Locating a handset ("paging")	42
Calling Line Identification	16	Making internal calls	42
Handsfree talking	17	Listening in to an external call	43
Muting	17	Changing the name of a handset	44
Making calls using network services	18	Changing a handset's internal number	44
Using the directory and lists	19	Using a handset as a room monitor	44
Directory/call-by-call list	19	Setting the handset	45
Last number redial list	21	Quick access to functions	45
Opening lists with the message key	21	Changing the display language	46
Making cost-effective calls	23	Setting the display	46
Linking call-by-call numbers with one number	23	Setting the screen picture	46
Automatic network provider preselection (preselection)	23	Setting the display backlight	47
SMS (text messages)	25	Activating/deactivating auto answer	47
Writing/sending an SMS	25	Changing the handsfree/ earpiece volume	47
Receiving an SMS	27	Changing ringer tones	47
Notification by SMS	29	Activating/deactivating advisory tones	48
		Setting the alarm clock	49
		Restoring the handset to the factory settings	49

Setting the base station 50
Protecting against unauthorised
access 50
Changing ringer tones 50
Activating/deactivating
music on hold 50
Repeater support 51
Restoring the base station to the
factory settings 51

**Connecting the base station
to PABX 52**
Dialling modes and recall 52
Saving an access code
(outside line code) 52
Setting pauses 53
Switching temporarily to touch
tone dialling (DTMF) 53

Appendix 54
Care 54
Contact with liquid 54
Questions and answers 54
Service (Customer Care) 56
Authorisation 57
Specifications 57

Notes on the user guide 58
Example of a menu input 58
Example of multiple line input 59
Writing and editing text 59

Accessories 61

**Wall-mounting the
base station 65**

Index 66

Safety precautions

Warning:

Read the safety precautions and the user guide before use.

Explain their contents and the potential hazards associated with using the telephone to your children.



Only use the mains adapter supplied, as indicated on the underside of the base station or charging cradle.



Only use the **recommended, rechargeable batteries** (page 57), i.e. never use a conventional (non-rechargeable) battery or other battery types as this could result in significant health risks and personal injury.

Batteries should not be disposed of in general household waste. Observe the local waste disposal regulations, details of which can be obtained from your local authority or the dealer you purchased the product from.



The operation of medical appliances may be affected. Be aware of the technical conditions in your particular environment, e.g. doctor's surgery.



Do not hold the rear of the handset to your ear when it is ringing or when the handsfree function is activated. Otherwise you risk serious and permanent damage to your hearing.

The handset may cause an unpleasant humming noise in hearing aids.



Do not install the base station or charging cradle in bathrooms or shower rooms. The base station and charging cradle are not splashproof (page 54).



Do not use your phone in environments with a potential explosion hazard (e.g. paint shops).



If you give your Gigaset to someone else, make sure you also give them the user guide.



Please remove faulty base stations from use or have them repaired by our Service, as they could interfere with other wireless services.

Safety precautions



All electrical and electronic equipment must be disposed of separately from general household waste using the sites designated by local authorities.

If a product displays this symbol of a crossed-out rubbish bin, the product is subject to European Directive 2002/96/EC.

The appropriate disposal and separate collection of used equipment serve to prevent potential harm to the environment and to health. They are a precondition for the re-use and recycling of used electrical and electronic equipment.

For further information on disposing of your used equipment, please contact your local authority, your refuse collection service or the dealer you purchased the product from.

Please note:

Not all of the functions described in this user guide are available in all countries.

Gigaset C470/C475 – More than just a telephone

Your phone, which has a clearly laid out colour display (65k colours), doesn't just offer you the option of sending and receiving SMS messages via the fixed network and of saving up to 150 phone numbers (page 19) – it can do much more besides:

- ◆ You can reduce the transmission power by activating eco mode (page 13).
- ◆ You can select frequently used phone numbers at the press of a **single** key (page 19).
- ◆ You can easily make calls using network services (page 18).
- ◆ You can designate important people as VIPs so you can identify important calls from the ringer tone (page 20).
- ◆ You can view missed calls on your phone (page 22).

Enjoy using your new telephone!

First steps

Pack contents

- ◆ one Gigaset C470/C475 base station with mains adapter,
- ◆ one Gigaset C47H handset,
- ◆ one phone cord,
- ◆ two batteries,
- ◆ one battery cover,
- ◆ one belt clip,
- ◆ one user guide.

Installing the base station

The base station is designed for use in closed, dry rooms with a temperature range of +5 °C to +45 °C.

Set up the base station at a central point in your apartment or house.

You can find instructions on how to mount the base station on the wall at the end of this user guide.

Please note:

- ◆ Never expose the telephone to heat sources, direct sunlight or other electrical appliances.
- ◆ Protect your Gigaset from moisture, dust, corrosive liquids and vapours.

Range and reception strength

Range:

- ◆ Outdoors: up to 300 m
- ◆ Indoors: up to 50 m

The range is reduced when eco mode is on (see page 13).



Reception strength:

The display shows the quality of the transmission power between the base station and handset:

- ◆ Good to poor:    
- ◆ No reception:  flashes

Connecting the base station

- **First** connect the power supply unit and **then** the phone jack as shown below and place the cables in the cable recesses.

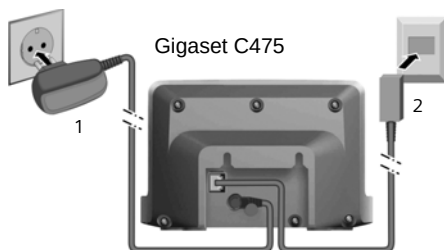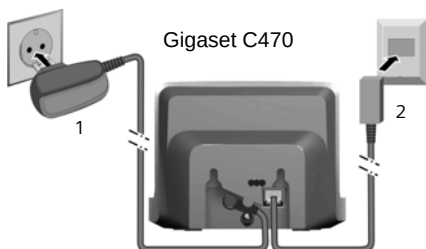


- 1 Mains adapter 230 V
- 2 Phone jack with phone cord

Please note:

- ◆ The mains adapter must **always be connected**, as the phone will not operate without mains connection.
- ◆ Only use the mains adapter and phone cord **supplied**.
- ◆ If you buy a replacement phone cord, make sure that the phone jack has the correct type of wiring.

Correct phone jack assignment



Setting up the handset for use



The display is protected by a plastic film. **Please remove the protective film!**

Inserting the batteries

Warning:

Use only the rechargeable batteries recommended by Gigaset Communications GmbH * (page 57). Never use a conventional (non-rechargeable) battery or other battery types as this could result in significant health risks and personal injury. For example, the batteries could explode. The phone could also malfunction or be damaged as a result of using batteries that are not of the recommended type.

* Gigaset Communications GmbH is a trademark licensee of Siemens AG.

- Insert the batteries the right way round.


The polarity is indicated in/on the battery compartment.



Closing the battery cover

- First insert the battery cover at the top.


- Then press the cover until it clicks into place.

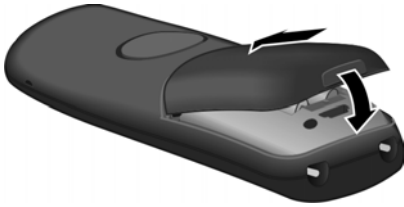

Attaching the belt clip

There are notches for attaching the belt clip on the side of the handset at the same height as the display.

- Press the belt clip onto the back of the handset so that the protrusions on the belt clip engage with the notches.

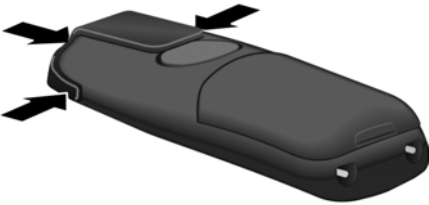

Opening the battery cover

- Place your fingertip in the cavity on the casing and pull the battery cover upwards.



Placing the handset in the base station and registering

- Place the handset in the base station with its **display facing upwards**.

The handset registers automatically. Registration can take up to 5 minutes. While this is happening, *Regstr.Procedure* appears in the display and the name of the base station flashes. The handset is assigned the lowest available internal number (1-6).

This will appear in the display when registration is complete, e.g. INT 1. This means that the number 1 has been assigned. If the internal numbers 1-6 are already assigned to other devices, the number 6 is overwritten.

Please note:

- Automatic registration is only possible while no calls are being made from the base station.
- Each key press interrupts the automatic registration.
- If automatic registration does not work the handset will have to be registered manually (page 41).
- You can change the name of the handset (page 44).

To charge the batteries, leave the handset in the base station.

Please note:

- The handset will automatically switch on if it is placed in the base station.
- Only place the handset in the base station or charging cradle that is intended for it.

For questions and problems see page 54.

Headset socket

You can connect various headset types (with 2.5 mm jack connector), including: HAMA Plantronics M40, MX100 and MX150.

A compatibility list of tested headsets can be found on the Internet at www.plantronics.com/productfinder.

Initial charging and discharging of batteries

If the handset is activated, the flashing battery icon  in the top right of the display indicates that the batteries are being charged.

During handset operation, the battery icon indicates the charge status of the batteries (page 1). The correct charge level can only be displayed if the batteries are first fully charged **and** discharged.

- ▶ To do this, leave the handset in the base station or charging cradle **without interruption for five hours**.
- ▶ Afterwards, remove the handset from the base station and do not put it back again until the batteries are fully discharged.

Please note:

After the first battery charge **and** discharge you may replace your handset in its base station after every call.

Please note:

- ◆ Always repeat the charging and discharging procedure if you remove the batteries from the handset and reinsert them.
- ◆ The batteries may warm up during charging. This is not dangerous.
- ◆ After a while the charge capacity of the batteries will decrease for technical reasons.

Setting the date and time

Set the date and time so that the correct date and time can be assigned to incoming calls, and so that the alarm can be used.

- ▶ If you have not yet set the date and time, press the display key **Time** to open the input field.

To change the time, open the input field with:

 →  → Date/Time

- ▶ Change multiple line input:

Date:

Enter day, month and year in 6-digit format.

Time:

Enter hours and minutes as 4 digits, e.g. **0 +** **7** **1** **5** for 07:15 a.m.

Save

Press the display key

Display in idle status

Once the phone is registered and the time set, the idle display is as shown here (example). If the answer machine is activated, the answer machine icon  will also be displayed in the header:



Your answer machine is set with a stand-ard announcement.

Your phone is now ready for use.

If you have any queries about using your phone, please read the tips on troubleshooting ("Questions and answers", page 54) or contact our customer service department ("Service (Customer Care)", page 56).

Operating the handset

Activating/deactivating the handset



In idle status, press and **hold** the end call key (confirmation tone).

Activating/deactivating the keypad lock



Press and **hold** the hash key.

You will hear the confirmation tone. The  icon appears in the display when the keypad lock is activated.

The keypad lock is deactivated automatically if someone calls you. It is re-activated when the call is finished.

Control key



In the description below, the side of the control key (up, down, right, left) that you have to press in the different operating situations is marked in black, e.g.  for "press right on the control key".

The control key has a number of different functions:

When the handset is in idle status



Open the directory.



Open the main menu.



Open the list of handsets.



Call up the menu for setting the handset's call volume (page 47), ringer tones (page 47) and advisory tones (page 48).

In the main menu, in submenus and lists



Scroll up/down line by line.



Open the submenu or confirm the selection.



Go back one menu level or cancel.

In input fields

You can use the control key to move the cursor up , down , right  or left .

During an external call



Open the directory.



Initiate internal consultation call and mute.



Adjust the loudspeaker volume for earpiece and hands-free mode.

Display keys

The function of the display keys changes depending on the particular operating situation. Example:



1 Current display key functions are shown in the bottom display line.

2 Display keys

The most important display icons are:



Open the main menu.



Open a context-dependent menu.



Delete key: deletes one character at a time from right to left.



Go back one menu level or cancel operation.



Copy number into directory.

Operating the handset



Divert external call to answer machine (C475 only).



Open the last number redial list.

Reverting to idle status

You can revert to idle status from anywhere in the menu as follows:

- ▶ Press and **hold** the end call key .

Or:

- ▶ Do not press any key: after 2 minutes the display will **automatically** revert to idle status.

Changes that you have not confirmed or saved by pressing **OK**, **Yes**, **Save**, **Send** or **Save Entry OK** will be lost.

An example of the display in idle status is shown on page 1.

Menu guidance

Your telephone's functions are accessed using a menu that has a number of levels.

Main menu (first menu level)

- ▶ Press  with the handset in idle status to open the main menu.

The main menu functions are shown in the display as a list with colour icons and names.

To access a function, i.e. to open the corresponding submenu (next menu level):

- ▶ Navigate to the function using the control key . Press the **OK** display key.

Submenus

The functions in the submenus are displayed as lists.

To access a function:

- ▶ Scroll to the function with the control key  and press **OK**.

Or:

- ▶ Enter the corresponding digit combination (page 14).

Briefly press the end call key  once to return to the previous menu level/cancel the operation.

Illustration in the user guide

The operating steps are shown in abbreviated form.

Example

The illustration:

 →  → Date/Time

means:



Press the key to display the main menu.



Use the control key  to scroll through the Settings submenu and press **OK**.

Date/Time Scroll to the function with the control key  and press **OK**.

Other types of illustrations:



/  /  etc.

Press the matching key on the handset.



Enter digits or letters.

You will find detailed examples of menu entries and multiple line input in the appendix to this user guide, page 58.

Correcting incorrect entries

You can correct incorrect characters in the text by navigating to the incorrect entry using the control key. You can then:

- ◆ press **⏮** to delete the character to the left of the cursor,
- ◆ insert characters to the left of the cursor,
- ◆ overwrite the character (flashing) when entering the time and date etc.

ECO DECT

ECO DECT reduces power consumption by using a power supply with low power consumption and also reduces the transmission power of the base station.

If only **one** handset is registered and it is in the base station, eco mode is always **activated automatically**. In this case, the transmission power of the base station is reduced to the minimum.

You can use your handset to reduce the transmission power on the base station **manually** even when the handset is not in the base station.

By doing so, you will reduce the transmission power even if you have several handsets registered.

Your handset also reduces the transmission power depending on the distance to the base station.

Activating/deactivating eco mode:

 →  → Base → Add. Features
→ Eco Mode

OK Press the display key
( = activated).

When eco mode is activated manually, the  icon is displayed at the top of the screen. If eco mode is **activated automatically** (only one handset is registered and it is in the base station) and eco mode has **not** been activated via the menu, then the icon is **not** displayed.

Please note:

- Activating eco mode reduces the range of the base station.
- Eco mode and any repeater support (see page 51) cancel each other out, i.e. both functions cannot be used at the same time.
- If external handsets (GAP) and handsets from earlier Gigaset versions are used, your handset will **not** automatically reduce the transmission power to the base station.

Menu tree

Instead of scrolling to locate a menu function, you can select a function more quickly by opening the menu and keying in a digit combination (or shortcut).

Example: for "Set ringer tone for external calls".

With the telephone in **idle status**, press (open main menu):

1 SMS

You have activated an SMS mailbox (general or private) without a PIN

1-1	New SMS	(page 25)
1-2	Incoming 0	(page 28)
1-3	Outgoing 0	(page 26)

You have activated an SMS mailbox with a PIN or 2-3 mailboxes

1-1	Mailbox	1-1-1	New SMS	(page 25)
		1-1-2	Incoming 0	(page 28)
		1-1-3	Outgoing 0	(page 26)
1-2 to 1-4	Mailbox 1 Mailbox 2 Mailbox 3	1-2-1 to 1-4-1	New SMS	(page 25)
		1-2-2 to 1-4-2	Incoming 0	(page 28)
		1-2-3 to 1-4-3	Outgoing 0	(page 26)
1-6	Settings	1-6-1	Service Centres	(page 30)
		1-6-2	SMS Mailboxes	(page 29)
		1-6-3	Notify Number	(page 29)
		1-6-4	Notify Type	(page 29)
		1-6-5	Status Report	(page 26)
		1-6-6	Subscribe to SMS	(page 25)

2 Sel. Services

3 Alarm Clock (page 49)

4 Add. Features

4-3 Room Monitor (page 44)

5 Settings

5-1	Date/Time	(page 10)	
5-2	Audio Settings	5-2-1	Handset Volume (page 47)
		5-2-2	Ringer Settings (page 48)
		5-2-3	Advisory Tones (page 48)
5-3	Display	5-3-1	Screen Picture (page 46)
		5-3-2	Colour Scheme (page 46)
		5-3-3	Contrast (page 46)
		5-3-4	Backlight (page 47)
5-4	Handset	5-4-1	Language (page 46)
		5-4-2	Auto Answer (page 47)
		5-4-3	Register H/Set (page 41)
		5-4-4	Reset Handset (page 49)
5-5	Base	5-5-1	Ringer Settings (page 50)
		5-5-2	Music on hold (page 50)
		5-5-3	System PIN (page 50)
		5-5-4	Base Reset (page 51)
		5-5-5	Add. Features (page 13, page 43, page 52)
		5-5-6	Preselection (page 24)
		5-5-7	Calls List Type (page 22)
5-6	Voice Mail	5-6-1	Set Key 1 (page 40)
only C475 base station:			
		5-6-2	Ans Machine (page 33)
		5-6-3	Call Screening (page 36)
		5-6-4	Announcements (page 33)
		5-6-5	Message Length (page 37)
		5-6-6	Record Quality (page 37)
		5-6-7	Ring Delay (page 37)

Making calls

Making an external call

External calls are calls using the public telephone network.



Enter the number and press the talk key.

Or:



Press and **hold** the talk key and then enter the number.

You can cancel the dialling operation with the end call key.

You are shown the duration of the call while the call is in progress.

Please note:

Dialling using the directory, the call-by-call list (page 1, page 19) or the calls and last number redial list (page 22/page 21) saves you from having to re-enter numbers and network provider prefixes ("call-by-call numbers").

Ending a call



Press the end call key.

Accepting a call

The handset indicates an incoming call in three ways: by ringing, by a display on the screen and by the flashing handsfree key.

You can accept the call by:

- ▶ Pressing the talk key.
- ▶ Pressing the handsfree key.
- ▶ Gigaset C470: Press the display key **Accept**.
- ▶ Gigaset C475: Press the display key **Accept** to divert the call to the answer machine (page 36).

If the handset is in the charging cradle and the Auto Answer function is activated (page 47), the handset will take a call automatically when you lift it out of the cradle.

If the ringer tone is intrusive, press the **Silence** display key. You can take the call as long as it is displayed on the screen.


Calling Line Identification

When you receive a call, the caller's number and/or name is displayed on the screen if the following conditions are met:


- ◆ Your network provider supports CLIP, CLI and CNIP.
 - CLI (Calling Line Identification): the caller's number is transmitted.
 - CLIP (Calling Line Identification Presentation): the caller's number is displayed.
 - CNIP (Calling Name Identification Presentation): the caller's name is displayed.
- ◆ You have arranged CLIP or CNIP with your network provider.
- ◆ The caller has arranged CLI with the network provider.

Call display with CLIP/CLI

If the number of the caller is saved in your directory, you will see their name, and if you have assigned a CLIP picture to that caller, this will also be displayed.

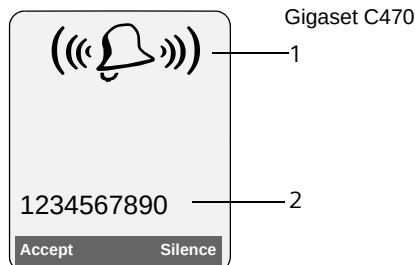

Or

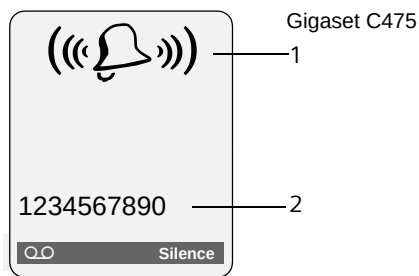

- 1 Ringer tone icon
- 2 Number or name of caller

The following is displayed in place of the number:

- ◆ External, if no number is transmitted.
- ◆ Withheld, if the caller has withheld Calling Line Identification.
- ◆ Unavailable, if the caller has not arranged Calling Line Identification.

Display with CNIP

If you have CNIP, then the name (town) that is registered with your network provider for that calling number will **also** be displayed. If the number of the caller is stored in your directory, the CNIP display is replaced by the corresponding directory entry.

1234567890	1
Anna Fielding, London	2

- 1 Caller's number
- 2 Name and town

The display shows:

- ◆ External, if no number is transmitted.
- ◆ Withheld, if the caller has withheld Calling Line Identification.
- ◆ Unavailable, if the caller has not arranged Calling Line Identification.

Handsfree talking

In handsfree mode, instead of holding the handset to your ear you can put it down, for example on the table in front of you. This allows others to participate in the call.

Activating/deactivating handsfree mode

Activating while dialling



Enter the number and press the handsfree key.

- ▶ You should inform your caller before you use the handsfree function so that they know someone else is listening.

Switching between earpiece and handsfree mode



Press the handsfree key.

During a call and when listening to the answer machine (Gigaset C475 only), activate or deactivate handsfree.

If you wish to place the handset in the charging cradle during a call:

- ▶ Press and hold the handsfree key  while placing the handset in the base station. If the handsfree key  does not light up, press the key again.

For how to adjust the loudspeaker volume, see page 47.

Muting

You can deactivate the microphone in your handset during an external call. The other party hears hold music.



Press the control key on the left to mute the handset.



Press the display key to reactivate the microphone.

You can turn the hold music on and off (page 50).

Making calls using network services

Network services are functions that your network provider makes available to you. You have to request these services from your network provider.

- **If you require assistance, please contact your network provider.**

Using the directory and lists

The options are:

- ◆ Directory
- ◆ Call-by-call list
- ◆ Last number redial list
- ◆ SMS list
- ◆ Call history
- ◆ Answer machine list
(Gigaset C475 only)

You can save a total of 150 entries in the directory and call-by-call list.

You create the directory and call-by-call list for your own individual handset. You can also send lists/entries to other handsets (page 20).

Directory/call-by-call list

In the **directory** you can store numbers and corresponding names.

- ▶ With the handset in idle status, open the directory by pressing the  key.

In the **call-by-call list**, you can store network provider prefixes ("call-by-call numbers").

- ▶ Open the call-by-call list in idle status by pressing the  key.

Length of entries

Number: max. 32 digits

Name: max. 16 characters

Please note:

For quick access to a number from the directory (quick dial), you can assign the number to a key.

Saving a number in the directory

 → New Entry

- ▶ Change multiple line input:

Number

Enter the number.

Name

Enter name.

Quick Dial:

Select key for quick dial.

- ▶ Save the changes.

Saving a number in the call-by-call list

 → New Entry

- ▶ Change multiple line input:

Number

Enter the number.

Name

Enter name.

Order of directory entries

The directory entries are usually sorted in alphabetical order. Spaces and digits take first priority. The sort order is as follows:

1. Space
2. Digits (0–9)
3. Letters (alphabetical)
4. Other characters

To get round the alphabetical order of the entries, insert a space or a digit in front of the name. These entries will then move to the beginning of the directory.

Selecting entries in the directory and call-by-call lists

 /  Open the directory or call-by-call list.

You have the following options:

- ◆ Use  to scroll through the entries until the required name is selected.
- ◆ Enter the first character of the name, or scroll to the entry with  if required.

Dialling with the directory/call-by-call list

 /  →  (select entry).



Press the talk key. The number is dialled.

Managing directory/call-by-call entries

 /  →  (select entry).

Viewing entries

View Press the display key. The entry is displayed.
Back with **OK**.

Editing entries

View **Edit** Press the display keys one after the other.

- ▶ Carry out changes and save.

Using other functions

Options Press the display key.

The following functions can be selected with :

Display Number

To edit or add to a saved number, or to save it as a new entry, press   after the number is displayed.

Edit Entry

Edit selected entry.

Delete Entry

Delete selected entry.

VIP Entry (directory only)

Mark a directory entry as a **VIP** (Very Important Person) and assign a specific ringer tone to it. You can then recognise important calls from the ringer tone.

Precondition: Calling Line Identification (page 16).

Copy Entry

Send a single entry to a handset (page 20).

Delete List

Delete **all** entries in the directory or call-by-call list.

Copy List

Send complete list to a handset (page 20).

Available Memory

Display the available entries in the directory and call-by-call list (page 19).

Using quick dial keys

- ▶ Press and **hold** the required quick dial key (page 19).

Sending the directory/call-by-call list to another handset

Preconditions:

- ◆ The sending and receiving handsets must both be registered to the same base station.
- ◆ The other handset and the base station can send and receive directory entries.

 /  →  (select entry)
→ **Options** (open menu) → Copy Entry / Copy List → to Internal

 Select the internal number of the receiving handset and press **OK**.

You can transfer several individual entries one after the other by responding **Yes** to the Copy next entry? prompt.

A successful transfer is confirmed by a message and confirmation tone on the receiving handset.

Please note:

- ◆ Entries with identical numbers are not overwritten on the receiving handset.
- ◆ The transfer is cancelled if the phone rings or if the memory of the receiving handset is full.

Copying a displayed number to the directory

Numbers displayed in a list, e.g. the call history or the last number redial list, in an SMS or during a call can be copied to the directory.

If you have CNIP, the first 16 characters of the transmitted name are copied to the Name line.

A number is displayed:

Options → Copy to Directory

- ▶ Complete the entry, see page 19.

Gigaset C475: The message playback is interrupted during the number transfer from the answer machine list.

Copying a number from the directory

There are many operating situations in which you can open the directory, e.g. to copy a number. Your handset need not be in idle status.

- Depending on the operating situation, open the directory with  or  or  Directory.

 Select an entry (page 19).

Last number redial list

The last number redial list contains the twenty numbers last dialled with the handset (max. 32 digits). If a number is in the directory or the call-by-call list, then the appropriate name will be displayed.

Manual last number redial

-  Press the key **briefly**.
-  Select entry.
-  Press the talk key again. The number is dialled.

When a name is displayed, you can display the corresponding phone number by pressing the display key .

Managing entries in the last number redial list

 Press the key **briefly**.

 Select entry.

 Open menu.

The following functions can be selected with :

Display Number (as in the directory, page 20)

Copy to Directory

Copy an entry to the directory (page 19).

Delete Entry (as in the directory, page 20)

Delete List (as in the directory, page 20)

Opening lists with the message key

You can use the message key  to open the following list selection:

- ◆ SMS list
If **several** mailboxes are set up (page 29), several lists are displayed.
- ◆ Answer machine list (Gigaset C475 only) or network mailbox, if your network provider supports this function and the fast access is set for the network mailbox (page 40).
- ◆ Call history


An advisory tone sounds as soon as a **new message** arrives in a list. The  key flashes (it goes off when the key is pressed). In **idle status**, the display shows an icon for the new message:

Icon	New message...
	... in the answer machine list (Gigaset C475 only) or on the network mailbox
	... in the call history
	... in SMS list

The number of new entries is shown beneath the corresponding icon.

List selection

If you press the message key , only the lists that contain messages are shown (exception: network mailbox). Lists with new messages are identified in bold:



Select a list with . To open, press  or **OK**.

If only one list contains entries, no list selection is offered and the relevant list is displayed immediately.

Incoming SMS message list

All received SMS messages are saved in the incoming message list, page 27.

Call history

Precondition: Calling Line Identification (CLIP, page 16)

Depending on the type of list set, the call history contains

- ◆ accepted calls ()
- ◆ missed calls
- ◆ calls recorded by the answer machine (∞, Gigaset C475 only)

Depending on the type of list set, all numbers of the last 30 incoming calls are saved or just the missed calls are saved.

Setting the call history type

 →  → Base → Calls List Type

Missed Calls / All Calls

Select and press **OK** ( = on).

 Press and **hold** (idle status).

The calls list entries are retained when you change the list type.

List entry

New messages are displayed at the top.

Example of list entries:



- ◆ List type (in header)
- ◆ Status of entry
 - Bold:** new entry
- ◆ Number or name of caller
 - You can add the caller's number to the directory (page 20).
- ◆ Date and time of call (if set, page 10)
- ◆ Type of entry:
 - accepted calls ()
 - missed calls
 - calls recorded by the answer machine (∞, Gigaset C475 only)

Pressing the display key **Delete** deletes the marked entry.

After pressing the display key **Options** you can select more functions with :

Copy to Directory

Copying a displayed number to the directory.

Delete List

Delete complete list.

Information

See following section entitled "Displaying CNIP information".

When you quit the call history, all entries are set to the status "old", i.e. the next time you call the list up they will no longer be shown in bold.

Answer machine list (Gigaset C475 only)

You can use the **answer machine list** to listen to the messages that are on the answer machine.

Displaying CNIP information

If you have CNIP, you can display the name and town that is registered with your network provider for this number.

You have selected a list entry.

Options Open menu.

Information Select and press **OK**.

If the name and town are not shown, it means that the caller has not requested Calling Line Identification or that Calling Line Identification has been withheld.

Press **OK** to return to the list.

Making cost-effective calls

Sign up with a network provider who offers particularly low-cost call rates (call-by-call). You can manage the numbers in the call-by-call list.

Linking call-by-call numbers with one number

You can insert the dialling code of a network provider ahead of the number ("linking").



Open call-by-call list.



Select entry (call-by-call number).

Options Press the display key.

Display Number

Select and press **OK**.



Enter number or select number from the directory (page 21).



Press the talk key. Both numbers are dialled.

Automatic network provider preselection (preselection)

You can specify a call-by-call number (preselection number) which is **automatically** placed in front of numbers when you dial them.

- ◆ The "**with preselection**" list contains the "rule" for dialling code numbers or the first digits of dialling code numbers with which you wish the preselection number to be used.

- ◆ The "**without preselection**" list contains the "exception to the rule".

Example:

You have entered 08 for "with preselection". Now all numbers that start with 08 will be dialled with preselection.

If, for example, you want 081 to still be dialled without preselection, enter 081 for "without preselection".

When dialling, the **first** digits of the selected numbers are compared with both lists after the talk/handsfree key is pressed:

- ◆ The preselection number is not prefixed if the dialled number
 - **does not** match any entries in the two lists
 - matches an entry in the "**without preselection**" list
- ◆ The preselection number is prefixed if the first digits of the dialled number match with **only** one entry in the list "**with preselection**".

Saving preselection numbers

 →  → Base → Preselection
→ Preselect No.

 Enter or change the preselection number (call-by-call number).

Save Press the display key.

 Press and **hold** (idle status).

Save or change entries in the preselection lists

Each of the two lists can contain 20 entries, each with 6 digits.

Numbers may be prefixed according to the country in the "**with preselection**" list. This means e.g. that all national calls or calls to the mobile network are **automatically** linked to the preselection number you have saved previously.

 →  → Base → Preselection
→ With Preselect / Without Presel.

 Select entry.

Edit Press the display key.

 Enter or edit first digits of number.

Save Press the display key.

 Press and **hold** (idle status).

Temporarily cancelling preselection

 (press and **hold**) → **Options**
→ Aut Preselect off

Permanently deactivating preselection

- Delete the preselection number (page 24).

SMS (text messages)

Your phone is supplied ready for sending SMS messages immediately.

Preconditions:

- ◆ Calling Line Identification is enabled for your phone line.
- ◆ Your network provider supports SMS in the fixed network (information on this can be obtained from your network provider).
- ◆ You are registered with your service provider to send and receive SMS.

SMS messages are exchanged between SMS centres operated by service providers. You must enter the SMS centre through which you wish to send and receive SMS messages into your phone. You can receive SMS messages from **every** SMS centre that is entered, provided you have registered with your service provider.

Your SMS messages are sent via the **Service Centr.** that is shown as the **active send service centre**. However, you can activate any other SMS centre as the active send service centre to send a current message (page 30).

If no SMS service centre is entered, the SMS menu only contains the entry **Settings**. Enter an SMS service centre (page 30).

Information on writing an SMS can be found in the appendix (page 59).

Rules

- ◆ An SMS can be up to 268 characters.
- ◆ If there are more than 160 characters, the SMS is sent as a **linked** SMS (up to 4 SMS messages with 153 characters each).

Please note:

- ◆ Each incoming SMS is signalled by a single ring (ringer tone as for external calls). If you accept an SMS "call", the SMS will be lost. To prevent this ring, suppress the first ringer tone for all external calls (page 31).
- ◆ If your phone is connected to a PABX, please read page 31.
- ◆ To receive SMS messages you must be registered with your service provider.

Registering with the registration assistant

The first time you press the display key **SMS** you will be asked whether you wish to register automatically with all entered SMS centres (see page 30). Confirm with **Yes** or refuse with **No** to abort automatic registration. You can now receive SMS messages from all SMS centres whose numbers you have entered.

You can call up automatic registration thereafter via the menu:

 →  → **Settings** → **Subscribe to SMS**

The registration assistant does not support setting up personal mailboxes (page 29).

Writing/sending an SMS

Writing an SMS

 → 

Mailbox 2 Select mailbox if necessary and press **OK**.

 Enter mailbox PIN if necessary and press **OK**.

New SMS Select and press **OK**.

 Write an SMS.

Please note:

Instructions on entering text can be found on page 59.

SMS (text messages)

Sending an SMS



Press the talk key

or:

Options Press the display key.

Send Select and press **OK**.

SMS Select and press **OK**.



Select number with dialling code (even if you are in the same area) from the directory or call-by-call list, or enter number directly. For sending SMS to an SMS mailbox: add the mailbox ID to the **end** of the number.

Send Press the display key. The SMS is sent.

Please note:

- If you are interrupted by an external call while writing an SMS, the text is automatically saved in the draft message list.
- If the memory is full, or if the SMS function on the base station is being used by another handset, the operation is cancelled. An appropriate message appears in the display. Delete SMS messages you no longer require or send the SMS later.

SMS status report

Precondition: Your network provider supports this feature.

If you have activated the status report, you will receive an SMS with a confirmation message after sending.

Activating/deactivating a status report



→ → Settings

Status Report

Select and press **OK** (= on).

Reading/deleting status report/saving number to directory

- Open the incoming message list (page 28) and then:



Select SMS with the **State OK** or **State not OK** status.

Read Press the display key.

- ◆ **Delete:**
Options Delete Entry **OK**.
- ◆ **Copy to directory:**
Options Copy to Directory **OK**.
- ◆ **Delete entire list:**
Options Delete List **OK**.

Draft message list

You can save an SMS in the draft message list and edit and send it later.

Saving an SMS in the draft message list

- Write an SMS (page 25).

Options Press the display key.

Save Entry Select and press **OK**.

Opening the draft message list

→ → (Mailbox, mailbox PIN)
→ **Outgoing** (3)

The first list entry is displayed, e.g.:

1234567890
21.11.07 09:45

Reading or deleting individual SMS messages

- Open the draft message list and then:



Select SMS.

Read Press the display key. The entry will be displayed. Scroll line by line using .

Or delete the SMS with

Options Delete Entry **OK**.

Writing/changing an SMS

- You are reading an SMS in the draft message list.

Options Open menu.

You have the following options:

New SMS

Write a new SMS and then send (page 26) or save it.

Edit

Edit the text of the saved SMS and then send (page 26).

Character Set

Text is shown in the selected character set.

Deleting draft message list

► Open the draft message list and then:

Options Open menu.

Delete all Select, press **OK** and confirm with **Yes**. The list is cleared.

 Press and **hold** (idle status).

Sending SMS messages to an e-mail address

If your service provider supports the **SMS as e-mail** feature, you can also send your SMS messages to e-mail addresses.

The e-mail address must be at the beginning of the text. You must send the SMS to the e-mail service of your SMS send centre.

 →  → (mailbox, mailbox PIN)
→ New SMS

E-Mail / 

Load the e-mail address from the directory or enter it directly. End the entry with a space or colon (depending on the service provider).

 Enter the SMS text.

Options Press the display key.

Send Select and press **OK**.

E-mail Select and press **OK**. If the number of the e-mail service is not entered (page 30), enter the number of the e-mail service.

Send Press the display key.

Sending SMS messages as a fax

You can also send an SMS to a fax machine.

Precondition: Your network provider supports this feature.

► Write an SMS (page 25).

Options Press the display key.

Send Select and press **OK**.

Fax Select and press **OK**.

 /  Select number from the directory or enter directly. Enter the number with dialling code (even if you are in the same area).

Send Press the display key.

Receiving an SMS

All received SMS messages are saved in the incoming message list. Linked SMS messages are displayed as **one** message. If this is too long or is not transferred completely, it is split into individual messages. Since an SMS remains in the list even after it has been read, you should **regularly delete SMS messages from the list**.

The display tells you if the SMS memory is full.

► Delete SMS messages you no longer require (page 28).

Incoming message list

The incoming message list contains:

- ◆ All received SMS messages, starting with the most recent.
- ◆ SMS messages that could not be sent due to an error.

New SMS messages are signalled on all Gigaset C47H handsets by the  icon in the display, the flashing message key  and an advisory tone.

SMS (text messages)

Opening the incoming message list with the key

 Press.

Select mailbox if necessary and enter mailbox PIN.

The incoming message list is displayed as follows (example):

SMS:	(2)	1
		2

- 1 **bold:** number of new entries
regular: number of read entries
- 2 Name of mailbox, here: general mailbox

Open list with **OK**.

An entry in the list is displayed as in the following example:

1234567890
21.11.07 09:45

Opening the incoming message list via the SMS menu

 →  → (Mailbox, mailbox PIN)
→ Incoming (2)

Reading or deleting individual SMS messages

- ▶ Open the incoming message list.
- ▶ Continue as described in "Reading or deleting individual SMS messages", page 26.

After you have read a new SMS, it is given the status "Old" (is no longer shown in bold).

Deleting the incoming message list

All **new and old** SMS messages in the list are deleted.

- ▶ Open the incoming message list.

Options Open menu.

- ▶ To continue, see "Deleting draft message list", page 27.

Replying to or forwarding SMS messages

- ▶ Read the SMS (page 28):

Options Press the display key.

You have the following options:

Reply

Write and send a reply SMS directly (page 25).

Edit

Edit the text in the SMS and then send it (page 26).

Forwarding an SMS

- ▶ You are reading an SMS (page 28):

Options Press the display key.

Forward Select and press **OK**. For further information, see page 26.

Copying a displayed number to the directory

Copying the sender's number

- ▶ Open the incoming message list and select entry (page 27).

Options Press the display key. For further information, see page 20.

Please note:

- You can create a special directory for SMS messages within your main directory by putting a star (*) before the names.
- An attached mailbox identifier is added to the directory.

Copying/dialling numbers from an SMS text

- ▶ Read the SMS (page 28) and scroll to the telephone number.

The digits are reverse-highlighted.

 Press the display key. For further information, see page 20.

Or:

 Press the talk key to dial the number.

If you wish to use the number to send an SMS:

- ▶ Save the number with the local area code (dialling code) in the directory.

Changing the character set

- ▶ Read the SMS (page 28):

Options Press the display key.

Character Set

Text is shown in the selected character set.

Notification by SMS

You can be notified about missed calls or new answer machine messages (Gigaset C475 only) via SMS.

Precondition: For missed calls, the caller's number (CLI) must have been transmitted.

Notification is sent to your mobile phone or another phone with SMS functionality.

You only need to set the phone number to which notification should be sent (notification number) and the notification type.

Saving the notification number

 →  → Settings → Notify Number



Enter the number to which the SMS should be sent.

Save

Press the display key.



Press and **hold** (idle status).

Warning:

Do **not** enter your own fixed network number for the notification of missed calls. This can lead to chargeable endless looping.

Setting the notification type

 →  → Settings → Notify Type

- ▶ Change multiple line input if necessary:

Missed Calls:

Select **On** if you require SMS notification.

Ans Machine:

(Gigaset C475 only)

Select **On** if you require SMS notification.

- ▶ Save changes (page 59).

SMS mailboxes

The **general mailbox** is the default setting. Anyone can access this mailbox and it cannot be protected by a PIN. You can additionally set up three **personal mailboxes** and protect these with a **PIN**. Each mailbox is identified by a name and a "mailbox ID" (a kind of extension number).

Please note:

- ◆ If you operate a number of devices (base stations) with SMS functionality on a single phone line, then each SMS mailbox ID may only occur once. In this case you must also change the preset ID of the general mailbox ("0").
- ◆ You can only use personal mailboxes if your service provider supports this function. You can tell whether this is the case by the addition of a star (*) to the number of a (preset) SMS centre.
- ◆ If you have forgotten your mailbox PIN, you can reset it by restoring the base station's default settings. This will **delete all SMS messages from all mailboxes**.

Setting up and changing a personal mailbox

Setting up a personal mailbox

 →  → Settings → SMS Mailboxes

 Select mailbox, e.g. Mailbox 2 and press **OK**.

► Change multiple line input:

On/Off:

Activate or deactivate mailbox.

ID:

Select mailbox ID (0–9). You can only select the available numbers.

Protection:

Activate/deactivate PIN protection.

PIN

If necessary, enter 4-digit PIN.

► Save changes (page 59).

Active mailboxes are marked with  in the mailbox list. They are shown in the SMS list and can, if necessary, be displayed by pressing the message key .

Deactivating a mailbox

► Set On/Off: to Off. Confirm message with **Yes** if necessary.

All SMS messages saved in this mailbox will be deleted.

Deactivating PIN protection

► Set Protection: to Off.

The mailbox PIN is reset to "0000".

Changing the name of a mailbox

 →  → Settings → SMS Mailboxes
→  (select mailbox)

Edit Press the display key.

 Enter new name.

Save Press the display key.

 Press and **hold** (idle status).

Changing a mailbox's PIN and ID

 →  → Settings → SMS Mailboxes
→  (select mailbox)

 Enter mailbox PIN if necessary and press **OK**.

► Set ID:, Protection: and PIN (page 30).

Sending an SMS to a personal mailbox

To send an SMS to a personal mailbox, the sender must know your ID and enter it after your number.

► You can send your SMS contact an SMS via your personal mailbox.

Your SMS contact will receive your SMS number with current ID and can save it in his or her directory. If the ID is invalid, the SMS will not be delivered.

Setting SMS centres

Entering/changing SMS centres

► You should find out about the services and special functions offered by your service provider **before you make a new application** and/or before you delete pre-configured call numbers.

 →  → Settings → Service Centres

 Select SMS centre (e.g. Service Centr. 1) and press **OK**.

► Change multiple line input:

Active Send:

Select **Yes** if SMS messages are to be sent via the SMS centre. For the SMS centres 2 to 4, the setting only applies to the next SMS.

SMS:

Press the display key **Edit**. Enter the number of the SMS service and insert a star if your service provider supports personal mailboxes.

E-mail:

Press the display key **Edit**. Enter the number of the e-mail service.

► Save changes (page 59).

Please note:

Ask your service provider for details on how to enter service numbers if you wish to use personal mailboxes (precondition: your service provider supports this function).

Sending an SMS through another SMS centre

- ▶ Activate the SMS centre (2 to 4) as the active send service centre.
- ▶ Send the SMS.

This setting only applies to the next SMS to be sent. Thereafter, the setting returns to Service Centr. 1.

SMS on a PABX


- ◆ You can only receive an SMS when the **Calling Line Identification is forwarded** to the extension of the PABX (CLIP). The CLIP evaluation of the phone number for the SMS centre takes place in your **Gigaset**.
- ◆ If required, you must prefix the number for the SMS centre with the access code (depending on your PABX).
If in doubt, test your PABX, e.g. by sending an SMS to your own number: once with and once without the access code.
- ◆ When you send SMS messages, your sender number may be sent without your extension number. In this case the recipient cannot reply to you directly.

Sending and receiving SMS messages **on ISDN PABXs** is only possible via the MSN number assigned to your base station.

Activating/deactivating muting for the first ring tone



Open menu.



Press keys.



First ring audible.

Or:



First ring muted.

Activating/deactivating SMS function

If you deactivate the SMS function, you cannot send or receive any SMS messages with your phone.

The settings which you have made for sending and receiving SMS messages (e.g. the call numbers of the SMS centres) and the entries in the incoming and draft message lists are saved even after you turn off your phone.



Open menu.



Enter the digits.



Deactivate SMS function.

Or:



Activate SMS function (default setting).

SMS troubleshooting

Error codes when sending

EO	Calling Line Identification permanently withheld (CLIR) or Calling Line Identification not activated.
FE	Error occurred during SMS transfer.
FD	Connection to SMS centre failed, see self-help.

Self-help with errors

The following table lists error situations and possible causes and provides notes on troubleshooting.

You cannot send messages.	
1.	You have not requested the CLIP service (Calling Line Identification Presentation). ▶ Ask your service provider to enable this service.
2.	SMS transmission has been interrupted (e.g. by a call). ▶ Re-send the SMS.
3.	Network provider does not support this feature.
4.	No number or an invalid number is entered for the SMS centre set as the active send service centre. ▶ Enter the number (page 30).
You receive an incomplete SMS.	
1.	Your phone's memory is full. ▶ Delete old SMS messages (page 28).
2.	The service provider has not yet sent the rest of the SMS.
You have stopped receiving SMS messages.	
1.	You have changed the ID of your mailbox. ▶ Give your SMS contacts your new ID or undo the change (page 30).
2.	You have not activated your mailbox. ▶ Activate your mailbox (page 30).
3.	Call diversion is activated with When: All Calls or the All Calls call diversion is activated for the network mailbox. ▶ Change the call diversion

The message is played back.

1. The "display call number" service is not activated.
▶ Ask your service provider to activate this function (chargeable).
2. Your mobile phone operator and your fixed network SMS service provider have not agreed on a co-operation.
▶ Obtain information from your fixed network SMS service provider.
3. Your terminal has been recorded by your SMS provider as having no fixed network SMS functionality, i.e. you are no longer registered with the provider.
▶ Start the registration assistant for automatic registration (see page 25).
▶ Have the device (re-)registered to receive SMS messages.

Messages are only received during the day.

The terminal is recorded in your SMS provider's database as having no fixed network SMS functionality, i.e. you are no longer registered with the provider.

- ▶ Start the registration assistant for automatic registration (see page 25).
- ▶ Obtain information from your fixed network SMS service provider.
- ▶ Have the device (re-)registered to receive SMS messages.

Operating the answer machine of the Gigaset C475 base station

You can operate the answer machine that is integrated into the base station using the keys on the base station (see page 2), via the handset or by remote control (other phone/mobile phone). You can only record your own announcement messages using the handset.

Announcement mode

You can use the answer machine in two different modes.

- ◆ In **Ans. & Record** mode, the caller hears the announcement and can then leave a message.
- ◆ In **Announce Only** mode, the caller hears your announcement but cannot leave a message.

Operation via the handset

The handset loudspeaker activates **automatically** if you receive an acoustic prompt or message while operating. You can switch it off with the handsfree key .

Activating/deactivating the answer machine

 →  → Voice Mail → Ans Machine
( = on)

When you switch the answer machine on, the remaining memory time is announced. If the time has not yet been set (page 10), an appropriate announcement is made. The  icon appears in the display.

The phone is supplied with pre-recorded announcements for answer and record mode and for announce only mode. If a personal announcement has not been recorded, the relevant pre-recorded announcement is used.

Recording a personal announcement/announce only

 →  → Voice Mail → Announcements
→ Record Announcement / Record Anc Only

OK Press the display key to start the recording.

You hear the ready tone (short tone).

- ▶ Now speak your announcement (at least 3 secs.).

End Press the display key to end the recording.

Cancel the recording with  or .
Restart the recording with **OK**.

After recording, the announcement is played back for you to check. You can re-record the announcement with **New**.

Please note:

- ◆ Recording ends automatically if the maximum recording time of 170 seconds is exceeded or there is a break in speech for more than 2 seconds.
- ◆ If you cancel the recording, the pre-recorded announcement will be used again.
- ◆ If the answer machine's memory is full, it will switch to **Announce Only** mode.
 - ▶ Delete old messages and the answer machine will automatically switch back to **Ans. & Record** mode. Repeat recording if required.

Playing back announcements

 →  → Voice Mail → Announcements
→ Play Announce / Play Anc Only

If you have not recorded a personal announcement, the relevant pre-recorded announcement is played.

Record a new announcement while playing back announcement:

New Press the display key.

- ◆ If the answer machine's memory is full, it will switch to **Announce Only** mode.
 - ▶ Delete old messages and the answer machine will automatically switch back to **Ans. & Record** mode. Repeat recording if required.

Deleting announcements/announce only

 →  → Voice Mail
→ Announcements → Del Announce / Del Anc Only

Yes Press the display key to confirm the prompt.

 Press and **hold** (idle status).

Once you have deleted your announcement, the relevant pre-recorded announcement will be used again.

Selecting announcement mode

You can choose between **Ans. & Record** and **Announce Only**.

 →  → Voice Mail
→ Announcements → Set Ans. Mode
→ Ans. & Record / Announce Only ( = on)

 Press and **hold** (idle status).

The selected mode is saved even after the answer machine is deactivated.

If the memory for messages is full in **Ans. & Record** mode, the answer machine will switch to the **Announce Only** mode and you will receive an instruction to delete old messages.

- ▶ Delete old messages.

The answer machine **automatically** switches back to the set mode once deletion is complete. You can then reselect the required recording mode.

Setting "Answer & Record" or "Announce Only" by toggling

You can use the **Ans Mode Time** setting to change over the announcement mode for a specific period.

Example: **Ans. & Record** mode is set. If you activate **Ans Mode Time** and set a period (e.g. 18:00 to 08:00) the answer machine switches to **Announce Only** mode for this period. Outside this period (08:01 to 17:59), **Ans. & Record** mode is active.

 →  → Voice Mail → Announcements
→ Set Ans. Mode → Ans Mode Time
( = on)

- ▶ Change multiple line input:

From:

Enter hours/minutes for the start of the period in 4-digit format.

Until:

Enter hours/minutes for the end of the period in 4-digit format.

Activation:

Select On or Off.

- ▶ Save changes with **Save**.

If the messages memory is full and **Activation: On** has been selected, saving is interrupted and you will receive an instruction to delete old messages.

- ▶ Delete old messages and repeat the setting.

As soon as you change the announcement mode (page 34), the **Ans Mode Time** function is automatically deactivated.

Playing back messages

The date and time of each message is logged (provided this has been set, page 10) and displayed during the playback. If Calling Line Identification is activated, the caller's number or name is displayed. If the caller's number is saved in the directory, their name is displayed.

Playing back new messages

New messages that have not yet been heard are indicated by the  icon in the display and by the  key flashing on the handset.

 Press the message key.

Ans M.: Select and press **OK**.

An announcement informs you if there are new or old messages.

If there are new messages, playback then begins with the first new message. After the last new message you will hear the end tone and an announcement about how much recording time remains.

If the message has been saved with the date and time you will hear an appropriate announcement before playback begins.

Playing back old messages

You can listen to old messages if there are no more new messages. Begin playback as described under "Listening to new messages".

After the entry time and date have been played back (after approx. 3 seconds) a new message assumes the status "old".

Stopping and controlling playback

During message playback:

 Pause playback. Press  again to resume.

 or 

Return to the start of the current message.
Press twice to go back to the previous message.

 or  Skip to the next message.
Press twice to skip to the next but one message.

If playback is interrupted for over a minute, the answer machine returns to idle status.

Reading CNIP information of a message

► Please see page 23.

Marking a message as "new"

A previously played back "old" message is displayed as a "new" message again.

During message playback:

 Press the star key.

An announcement informs you of the message's new status.

Or:

Options Open menu.

Mark as New

Select and press **OK**.

Playback of the current message is cancelled. Playback of next message starts, if applicable.

The  key on the handset flashes.

Copying the telephone number of a message to the directory

See "Copying a displayed number to the directory", page 20.

Deleting messages

You can either delete all old messages together or individually.

Deleting all old messages

During playback or pause:

Options Press the display key.

Del All Old Msgs

Select and press **OK**.

Yes Press the display key to confirm the prompt.

Deleting individual old messages

During playback or pause:

Delete Press the display key.

Picking up a call from the answer machine

You can pick up a call while the answer machine is recording or is being operated via remote operation:

 / **Accept** Press the talk or display key.

Recording stops and you can speak to the caller.

If 2 seconds of the call have already been recorded when you pick it up, the call will be displayed as a new message. The  key on the handset flashes.

You can accept the call even if it is not signalled on the handset.

Diverting an external call to the answer machine

You can divert an incoming external call to the answer machine even if it is deactivated.

Precondition: Sufficient memory space is available on the answer machine.

An external call is signalled on the handset:

 Press the display key.

The answer machine starts immediately in recording mode and records the call. The set time for the call acceptance (page 37) is ignored.

Activating/deactivating two-way recording

You can record an **external** call with the answer machine.

► Inform the caller that the call is being recorded.

Options Open menu.

Two Way Record

Select and press **OK**.

The two-way recording is indicated on the display by an advisory text and is added to the answer machine list as a new message.

End Press the display key to stop the two-way recording.

The maximum recording time depends on the memory available on the answer machine. If the memory is full you will hear an end tone, the recording is aborted, and the call recorded up to that point is listed in the answer machine list as a new message. If the answer machine was in Ans. & Record mode, it will switch to the Announce Only mode. You will receive an instruction to delete old messages.

► Delete old messages.

The answer machine **automatically** switches back to the set mode once deletion is complete.

Activating/deactivating call screening

During recording of a message you can screen a call via the loudspeaker of registered handsets.

Permanently activating/deactivating call screening

 →  → Voice Mail → Call Screening
→ Handset ( = on)

 Press and **hold** (idle status).

You can switch off the Call Screening function on the handset during the recording.

Switching off call screening for the current recording

Silence Press the display key.

Setting up the answering machine

The answer machine has already been preset at the factory. Make individual settings using the handset.

Call acceptance/charge saving function for remote operation

You can set when you want the answer machine to accept a call.

The options are: 0 sec., after 10 sec., 18 sec. or 30 sec. and the cost-saving setting Automatic.

In Automatic mode, the following applies for call acceptance:

- ◆ If there are no new messages, the answer machine accepts a call after 18 seconds.
- ◆ If new messages are present, the answer machine accepts a call after **10 seconds**.

When operating remotely you can tell after approx. 15 seconds that there are no new messages (otherwise the answer machine would already have accepted your call). There will be no call charges if you hang up now.

 →  → Voice Mail → Ring Delay

 Select 0 sec. / 10 sec. / 18 sec. / 30 sec. / Automatic.

Save Press the display key.

 Press and **hold** (idle status).

Please note:

You can configure your telephone so that the **first** ringer tone is **suppressed** on all calls (page 31). The time set for call acceptance therefore does not indicate how long the phone rings before the answer machine accepts the call.

Setting the recording time

You can set the maximum recording time of a message. The options are: 1, 2, 3 mins or Maximum.

 →  → Voice Mail → Message Length

 Select recording time.

Save Press the display key.

Setting the recording quality

Set the quality you require for your recordings. The options are: Standard, High, Excellent. If the quality is higher, the maximum recording time is reduced.

 →  → Voice Mail → Record Quality

 Select the recording quality.

Save Press the display key.

Changing the language for voice prompt and pre-recorded announcement

Enter these digits **and** press

 **OK** to set English.

 **OK** to set French.

 **OK** to set Arabic.

Resetting fast access for the answer machine using key 1

The integrated answer machine has already been preset for fast access at the factory. However, if you have set the network mailbox for fast access (page 40), you can reset this setting.

 →  → Voice Mail → Set Key 1

Answer Machine / Network Mailb.

Select and press **OK**.

 Press and **hold** (idle status).

After you have selected the network mailbox or the answer machine, press and **hold** key . You will be connected directly.

The setting for fast access applies to all Gigaset C47H handsets.

Operating when on the move (remote control)

You can check and activate your answer machine from any other telephone (hotel, pay phone etc.), or initiate ringback from the answer machine with an SMS.

Preconditions:

- ◆ You have set a system PIN other than 0000 (page 50).
- ◆ The phone you are using for remote operation has touch tone dialling (DTMF), i.e. you hear different tones when you press the keys. Alternatively, you can use a code transmitter (available from your mobile phone retailer).

Calling the answer machine and playing back messages



Dial your own number.



When you hear your announcement, press **9** and enter the system PIN.

You will be informed whether any new messages have been recorded. The messages are now played back. You can now operate the answer machine with the keypad.

The following keys are used for operation:



To return to the start of the current message.
Press twice to go back to the previous message.



Stop playback. Press again to resume.



Go to the next message.



Mark message as "new".



Delete current message.

Activating the answer machine

- Phone home and let the phone ring until you hear: "Please enter PIN".



Enter system PIN.

Your answer machine is activated. It tells you how much memory time is left.

The messages are now played back.

The answer machine cannot be deactivated remotely.

Initiating ringback from the answer machine with SMS and listening to messages

Precondition: You must have stored a notification number (see page 29).

You can use the telephone (mobile phone or any other device with SMS functionality), for which you have stored the notification number in your home phone, to send an SMS to your answer machine when you are away from home. It will then call you back. The message playback begins when you accept the call and press any key.

The SMS must contain the following:

<System PIN><Ringback number>*

The ringback number is optional.

Examples:

4711 or *4711*089123456*

If a ringback number is entered, it is dialled; otherwise the notification number is dialled.

You can now operate the answer machine via the keypad, as described in the previous sections.

Using the network mailbox

The network mailbox is your network provider's answer machine within the network. You cannot use the network mailbox unless you have **requested** it from your network provider.

Configuring fast access for the network mailbox

With fast access, you can dial the network mailbox or the integrated answer machine (Gigaset C475 only) directly.

Gigaset C470: Fast access is set for the network mailbox. You only need to enter the number of the network mailbox.

Gigaset C475: The integrated answer machine is set for fast access. Instead of using this, you can specify the network mailbox. Ask your network provider about this.

Configuring fast access for the network mailbox and entering the network mailbox number

 →  → Voice Mail → Set Key 1

Network Mailb.

Select and press **OK** ( = on).



Enter the number for the network mailbox.

Save

Press the display key.



Press and **hold** (idle status).

The setting for fast access applies to all Gigaset C47H handsets.

Calling the network mailbox



Press and **hold**. You are connected straight to the network mailbox.



Press handsfree key  if required. You will hear the network mailbox announcement.

Viewing the network mailbox report

When a message is recorded, you receive a call from the network mailbox. If you have requested Calling Line Identification, the network mailbox number will be displayed. If you take the call, the new messages are played back. If you do not take the call, the network mailbox number will be saved in the missed calls list and the message key flashes (page 21).

Using several handsets

Registering handsets

You can register up to six handsets to your base station.

Automatic registration of Gigaset C47H to Gigaset C470/C475

Precondition: The handset must not already be registered to a base station.

Registering the handset to the base station occurs automatically.

- Place the handset in the base station with its display facing forward.

Registration can take up to 5 minutes. While this is happening, **Regstr.Procedure** appears in the display and the name of the base station flashes. When the handset has registered, its screen displays its internal number, e.g. INT 2 for internal number 2. The handset is assigned the lowest available internal number (1–6). If all internal numbers 1–6 have been assigned, number 6 is overwritten, provided the handset with the internal number 6 is in idle status.

Please note:

- Automatic registration is not possible when the base station to which you wish to register the handset is being used to make a call.
- Each key press interrupts the automatic registration.
- If automatic registration does not work, you will have to register the handset manually.
- You can change the name of the handset (page 44).

Manual registration of Gigaset C47H to Gigaset C470/C475

You must activate manual registration of the handset on both the handset and the base station.

Once it has been registered, the handset returns to idle status. The handset's internal number is shown in the display e.g. INT 1. If not, repeat the procedure.

On the handset



→ **Handset** → **Register H/Set**

Enter the system PIN of the base station (the default is 0000) and press **OK**. Base 1 flashes in the display.

On the base station

Within 60 sec. press and **hold** the registration/paging key on the base station (page 2) (approx. 3 sec.).

Registering other handsets

You can register other Gigaset handsets and handsets for other devices with GAP functionality as follows.

On the handset

- Start to register the handset as described in its user guide.

On the base station

Press and **hold** the registration/paging key on the base station (page 2) (approx. 3 sec.).

Deregistering handsets

You can deregister any other registered handset from any registered Gigaset C47H handset.



Open list of internal parties.
The handset you are currently using is indicated by <.



Select the internal party you wish to deregister.

Options

Open menu.

De-reg. H/Set No.

Select and press **OK**.



Enter the current system PIN and press **OK**.

Yes

Press the display key.

Locating a handset ("paging")

You can locate your handset using the base station.

- ▶ **Briefly** press the registration/paging key on the base station (page 2).
- ▶ All handsets will ring simultaneously ("paging"), even if the ringer tones are deactivated.

Ending paging

- ▶ **Briefly** press the registration/paging key on the base station or press the talk key  on the handset.

Making internal calls

Internal calls to other handsets registered to the same base station are free.

Calling a specific handset



Initiate internal call.



Enter the number of the handset.

Or:



Initiate internal call.



Select handset.



Press the talk key.

Calling all handsets ("group call")



Initiate internal call.



Press the star key. All handsets are called.

Ending a call



Press the end call key.

Transferring a call to another handset

You can transfer an external call to another handset (connect).



Open the list of handsets.
The external participant hears hold music if activated (see page 50).



Select a handset or Call All and press **OK**.

When the internal participant answers:

- ▶ If necessary announce the external call.



Press the end call key.

The external call is transferred to the other handset.

If the internal participant does **not** answer or the line is busy, press the display key **End** to return to the external call.

When transferring a call you can also press the end call key  before the internal participant answers.

Then, if the internal participant does not answer or the line is busy, the call will automatically return to you (the display will show **Recall**).

Internal consultation/conference calls

When you are speaking to an **external** participant, you can call an **internal** participant at the same time for consultation or hold a conference call between all 3 participants.

You are conducting an **external** call:

-  Open the list of handsets. The external participant hears hold music if activated (see page 50).
-  Select handset and press **OK**. You are connected with the internal participant.

Either:

End Press the display key.
You are reconnected with the external participant.

Or:

Conference Press the display key.
All 3 participants are connected with each other.

Ending a conference call

 Press the end call key.

If an **internal** participant presses the end call key , the other handset remains connected to the external participant.

Accepting/rejecting call waiting

If you receive an **external** call during an **internal** call, you will hear the call waiting tone (short tone). The caller's number or name will appear in the display if Calling Line Identification is enabled.

Ending an internal call, accepting an external call

Accept Press the display key.

The internal call is **ended**. You are connected to the external participant.

Rejecting the external call

Reject Press the display key.

The call waiting tone is turned off. You remain connected with the internal participant. The ringer tone can still be heard on other registered handsets.

Listening in to an external call

Precondition: The Listening In function must be activated.

You are conducting an external call. An internal participant can listen in on this call and take part in the conversation. All the participants are made aware of the "listening in" by a signal tone.

Activating/deactivating internal listening-in

 →  → Base → Add. Features
→ Listening In

Press **OK** to activate/deactivate the function ( = on).

 Press and **hold** (idle status).

Internal listening in

The line is engaged with an external call. Your screen will display information to that effect. You want to listen in to the external call.

 Press and **hold** the talk key.

You are linked into the call. All participants hear a signal tone. During this time, this handset displays the **Conference** message and it is not possible to dial another number from this handset.

Ending listening in

 Press the end call key.

All participants hear a signal tone.

If the **first** internal participant presses the end call key , the handset that has "listened in" remains connected to the external participant.

Changing the name of a handset

The names "INT 1", "INT 2" etc. are assigned automatically at registration. You can change these names. The name must be no more than 10 characters. The changed name is displayed in every handset's list.



Open list of handsets. Your own handset is indicated by <.



Select handset.



Press the display key.



Enter name.



Press the display key.

Changing a handset's internal number

A handset is **automatically** assigned the lowest free number on registration. If all slots are occupied, number 6 is overwritten if this handset is in idle status. You can change the internal number of all registered handsets (1–6).



Open list of handsets. Your own handset is indicated by <.



Open menu.

Edit H/Set No.

Select and press **OK**. The list of handsets is displayed.



The current number flashes. Select a handset.



Enter the new internal number (1–6). The handset's old number is overwritten.



Press the display key to save the input.



Press and **hold** (idle status).

You will hear the error tone (descending tone sequence) if you assign an internal number twice.

- Repeat the procedure with a free number.

Using a handset as a room monitor

If the room monitor is activated, a previously saved destination number is called as soon as a set noise level is reached. You can save an internal or external number in your handset as the destination number.

The room monitor call to an external number stops after around 90 seconds. The room monitor call to an internal number (handset) stops after approx. 3 minutes (depending on the base station). When the room monitor is activated, all keys are locked except the end call key. The handset's speaker is muted.

When the room monitor is activated, incoming calls to the handset are indicated **without a ringer tone** and are only shown on the screen. The display and keypad are not illuminated and advisory tones are also turned off.

If you accept an incoming call, the room monitor mode is suspended for the duration of the call, but the function **remains** activated.

If you deactivate then reactivate the handset, the room monitor mode remains activated.

Warning!

- You should always check the operation of the room monitor before use. For example, test its sensitivity. Check the connection if you are diverting the room monitor to an external number.
- When the function is switched on, the handset's operating time is severely reduced. If necessary, place the handset in the charging cradle. This ensures that the batteries do not run down.
- Ideally the handset should be positioned 1 to 2 metres away from the baby. The microphone must be directed towards the baby.
- The connection to which the room monitor is diverted must not be blocked by an activated answer machine.

Activating the room monitor and entering the number to be called

 →  → Room Monitor

- ▶ Change multiple line input:

Room M.:

Select On to activate.

Call to:

Press the display key **Edit** and enter destination number.

External number: Select number from the directory or enter directly. Only the **last 4 digits** are displayed.

Internal number: **INT** →  (Select handset or Call All if all registered handsets are to be called) → **OK**.

Store number with **Save**.

Level:

Set noise level sensitivity (Low or High).

- ▶ Save the changes.

Changing a set external destination number

 →  → Room Monitor

 Scroll to the Call to: line.

Edit Press the display key.

<C Delete existing number.

- ▶ Enter number as described in "Activating the room monitor and entering the number to be called" (page 45).
- ▶ Save changes (page 59).

Changing a set internal destination number

 →  → Room Monitor

 Scroll to the Call to: line.

Delete Press the display key.

Edit Press the display key.

- ▶ Enter number as described in "Activating the room monitor and entering the number to be called" (page 45).
- ▶ Save the changes.

Deactivating the room monitor remotely

Preconditions: The phone must support touch tone dialling and the room monitor should be set for an external destination number.

- ▶ Accept the call from the room monitor and press keys **9** **#**.

The room monitor function will deactivate after the call ends. There will be no further room monitor calls. The other room monitor settings (e.g. no ringer tone) on the handset will remain activated until you press the display key **OFF** on the handset.

To reactivate the room function with the same phone number:

- ▶ Turn on the activation again and save with **Save** (page 45).

Setting the handset

Your handset is preconfigured, but you can change the settings to suit your individual requirements.

Quick access to functions

The display keys have a function preset by default. You can change the function assigned.

To start the function, you then simply need to press the button.

Changing display key assignments

- ▶ Press and **hold** the left or right display key.

The list of possible key assignments is opened. The following can be selected:

INT

Internal calls (see page 42).

SMS

Assign the menu for SMS functions to a key (see page 25).

Setting the handset

SMS Notific.

Assign key with the menu for activating SMS notification (page 29).

If a function or number has already been assigned to the left display key, the selected function (or its abbreviation) will be displayed in the lowest display line above the display key.

Starting a function

With the handset in idle status, press the display key **briefly**.

The function menu is opened.

Changing the display language

You can view the display texts in different languages.

 →  → Handset → Language

The current language is indicated by .

 Select a language and press **OK**.

 Press and **hold** (idle status).

If you accidentally choose a language you do not understand:

    Press keys in sequence.

 Select the correct language and press **OK**.

Setting the display

You have a choice of four colour schemes and several different contrasts.

 →  → Display

Colour Scheme

Select and press **OK**.

 Select a colour scheme and press **OK** ( = current colour).

 Press **briefly**.

Contrast Select and press **OK**.

 Select contrast.

Save

Press the display key.



Press and **hold** (idle status).

Setting the screen picture

You can display a screen picture (picture or digital clock) when the handset is in idle status. This will replace the idle status display. It may conceal the date, time and name.

The screen picture is not displayed in certain situations, e.g. during a call or when the handset has been deregistered.

If a screen picture has been activated, the menu item **Screen Picture** is marked with .

 →  → Display → Screen Picture

The current setting is displayed.

► Change multiple line input:

Activation:

Select **On** (screen picture is displayed) or **Off** (no screen picture).

Selection:

Change screen picture if necessary (see below).

► Save changes: (page 59).

If the screen picture conceals the display, **briefly** press  to show the idle display with time and date.

Changing the screen picture

 →  → Display → Screen Picture

 Scroll to the Selection line.

View

Press the display key. The active screen picture is displayed



Select screen picture and press **Save**.

► Save changes: (page 59).

Setting the display backlight

Depending on whether or not the handset is in the charging cradle, you can activate or deactivate the backlight. If the base station is turned on, the display is permanently dimmed.

 →  → Display → Backlight

The current setting is displayed.

► Change multiple line input:

In Charger

Select On or Off.

Without Charger

Select On or Off.

Please note:

With the On setting, the standby time of the handset can be significantly reduced.

Save

Press the display key.



Press and **hold** (idle status).

Activating/deactivating auto answer

If you activate this function, when you receive a call you can simply lift the handset out of the charging cradle without having to press the talk key .

 →  → Handset

Auto Answer

Select and press **OK** ( = on).



Press and **hold** (idle status).

Changing the handsfree/earpiece volume

You can set the loudspeaker volume for handsfree talking to five different levels and the earpiece volume to three different levels.

 → Handset Volume



Set the earpiece volume.



Scroll to the **Speaker:** line.



Set the handsfree volume.

Save

Press display key if necessary to save the setting permanently.

Setting the volume during a call:



Press the control key.



Select volume.

Save

Press display key if necessary to save the setting permanently.

The setting will automatically be saved after approx. 3 seconds, if not then press the display key **Save**.

If  is assigned to another function:

Options

Open menu.

Volume

Select and press **OK**.



Configure setting (see above).

Please note:

You can also set the call volume, the ringer tones and the advisory tones via the menu (see page 15).

Changing ringer tones

◆ Volume:

You can choose between five volumes (1–5; e.g. volume 2 = ) and the "crescendo" ring (6; volume increases with each ring = .

◆ Ringer tones:

You can select various ringer tones.

You can set different ringer tones for the following functions:

◆ **Ext. Calls:** for external calls

◆ **Internal Calls:** for internal calls

◆ **All:** the same ringer tone for all functions

Settings for individual functions

Set the volume and melody depending on the type of signalling required.



→ Ringer Settings



Select setting, e.g.
Ext. Calls and press **OK**.



Set volume (1–6).



Scroll to the next line.



Select melody.



Press the display key to save the setting.

Same ringer tone for all functions



→ Ringer Settings → All

► Set volume and ringer tone (see "Settings for individual functions").



Press the display key to confirm the prompt.



Press and **hold** (idle status).

Please note:

You can also set the call volume, the ringer tones and the advisory tones via the menu (see page 15).

Activating/deactivating the ringer tone

You can deactivate the ringer tone on your handset before you answer a call or when the handset is in idle status; the ringer tone can be deactivated permanently or just for the current call. The ringer tone cannot be reactivated while an external call is in progress.

Deactivating the ringer tone permanently



Press and **hold** the star key.

The  icon appears in the display.

Reactivating the ringer tone



Press and **hold** the star key.

Deactivating the ringer tone for the current call



Press the display key.

Activating/deactivating the alert tone

In place of the ringer tone you can activate an alert tone. When you get a call, you will hear a **short tone** ("Beep") instead of the ringer tone.



Press and **hold** the star key and **within 3 seconds**:



Press the display key. A call will now be signalled by **one** short alert tone.  appears in the display.

Activating/deactivating advisory tones

Your handset uses "advisory tones" to tell you about different activities and statuses. The following advisory tones can be activated/deactivated independently of each other:

◆ **Key click**: every key press is confirmed.

◆ **Acknowledge tones**:

- **Confirmation tone** (ascending tone sequence): at the end of an entry/setting and when an SMS or a new entry arrives in the answer machine list or call history
- **Error tone** (descending tone sequence): when you make an incorrect entry
- **Menu end tone**: when scrolling at the end of a menu

◆ **Battery tone**: the batteries need to be charged.



→ Advisory Tones

► Change multiple line input:

Key Tones:

Select On or Off.

Confirm.:

Select On or Off.

Battery:

Select On, Off or In Call. The battery warning tone is only activated/deactivated and only sounds during a call.

► Save changes: (page 59).

You cannot deactivate the confirmation tone for placing the handset in the base station.

Please note:

You can also set the call volume, the ringer tones and the advisory tones via the menu (see page 15).

Setting the alarm clock

Precondition: The date and time have already been set (page 10).

Activating/deactivating the alarm clock and setting the wake-up time



► Change multiple line input:

Activation:

Select On or Off.

Time:

Enter the wake-up time in 4-digit format.

Melody:

Select melody.

Volume:

Set the volume (1–6).

► Save changes: (page 59).

You will see the icon.

A wake-up call with selected ringer tone (page 47) is signalled on the handset. The wake-up call sounds for 60 seconds. is shown in the display. If no key is pressed, the wake-up call is repeated twice at five minute intervals and then turned off.

During a call, the wake-up call is signalled by a short tone.

Deactivating the wake-up call/ repeating after a pause (snooze mode)

Precondition: A wake-up call is sounding.

OFF

Press the display key. The wake-up call is deactivated.

Or

Snooze

Press the display key or any key. The wake-up call is deactivated and then repeated after 5 minutes. After the second repetition the wake-up call is deactivated completely.

Restoring the handset to the factory settings

You can reset any individual settings and changes that you have made. This will not affect entries in the directory, call-by-call list, call history, SMS lists or the handset's registration to the base station.

→ → Handset → Reset Handset

Yes

Press the display key.



Press and **hold** (idle status).

Setting the base station

The base station settings are carried out using a registered Gigaset C47H handset.

Protecting against unauthorised access

Protect the system settings of the base station with a PIN known only to yourself. The system PIN must be entered when, for example, registering/deregistering a handset to/from the base station or when restoring the default settings.

Changing the system PIN

You can change the 4-digit system PIN set on the base station (default setting: 0000) to a 4-digit PIN known only by you.

Gigaset C475: Setting a system PIN facilitates remote operation of the answer machine (page 38).



→ → Base → System PIN



Enter the current system PIN and press **OK**.



Enter new system PIN. For security reasons, the PIN is shown as four stars (****).



Jump to the next line, re-enter new system PIN and press **OK**.



Press and **hold** (idle status).

Resetting the system PIN

If you have forgotten your system PIN you can reset the base station to the original code **0000**:

Disconnect the power cord from the base station. Hold down the registration/paging key on the base station while reconnecting the power cable to the base station. Release the key after a while.

The base has now been reset and the system PIN **0000** set.

Please note:

All handsets are deregistered and must be re-registered.

Changing ringer tones

◆ Volume:

You can choose between five volumes and the "crescendo" ring, see page 47. Select "0" to deactivate the base station ringer tone.

◆ Ringer tones:

You can set a ringer tone melody for external calls, see page 47.



→ → Base → Ringer Settings

For how to adjust the settings, see page 47.

Activating/deactivating music on hold



→ → Base → Music on hold

Press **OK** to activate or deactivate music on hold (= on).

Repeater support

With a repeater you can increase the range and reception strength of your base station. You will need to activate repeater mode. This will terminate any calls that are in progress at the time.

Precondition: A repeater is registered.
Eco mode is disabled.

 →  → Base → Add. Features
→ Repeater Mode

Yes Press the display key.

When repeater mode is active, the menu item is marked with .

Please note:

Repeater support and eco mode (see page 13) cancel each other out, i.e. both functions cannot be used at the same time.

Restoring the base station to the factory settings

When the settings are restored

- ◆ eco mode is disabled,
- ◆ handsets are still registered,
- ◆ the system PIN is not reset.

 →  → Base → Base Reset

 Enter the system PIN and press **OK**.

Yes Press the display key.

Cancel the restoring process by pressing  or the display key **No**.

 Press and **hold** (idle status)

Connecting the base station to PABX

The following settings are only necessary when your PABX requires them; see the PABX user guide.

You cannot send or receive SMS messages on PABXs that do not support Calling Line Identification.

Dialling modes and recall

The current setting is indicated by .

Changing the dialling mode

The following dialling modes can be selected:

- ◆ Touch tone dialling (DTMF)
- ◆ Dial pulsing (DP)

 →  → Base → Add. Features
→ Dialling Mode

 Select dialling mode ( = on) and press **OK**.

 Press and **hold** (idle status).

Setting recall

Your phone is preset at the factory for operation on the main connection. For operation on a PABX, you may have to change this value. Please refer to the user guide for your PABX.

 →  → Base → Add. Features
→ Recall

 Select recall and press **OK** ( = set value). Possible values are:
80 ms, 100 ms, 120 ms,
180 ms, 250 ms, 300 ms,
600 ms, 800 ms.

 Press and **hold** (idle status).

Saving an access code (outside line code)

Precondition: You may have to enter an access code for external calls in your PABX, e.g. "0".

 →  → Base → Add. Features
→ Access Code

 Enter or change access code, max. 3 digits.

► Save changes: (page 59).

If an access code has been saved:

- ◆ The access code is prefixed automatically when you select from the following lists: numbers of the SMS centres, call history or answer machine list.
- ◆ The access code must be entered when dialling manually and when manually entering directory, emergency/quick dial numbers and SMS centre numbers.
- ◆ If you copy the recipient's number from the directory when sending an SMS, you have to delete the access code.
- ◆ An existing access code is deleted using **⏮**.

Setting pauses

Changing pause after line seizure

You can change the length of pause that is inserted between pressing the talk key  and sending the number.



Open menu.



Press keys.



Enter a digit for the length of the pause (1 = 1 sec.; 2 = 3 sec.; 3 = 7 sec.) and press **OK**.

Changing the pause after the recall key

You can change the length of the pause if your PABX requires this (refer to the user guide for your PABX).



Open menu.



Press keys.



Enter a digit for the length of the pause (1 = 800 ms; 2 = 1600 ms; 3 = 3200 ms) and press **OK**.

Changing a dialling pause (pause after access code)

Precondition: You have saved an access code (page 52).



Open menu.



Press keys.



Enter a digit for the length of the pause (1 = 1 sec.; 2 = 2 sec.; 3 = 3 sec.; 4 = 6 sec.) and press **OK**.

To insert a dialling pause: press  for 2 seconds. A P appears in the display.

Switching temporarily to touch tone dialling (DTMF)

If your PABX still operates with dial pulsing (DP), but you need touch tone dialling (DTMF) for a connection (e.g. to listen to the network mailbox) you must switch to touch tone dialling for the call.

Precondition: You are conducting a call or have already dialled an external number.



Press the star key.

After the call is ended, dial pulsing is automatically activated again.

Appendix

Care

- ▶ Wipe the base station, charging cradle and the handset with a **damp** cloth (do not use solvent) or an antistatic cloth.

Never use a dry cloth. This can cause a build up of static.

Contact with liquid

If the handset has come into contact with liquid:

1. **Switch the handset off and remove the batteries immediately.**
2. Allow the liquid to drain from the handset.
3. Pat all parts dry, then place the handset with the battery compartment open and the keypad facing down in a dry, warm place **for at least 72 hours** (**not** in a microwave, oven etc.).
4. **Do not switch on the handset again until it is completely dry.**

When it has fully dried out, you will normally be able to use it again.

Questions and answers

If you have any questions about using your phone, visit us at www.gigaset.com/customercare at any time. The table below contains a list of common problems and possible solutions.

The display is blank.

1. The handset is not turned on.
 - ▶ Press **and hold** the end call key .
2. The battery is flat.
 - ▶ Charge or replace the batteries (page 8).

The keys of a handset do not respond when pressed.

The keypad lock is activated.

- ▶ Press and **hold** the hash key  (page 11).

"Base station x" flashes on the display.

1. The handset is outside the range of the base station.
 - ▶ Move the handset closer to the base station.

The base station's range is reduced because eco mode is activated.

 - ▶ Deactivate eco mode (page 13) or reduce the distance between the handset and the base station.
2. The handset has been deregistered.
 - ▶ Register the handset (page 41).
3. The base station is not turned on.
 - ▶ Check the base station's mains adapter (page 8).

Base Search flashes in the display.

No base station turned on or in range.

- ▶ Move the handset closer to the base station.
- ▶ Check the base station's mains adapter (page 8).

Handset does not ring.

The ringer tone is switched off.

- ▶ Activate the ringer tone (page 48).

You cannot hear a ringer/dialling tone from the fixed network.

The phone cord supplied has not been used or has been replaced by a new cord with the wrong jack connections.

- ▶ Please always use the phone cord supplied or ensure that the jack connections are correct when purchasing from a retailer (page 8).

Error tone sounds after system PIN prompt.

You have entered the wrong system PIN.

- ▶ Reset the system PIN to 0000 (page 50).

Forgetting the system PIN.

- ▶ Reset the system PIN to 0000 (page 50).

Call charges are not displayed.

1. Your network provider does not support this feature.
2. There are no metering pulses.
 - ▶ Ask your network provider to transmit the metering pulses.

The other party cannot hear you.

You have pressed the  (INT) key. The handset is "muted".

- ▶ Activate the microphone again (page 17).

The number of the caller is not displayed despite CLIP.

Calling Line Identification is not enabled.

- ▶ **The caller** should ask the network provider to release Calling Line Identification (CLI).

You hear an error tone when keying an input (a descending tone sequence).

Action has failed/invalid input.

- ▶ Repeat the operation.
Watch the display and refer to the user guide if necessary.

You cannot listen to messages on the network mailbox.

Your phone system is set for dial pulsing.

- ▶ Set your phone system to touch tone dialling.

Gigaset C475 only:**No time is specified for a message in the call history.**

Date/time is not set.

- ▶ Set the date/time.

The answer machine reports "PIN is incorrect" to the remote control.

1. You have entered the wrong PIN.
 - ▶ Enter the system PIN again.
2. The system PIN is still set to 0000.
 - ▶ Change the system PIN (page 50).

The answer machine is not recording any messages/has switched over to announcement.

Its memory is full.

- ▶ Delete old messages.
- ▶ Play back new messages and delete.

Service (Customer Care)

You can get assistance easily when you have technical questions or questions about how to use your device by using our online support service on the Internet at:

www.gigaset.com/customer-care

This site can be accessed at any time wherever you are. It will give you 24/7 support for all our products. It also provides a list of FAQs and answers plus user guides for you to download. You will also find frequently asked questions and answers in the **Questions and Answers** section of this user guide in the appendix.

If the device needs to be repaired, please contact one of our Customer Care Centers:

Abu Dhabi	97 12 62 23 800	Kuwait	00965-2464993
Argentina	0800-888-9878	Latvia	7 50 11 18
Australia	1300 780 878	Lebanon	00961-1236110
Austria .05 17 07 50 04 (0,065 Euro/Min.)		Luxembourg	40 66 61 56 40
Bahrain	97 31 73 11 173	Malaysia	603 77124304
Belgium	0 78 15 66 79	Malta	+353 21 4940 632
Bosnia Herzegovina	033 276 649	Mexico .01800 999 4442738 (01800 999	
Brazil		Gigaset)	
Grande Capitais e Regiões Metropolitanas:		Netherlands	
Demais localidades:	(11) 4003 3020		0900-3333102 (0,25 Euro/min.)
.	0800 888 3020	New Zealand	0800 780 878
Bulgaria	02 873 94 88	Norway	22 70 84 00
Canada	866 247 8758	Oman	96 82 47 09 281
China	0 21 400 670 6007 (RMB 0.11)	Poland	0 801 140 160
Croatia	01 / 2456 555 (0,23 Kn)	Portugal	(351) 808 781 223
Czech Republic	233 032 727	Romania	+4.021.529.7114.
Denmark	35 25 86 00	Russia	8 (495) 228 1312
Dubai	97 14 39 69 944	Serbia	0800 222 111
Egypt	202 7623441	Singapore	6735 9100
Finland	09 23 11 34 25	Slovak Republic	
France	01 56 38 42 00 (Appel national)		02 59 68 22 66 (4,428 sk)
Germany	01805 333 222	Slovenija	0 14 74 63 36
(0,14 Euro/Min. aus dem Festnetz der Deutschen Telekom.		South Africa	08 60 10 11 57
Für Anrufe aus den Mobilfunknetzen können		Spain	902 103935
abweichende Preise gelten)		Sweden	08 750 99 11
Greece	801 1000 500 (0,026 Euro)	Switzerland	
Hong Kong	2763 0203		0848 212 000 (0,08 SFr./Min.)
.	2389 7285	Taiwan	02 266 24343
Hungary	06 14 71 24 44 (27 Ft)	Thailand	02 722 1118
India	Please refer to your	Turkey	0216 459 98 59
.	local warranty card	Ukraine	+380-44-451-71-72
Ireland	18 50 77 72 77	United Arab Emirates	0 43 66 03 86
Israel	1 700 700 727	United Kingdom	0 84 53 67 08 12
Italy	199.15.11.15	USA	1-866 247-8758
Jordan	00962 6 5625460/1/2		(toll free)
		Vietnam	1900 545 416

Please have your record of purchase ready when calling.

Replacement or repair services are not offered in countries where our product is not sold by authorised dealers.

Authorisation

This device is intended for connection to analogue networks outside the EEA (with the exception of Switzerland) depending on national type approval.

Country-specific requirements have been taken into consideration.

We, Gigaset Communications GmbH, declare that this device meets the essential requirements and other relevant regulations laid down in Directive 1999/5/CE.

A copy of the 1999/5/EC Declaration of Conformity is available at this Internet address:

www.gigaset.com/docs.

CE 0682

Specifications

Recommended batteries

Technology:

Nickel-metal-hydride (NiMH)

Size: AAA (Micro, HR03)

Voltage: 1.2 V

Capacity: 600–1200 mAh

We recommend the following battery types, because these are the only ones that guarantee the specified operating times, full functionality and long service life:

- ◆ Sanyo Twicell 650
- ◆ Sanyo Twicell 700
- ◆ Panasonic 700 mAh "for DECT"
- ◆ GP 700mAh
- ◆ Yuasa AAA Phone 700
- ◆ Varta Phone Power AAA 700mAh
- ◆ GP 850 mAh
- ◆ Sanyo NiMH 800
- ◆ Yuasa AAA 800

The device is supplied with two recommended batteries.

Handset operating times/charging times

The operating time of your Gigaset depends on the capacity and age of the batteries and the way they are used. (All times are maximum possible times and apply when the display backlight is switched off.)

	Capacity (mAh) approx.			
	500	700	900	1100
Standby time (hours)	180	300	320	395
Talktime (hours)	9	12	16	19
Operating time for 1.5 hrs of calls per day (hours)	80	115	150	180
Charging time, base station (hours)	4	5	7	8
Charging time, charging cradle (hours)	5	7	9	11

At the time of going to print, batteries up to 900 mAh were available and had been tested in the system. Due to the constant progression in battery development, the list of recommended batteries in the FAQ section of the Gigaset Customer Care pages is regularly updated:

www.gigaset.com/customer-care

Base station power consumption

In standby mode:

Gigaset C470: approx. 1.2 watt

Gigaset C475: approx. 1.6 watt

During a call:

Gigaset C470: approx. 1 watt

Gigaset C475: approx. 1.5 watt

General specifications

DECT standard	is supported
GAP standard	is supported
No. of channels	60 duplex channels
Radio frequency range	1880–1900 MHz
Duplex method	Time multiplex, 10 ms frame length
Channel grid	1728 kHz
Bit rate	1152 kbit/s
Modulation	GFSK
Language code	32 kbit/s
Transmission power	10 mW, average power per channel
Range	up to 300 m outdoors, up to 50 m indoors
Base station power supply	230 V ~/50 Hz
Environmental conditions in operation	+5 °C to +45 °C; 20% to 75% humidity
Dialling mode	DTMF (touch tone dialling)/DP (dial pulsing)

Notes on the user guide

This section explains the meaning of certain typographical conventions that are used in this user guide.

Example of a menu input

The steps you need to perform are shown in abbreviated form in the user guide. This is illustrated below using the example of "Setting the contrast for the display". The things you have to do are explained in the boxes.

 →  → Display

- ▶ With the handset in idle status, press on the **right** of the control key () to open the main menu.
- ▶ Select the line **Settings** using the control key ()
- ▶ Press  or press the display key **OK** to confirm the **Settings** function.

The **Settings** submenu is displayed.

- ▶ Press on the bottom of control key () repeatedly until the **Display** menu function is selected.
- ▶ Press  or press the display key **OK** to confirm the selection.

Contrast Select and press **OK**.

- ▶ Press on the bottom of control key () repeatedly until the **Contrast** menu function is selected.
- ▶ Press  or press the display key **OK** to confirm the selection.



Select contrast and press the display key **Save**.

- ▶ Press on the right or left of the control key to set the contrast.
- ▶ Press the display key **Save** to confirm the selection.



Press and **hold** (idle status).

- ▶ Press and hold the end call key until the handset returns to idle status.

Example of multiple line input

In many situations you can change settings or enter data in several lines of a display.

In this user guide icons are used to guide you step by step through multiple line input. This is illustrated below using the example of "Setting the date and time". The things you have to do are explained in the boxes.

You will see the following display (example):

Date/Time

Date:
[15.11.07]

Time:
11:11

↩
Save

Date:

Enter day, month and year in 6-digit format.

The second line is marked with [] to show it is active.

► Enter the date using the digit keys.

Time:

Enter hours/minutes in 4-digit format.

► Press the  key.

The fourth line is marked with [] to show it is active.

► Enter the date using the digit keys.

► Save the changes.

► Press the display key **Save**.

► Then press and **hold** the  key.

The handset switches to idle status.

Writing and editing text

The following rules apply when writing text:

- ◆ Control the cursor with    .
- ◆ Characters are inserted on the left of the cursor.
- ◆ Press the star key  to show the table of special characters. Select the required character, press the display key **Insert** to insert the character at the cursor position.
- ◆ The first letter of the name of directory entries is automatically capitalised, followed by lower case letters.

Writing an SMS/names

Press the relevant key several times to enter letters/characters.

Standard characters

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x
				1						
	a	b	c	2	ä	á	à	â	ã	ç
	d	e	f	3	ë	é	è	ê		
	g	h	i	4	ï	í	ì	î		
	j	k	l	5						
	m	n	o	6	ö	ñ	ó	ò	ô	õ
	p	q	r	s	7	ß				
	t	u	v	8	ü	ú	ù	û		
	w	x	y	z	9	ÿ	ý	æ	ø	å
	.	,	?	!	0					

1) Space

2) Line break

Arabic

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x	11x	12x
1 			1									
2 	ث	ج	ح	خ	2	a	b	c				
3 	ا	ب	ة	ت	أ	إ	آ	3	d	e	f	
4 	ط	ظ	ع	غ	4	g	h	i				
5 	س	ش	ص	ض	5	j	k	l				
6 	د	ذ	ر	ز	6	m	n	o				
7 	ي	ى	ء	ئ	7	p	q	r	s			
8 	م	ن	ه	و	ق	8	t	u	v			
9 	ف	ق	ك	ل	9	w	x	y	z			
0 + 	.	,	?	!	0							

1)Space

2)Line break

When you press and **hold** a key, the characters of that key appear in the display and are highlighted one after the other. When you release the key, the highlighted character is inserted into the input field.

Setting upper/lower case or digits

Press the hash key  **briefly** to switch from "Abc" mode to "123" and from "123" to "abc" and from "abc" to "Abc" (upper case: 1st letter upper case, all others lower case). Press the hash key  **before** entering the letter.

You can see briefly in the display whether upper case, lower case or digits is selected.

Accessories

Gigaset Handsets

Upgrade your Gigaset to a cordless PABX:

Gigaset C47H handset

- ◆ Illuminated graphical colour display (65k colours)
- ◆ Illuminated keypad
- ◆ Handsfree talking
- ◆ Polyphonic ringer tones
- ◆ Directory for around 150 entries
- ◆ SMS (precondition: CLIP must be enabled)
- ◆ Headset socket
- ◆ Room monitor

www.gigaset.com/gigasetC47H



Gigaset S67H handset

- ◆ Illuminated graphical colour display (65k colours)
- ◆ Illuminated keypad
- ◆ Handsfree talking
- ◆ Polyphonic ringer tones
- ◆ Directory for around 250 entries
- ◆ Picture CLIP
- ◆ SMS (precondition: CLIP must be enabled)
- ◆ Headset socket
- ◆ Room monitor

www.gigaset.com/gigasetS67H



Gigaset Handset SL37H

- ◆ Illuminated graphical colour display (65k colours)
- ◆ Illuminated keypad
- ◆ Handsfree talking
- ◆ Polyphonic ringer tones
- ◆ Directory for around 250 entries
- ◆ Picture CLIP
- ◆ SMS (precondition: CLIP must be enabled)
- ◆ PC interface. e.g. for managing directory entries, ringer tones and screensavers
- ◆ Headset socket
- ◆ Bluetooth
- ◆ Room monitor
- ◆ Walky-talky function

www.gigaset.com/gigasetSL37H



Gigaset Handset SL56

- ◆ Illuminated graphical colour display (65k colours)
- ◆ Illuminated keypad
- ◆ Handsfree talking
- ◆ Polyphonic ringer tones
- ◆ Directory for around 250 entries
- ◆ Picture CLIP
- ◆ SMS (precondition: CLIP must be enabled)
- ◆ Voice dialling
- ◆ PC interface. e.g. for managing directory entries, ringer tones and screensavers
- ◆ Headset socket
- ◆ Bluetooth

www.gigaset.com/gigasetSL56



Gigaset Handset S45

- ◆ Illuminated colour display (4096 colours)
- ◆ Illuminated keypad
- ◆ Handsfree talking
- ◆ Polyphonic ringer tones
- ◆ Directory for around 150 entries
- ◆ SMS (precondition: CLIP must be enabled)
- ◆ Headset socket
- ◆ Room monitor

www.gigaset.com/gigaset45



Gigaset Handset E45

- ◆ Dust and splashproof casing
- ◆ Illuminated colour display (4096 colours)
- ◆ Illuminated keypad
- ◆ Handsfree talking
- ◆ Polyphonic ringer tones
- ◆ Directory for around 150 entries
- ◆ SMS (precondition: CLIP must be enabled)
- ◆ Headset socket
- ◆ Room monitor

www.gigaset.com/gigasete45



Gigaset repeater

The Gigaset repeater can be used to increase the reception range of your Gigaset handset to the base station.

www.gigaset.com/gigasetrepeater



Gigaset HC450 – door intercom for cordless phones

- ◆ Use the intercom from your cordless phone – no need for a fixed home phone
- ◆ Intuitive user functions using the softkeys (open door, switch on entry light)
- ◆ Simple to configure using the handset menu
- ◆ Divert to outside phone numbers (intercom feature)
- ◆ Simple to install and register with the Gigaset system
- ◆ Replaces existing call button – no further cable is needed
- ◆ Supports the existing doorbell and standard door opener
- ◆ Configuration options for the second ringer key (separate intercom call, activating interior lighting, or function such as first ringer key)



www.gigaset.com/GigasetHC450

All accessories and batteries are available from your phone retailer.




Only use original accessories. This will avoid possible health risks and damage to property, and also ensure that all the relevant regulations are complied with.

Wall-mounting the base station

C470: 41.1 mm
C475: 42.0 mm



C470: approx. 2.5 mm



Index

A

- Access code 52
 - for a PABX 52
- Access protection 50
- Accessories 61
- Acknowledge tones 48
- Activating
 - advisory tones 48
 - answer machine 33
 - answer machine
 - (remote operation). 39
 - call acceptance 47
 - handset 11
 - internal listening in 43
 - keypad lock 11
 - muting ringer tone 31
 - room monitor 45
 - two-way recording 36
- Advisory tones 48
- Alarm clock 49
- Alert tone 48
- Announcement
 - (answer machine) 34
- Announcement mode
 - (answer machine) 33, 34
- Answer machine 33
 - activating/deactivating 33
 - deleting messages 35
 - playing back messages 35
 - recording a personal announcement/
 - announce only 33
 - remote operation 38
 - scrolling back 35
 - scrolling forward. 35
- Answer machine list. 21, 23
- Answer machine, see also
 - Network mailbox
- Assigning a key 45
- Assigning numerical keys 45
- Authorisation. 57
- Automatic
 - call acceptance 16, 47
 - network provider preselection 23

B

- Base station
 - connecting 8
 - connecting and installing 7
 - connecting to PABX 52
 - range 7
 - restoring to factory settings 51
 - setting 50
 - system PIN 50
- Battery
 - charging 1, 10
 - display 1, 10
 - fitting 8
 - icon 1, 10
 - recommended batteries 57
 - tone 48

C

- Call
 - accepting 16
 - ending 16
 - external. 16
 - internal. 42
 - party listening in 43
 - picking up from answer machine . . 36
 - transferring (connect) 42, 44
 - two-way recording 36
- Call acceptance. 37, 47
- Call duration. 16
- Call history 22
- Call screening during recording 36
- Call waiting
 - internal call 43
- Call-by-call key 1
- Call-by-call list. 19
- Call-by-call numbers 19, 23
- Calling
 - external. 16
- Calling Line Identification 16
- Care of the telephone 54
- Changing
 - destination number 45
 - dialling mode 52
 - display language 46
 - earpiece volume 47
 - handsfree volume 47
 - internal number of a handset 44
 - name of a handset. 44
 - pause time 53
 - ringer tone 47

system PIN	50
Changing the system PIN	50
Character set	27, 29
Charge saving function (remote operation).	37
Charge status display	1
CLI, CLIP	16
CLIP picture	16
CNIP	16
Conference (internal).	43
Configuring the network mailbox	40
Confirmation tone	48
Connecting, base station to PABX	52
Consultation call (internal).	43
Control key	1, 11
Correcting incorrect entries	12
Customer Care.	56

D

Deactivating	
advisory tones	48
answer machine	33
call acceptance	47
handset	11
internal listening in.	43
keypad lock	11
muting ringer tone	31
preselection	24
room monitor	45
two-way recording	36
Delete key	11
Deleting	
announcement for answer machine	34
characters	12
message.	35
Deregistering (handset)	42
Destination number (room monitor).	45
Dial pulsing	52
Dialling	
call-by-call list.	19
directory	19
with quick dial	20
Dialling mode	52
Dialling pause	53
entering	1
Directory	19
copying number from text.	20
managing entries	20
opening	11

order of entries	19
saving entry	19
saving the sender's number (SMS)	28
sending entry/list to handset	20
using to enter numbers	21
Display	
backlight.	47
changing display language.	46
contrast.	46
in idle status	12
memory (directory/call-by-call).	20
name (CNIP)	16
network mailbox report	40
number (CLI/CLIP)	16
screen picture	46
setting	46
wrong language	46
Display keys	1, 11
assigning.	45
DP (dial pulsing)	52
Draft message list (SMS)	26

E

Earpiece mode	17
Earpiece volume	47
ECO DECT	13
Eco mode	13
E-mail address.	27
End call key.	1, 16
Ending, call.	16
Ending, see deactivate	
Entry	
saving, changing (preselection)	24
selecting (menu)	58
selecting from directory	19
Error tone.	48
Example	
menu input	58
multiple line input	59
External call	
diverting to answer machine	36
F	
Fast access	
answer machine	37
network mailbox	40
Fax (SMS)	27

G

Group call 42

H**Handset**

- activating/deactivating 11
- advisory tones 48
- changing internal number 44
- changing name 44
- changing the number 44
- contact with liquid 54
- deregistering 41, 42
- display backlight 47
- display language 46
- earpiece volume 47
- handsfree volume 47
- idle status 12
- list 11
- locating 42
- muting 17
- paging 42
- registering 41
- restoring to factory settings 49
- screen picture 46
- setting 45
- setting up 8
- signal strength 7
- transferring a call 42
- using room monitor 44
- using several 41

Handset operating time

- in room monitor mode 44

Handsfree key 1

Handsfree talking 17

Hash key 1, 11

Headset socket 9

Hearing aids 5

Hold music 17, 50

- setting 50

I**Icon**

- alarm clock 49
- answer machine 33
- battery 10
- display 11
- for new messages 21
- keypad lock 11
- new message 35
- new SMS 27
- ringer tone 48

Idle status (display) 12

Idle status, returning to 12

Incoming message list (SMS) 27

Incorrect input (correction) 12

Installing, base station 7

Internal

- conference 43

- consulting 43

- listening in 43

- making calls 42

Internal call 42

- call waiting 43

K

Key 1 (fast access) 1, 37

Keypad lock 11

Keys

- assigning directory entry 19

- call-by-call list 1

- control key 1, 11

- delete key 11

- display keys 1, 11

- end call key 1, 16

- fast access 1, 37

- handsfree key 1

- hash key 1, 11

- message key 1

- on/off key 1

- quick dial 19, 20

- recall key 1

- star key 1

- talk key 1, 16

L

Language, display 46

Last number redial 21

Linking, see SMS

Liquid 54

List

- answer machine 21, 23

- call history 22

- call-by-call list 19

- handsets 11

- missed calls 22

- network mailbox 22

- SMS draft message list 26

- SMS incoming message list 27

- SMS list 22

Listening in to call 43

Locating, handset 42

- Lock
 - activating/deactivating keypad protection 11
- M**
- Mailbox ID, see SMS
- Mailboxes, see SMS
- Mains adapter 5
- Making calls
 - accepting a call 16
 - external 16
 - internal 42
- Making cost-effective calls 23
- Manual last number redial 21
- Medical appliances. 5
- Memory
 - directory/call-by-call 20
- Menu
 - end tone 48
 - menu guidance 12
 - menu input 58
 - opening 11
 - overview 14
- Message key
 - open list 27
 - opening lists. 21
- Messages 33
 - deleting 35
 - key. 1
 - marking as "new" 35
 - new message icon 35
 - playing back 35
- Microphone. 1
- Missed calls 22
- Multiple line input 59
- Muting
 - first ring 31
 - handset 17
- N**
- Name
 - displaying caller's name (CNIP) 16
 - of a handset 44
- Network provider (numbers list) 19
- Network provider preselection,
 - automatic 23
- Network services 18
- Notification by SMS 29
- Number
 - as destination for room monitor 45
 - copying from an SMS text 28
 - copying from directory. 21
 - copying to directory. 20
 - displaying caller's number (CLIP). . . . 16
 - entering with directory. 21
 - saving in the directory 19
- Numbers list
 - network provider 19
- O**
- On/Off key 1
- Order in directory 19
- P**
- PABX
 - connecting base station 52
 - pauses 53
 - saving access code. 52
 - setting dialling mode 52
 - setting recall 52
 - SMS 31
 - switch to touch tone dialling 53
- Pack contents 7
- Paging 42
- Pause 53
- Phone jack assignment 8
- PIN change
 - system PIN 50
- Playing back
 - announcement (answer machine) 34
 - message (answer machine) 35
- Power consumption 57
- Preselection 23
 - deactivating 24
- Protecting the phone against access. . . 50
- Q**
- Questions and answers 54
- Quick dial 19
- R**
- Range. 7
- Recall 52
- Recall key 1
 - pause after 53
- Reception booster, see Repeater
- Recording
 - quality. 37
 - time 37
 - two-way recording. 36

Index

Registering (handset)	41
Remote control	38
Repeater	51
Ringer tone	
changing	47
muting	31
setting melody	50
setting volume	47, 50
Room monitor	44

S

Saving (access code)	52
Screen picture	46
Searching in directory	19
Sending	
directory entry to handset	20
Sensitivity (room monitor)	45
Service	56
Setting	
date	10
melody	50
time	10
Setting up	
handset	8
Shortcut	14
Signal strength	7
Signal tone, see Advisory tones	

SMS	25
active send service centre	25
changing mailbox	30
deleting	26
draft message list	26
forwarding	28
incoming message list	27
linked	25
mailbox ID	29
mailboxes	29
notification by SMS	29
notification number	29
notification type	29
PIN protection	30
reading	26
receiving	27
registration assistant	25
replying to and forwarding	28
rules	25
saving number	28
self help with error messages	32
sending as a fax	27
sending to a personal mailbox	30

sending to an e-mail address	27
status report	26
to a PABX	31
troubleshooting	32
writing	25, 59

SMS centre	
changing number	30
setting	30
SMS list	22
Snooze mode	49
Sound, see Ringer tone	
Special functions	52
Specifications	57
Star key	1
System settings	50

T

Talk key	1, 16
Text message, see SMS	
Touch tone dialling	52, 53
Troubleshooting	54
Troubleshooting (SMS)	32

U

Unknown	17
Unknown caller	17

V

Viewing the network mailbox report	40
VIP (directory entry)	20
Volume	
earpiece volume	47
handset handsfree volume	47
ringer tone	47, 50
setting	48

W

Warning tone, see Advisory tones	
Writing (SMS)	25
Writing, editing text	59