rocstor®

Features

Upstream:

USB Type-C Male (Connect to host computer)
• Supports DP1.2 Alt mode
Note: To get max bandwidth, the host computer should support DP1.2 Alt mode.

Downstream:

HDMI
• Supports max 4K@30Hz
• Supports 8/10 bit color depth output
• Supports output pixel format RGB/YCbCr4:4:4/YCbCr4:2:2

USB-A X2
• Max 5Gbps data transmission per port
• USB 3.0 (Port1) Supports max 7.5W (5V/1.5A ⚡) downstream charging port.
• USB 3.0 (Port2) supports max 900mA downstream charging.
• 2 USB-A share max 1.8A output
• Supports short-circuit, over-current, over-voltage protection.

SD/Micro SD 3.0
• Supports UHS-I up to 104MBps data rate.
• Allow 2 card slots to work simultaneously.

Type-C (for PD Charging)
• Supports max 100W PD charging
• Supports PD3.0 Fast Role Swap, the connected device will not get disconnected while plugging in and out the Power Delivery (PD) Adapter
• 15W is dedicated to the functioning of this product, the rest power (max 85W) will be passed to charge for the host computer.

VGA X1
• Supports max 1080P@60Hz output
• Supports to output 2 video under SST mode with dual 1080P@60Hz
Note: The max resolution of the display determined by the computer and the monitor.

RJ45 x1
• Supports Gigabit Ethernet,10M/100M/1000M
• Supports Wake-On-LAN
• Supports full duplex flow control
• Light indicator indicates the RJ45 port state. No light when no Internet is connected. Orange light turns on when network connection is established. Green light flashes when transmitting data.

3.5mm Audio x1
• Supports phone out with digital audio max 96KHz/24bit sampling rate.
• Supports Mic in with digital audio max 96KHz/24bit sampling rate.
• DAC SNR MAX 95 dB
• Supports CTIA&OMTP auto detection
• Supports voice adjustment function when connected to headset.

User Manual

USB-C Multiport HUB Adapter - 9 Port

Y01H01-AG

Congratulation

Thank you for purchasing the Rocstor USB-C Multi port 9-in-1 HUB Adapter. For best results and safety, please read these instructions before connecting, operating or using this product. Please keep this manual for future needs.

Introduction

The Rocstor USB-C 9-in-1 multi port adapter which provides the most advanced efficient solution in extending a single Type-C port to a multiple device connection. It integrates advance video, data and power ports and allows users to connect (2) displays simultaneously. Enjoy your videos on big screen, connect multiple USB devices for data transmission, and use the Ethernet port to connect your device to super high-speed network. Enjoy music and high-quality sound when connecting to Audio port and charge your laptop device when utilizing the Power Delivery (PD) charge port that supports maximum of 100W charging. This adapter works on all Type-C and Thunderbolt™ 3 host computer that supports DP Alt mode.

Package Contents

• 1 x USB-C (9 in 1) Port HUB
• User Manual

System Requirement

Laptop with an available USB-C Port

- Windows 7 / 8 / 10
- Android OS
- Chrome OS
- Linux OS
- Mac OS v10.5 or above
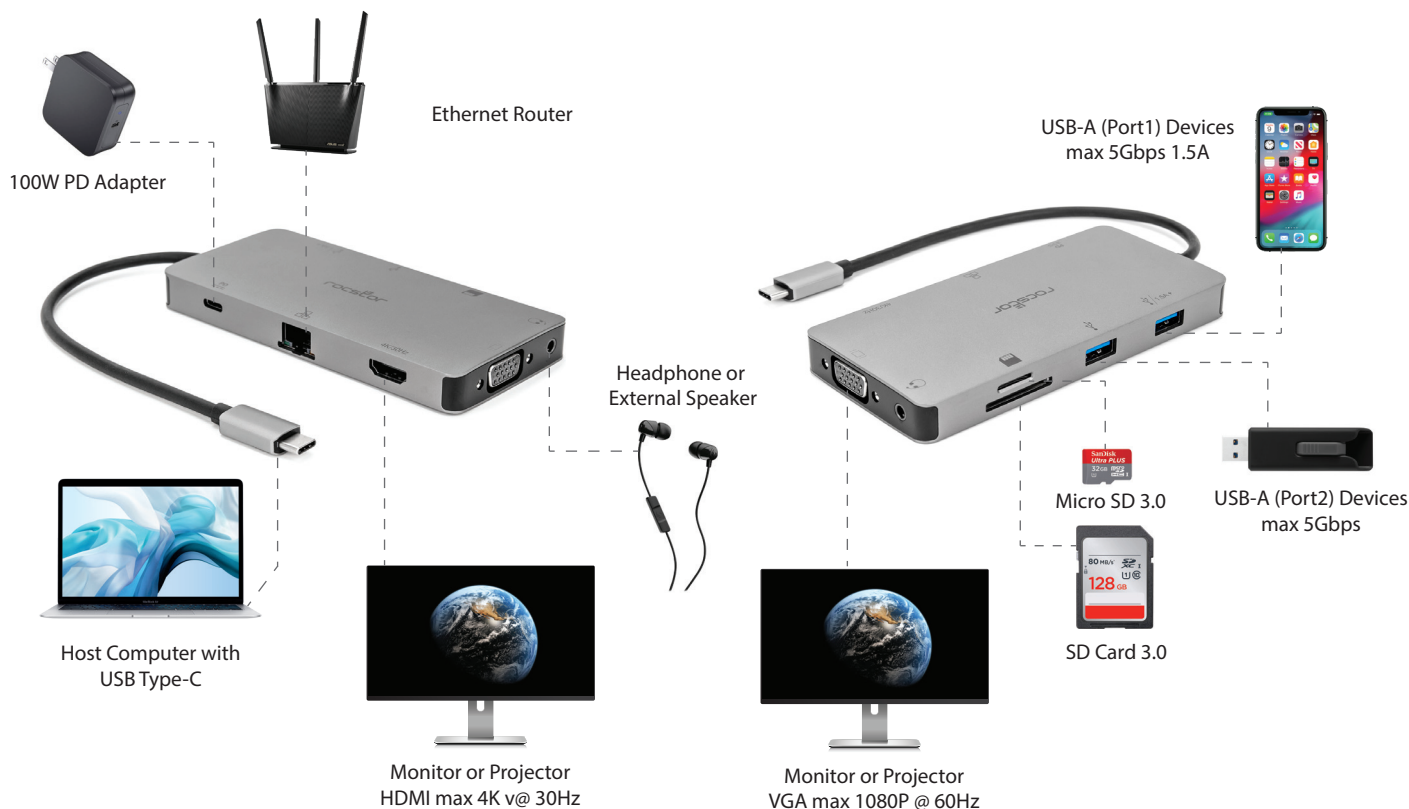
Operating systems, USB 3.0/3.1

How to Use

Plug the USB-C male connector of the Hub into the USB-C port on your USB-C laptop. To charge a USB device, connet the USB device to the USB 3.0 (Type-A).

Specification

Input / Output Connector	
Input	Type-C Male x1
Output	HDMI x1
	VGA x1
	USB-A Female x2
	RJ45 x1
	SD/Micro SD 3.0 x1
	3.5mm Audio x1
	Type-C Female x 1
Warranty	
Limited Warranty	1 Year
Environmental	
Operating Temperature	0℃ to + 45℃
Operating Humidity	10% to 90 % RH (no condensation)
Storage Temperature	-10℃ to + 70℃
Storage Humidity	10% to 90 % RH (no condensation)
Regulatory Approvals	
Certifications	FCC, CE
Accessory	User Manual

100W PD Adapter

Ethernet Router

USB-A (Port1) Devices
max 5Gbps 1.5A

Host Computer with
USB Type-C

Headphone or
External Speaker

Monitor or Projector
HDMI max 4K v@ 30Hz

Monitor or Projector
VGA max 1080P @ 60Hz

Micro SD 3.0

USB-A (Port2) Devices
max 5Gbps

SD Card 3.0

Support

Technical support is available to all the registered users of Rocstor products.

⚠ Safety Information:

WARNING: Please follow these safety instructions. Failure to do so may result damages or injury.
It is normal that the Rocstor 9-in-1 Multi-port Hub adapter becomes very warm during use.
Please note that:
continuous contact with warm surfaces for extended time may cause discomfort or injury. In order to reduce the possibility of overheating or heat-related injuries, always allow needed ventilation around the Rocstor 9-in-1 Multi-port Hub adapter and use care when handling it. Avoid instances where your skin is in extended contact with the hub when plugged into the host computer. It is not recommended to sleep with the adapter when plugged into a host computer. Avoid placing the hub adapter under a pillow, blanket, or your body when connected to a host computer. If you have a medical condition that affects your ability to detect heat against the body, extra care should be used. Never use the adapter in locations with water, such as a sink, bathtub, or shower stall. Never connect or disconnect the adapter with wet hands.

8 10606 03526 5

Warranty Information

CE FC ☒ ♲