

Contents

The Quick Guide is not intended as a substitute for your *Owner's Manual*. We strongly encourage you to review the *Owner's Manual* and supplementary manuals so you will have a better understanding of your vehicle's capabilities and limitations.

Overview

Topic 1

Entering and Exiting

- Keys ▶ P.7
- Smart Access System with Push-button Start ▶ P.8
- Theft Deterrent System ▶ P.9



Topic 2

Before Driving

- Seats ▶ P.11
- Outside Rear View Mirrors ▶ P.12
- Steering Wheel ▶ P.12
- Driving and Seat Position Memory System ▶ P.13
- Head Restraints ▶ P.14
- Seat Belts ▶ P.14
- Anti-glare Inside Rear View Mirror ▶ P.15

Topic 3

When Driving

- Engine (Ignition) Switch ▶ P.17
- Automatic Transmission ▶ P.18
- F-Sport Mode Total Control Switch ▶ P.21
- Parking Brake ▶ P.22
- Turn Signal Lever ▶ P.22
- Multi-information Display ▶ P.23
- Satellite Switches ▶ P.24
- Emergency Flasher Switch ▶ P.25



- Intuitive Parking Assist ▶ P.25
- Cruise Control ▶ P.26
- Dynamic Radar Cruise Control ▶ P.27



Topic 4

Rain and Night Driving

- Headlights ▶ P.29
- Headlight Cleaner ▶ P.29
- Fog Lights ▶ P.30
- Windshield Wipers and Washer ▶ P.30
- Rear Window and Outside Rear View Mirror Defoggers ▶ P.31
- Instrument Panel Light Control ▶ P.31

Topic 5

Driving Comfort

- Audio System ▶ P.33
- Air Conditioning System ▶ P.36
- Garage Door Opener ▶ P.37
- Ashtrays ▶ P.38
- Seat Heaters/Seat Heaters and Ventilators ▶ P.39
- Console Boxes ▶ P.39
- Glove Box ▶ P.40
- Cup Holders ▶ P.40



- Interior Lights ▶ P.41
- Compass ▶ P.41
- Trunk Storage Extension ▶ P.42
- Luggage Mat ▶ P.43



Topic 6

Opening and Closing

- Door Locks ▶ P.45
- Power Windows ▶ P.46
- Moon Roof ▶ P.46
- Fuel Tank Cap ▶ P.47
- Hood ▶ P.47
- Trunk ▶ P.48

What to do if...

Responding to warning/indicator lights and other problems that may arise.


Customizing Your Lexus


A list of features that can be customized.

Depending on specifications, the vehicle shown in the illustration may differ from your vehicle in terms of color and equipment.

Overview

Instrument Panel

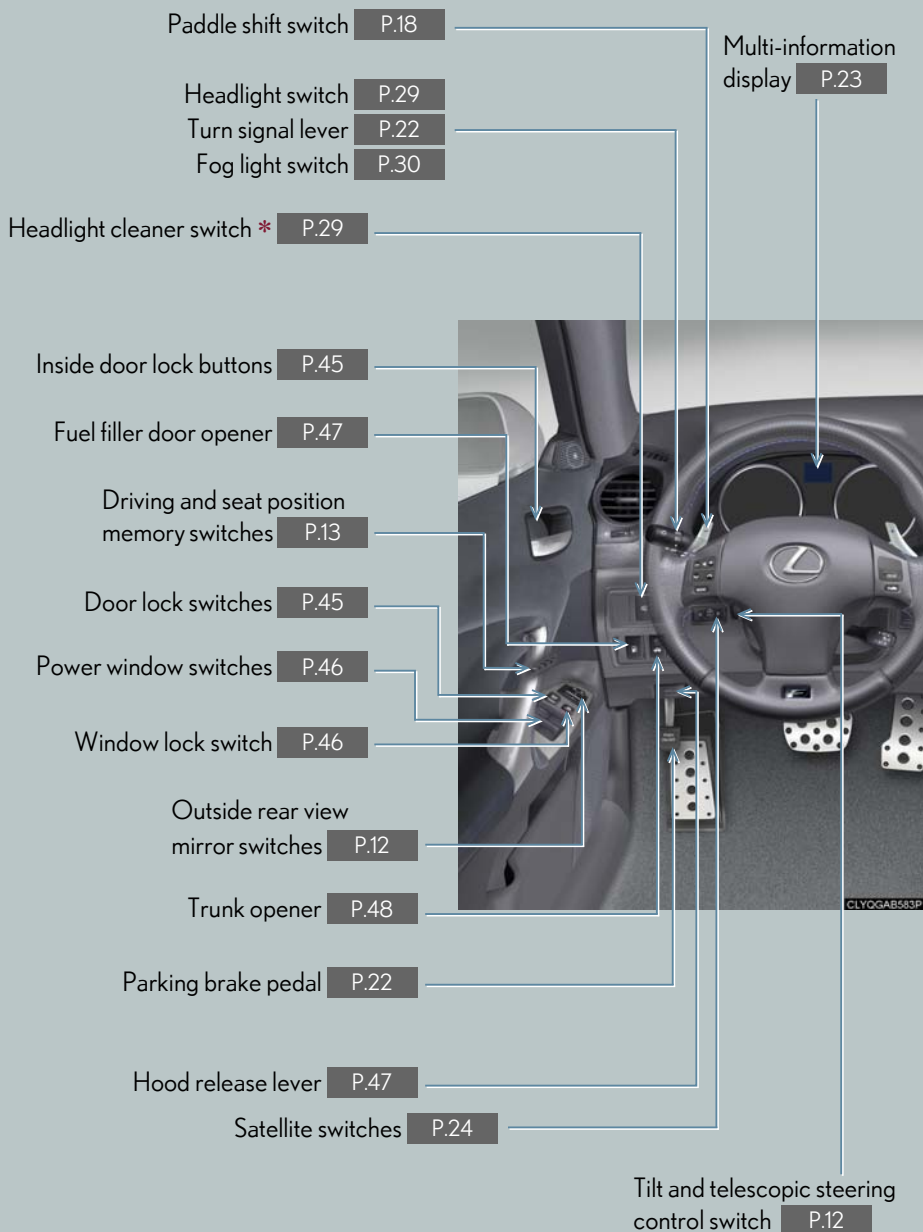

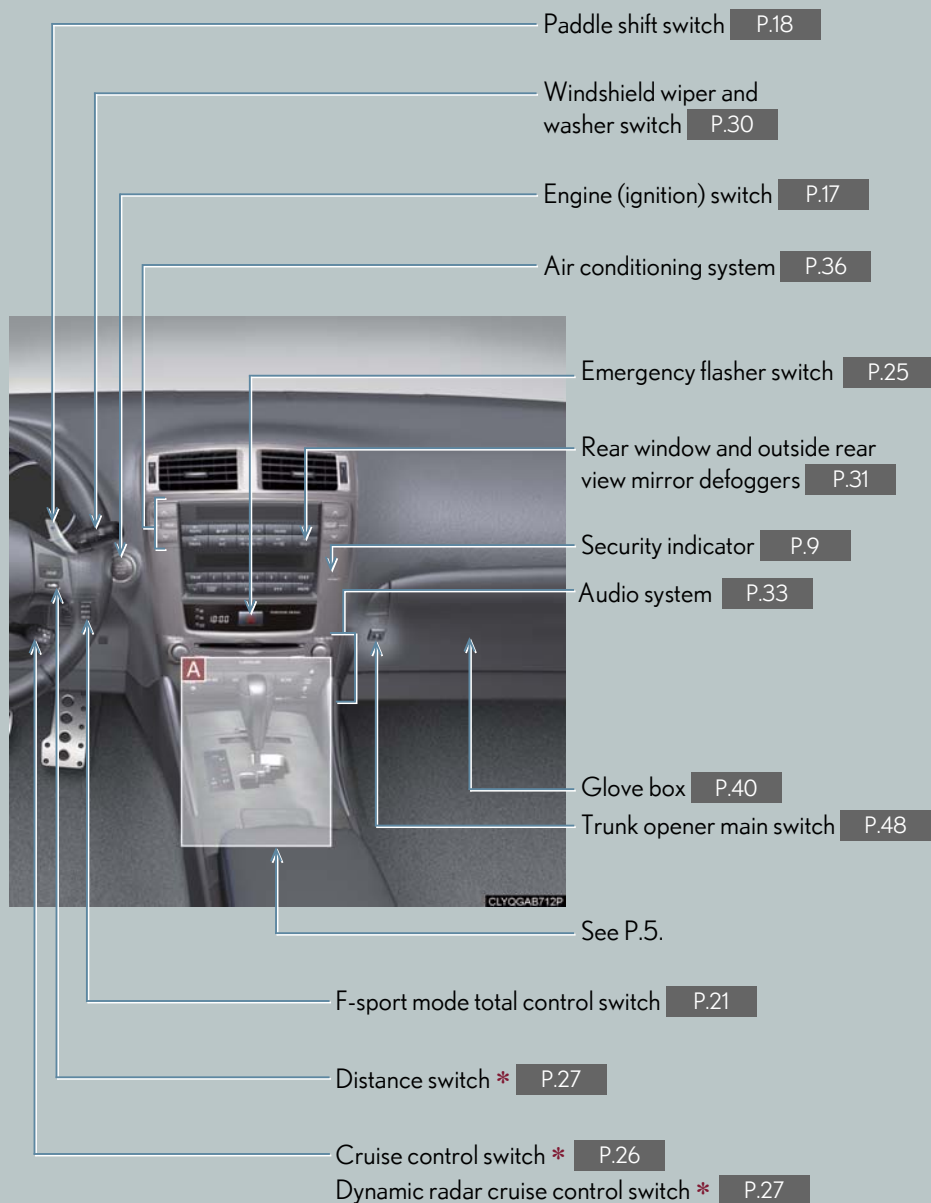

* : If equipped

Overview

Instrument Panel



* : If equipped



Topic 1

Entering and Exiting

Keys	7
Smart Access System with Push-button Start	8
Theft Deterrent System.....	9

Keys

Electronic key



CLY0GAB459

Smart access system with push-button start
(→P.8, 17)

Mechanical key



CLY0GAB159

- Locks and unlocks the doors
- Opens the trunk
- Locks and unlocks the glove box

The mechanical key is stored inside the electronic key. To extract the key, release the latch and pull.

Wireless remote control



qKY001L

- 1 Press:** locks all doors
- 2 Press once:** unlocks the driver's door
Press twice: unlocks all doors
Press and hold: opens the windows and moon roof*
- 3 Press and hold:** opens the trunk
- 4 Press and hold:** sounds the alarm
(Use the alarm to attract attention to the vehicle in order to help deter break-ins. To stop the alarm, press any button on the wireless remote control.)

*: If equipped

Smart Access System with Push-button Start

The smart access system with push-button start allows you to enter and exit the vehicle or start the engine by simply carrying the electronic key in your pocket or bag. For details on starting the engine, see page 17.

Entering the vehicle



To unlock the vehicle, simply grasp either of the front door handles.

Exiting the vehicle



To lock the vehicle, press the lock button on either of the front door handles.

Opening the trunk



To open the trunk, press the trunk release button.

For details on what to do when the electronic key does not operate properly, see page 52.

Theft Deterrent System

The theft deterrent system includes the following features to help protect your vehicle from theft.

Engine immobilizer system



The engine immobilizer system prevents the engine from being started in the event that an attempt is made to start the vehicle using an unregistered key.

The security indicator light flashes to indicate that the system is set.

Alarm

The system sounds the alarm and flashes the lights when forcible entry is detected.

To set the alarm: close the doors, trunk and hood, and lock all doors. The security indicator light comes on to indicate that the alarm is in its preparation state. When the indicator light begins to flash, the system is armed.

To deactivate or stop the alarm: turn the "ENGINE START STOP" switch to ACCESSORY or IGNITION ON mode, or unlock the doors or trunk using the entry function or the wireless remote control.

Steering lock



The steering wheel locks when the "ENGINE START STOP" switch is turned OFF and the driver's door is opened.

When the steering lock cannot be released, the green indicator light on the "ENGINE START STOP" switch will flash and a message will be shown on the multi-information display. To release it, press the "ENGINE START STOP" switch while gently turning the wheel left and right.



Topic 2

Before Driving

Seats	11
Outside Rear View Mirrors	12
Steering Wheel	12
Driving and Seat Position Memory System...	13
Head Restraints	14
Seat Belts.....	14
Anti-glare Inside Rear View Mirror.....	15

Seats

■ Adjusting seat position



- 1 Moves the seat forward
- 2 Moves the seat backward

■ Adjusting seatback angle



- 1 Tilts the seatback forward
- 2 Reclines the seatback

■ Adjusting seat cushion



- 1 Raises and lowers the front of the cushion
- 2 Raises and lowers the entire seat

■ Adjusting lumbar support



- 1 Firmer
- 2 Softer

Outside Rear View Mirrors




- 1 Selects a mirror to adjust ("L": left or "R": right)
- 2 Adjusts the mirror up, down, in, or out using the switch

The mirrors will automatically angle downwards when the vehicle is reversing.

To disable this function, set the mirror select switch in the neutral position (between "L" and "R").

Steering Wheel

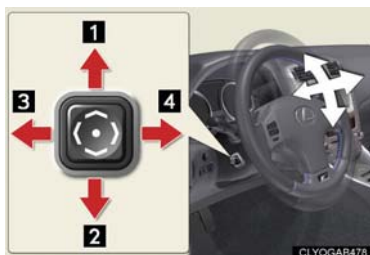

- 1 Up
- 2 Down
- 3 Away from the driver
- 4 Toward the driver

The steering wheel retracts automatically when the "ENGINE START STOP" switch is turned OFF to allow for easy exit and entry. The steering wheel returns automatically to its previously set position when the "ENGINE START STOP" switch is switched to ACCESSORY or IGNITION ON mode.

Driving and Seat Position Memory System

Your preferred driving position (the position of the driver's seat, steering wheel and the outside rear view mirrors) and front passenger seat position can be memorized and recalled with the touch of a button.

Setting memory positions



While holding down the "SET" button, press and hold one of the memory buttons ("1", "2", or "3") until you hear a beep.

The current position of the seat, as well as the position of the steering wheel and the outside rear view mirrors (for the driver's seat only) is recorded.


Recalling memory positions



Press one of the memory buttons ("1", "2", or "3").

Linking driving position memory with door unlock operation



While holding down the desired memory button, press and hold  on the wireless remote control until you hear a beep.

To prevent triggering of the alarm, open one of the doors within 60 seconds after the beep is heard.

Linking driving position memory to the door unlock operation allows the memory position to be recalled automatically when the driver's door is opened. (The linked function does not operate if the driver's door is unlocked using the mechanical key or manually from inside the vehicle.)

Head Restraints



To raise: push the head restraint upward.

To lower: push the head restraint down while pressing the lock release button.

Seat Belts

■ Adjusting shoulder belt height (front seats only)



To raise: push the anchor upward.

To lower: depress the button and push the anchor down.

■ Seat belt comfort guides (rear seats only)



If the shoulder belt sits close to the neck, slide the comfort guide forward.

Anti-glare Inside Rear View Mirror

The anti-glare mirror uses a sensor to detect light from vehicles behind and automatically reduces glare.



To turn automatic mode on/off, press the "AUTO" button.

The indicator comes on when automatic mode is turned on.



Topic 3

When Driving

Engine (Ignition) Switch.....	17
Automatic Transmission.....	18
F-Sport Mode Total Control Switch.....	21
Parking Brake.....	22
Turn Signal Lever.....	22
Multi-information Display.....	23
Satellite Switches.....	24
Emergency Flasher Switch.....	25
Intuitive Parking Assist.....	25
Cruise Control.....	26
Dynamic Radar Cruise Control.....	27

Engine (Ignition) Switch

With the electronic key on your person, the engine can be started by simply pressing the "ENGINE START STOP" switch while depressing the brake pedal.
(The mechanical key cannot be used to start the engine.)

Starting the engine



Make sure the parking brake is set and the shift lever is in P.


- 1 Depress the brake pedal.
The "ENGINE START STOP" switch indicator light turns green.
- 2 Press the "ENGINE START STOP" switch.

Stopping the engine

- 1 Set the parking brake and shift the shift lever to P.
- 2 Press the "ENGINE START STOP" switch.


Changing "ENGINE START STOP" switch modes

To change the "ENGINE START STOP" switch mode without turning on the engine, press the "ENGINE START STOP" switch without depressing the brake pedal. The mode can be changed in the following order:

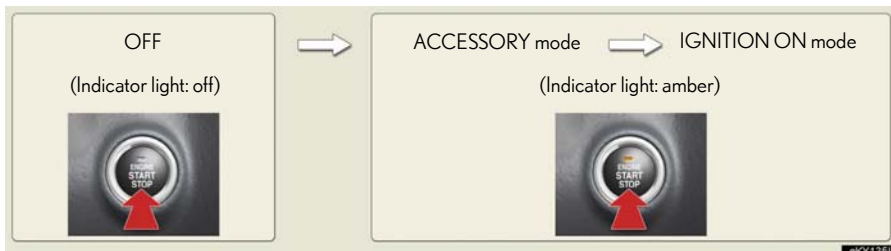

Automatic Transmission

Shift positions

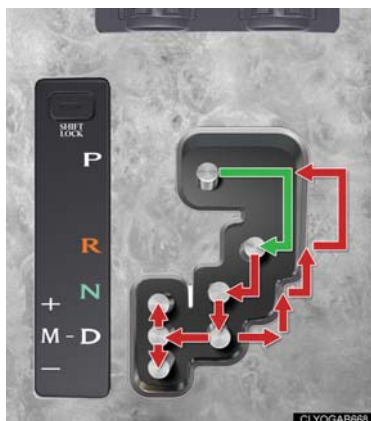

- P Park
- R Reverse
- N Neutral (drive not engaged)
- D Drive
- M M mode

← The vehicle can only be shifted out of P when the “ENGINE START STOP” switch is in IGNITION ON mode and the brake pedal is depressed.

Entering and Exiting

Before Driving

When Driving

Rain and Night Driving

Driving Comfort

Opening and Closing

What to do if ...

Customizing Your Lexus



■ Changing shift ranges in the D position

Operating the paddle shift switches allows shift ranges to be selected to suit the driving conditions.



- 1 Pull the “-” paddle shift switch toward you.
The indicator in the meter cluster will change to display the selected shift range.

- 2 **Higher shift range:**
Pull the “+” paddle shift switch toward you.
Lower shift range:
Pull the “-” paddle shift switch toward you.



Pulling and holding the “+” paddle shift switch for a certain period of time allows you to return to normal D position driving. If the accelerator pedal is depressed for more than a certain period of time in one range, shift range selection in the D position will be automatically deactivated.

■ Changing gears in the M position

Operating the shift lever or paddle shift switches allows a gear to be selected and held, enabling you to time gear shifts as you please while driving.



1 Shift the shift lever to M.

The indicator in the meter cluster will change to display the selected gear.



2 To upshift:

Move the shift lever in the "+" direction, or pull the "+" paddle shift switch toward you.

To downshift:

Move the shift lever in the "-" direction, or pull the "-" paddle shift switch toward you.



In M mode, the gear will change only when the shift lever or paddle shift switches are operated. However, when the vehicle speed drops the gear will be automatically downshifted.

F-Sport Mode Total Control Switch

F-sport mode total control switch allows you to select a driving mode that suits the road conditions or your preference.



1 "Sport" mode

Various driving controls are adjusted, enabling sporty driving.

2 Snow mode

For starting or accelerating on snow-covered roads or other slippery surfaces.

An indicator comes on in the meter cluster when in sport or snow mode.

To cancel the mode, press the same side of the switch again. When the "ENGINE START STOP" switch is turned OFF, the mode is automatically deactivated.

Parking Brake



To set the parking brake: firmly depress the parking brake pedal.

To release the parking brake: depress the parking brake pedal again.

Turn Signal Lever



1 Right turn signal

2 Left turn signal

To signal a lane change, move the lever partway and hold.

Entering and Exiting

Before Driving

When Driving

Rain and Night Driving

Driving Comfort

Opening and Closing

What to do if ...

Customizing Your Lexus

Multi-information Display


The multi-information display shows information about your vehicle, including the items shown below.

Display information



- Trip information
 - Outside temperature
 - Driving range
 - Average fuel consumption
 - Average fuel consumption after refueling
 - Current fuel consumption
 - Average vehicle speed
 - Gear position
- Satellite switch mode
- Intuitive parking assist information (if equipped)
- Dynamic radar cruise control settings (if equipped)
- Warning messages

Changing the display of trip information

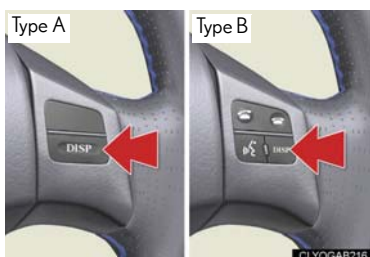

Trip information items can be switched by pressing the "DISP" switch.

- When using the intuitive parking assist or dynamic radar cruise control, the appropriate display is shown on the screen.
- In the event that a problem is detected in any of the vehicle's systems, a warning message is shown on the multi-information display.

Satellite Switches

The satellite switches can be used to change the settings of various functions. Settings are shown on the multi-information display.



The satellite switches can be used to change the settings of the following items.

- Intuitive parking assist (if equipped)
- Tire inflation pressure warning system initialization
- ID code selection for tire inflation pressure warning system
- AFS (Adaptive Front-lighting System)

Changing the settings



1 To cycle through the functions, press either the left or right selector switch.

2 To change the settings, press the "ON/OFF" button.

For detailed information on changing the settings, see the Owner's Manual.

Emergency Flasher Switch



Engaging the emergency flasher switch causes all the turn signal lights to flash.

The emergency flashers can be operated even when the "ENGINE START STOP" switch is OFF.


Intuitive Parking Assist (If Equipped)

The system uses a screen display and buzzer to inform the driver of obstacles near the vehicle when parking or driving at low speed.

Turning the system on and off

The system can be turned on and off using the satellite switch. (→P.24)

Screen display

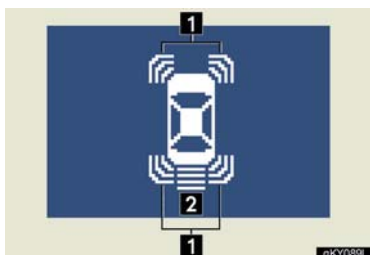

Sensors are used to detect obstacles near the vehicle. The distance to a detected obstacle is shown by the number of indicator bars.

- 1 Indicates obstacles detected by the corner sensors
- 2 Indicates obstacles detected by the back sensors

Cruise Control (If Equipped)

Cruise control allows the driver to maintain a constant speed without having to operate the accelerator pedal.


Use for highway driving or when traveling at a constant speed for long periods of time.

Setting the speed



- 1 Press the "ON-OFF" button.
The system will turn on.
- 2 Accelerate or decelerate to the desired speed, and then push the lever down.
This sets the speed in the cruise control memory.

Canceling

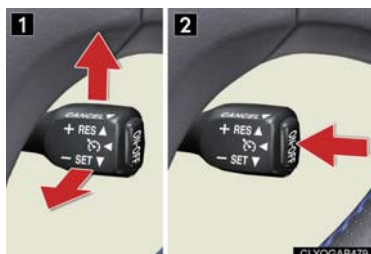

- 1 To temporarily cancel the cruise control, pull the lever toward you. To resume the cruise control, push the lever up.
- 2 To turn the system off, press the "ON-OFF" button.

Adjusting the speed setting



- To increase speed:** push the lever up.
To decrease speed: push the lever down.

Release the lever when the desired speed is reached.

Dynamic Radar Cruise Control (If Equipped)

Dynamic radar cruise control supplements conventional cruise control with a vehicle-to-vehicle distance control mode.

Cruise control display



Cruise control settings are shown on the multi-information display.

- 1 Vehicle ahead indicator
- 2 Vehicle-to-vehicle distance
- 3 Preset speed

Vehicle-to-vehicle distance control mode



- 1 Press the "ON-OFF" button.
- 2 Accelerate or decelerate to the desired speed, and then push the lever down. Vehicle-to-vehicle distance can be adjusted using the distance switch.

Constant speed control mode



- 1 Press the "ON-OFF" button.
- 2 Push the lever forward and hold for at least one second.
- 3 Accelerate or decelerate to the desired speed, and then push the lever down.

Canceling



- 1 To temporarily cancel the dynamic radar cruise control, pull the lever toward you. To resume the cruise control, push the lever up.
- 2 To turn the system off, press the "ON-OFF" button.

Adjusting the speed setting



To increase speed: push the lever up.

To decrease speed: push the lever down.

Release the lever when the desired speed is reached.

The vehicle-to-vehicle distance control mode maintains the preset cruising speed as long as no vehicle is detected ahead.



Topic 4


Rain and Night Driving

Headlights.....	29
Headlight Cleaner	29
Fog Lights	30
Windshield Wipers and Washer.....	30
Rear Window and Outside Rear View	
Mirror Defoggers.....	31
Instrument Panel Light Control	31

Headlights



- 1 The instrument panel, side marker, parking, tail and license plate lights turn on.
- 2 The headlights and all lights listed above turn on.
- 3 The headlights and parking lights turn on/off automatically in accordance with ambient light levels.

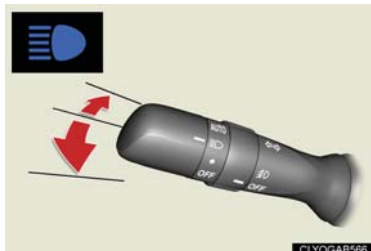

To engage the high beams, push the lever forward. To flash the high beams temporarily, pull the lever toward you.

■ AFS (Adaptive Front-lighting System)

AFS improves visibility on curves by automatically adjusting the horizontal orientation of the headlights in accordance with vehicle speed and the degree of the tire angle as controlled by steering input.

The system can be turned on and off using the satellite switch. (→P.24)

Headlight Cleaner (If Equipped)



The headlight cleaner can be used only when the "ENGINE START STOP" switch is in IGNITION ON mode and the headlights are on.

Fog Lights




The fog lights can be used only when the headlights (low beam) are on.

Windshield Wipers and Washer



- 1 Automatic operation
- 2 Low speed
- 3 High speed
- 4 Single wipe
- 5 Wash and wipe

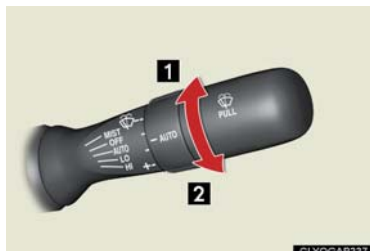

When the wipers are set to automatic operation, sensor sensitivity can be adjusted by turning the band.

- 1 Decreases the sensitivity (-)
- 2 Increases the sensitivity (+)

Rear Window and Outside Rear View Mirror Defoggers

► Without navigation system



To defog the rear window and the outside rear view mirrors, press the button.

Press again to cancel.

► With navigation system




The system turns off automatically after 15 minutes.

Instrument Panel Light Control



1 To dim: turn the dial counterclockwise.

2 To brighten: turn the dial clockwise.

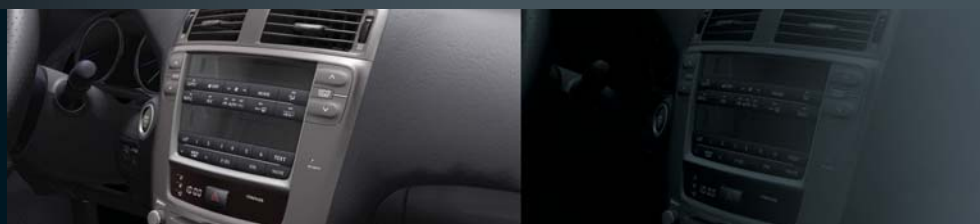

Topic 5

Driving Comfort

Audio System.....	33
Air Conditioning System.....	36
Garage Door Opener	37
Ashtrays.....	38
Seat Heaters / Seat Heaters and Ventilators	39
Console Boxes.....	39
Glove Box	40
Cup Holders.....	40
Interior Lights.....	41
Compass.....	41
Trunk Storage Extension.....	42
Luggage Mat.....	43

Audio System (without navigation system)

Owners of models equipped with a navigation system should refer to the "Navigation System Owner's Manual".

Basic operation



- 1 Sound quality modes
- 2 Listening position (if equipped)
- 3 Automatic Sound Levelizer (ASL)
- 4 Audio sources
- 5 Power/Volume

Audio sources

"AM·SAT": AM radio/Satellite Radio*

"FM": FM radio

"DISC·AUX": CD player/Auxiliary audio device

*: The optional Lexus genuine satellite tuner and antenna allows you to receive and play XM® Satellite Radio broadcasts. (Subscription is required. For detailed information, see the Owner's Manual.)

Radio



- 1 Traffic information
- 2 Station presets
- 3 Text messages
- 4 Radio tuner
- 5 RDS genre select
- 6 Scan
 - All radio stations: press
 - Preset radio stations: press and hold
- 7 Seek

Entering station presets

- 1 Select the desired station by using the tune, seek or scan function.
- 2 Press and hold one of the preset buttons (1-6) until you hear a beep indicating that the station is set.

CD player

Playing an audio CD



- 1** Random playback
Current CD: press
All CDs: press and hold
- 2** Repeat
Current track: press
Current CD: press and hold
- 3** Text information
- 4** CD select
- 5** CD load
- 6** Scan
All tracks in current disc: press
First track of each disc: press and hold
- 7** Eject
- 8** Track select/fast forward/rewind

Playing a CD with MP3/WMA files



- 1** Random playback
Current file: press
All files in current folder: press and hold
- 2** Repeat
Current file: press
All files in current folder: press and hold
- 3** Folder select
- 4** Text information
- 5** File select
- 6** CD select
- 7** CD load
- 8** Scan
All files in current folder: press
First file of each folder: press and hold
- 9** Eject



■ Loading a CD

- 1 Press the "LOAD" button.
"WAIT" is shown on the display.
- 2 Insert a CD when the indicators on the slot turn from amber to green.
The display changes from "WAIT" to "LOAD".

■ Loading multiple CDs

- 1 Press and hold the "LOAD" button until you hear a beep.
"WAIT" is shown on the display.
- 2 Insert a CD when the indicators on the slot turn from amber to green.
The display changes from "WAIT" to "LOAD".
The indicators on the slot turn to amber when the CD is inserted.
- 3 Insert the next CD when the indicators on the slot turn from amber to green again.
Repeat the procedure for the remaining CDs.
To stop the operation, press the "DISC·AUX" button.

■ Remote control (steering wheel switches)

The audio system can be operated using the remote control located on the steering wheel.



- 1 Power on/change mode: press
Power off: press and hold
- 2 Volume
- 3 Radio: radio tuner
CD: CD/track/file (MP3/WMA) select

Air Conditioning System (without navigation system)

Owners of models equipped with a navigation system should refer to the "Navigation System Owner's Manual".



- | | |
|--------------------------------------|---|
| 1 Driver side temperature control | 8 Micro dust and pollen filter button |
| 2 Switch to automatic mode | 9 Passenger side temperature control |
| 3 Driver side temperature display | 10 Windshield defog/defrost |
| 4 Off button | 11 Outside air/recirculated air mode switch |
| 5 Fan speed controls | 12 Air conditioning switch |
| 6 Air flow controls | 13 Dual mode switch |
| 7 Passenger side temperature display | |

Using the automatic mode



- 1 Press the "AUTO" button.
- 2 Adjust the temperature using the "TEMP" buttons.

Adjusting the temperature in dual mode



In dual mode, driver and passenger side temperature settings can be adjusted separately.

- 1 Press the "DUAL" switch.
- 2 Adjust the driver side temperature using the "TEMP" buttons, and the passenger side temperature using the "PASSENGER TEMP" buttons.

Garage Door Opener


The garage door opener can be programmed to operate garage doors, gates, entry doors, door locks, home lighting systems, security systems, and other devices.

The garage door opener (HomeLink® Universal Transceiver) is manufactured under license from HomeLink®.



The HomeLink® compatible transceiver in your vehicle has 3 buttons which can be programmed to operate 3 different devices.

Programming HomeLink®

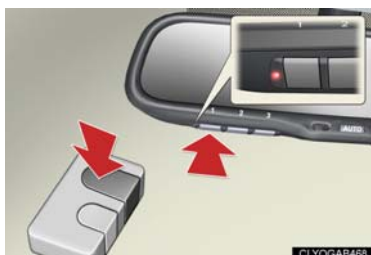

- 1 Hold your hand-held transmitter within 3 inches of the HomeLink® buttons.
- 2 Press and hold down the desired HomeLink® button.
- 3 For U.S.A. owners:

While pressing the HomeLink® button, press and hold down the button on the hand-held transmitter until the indicator light changes from a slow to a rapid flash.

For Canadian owners:

While pressing the HomeLink® button, repeatedly press and release (cycle) the button on the hand-held transmitter every 2 seconds until the indicator light changes from a slow to a rapid flash.

If your garage door has the rolling code feature:

- 4 Press the training button on the motor-head unit in your garage.
- 5 Press and release the programmed HomeLink® button twice. The garage door may open.

If the door does not open, press and release the same button once again.

■ Programming other devices

For U.S.A. owners:

To program an entry gate, see the Owner's Manual.

To program other devices, contact your Lexus dealer.

For Canadian owners:

To program all other devices, follow the same procedure as for garage door programming.

■ Operating HomeLink®



Press the appropriate HomeLink® button.
The indicator light should come on.

Ashtrays



► Front

To remove the ashtray, push the release lever.



► Rear

To remove the ashtray, press down on the plate and lift the ashtray out.

Seat Heaters / Seat Heaters and Ventilators



► Seat heaters (if equipped)

Turn the dial toward **1**.



► Seat heaters and ventilators (if equipped)

Seat heaters: turn the dial toward **1**.

Ventilators: turn the dial toward **2**.

Console Boxes



To open, slide and lift the armrest with the knob pulled up.




To open, press in the overhead console.

There is a power outlet located in the front console box.



Glove Box

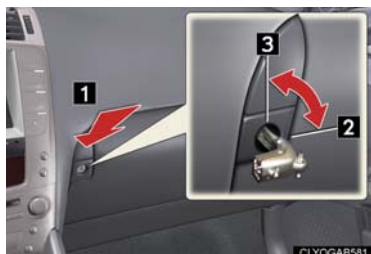

1 Opens: press the button.

2 Locks

3 Unlocks

The glove box can be locked and unlocked using the mechanical key.

Cup Holders



► Front (type A)

To open, press down on the front of the lid.



► Front (type B)

To open, pull and hold the knob and slide the arm-rest.



► Rear

To open, press in and release.

Interior Lights



► Without moon roof


- 1 Door position on/off
- 2 On/off



► With moon roof

- 1 Door position on/off
- 2 On/off

Compass

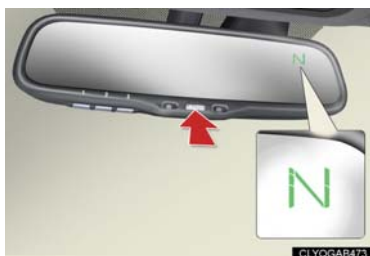


To display the compass, press and hold the "AUTO" button for 3 or more seconds.

To cancel the display, press and hold the "AUTO" button again for 3 or more seconds.

Trunk Storage Extension

Longer items can be loaded in the vehicle by utilizing the trunk space and rear seat area.

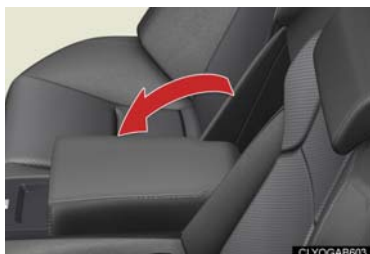

- 1 Pull down the rear armrest.



- 2 Lift up the trunk door cover.



- 3 Open the inside trunk door from the trunk and load baggage or other items.

Entering and Exiting

Before Driving

When Driving

Rain and
Night Driving

Driving Comfort

Opening and Closing

What to do if ...

Customizing
Your Lexus

Luggage Mat



Pull the lever upwards when lifting the luggage mat up.



The lever can be hooked on the edge of the trunk.



Topic 6

Opening and Closing

Door Locks	45
Power Windows	46
Moon Roof	46
Fuel Tank Cap	47
Hood	47
Trunk	48

Door Locks

■ Locking the vehicle from inside



► Inside lock button

- 1 Locks
- 2 Unlocks

► Door lock switch

Operates all door locks.

- 1 Locks
- 2 Unlocks

■ Locking the vehicle from outside

Use the entry function or wireless remote control (→P.7, 8)

■ Rear door child-protector lock



Pushing down the switch prevents the rear doors from being opened from the inside.

Always set the child protector locks when children are seated in the rear seat.

Power Windows



1 Power window switches

To open: press the switch.

To close: pull the switch up.


Fully pulling up and releasing the switches causes the windows to close fully. Fully pressing down and releasing the switches causes the windows to open fully.

2 Window lock switch

The window lock switch disables the operation of all windows other than the driver's door window.

Moon Roof (If Equipped)

Opening and closing

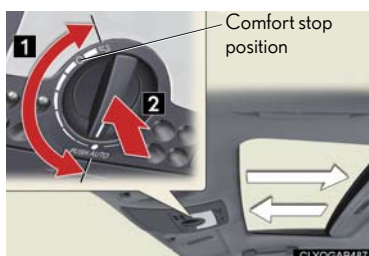


1 The moon roof can be opened to 7 different positions by turning the dial clockwise from the closed position.

2 To open the moon roof to the comfort stop position, simply press the dial. Press again to close.

The comfort stop position reduces wind noise.

Tilting up and down

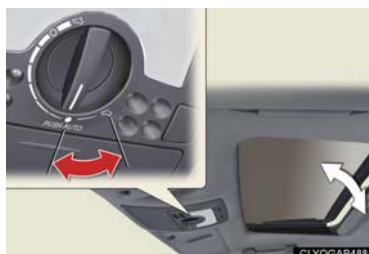

To tilt the moon roof up, turn the dial counter-clockwise from the closed position.

To tilt the moon roof down, turn the dial clockwise.

Fuel Tank Cap



- 1 Press the fuel filler door opener.



- 2 Slowly remove the cap by turning it counter-clockwise.
After the cap is removed, it can be hung on the inside of the fuel filler door.

Hood



- 1 Pull the hood release lever.



- 2 Insert your fingers under the hood, pull the hood catch and lift the hood.

Trunk



► Trunk opener

To open the trunk from inside the cabin, simply press the trunk opener.

To disable the trunk opener, turn off the main switch in the glove box.

1 On

2 Off

When the trunk opener is disabled, the trunk cannot be opened using the wireless remote control or the entry function.

► Entry function and wireless remote control (→P.7, 8)

Entering and Exiting

Before Driving

When Driving

Rain and Night Driving

Driving Comfort

Opening and Closing

What to do if ...

Customizing Your Lexus

List of Warning/Indicator Lights



The units used on the speedometer and tachometer gauge display, as well as the indicators and warning lights, may differ depending on the model / type.

Stop the vehicle immediately. Continuing to drive the vehicle may be dangerous.

- (U.S.A.)
 (Canada)
Brake system warning light

Stop the vehicle immediately.

- Charging system warning light

Have the vehicle inspected immediately.

- (U.S.A.)
 (Canada)
Malfunction indicator lamp

Electric power steering warning light
- SRS warning light

PCS
Pre-collision system warning light*
- (U.S.A.)
 (Canada)
ABS warning light

A/T OIL TEMP
Automatic transmission fluid temperature warning light

For further information, refer to the Owner's Manual.

Follow the correction procedures.



Open door warning light



Low fuel level warning light



(On the instrument cluster)

Driver's seat belt reminder light



(On the center panel)

Front passenger's seat belt reminder light



Tire pressure warning light



Master warning light

See the Owner's Manual



Turn signal indicator



Headlight high beam indicator



Headlight indicator (U.S.A.)



Tail light indicator (Canada)



"SPORT" indicator



"SNOW" indicator



Cruise control indicator



"AFS OFF" indicator



Front fog light indicator



Intuitive parking assist indicator*



Slip indicator



SRS airbag cut-off indicator



"VSC OFF" indicator



Shift range display




Gear position display

*: If equipped

For further information, refer to the Owner's Manual.

Spare Tire and Tool Compartment

Jack, tools, and spare tire

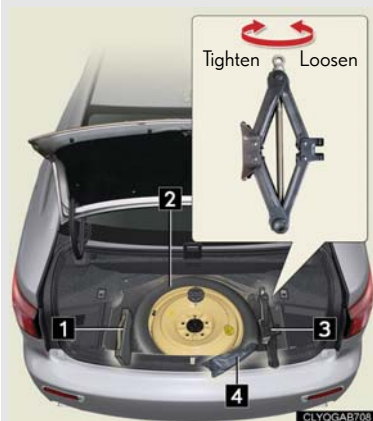

- 1 Tool bag
- 2 Spare tire
- 3 Jack
- 4 Jack handle

Taking out the spare tire



- 1 Lift up the panel on the trunk floor, and remove the tray.
- 2 Loosen the center fastener and remove the spare tire.

If the electronic key does not operate properly

Unlocking and locking the doors



To unlock or lock the vehicle, use the mechanical key to remove the lock cover on the driver's door handle. The mechanical key is stored inside the electronic key.

- 1 Unlocks
- 2 Locks

Starting the engine



- 1 Depress the brake pedal.
- 2 Touch the Lexus emblem side of the electronic key to the "ENGINE START STOP" switch.
- 3 Press the "ENGINE START STOP" switch within 10 seconds of the buzzer, keeping the brake pedal depressed.

To change "ENGINE START STOP" switch modes, release the brake pedal and press the "ENGINE START STOP" switch within 10 seconds of the buzzer.

If the electronic key battery becomes depleted, replace it with a new battery. For instructions on replacing the battery, refer to the Owner's Manual. If you need further assistance, contact your Lexus dealer.

If the engine doesn't start

Make sure that the correct operating procedures have been followed.



Brake pedal

Make sure that the brake pedal is firmly depressed when attempting to start the engine. (→P.17)



Steering wheel lock

Make sure that the steering wheel lock is released.

To release it, press the "ENGINE START STOP" switch while gently turning the wheel left and right. (→P.9)

If the engine still does not start, see the Owner's Manual for more information or contact your Lexus dealer.

Electronic Key Alarm

The electronic key alarm uses an alarm and warning messages to indicate that the electronic key has been used improperly. Take appropriate measures in response to any warning messages that are displayed. In some cases, an alarm may sound without an accompanying warning message. If so, follow the correction procedure in the table below.

Alarm	Situation	Correction procedure
Exterior alarm sounds once for 2 seconds	Tried to lock the doors using the entry function while the electronic key is still inside the passenger compartment.	Retrieve the electronic key from the passenger compartment and lock the doors again.
	Closed the trunk while the electronic key is still inside and all doors are locked.	Retrieve the electronic key from the trunk and close the trunk lid.
Exterior alarm sounds once for 60 seconds	Tried to exit the vehicle with the electronic key and lock the doors without first turning the "ENGINE START STOP" switch OFF.	Turn the "ENGINE START STOP" switch OFF and lock the doors again.
Exterior alarm sounds once for 10 seconds	Tried to lock the vehicle using the entry function while a door is open.	Close all of the doors and lock the doors again.
Interior alarm sounds continuously	Tried to open the door and exit the vehicle without shifting the shift lever to P.	Shift the shift lever to P.
Interior alarm pings continuously	Switched to ACCESSORY mode while the driver's door is open. (Opened the driver's door when the "ENGINE START STOP" switch is in ACCESSORY mode.)	Close the driver's door.
	Turned the "ENGINE START STOP" switch OFF while the driver's door is still open.	Close the driver's door.

Customizing Your Lexus

Your vehicle includes a variety of electronic features that can be personalized to your preferences. Programming these preferences requires specialized equipment and can be performed by an authorized Lexus dealership.

Some function settings are changed simultaneously with other functions being customized. Contact your Lexus dealer for further details.

Item	Function	Default setting	Customized setting
Smart access system with push-button start	Operation signal (Emergency flashers)	On	Off
	Operation signal (Buzzer)	On	Off
Wireless remote control	Unlocking operation	Driver's door unlocked in one step, all doors unlocked in two steps	All doors unlocked in one step
	Automatic door lock function to be activated if door is not opened after being unlocked	On	Off
	Time elapsed before automatic door lock function is activated if door is not opened after being unlocked	60 seconds	30 seconds
			120 seconds
	Operation signal (Emergency flashers)	On	Off
	Operation signal (Buzzer)	On	Off
	Door lock buzzer	On	Off
	Trunk unlocking function	On	Off
	Trunk unlocking operation	Press and hold	Press twice
			One short press
	Panic function	On	Off

Item	Function	Default setting	Customized setting
Door lock	Unlocking using a key	Driver's door unlocked in one step, all doors unlocked in two steps	All doors unlocked in one step
	Speed-detecting automatic door lock function	Off	On
	Opening driver's door unlocks all doors	Off	On
	Shifting to P unlocks all doors.	On	Off
	Shifting to a position other than P locks all doors.	On	Off
Steering wheel	Auto tilt-away function	On	Off
Power windows	Linked door lock operation	On	Off
	Linked door key operation	Open and close	Open only Close only
	Wireless remote control linked operation	On	Off
Moon roof	Linked door lock operation	On	Off
	Linked door key operation	Open and close	Open only Close only
	Linked operation of components when door key is used	Slide only	Tilt only
	Wireless remote control linked operation	On	Off
	Linked operation of components when wireless remote control used	Slide only	Tilt only
Automatic light control system	Light sensor sensitivity	Level 3	Level 1 to 5
	Time elapsed before headlights automatically turn off after doors are closed	30 seconds	0 seconds
			60 seconds 90 seconds
Lights	Daytime running light system (U.S.A. only)	On	Off

Entering and Exiting

Before Driving

When Driving

Rain and Night Driving

Driving Comfort

Opening and Closing

What to do if ...

Customizing Your Lexus

Customizing Your Lexus

Item	Function	Default setting	Customized setting
Windshield wipers and washer	Switching operation when the vehicle is stationary	On	Off
	Drip prevention function	On	Off
	Time elapsed before the drip prevention function operates	Variable depending on the vehicle speed	3 seconds
Intuitive parking assist	Back sensor operation display and buzzer	On	Off
	Buzzer volume	Level 3	Level 1 to 5
	Distance to which a sensor detects	4.9 ft. (150 cm)	2.0 ft. (60 cm)
Illumination	Time elapsed before lights turn off	15 seconds	7.5 seconds 30 seconds
	Operation when the doors are unlocked	On	Off
	Operation after the “ENGINE START STOP” switch turned OFF	On	Off
	Front foot well lighting	On	Off
	Shift lever lighting	On	Off
	Outer foot light	On	Off
		On	Off
Seat belt reminder	Vehicle speed linked seat belt reminder buzzer	On	Off



Your Lexus dealer

Your Lexus dealer will provide quality maintenance and any other assistance you may require.

If there is not a Lexus dealer near you, please call the following number:

■ U.S. OWNERS

- In the U.S. mainland or Canada:

Lexus Roadside Assistance

1-800-25-LEXUS or **1-800-255-3987** (Toll-Free)

- In Hawaii:

Servco Automotive Roadside Assistance/Customer Services

1-800-25-LEXUS or **1-800-255-3987** (Toll-Free)

■ CANADIAN OWNERS

- In Canada or the U.S. mainland:

Lexus Roadside Assistance/Customer Service

1-800-26-LEXUS or **1-800-265-3987** (Toll-Free)

Please access our **websites** for further information.

- The U.S. mainland: www.lexus.com

- Hawaii: www.servcolexus.com

- Canada: www.lexus.ca

©2007 TOYOTA MOTOR CORPORATION

All rights reserved. This material may not be reproduced or copied, in whole or in part, without the written permission of Toyota Motor Corporation.