HS178 Assembly Instruction



After-Sales Phone Number: +1 (209) 564-9545



Scan the QR code to watch the installation video.




After-Sales Phone Number: +1 (209) 564-9545




installation video

Instructions for Use

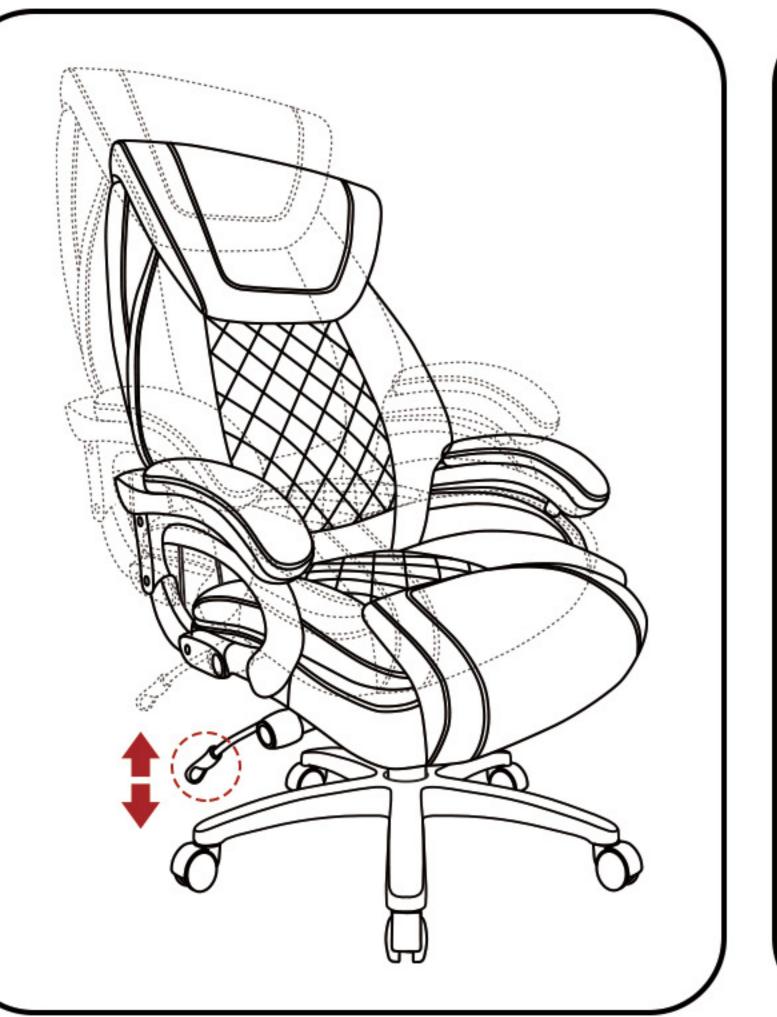



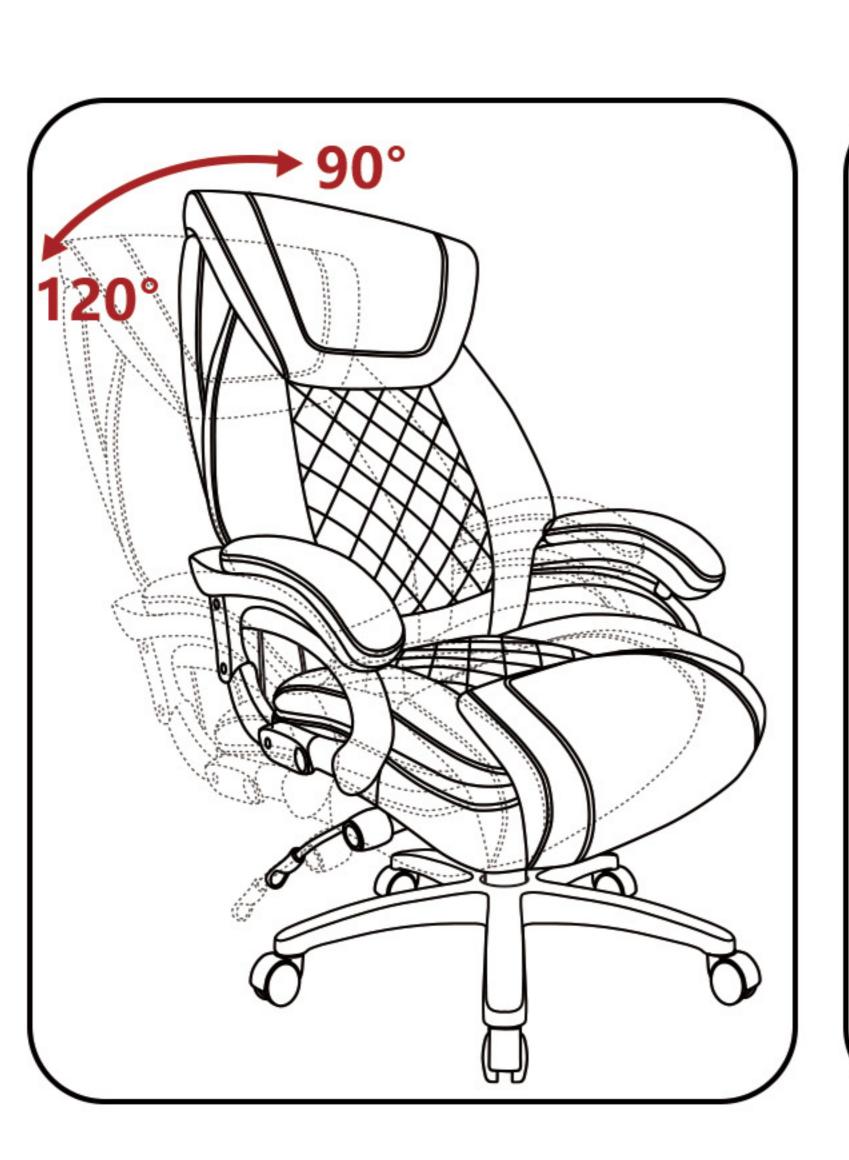



Up and Down Adjustment


Adjustable Lumbar Support

Rocking Fuction

Strong Loading Capacity

Thanks for purchasing our products. Please read this manual before assembly. And please assemble in order. After the assembly, keep the instruction properly. Make sure all the parts are included (12 kinds in total)

Accessories List

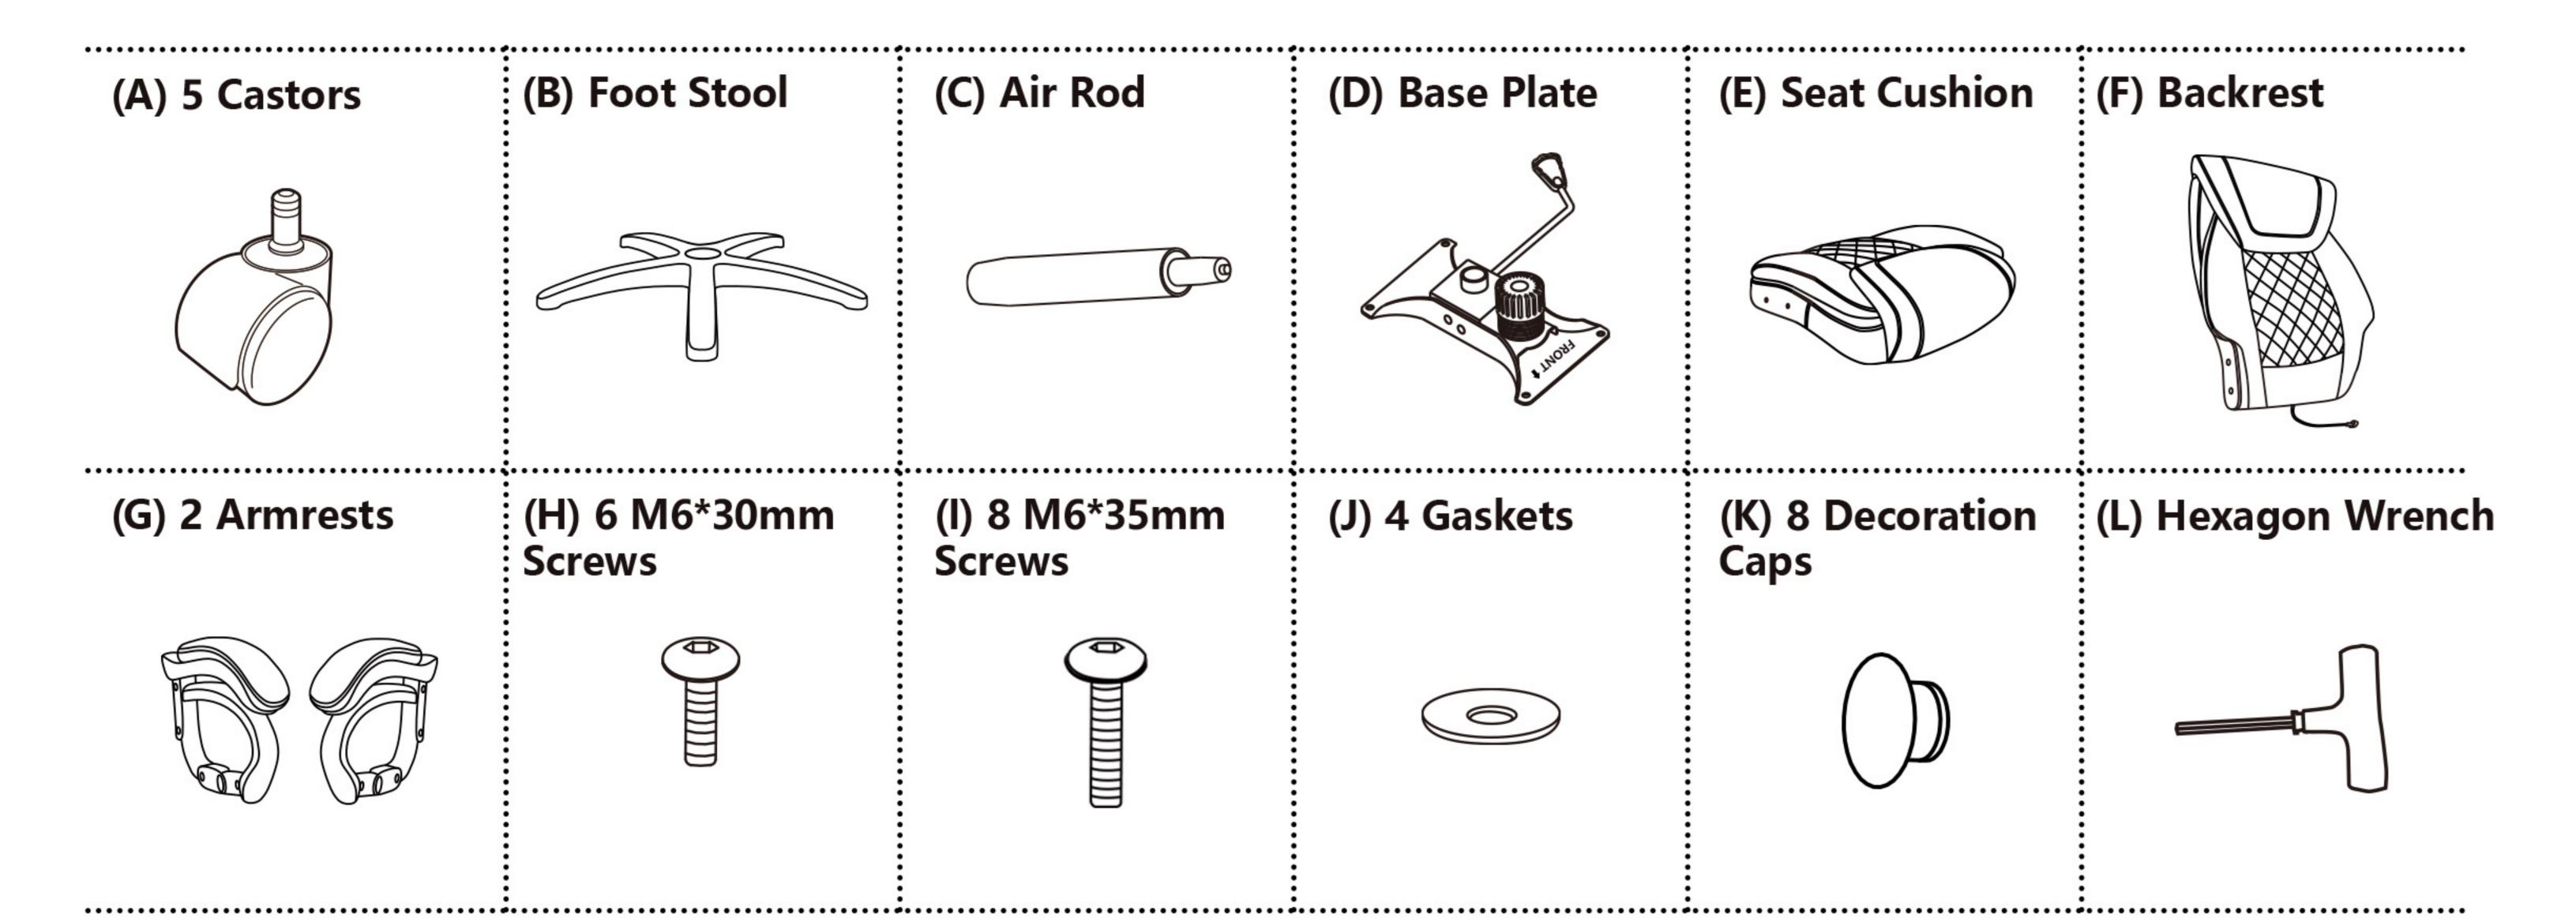

Notice

[If any question, please contact HeroSet-Service@outlook.com/HeroSet-Sales@outlook.com]

- Do not stand in this chair or use the chair as a step ladder use it as chair only. This chair is designed for one person to use at a time.
- Do not use this chair unless all bolts, screws and knobs are firmly secured.
- Check all bolts, screws and knobs every 90 days. Tighten them if any are loose.
- Failure to follow these instructions may result in serious injury or death of yourself and people around you.
- Some of the parts are heavy and/or have sharp edge, please install it carefully to avoid hurting you and people around you.


Assembly Instruction

Please assemble in a wide and flat place.

Step 1

Take out 5 Castors (A) and Air Rod (C). Insert Castors (A) into Foot Stool (B). There are 5 Castors (A) need to be inserted. Then insert Air Rod (C) into the hole of Foot Stool (B) as shown.


* Caution: Confirm Castors (A) must be inserted deeply. Otherwise the castors could easily fall out and the chair could fall down.

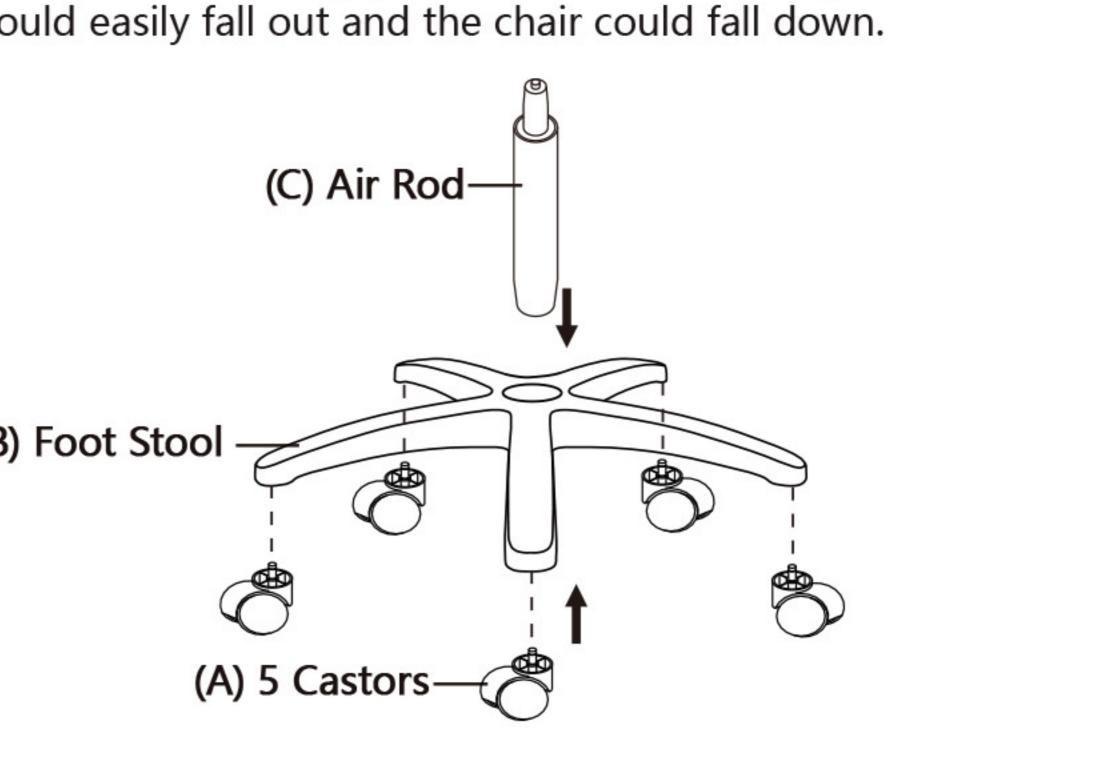

Step 2


Fix Base Plate (D) to the bottom of Seat Cushion (E). Tighten the 4 M6*30mm Screws (H) and 4 Gaskets (J) with Hexagon Wrench (L) firmly.

* Caution: Align the direction with the 'FRONT' mark for installation, half-tighten the screws first, and tighten the four screws after aligning the holes to prevent the chassis from shifting and being difficult to tighten

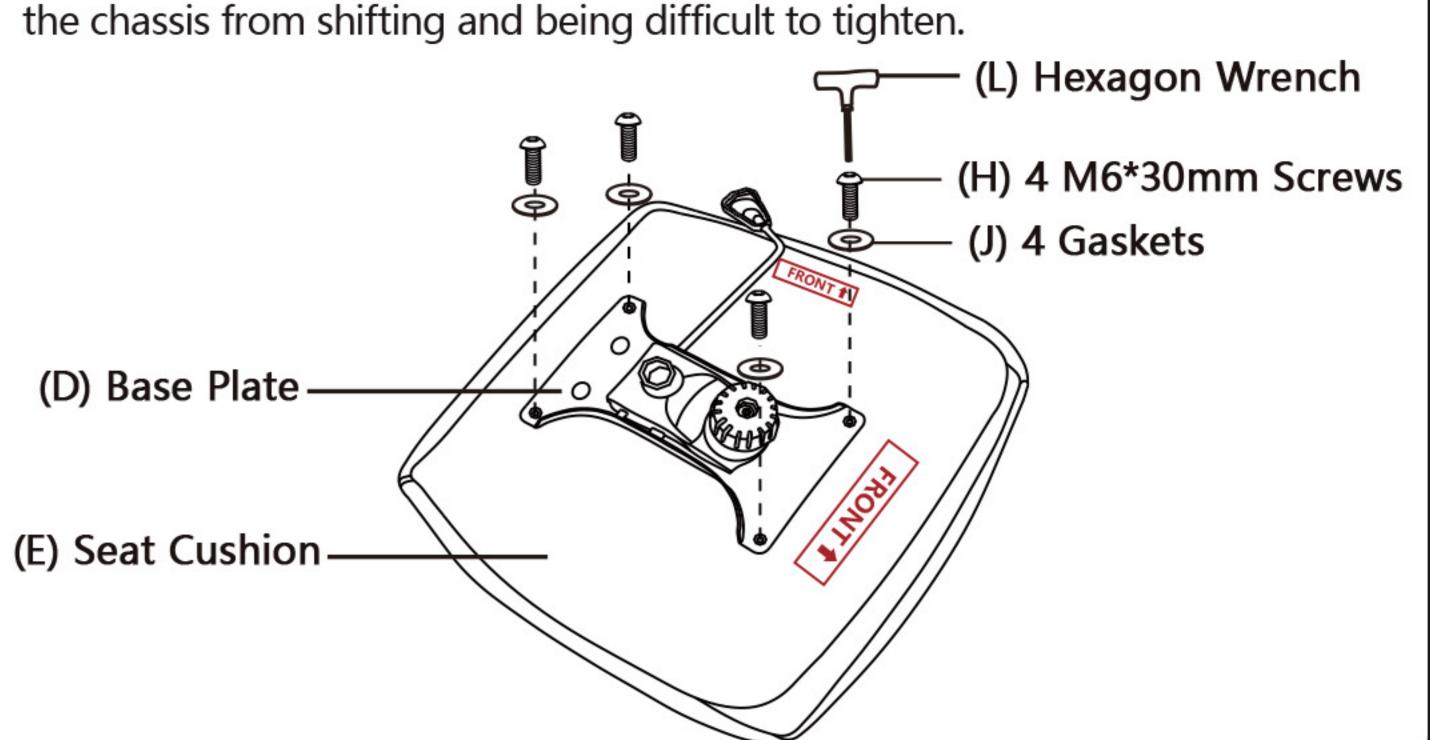

Step 3


Insert the step 2' Base Plate (D) into Air Rod (C) as shown. Then take out the 2 Armrests (G), tighten the 4 M6*35mm Screws (I) with Hexagon Wrench (L) and fix the 2 Armrests (G) to the two sides of the Seat Cushion (E).

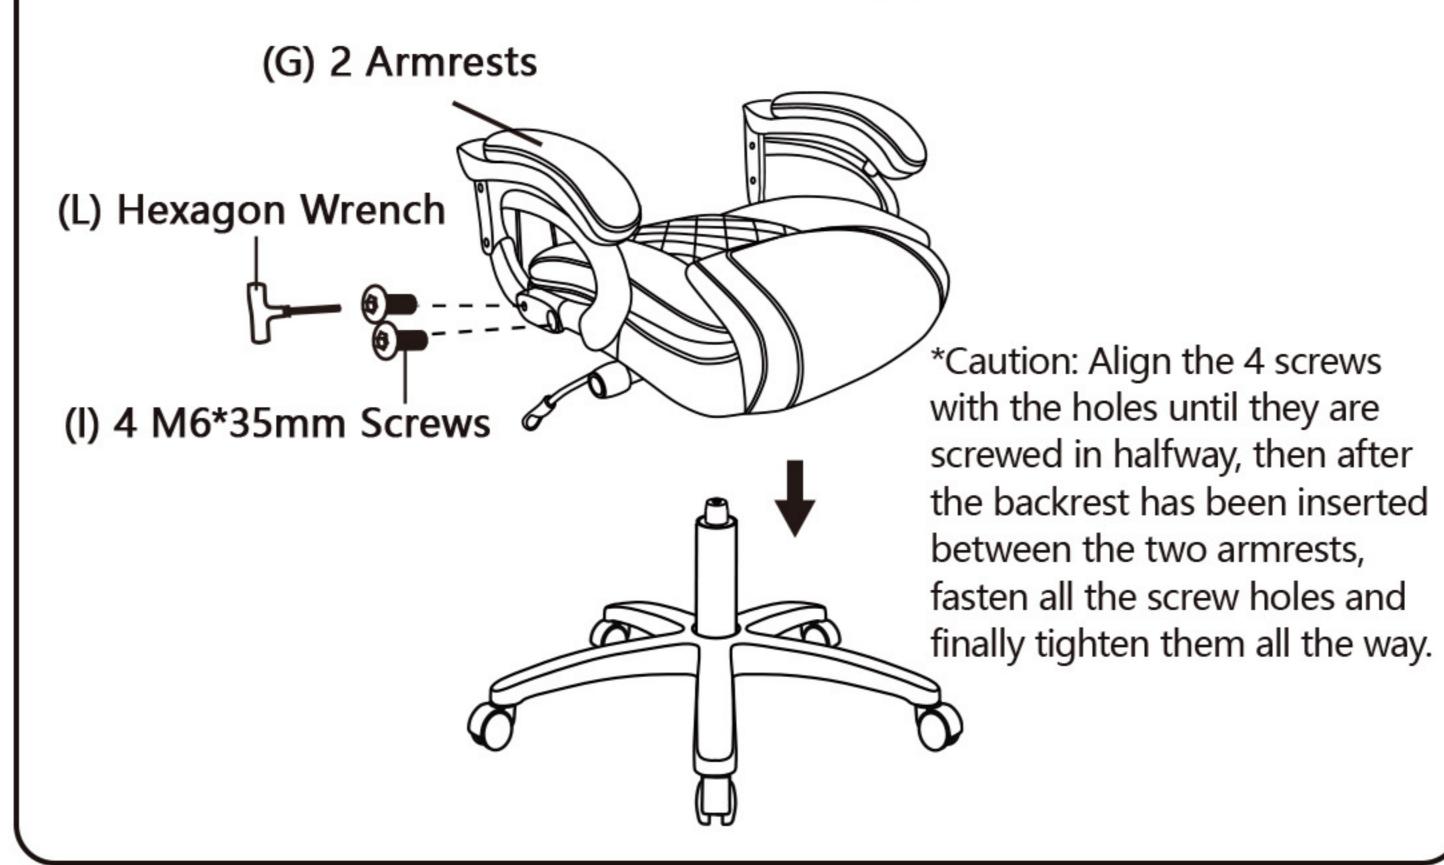

Step 4


Insert the Backrest (F) between the two Armrests (G), align the holes then press the armrests in and fasten them, then tighten with 4 M6*35mm Screws (I).

*Caution: As the chair is heavy, it is better for two people to put the backrest into the middle of the armrests together.

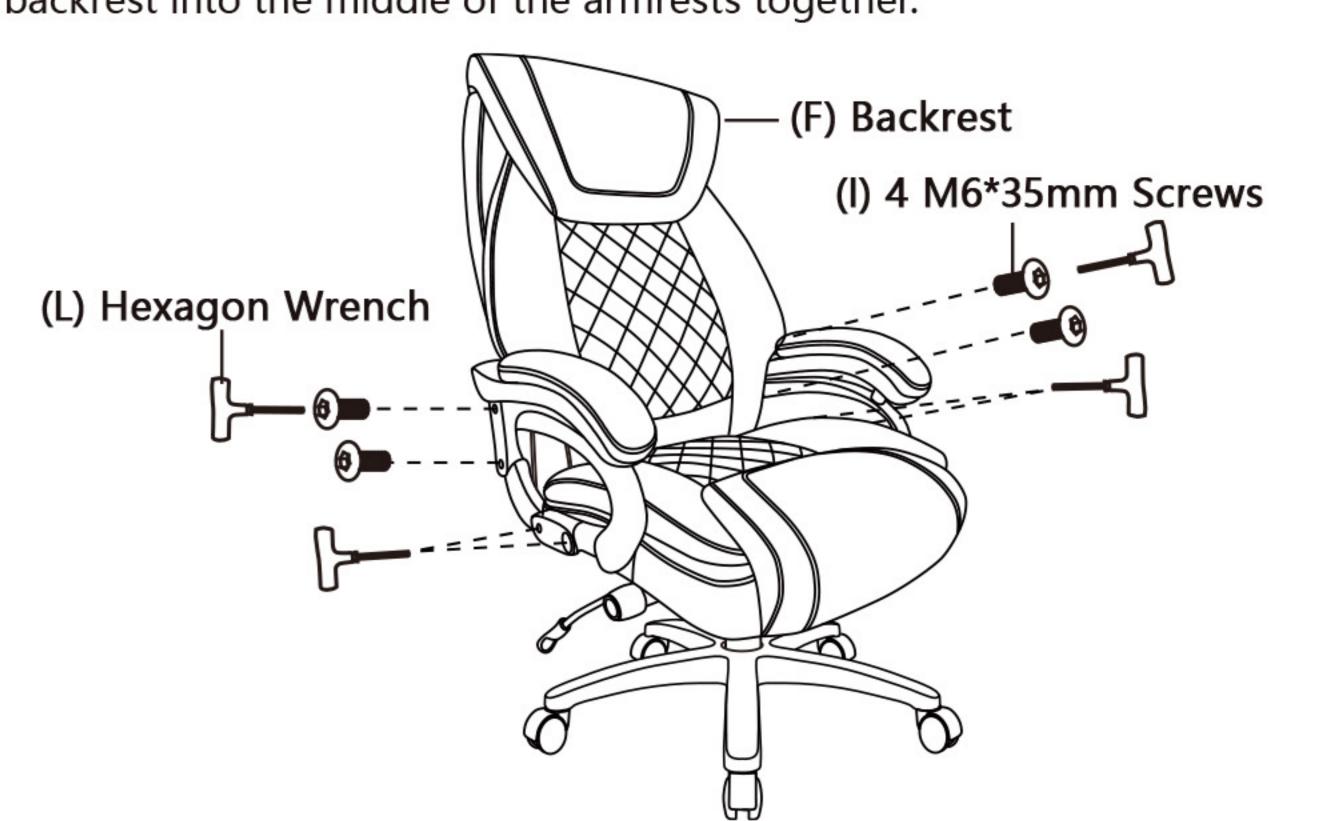


Step 5

Install the lumbar support adjuster on the Backrest (F) of the chair on the bottom of the Seat Cushion (E), align the adjuster with the holes according to the 'FRONT' mark and install with 2 M6*30mm Screws (H).

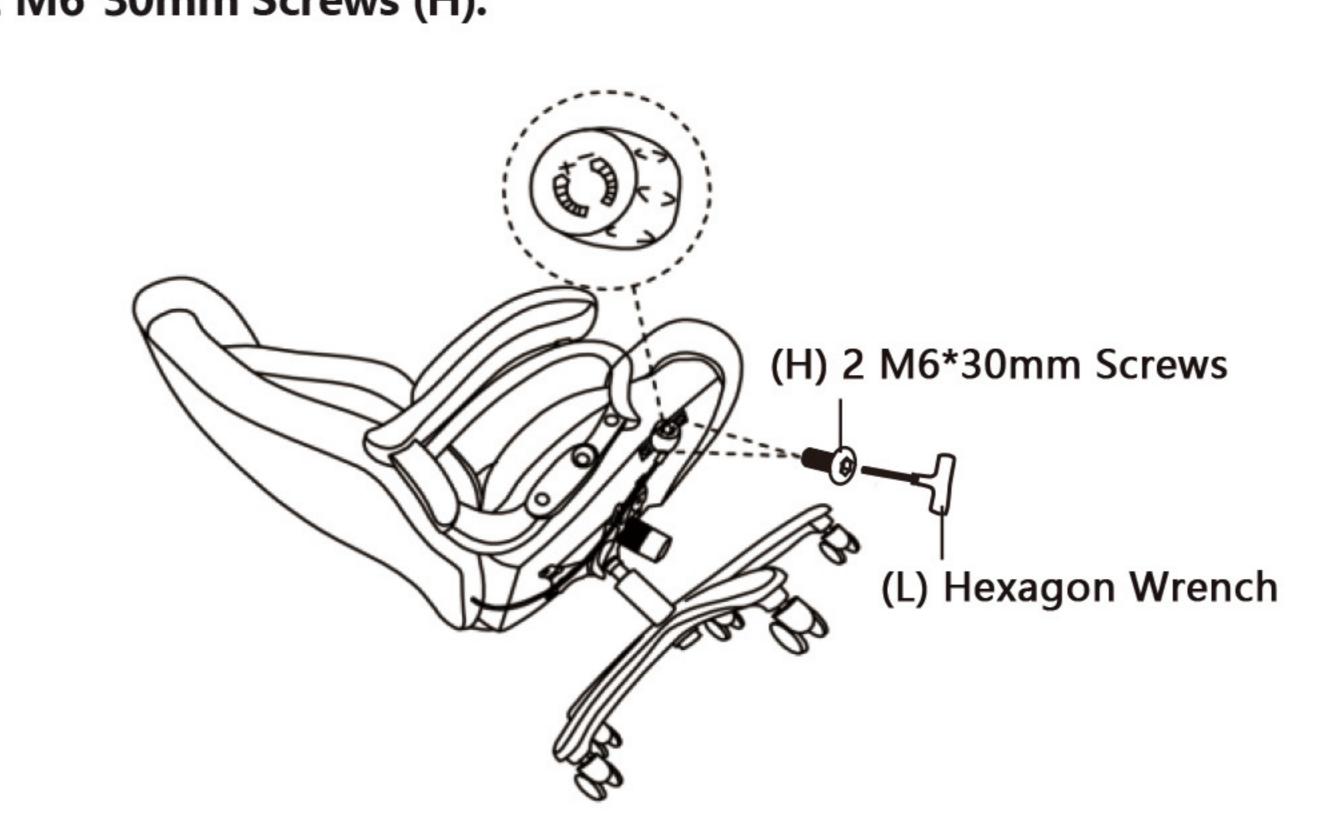

Step 6

Cover the screw holes on both sides of the Armrests (G) with 8 Decoration Caps (K), the assembly is complete now.

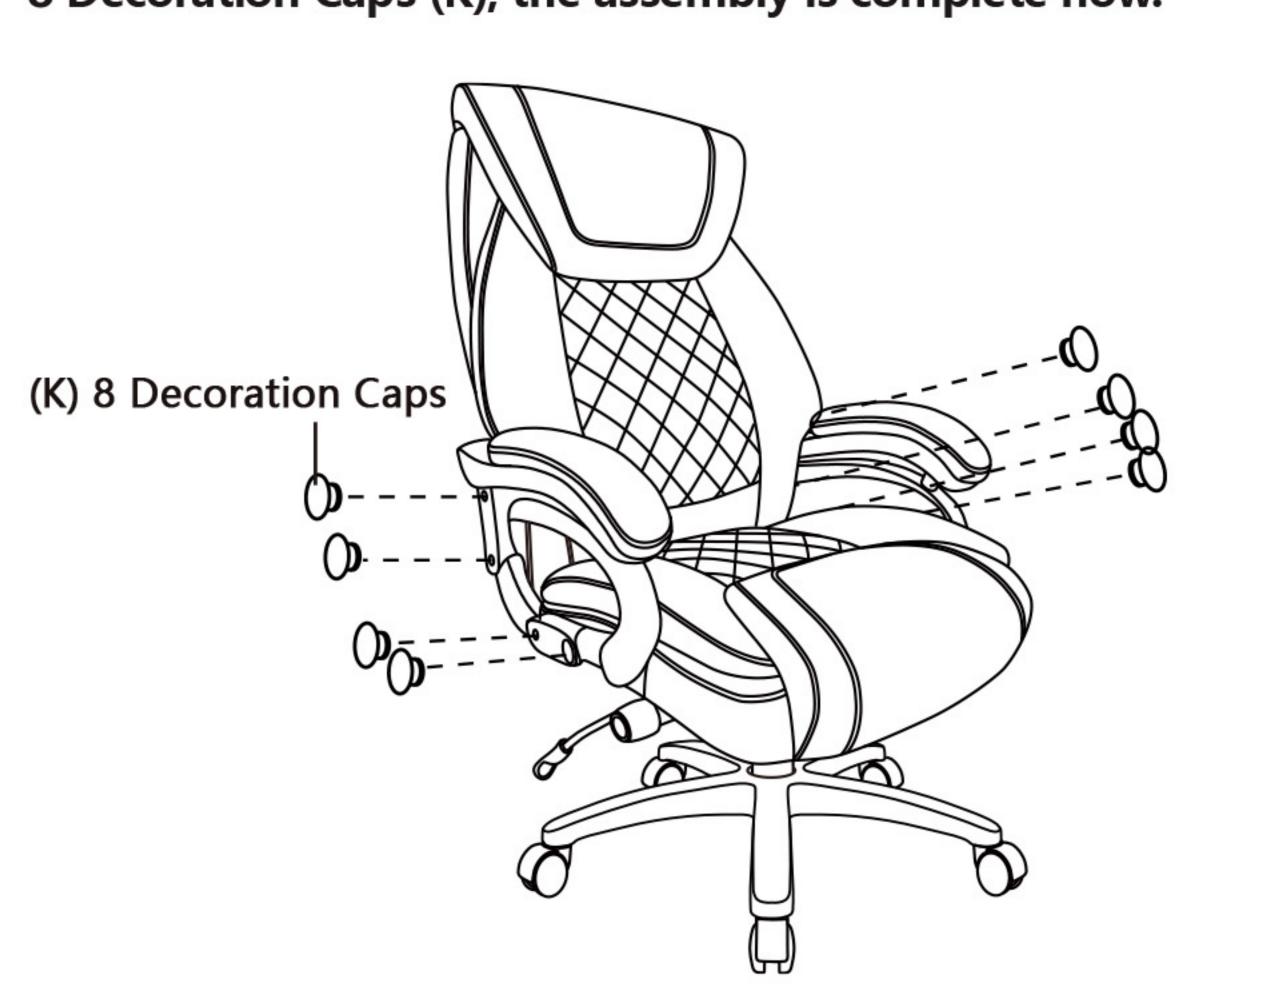

Activate Your Warranty Now!

We guarantee you a pleasant buying experience. Please scan the QR code to activate your warranty, so that you can enjoy priority and better after-sales service.

