



TL-D Standard Colours

TL-D 18W/54-765 1SL/25

TL-D Standard Colors lamps (tube diameter of 26 mm) create atmospheres from warm white to cool daylight. Lamps with moderate efficacy and color rendering.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		Voltage (Nom)		59 V
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Controls and dimming		
Life To 10% Failures (Nom)	10000 h	Dimmable	Yes	
Life to 50% Failures (Nom)	13000 h	Mechanical and housing		
Light technical		Bulb Shape	T8 [26 mm (T8)]	
Color Code	54-765	Approval and application		
Luminous Flux (Nom)	1050 lm	Mercury (Hg) Content (Nom)	8.0 mg	
Color Designation	Cool Daylight	Energy Consumption kWh/1000 h	22 kWh	
Lumen Maintenance 10000 h (Nom)	75 %	Product data		
Lumen Maintenance 2000 h (Nom)	90 %	Full product code	871150095043740	
Lumen Maintenance 5000 h (Nom)	80 %	Order product name	TL-D 18W/54-765 1SL/25	
Correlated Color Temperature (Nom)	6200 K	EAN/UPC - Product	8711500950437	
Color Rendering Index (Nom)	72	Order code	928048005422	
Operating and electrical		Numerator - Quantity Per Pack	1	
Power (Nom)	18.0 W			
Lamp Current (Nom)	0.360 A			

TL-D Standard Colours

Numerator - Packs per outer box	25
Material Nr. (12NC)	928048005422
Net Weight (Piece)	71.000 g

ILCOS Code	FD-18/62/2A-E-G13
------------	-------------------


Dimensional drawing

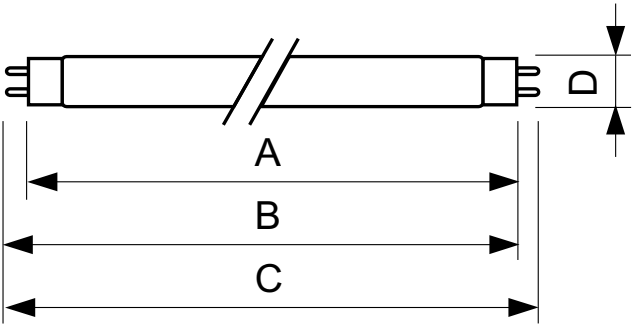


TL-D 18W/54-765 1SL/25

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 18W/54-765 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

Photometric data

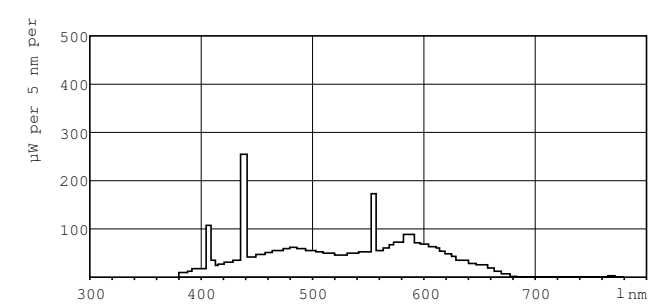


LDPB_TL-DSTD_54-765-Spectral power distribution B/W

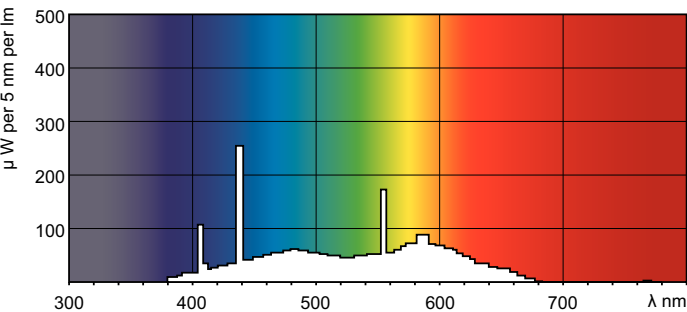


LDPO_TL-DSTD_54-765-Spectral power distribution Colour

Lifetime

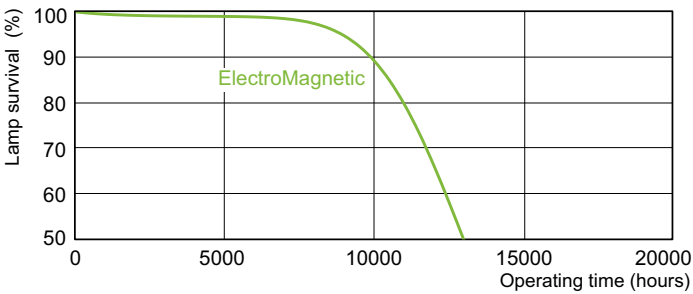


LDLE_TL-DSTD_0001-Life expectancy diagram

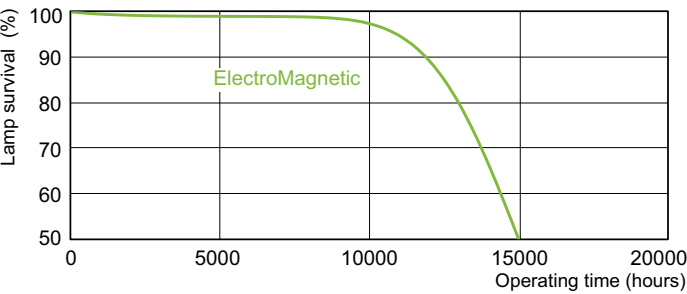

LDLE_TL-DSTD_0002-Life expectancy diagram

TL-D Standard Colours

Lifetime

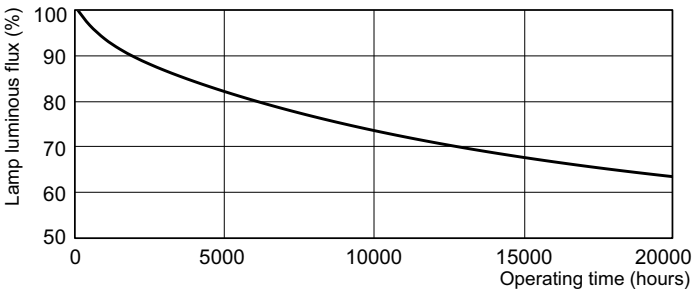

LDLM_TL-DSTD_0001-Lumen maintenance diagram

