


NDiS B360 Quick Reference Guide

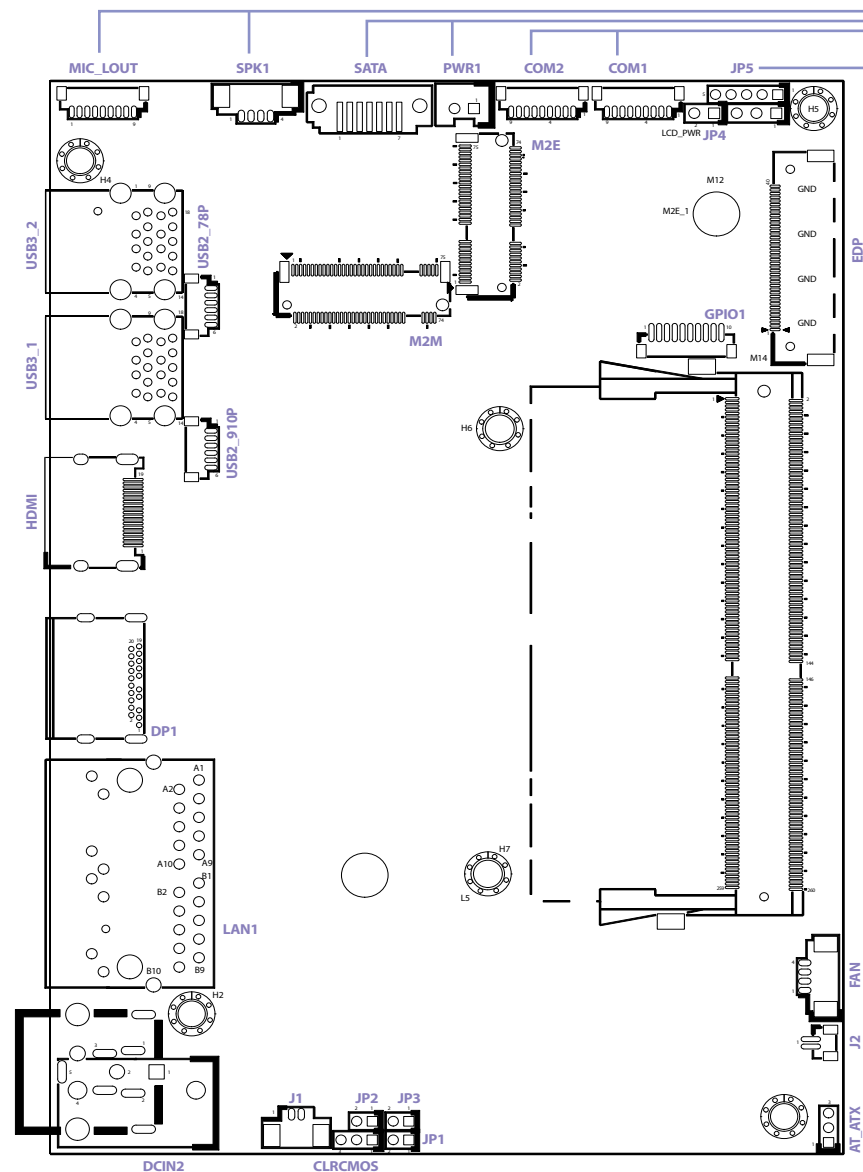

MIC_LOUT1: MIC&LINE Out Connector

Pin	Function
1	LOUT_R
2	LOUT_JD
3	GND
4	LOUT_L
5	GND
6	MIC_R
7	MIC_JD
8	MIC_L
9	GND

SATA: SATA Connector

Pin	Function
1	GND
2	SATA_TXP
3	SATA_TXN
4	GND
5	SATA_RXN
6	SATA_RXP
7	GND

COM1,COM2: COM Port Connector

Pin	Function
1	RI
2	CTS
3	RTS
4	DSR
5	GND
6	DTR
7	TXD
8	RXD
9	DCD

JP5: RI Connector

Pin	Function
1	RI1
2	COM1_RI
3	+5V
4	COM1_RI
5	+12V

SPK1: Speaker Connector

Pin	Function
1	OUT_L+
2	OUT_L-
3	OUT_R+
4	OUT_R-


PWR1: SATA Power Connector

Pin	Function
1	+5V
2	GND

JP4: 12V Header

Pin	Function
1	12V
2	GND

NDiS B360 Quick Reference Guide

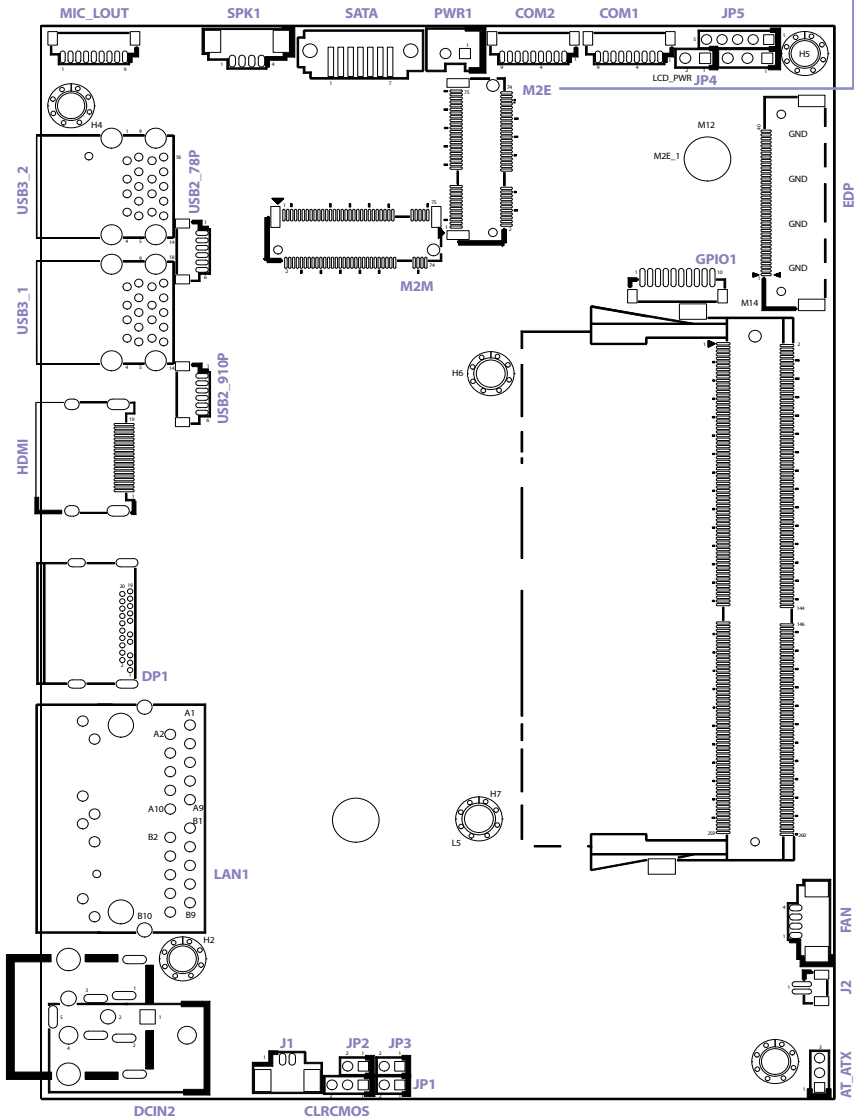

M2E (2230_M2E)

Pin	Definition	Pin	Definition
1	GND	2	3VSB
3	USBP	4	3VSB
5	USBN	6	NC
7	GND	8	NC
9	NC	10	NC
11	NC	12	NC
13	NC	14	NC
15	NC	16	NC
17	NC	18	NC
19	NC	20	NC
21	NC	22	NC
23	NC	32	NC
33	GND	34	NC
35	PCIE_TXP	36	NC
37	PCIE_TXN	38	NC
39	GND	40	NC
41	PCIE_RXP	42	NC
43	PCIE_RXN	44	NC
45	GND	46	NC
47	CLK_PCIEP	48	NC
49	CLK_PCIEN	50	SUSCLK
51	GND	52	PLTRST#
53	CLKREQ#	54	BT_DISABLE#
55	WAKE#	56	WIFI_DISABLE#
57	GND	58	NC
59	NC	60	NC
61	NC	62	NC
63	GND	64	NC
65	NC	66	NC
67	NC	68	NC
69	GND	70	NC
71	NC	72	3VSB
73	NC	74	3VSB
75	GND	76	

333




- **USB2_78P1, USB2_910P1:**
Internal USB2.0 x2 Port

GPI01: GPIO Connector


- **EDP1: eDP Connector**



NDiS B360 Quick Reference Guide

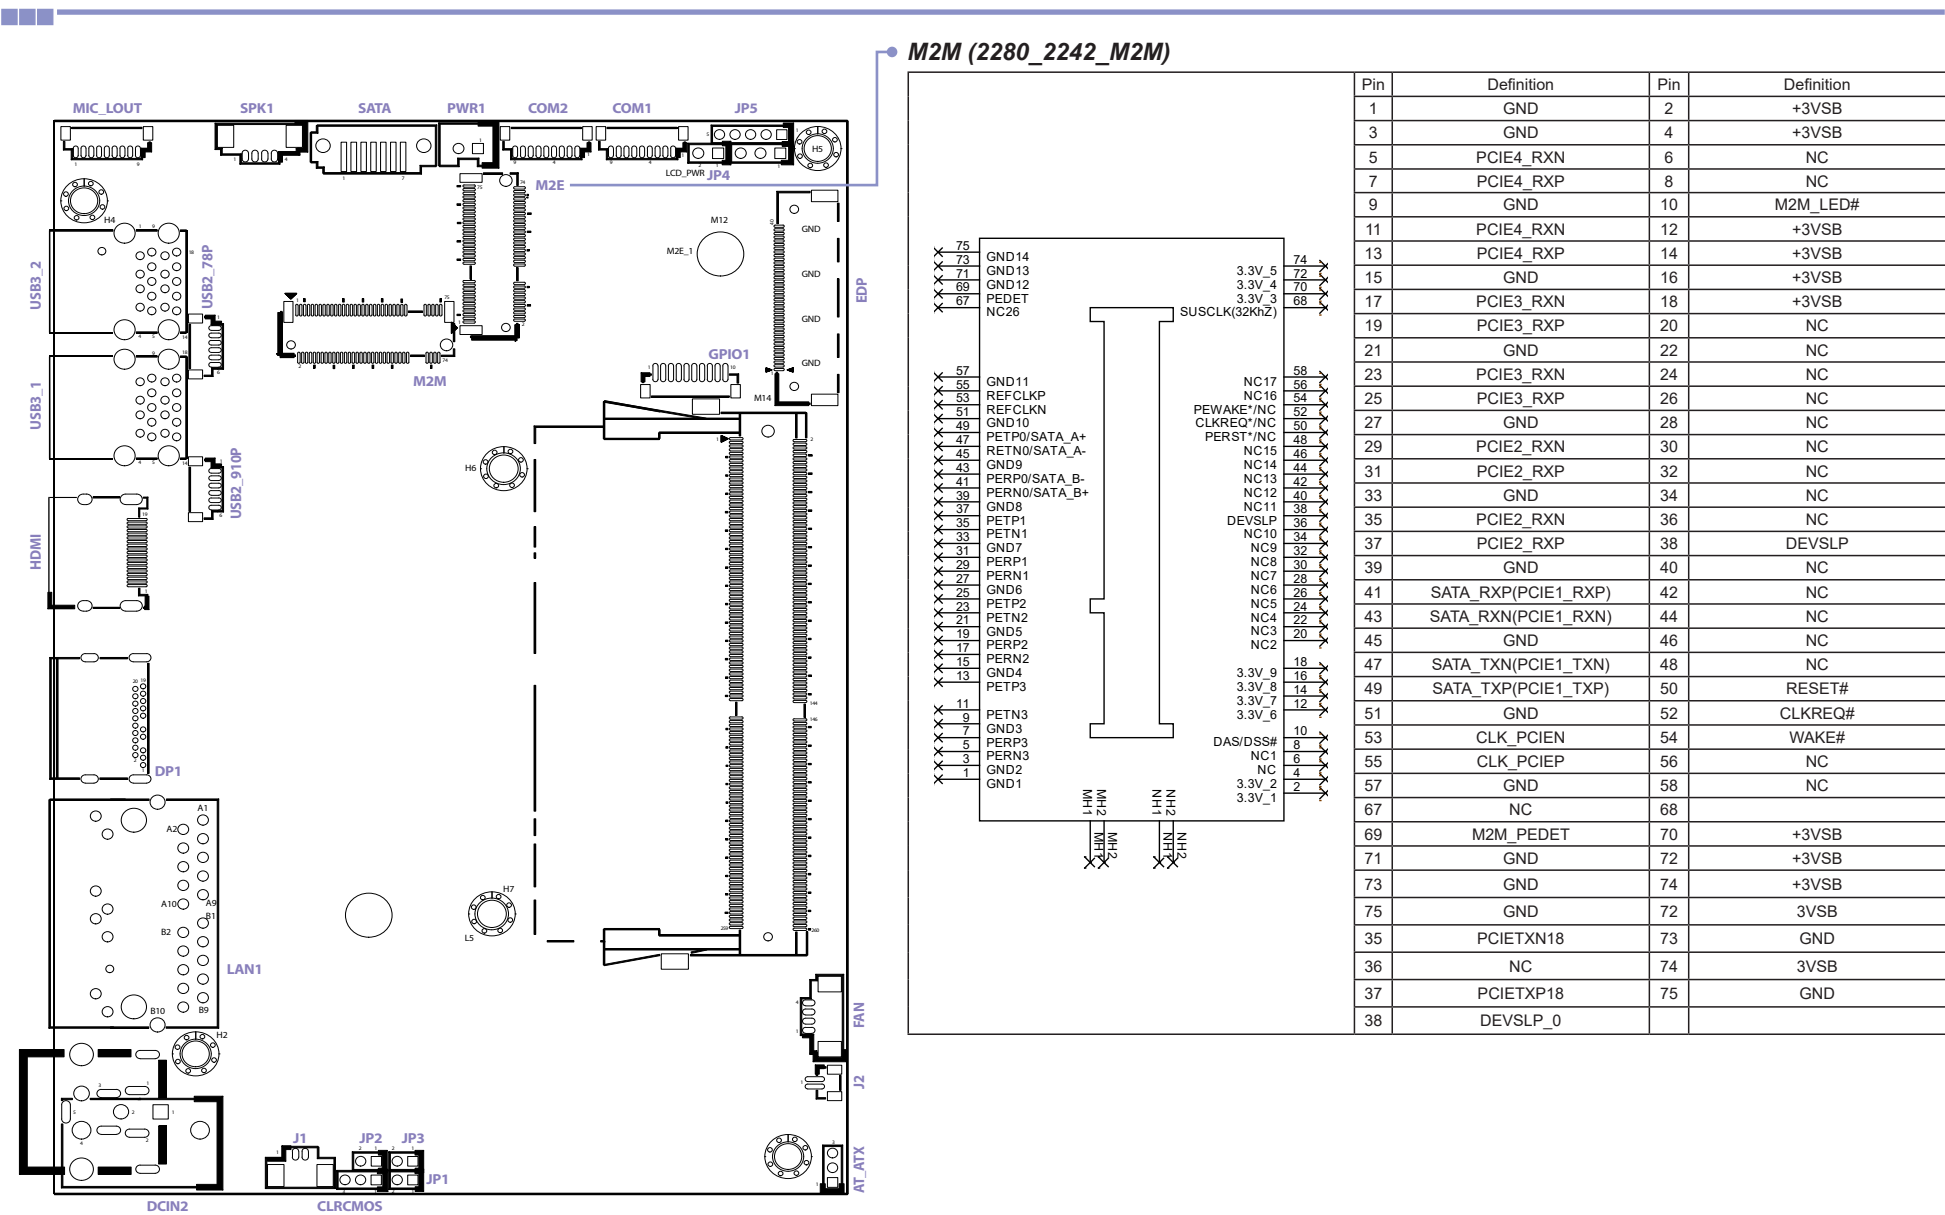

NDiS B360 Quick Reference Guide

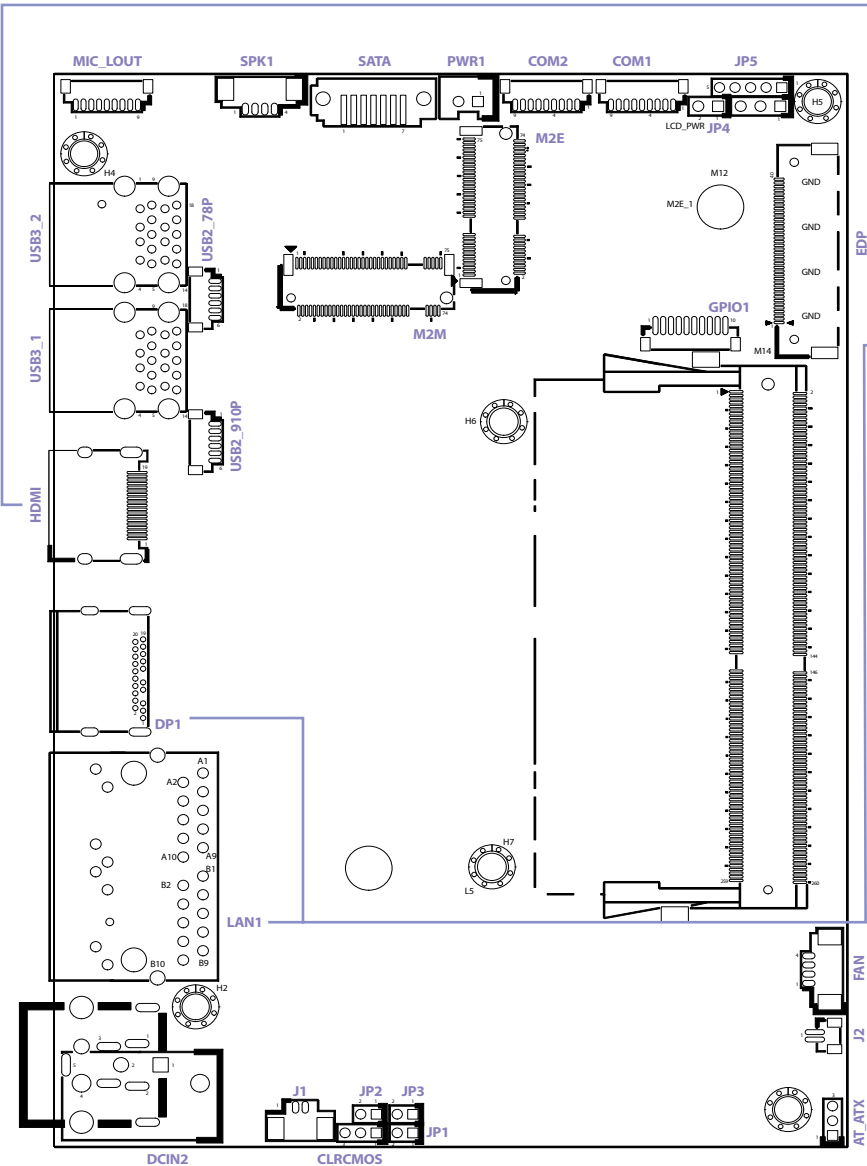

HDMI: Connector

Pin	Function	Pin	Function
1	D2+	11	GND
2	D2- SHIELD	12	CLKN
3	D1+	13	NC
4	D1- SHIELD	14	NC
5	D0+	15	SCL
6	D0- SHIELD	16	SDA
7	CK+	17	GND
8	CK- SHIELD	18	+5V
9	NC	19	HPD
10	SCL		
11	SDA		
12	PGND		
13	+5V		
14	HPD		
15	MH1		
16	MH2		
17	MH3		
18	MH4		
19	MH5		
20	MH6		

DP1: Connector

Pin	Function
1	DP0
2	GND
3	DN0
4	DP1
5	GND
6	DN1
7	DP2
8	GND
9	DN2
10	DP3
11	GND
12	DN3
13	CONFIG1
14	CONFIG2
15	AUXP
16	GND
17	AUXN
18	HPD
19	GND
20	+3V

LAN1: Connector

Pin	Function
1	MDI_0P
2	MDI_0N
3	MDI_1P
4	MDI_1N
5	MDI_2P
6	MDI_2N
7	MDI_3P
8	MDI_3N
9	CT
10	GND
11	LINK1000#
12	LINK100#
13	ACTLED#
14	+3VSB


FAN: Connector

Pin	Function
1	GND
2	+12V
3	FAN SPEED DETECT
4	FAN SPEED CONTROL

J2: System Power Button

Pin	Function
1	GND
2	PWRBTN#

NDiS B360 Quick Reference Guide

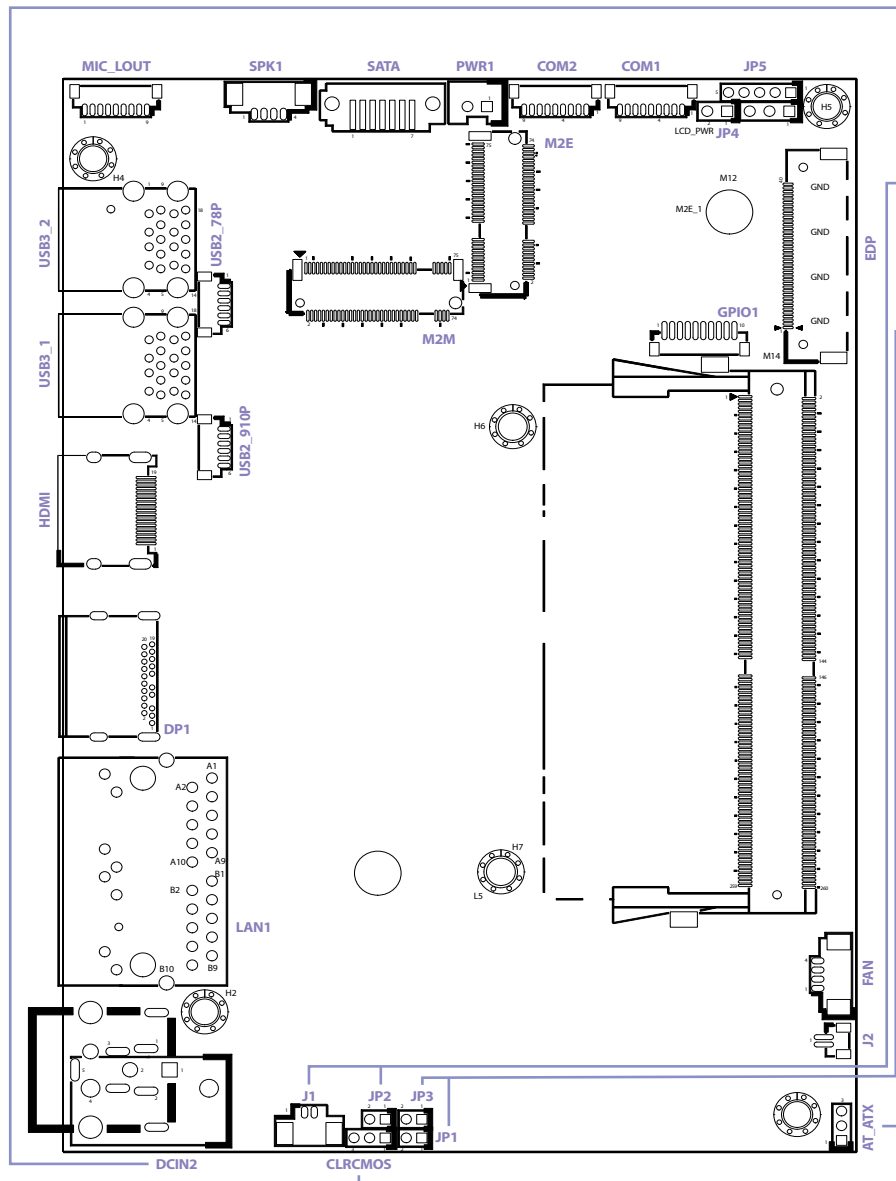

• DCIN2: DC Power Input Jack (+12V only)

	Pin	Function	Pin	Function
	1	+12VSUS	4	GND
	2	+12VSUS	5	CGND
	3	GND		

• J1: Battery Connector

	Pin	Function
	1	GND
	2	BAT

JP2: HDD LED Connector

	Pin	Function
	1	HDD_LED+
	2	HDD_LED-

• JP3: System Rest Mutton

	Pin	Function
	1	GND
	2	RESET#

JP1: Power LED Connector

	Pin	Function
	1	PWR_LED-
	2	PWR_LED+

• CLR CMOS: Clear CMOS

	Pin	Function
	1	Normal (default)
	2	Clear CMOS

AT_ATX: ATX/AT Mode Select

	Pin	Function
	1-2	AT
	2-3	ATX (default)