




Fast Track Troubleshooting

Publication # tsRS267TD Revision Date 03/30/2011

Models Covered:
 RS267TDBP/XAA
 RS267TDPN/XAA
 RS267TDRS/XAA
 RS267TDWP/XAA

IMPORTANT SAFETY NOTICE – “For Technicians Only” This service data sheet is intended for use by persons having electrical, electronic, and mechanical experience and knowledge at a level generally considered acceptable in the appliance repair trade. Any attempt to repair a major appliance may result in personal injury and property damage. The manufacturer or seller cannot be responsible, nor assume any liability for injury or damage of any kind arising from the use of this data sheet.


NOTICE: Door Handle Parts Change:
 Refer to bulletins.
 09/2010 Parts Change
 2/2011 Parts Change

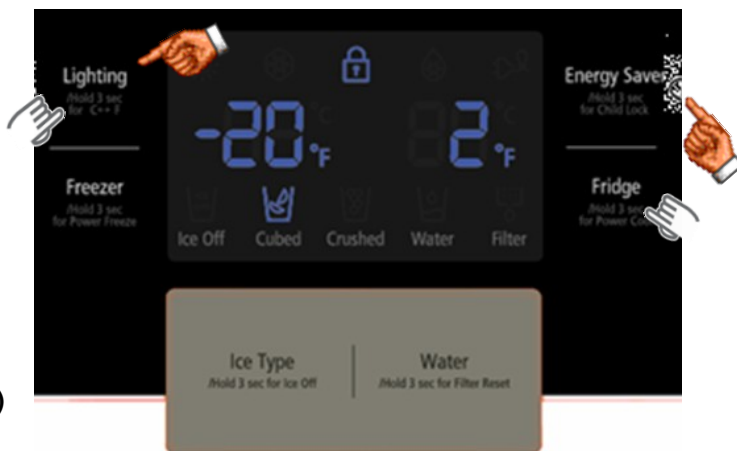

Self Diagnosis: Press both buttons (Energy Saver– Lighting) *simultaneously* (No sound when both buttons are pressed at the same time) 'til the display quits blinking and beeps, 8-12 seconds, then release and read Fault Codes. This will also cancel the Fault Mode created by self-diagnosis at power up.

Forced Mode: Press both buttons (Lighting– Fridge) *simultaneously* (No sound when both buttons are pressed at the same time) 'til it beeps and goes blank, 8-12 seconds

Wait 5 seconds between button



Press Freezer button one time at the Test Mode to Force Compressor Run, measure fan and compressor voltages at main PCB


Press Freezer button a second time to Force Defrost of Fridge, measure defrost voltage at main PCB

Press Freezer button a third time to Force Defrost for Fridge & Freezer, measure defrost voltages at main PCB

Sales Mode, No Compressor Operation

Press Lighting & Freezer temp buttons simultaneously for 3 sec (you will hear a “Ding Dong”) to remove or put into Sales Mode. When in the Sales Mode the Display will show "OF" "OF" Removing power will not cancel this mode.

Display Change F° to C° Press & Hold “Lighting” for 3 sec.

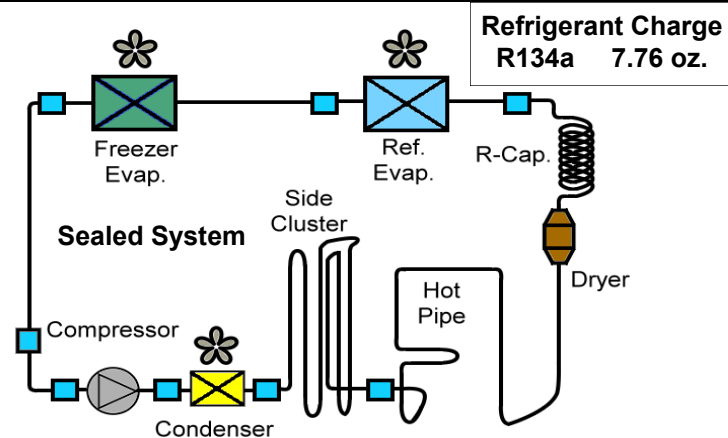

Component Value Chart

Component	Resistance	Wattage	Voltage
Freezer Defrost Heater	Ω	218	120vac
Fridge Defrost Heater	103Ω	140	120vac
Dispenser Heater	2057Ω	7	120vac
Fill Tube Heater	3130Ω	4.6	120vac
I/M Heater	99Ω	145	120vac
Sensors	2.5kΩ-89kΩ	N/A	1~4.5vdc
Fans	N/A	N/A	7~12vdc

SUPPORT INFORMATION

Training — Plus One <http://my.plus1solutions.net/clientPortals/samsung/>
 Help — GSPN <http://service.samsungportal.com/>
 Samsung Product Support TV <http://support-us.samsung.com/spstv/howto.jsp>
 Customer information videos and chat programs. Programs for Fridges, Laundry, Ranges & D/W

DC FAN MOTORS

Brushless DC Fan motors are used to save energy. The fans operate at two speeds. Fan speed information is read by the Main PCB. If the fan speed exceeds 600 RPM or the speed is too slow, or stopped the fan drive circuit is disabled, After 10 seconds the circuit tries again with 3 seconds of DC voltage. If the fan continues this activity for 5 cycles, 10 seconds off 3 seconds on, the fan drive circuit is disabled for 10 minutes.

TO TEST THE FAN CIRCUIT VOLTAGE.

Power off and back on to check the DC voltage to the motor, wait from 10 to 60 seconds for the fan voltage to kick in, and then check fan voltage, the average reading is 9 VDC. If you get 3 seconds of voltage every 10 seconds for the 5 fan power up cycles, then the Main PCB is good.

NOTE: You may need to put unit in FORCED FREEZE mode to activate the fans/compressor.

If the fan blade is blocked by ice, then defrost and check the motor again, after removing power from the unit.

If the evaporator is ice blocked and thus blocking the air flow, the fan will over RPM and is stopped. Remove ice and check the motor again. If everything is clear around the fan blade then the motor would be at fault. Continuous fan errors will be displayed on the front panel display. **PLEASE NOTE:** The door switches control the evaporator fan motors. Have them closed to test the motors. Delay time 10 – 60 seconds.

Heat Release Ice Makers

Heat Release Ice production Explanation

38 minutes after the water fill is complete, the control board will check the temperature of the eject Thermistor, on the Ice Maker Head, if the Thermistor reads a temperature lower than 18.5 degrees for more than 5 seconds, then the ice production process is completed. The Ice maker will harvest if the ice bucket is not sensed as full. If a Fault Mode is detected with the Ice Maker operation, the Ice Maker stops working for 3 hours. Which means, the Ice Maker checks the operation every 3 hours until it works properly.

Heat Release I/M Test Mode

Press and hold the ICE TEST S/W for at least 1.5sec, the harvest function will start. If the ice maker Thermistor is below 0 degrees the Ice maker heater turns on for about 2 minutes. If the temperature exceeds 0 degrees, Ice maker heater turns on for 30 seconds. After the Ice maker heater turns on for 30 seconds, the heater turns off and then Ice maker harvest motor turns on. The motor will rotate in right direction for about 3 minutes, after this, water supply valve is turned on, then the valve is turned off, the test mode is completed. If the above operation is not carried out within 6 minutes, it will go into a fault mode.

FREEZER TEMPERATURE CONTROL BY THE ICE MAKER

Interior Temperature of the freezer will be set to -14 degrees Fahrenheit until the ice bucket is full. When the ice bucket is full, the freezer will maintain original set temperature. Also, whenever the ice is used, the freezer will again set to -14 degrees Fahrenheit. Selecting "Ice Off" will allow the freezer to be controlled by the set temperature. If water is not hooked up, the freezer will always be at -14 unless "Ice Off" is selected.

Temperature/Resistance/Voltage Chart for Samsung Refrigerators Sensors

Temp.	(Ω)	Volts	Temp.	(Ω)	Volts	Temp.	(Ω)	Volts	Temp.	(Ω)	Volts
-29.2°F	64227	4.326	1.4°F	28021	3.685	32.0°F	13290	2.853	62.6°F	6771	2.019
-27.4°F	61012	4.296	3.2°F	26760	3.64	33.8°F	12749	2.802	64.4°F	6521	1.974
-25.6°F	57977	4.264	5.0°F	25562	3.594	35.6 °F	12233	2.751	66.2°F	6281	1.929
-23.8°F	55112	4.232	6.8°F	24425	3.548	37.4 °F	11741	2.7	68.0°F	6052	1.885
-22.0°F	52406	4.199	8.6°F	23345	3.501	39.2 °F	11271	2.649	69.8°F	5832	1.842
-20.2°F	49848	4.165	10.4°F	22320	3.453	41.0°F	10823	2.599	71.6°F	5621	1.799
-18.4°F	47431	4.129	12.2°F	21345	3.405	42.8°F	10395	2.548	75.2°F	5225	1.716
-16.6°F	45146	4.093	14.0°F	20418	3.356	44.6°F	9986	2.498	77.0°F	5000	1.675
-14.8°F	42984	4.056	15.8°F	19537	3.307	46.4°F	9596	2.449	78.8°F	4861	1.636
-13.0°F	40938	4.018	17.6°F	18698	3.258	48.2°F	9223	2.399	80.6°F	4690	1.596
-11.2°F	39002	3.98	19.4°F	17901	3.208	50.0°F	8867	2.35	86.0°F	4218	1.483
-9.4°F	37169	3.94	21.2°F	17142	3.158	51.8°F	8526	2.301	87.8°F	4072	1.447
-7.6°F	35433	3.899	23.0°F	16419	3.107	53.6°F	8200	2.253	89.6°F	3933	1.412
-5.8°F	33788	3.858	24.8°F	15731	3.057	55.4°F	7888	2.205	91.4°F	3799	1.377
-4.0°F	32230	3.816	26.6°F	15076	3.006	57.2°F	7590	2.158	95.0°F	3547	1.309
-2.2°F	30752	3.773	28.4°F	14452	2.955	59.0°F	7305	2.111	96.8°F	3428	1.277
-0.4°F	29350	3.729	30.2°F	13857	2.904	60.8°F	7032	2.064	100.4°F	3204	1.213

* Self-diagnosis CHECK LIST

Display		Trouble item	Trouble contents
F	R		
88		FZ-Sensor Error	Senser system in FZ compartment errors
88		FF-Sensor Error	Sensor system in FF compartment errors
89		FZ-DEF-Sensor Error	Defrost Sensor system in FZ compartment errors
89		FF-DEF-Sensor Error	Defrost Sensor system in FF compartment errors
88		Ambient-Sensor Error	Snesor external system errors
88	88	Flex room Error	Sensor system in Pantry Room compartment errors
88		I/M-Sensor Error(R)	Sensor system in ICE maker(R) errors
83		HUMIDITY-Sensor Error	Sensor system in Humidity Sensor error
84		I/M-Sensor Error(FF)	Sensor system in Ice maker(FF) errors
89		ICE ROOM-SENSOR ERROR	Sensor system in Ice Room errors
88		FZ-FAN Error	Fan motor system in FZ compartment errors
82		FZ-DEF-HEATER ERROR	DEFROST SYSTEM IN FZ COMPARTMENT ERRORS
83		FF-DEF-HEATER ERROR	DEFROST SYSTEM IN FF COMPARTMENT ERRORS
84		ICE/MAKER FUNCTION ERROR	ICE MAKER IN FZ FUNCTION ERRORS
85		FLEX ZONE DAMPER HEATER ERROR	DAMPER HEATER OPEN/ BAD WIRE
86		ICE/MAKER FUNCTION ERROR(FZ)	ICE MAKER IN FZ FUNCTION ERRORS
87	88	FLEX ZONE DAMPER HEATER ERROR	DAMPER HEATER OPEN/ BAD WIRE
83		ICE PIPE HEATER ERROR(FZ)	ICE PIPE HEATER IN FZ COMPARTMENT ERRORS
89		ICE MAKER FUNCTION ERROR(FF)	SENSOR SYSTEM IN HUMIDITY SENSOR ERRORS
40		ICE ROOM-FAN ERROR	FAN MOTOR SYSTEM IN ICE ROOM ERRORS
88		PANEL ↔ MAIN MICOM COMMUNICATION ERROR	PANEL < > MAIN MICOM COMMUNICATION ERRORS
88		ICE DUCT-HEATER ERROR(FF)	HEATER SYSTEM IN ICE DUCT(FF) ERRORS

CN= Connector # for measuring voltages; () means go to connector #, pin # shown in () for voltage common.

CN30 Sensors & Switches Component Name

4-(CN76-1) F Def Sensor (Org-Gry) 2.3~4.2vdc

Voltage on operating component

Pin #s & wire colors on each connector to measure voltages

Key To Read PCB Layout

CN78
 1-2 Fz LED (Brn-Gry)
 3-5 FF Low LED (S/Blu-Gry)
 4-5 FF Upper LED (Prp-Gry)
 11 Flow Sensor Hall in (Pnk)
 12 Flow Sensor Gnd (Gry)
 13 Flow Sensor Hall out (Wht)


CN50
 3-5 13vdc (Red-Gry)
 4-5 5vdc (Org-Gry)
 6-10 Ice Sw (Pnk-Gry)
 7-10 Water Sw (Blu-Gry)
 8-15 Jumper (Prp)
 11-10 Bucket Sw (Grn-Gry)

CN76 Cool Zone
 1-3 13vdc (Red-Blk)

CN40 Sensors & Switches
 2-1 Ambient Sensor (Yel-Yel) 1.2~2 vdc
 3-4 Frz Dr Sw (W/Grn-Gry)
 5-4 Fz Sensor (Yel-Gry) 3.5~4.2vdc
 6-4 F Def Sensor (Blu-Gry) 2.3~4.2vdc
 7-4 R Door Sw (W/Red-Gry)
 9-4 R Sensor (Blk-Gry) 2~4.2vdc
 11-4 R Def Sensor (Prp-Gry) 2~4.2vdc

CN90 Ice Maker
 3-8 Sensor I/M eject (Wht-Gry)
 4-8 Test Sw (S/Blu-Gry) 5vdc
 5 Full Hall IC out (Blu)
 6 Horiz Hall IC out (Prp)
 7-8 5vdc (W/Yel-Gry)

CN75 F, R, C Fans
 2-1 C Fan (S/Blu-Gry) 7-11vdc
 3-1 R Fan (Org-Gry) 7-11vdc
 4-1 F Fan (Yel-Gry) 7-11vdc
 5 F Fan FG (Blk)
 6 R Fan FG (Brn)
 7 C Fan FG (Red)
 10- vdc Gnd

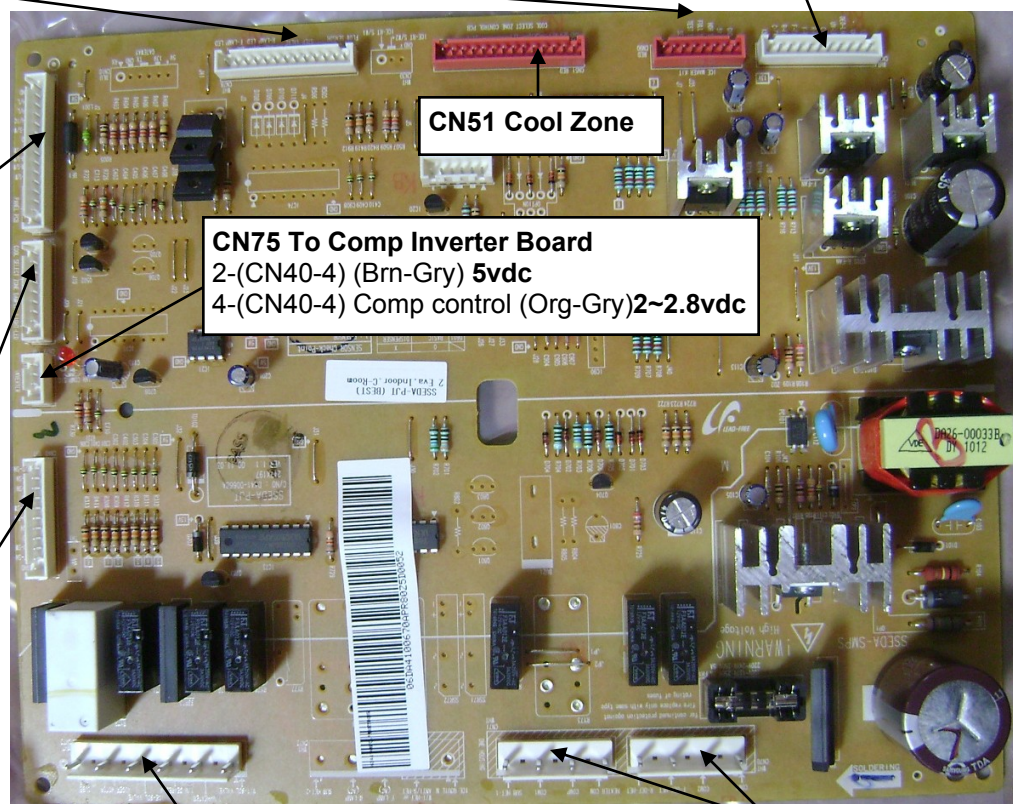


CN51 Cool Zone

CN75 To Comp Inverter Board
 2-(CN40-4) (Brn-Gry) 5vdc
 4-(CN40-4) Comp control (Org-Gry) 2~2.8vdc

CN70/CN71 All 120vac
 1 Common N (Blk)
 3 Common L (Red)
 5-9 F Defrost (Brn-Org)
 7-9 R Defrost/Fill Tube (Wht-Org)
 9 Hearer Common (Org)
 13- Common N (Blk)
 15-3 Door Cap/Disp Heater (Blu-Red)

CN73 All 120vac
 1-(CN70-9) Dispenser Valve (W/Blk-Red)
 3-(CN70-3) I/M Htr (W/Blu-Red)
 5-(CN70-3) I/M Mtr (Brn-Red)
 7-(CN70-9) I/M Valve Fridge (Prp-Red)
 9-(CN70-9) Auger Motor (Pnk-Red)
 11-(CN70-9) Cube Solenoid (Yel-Red)

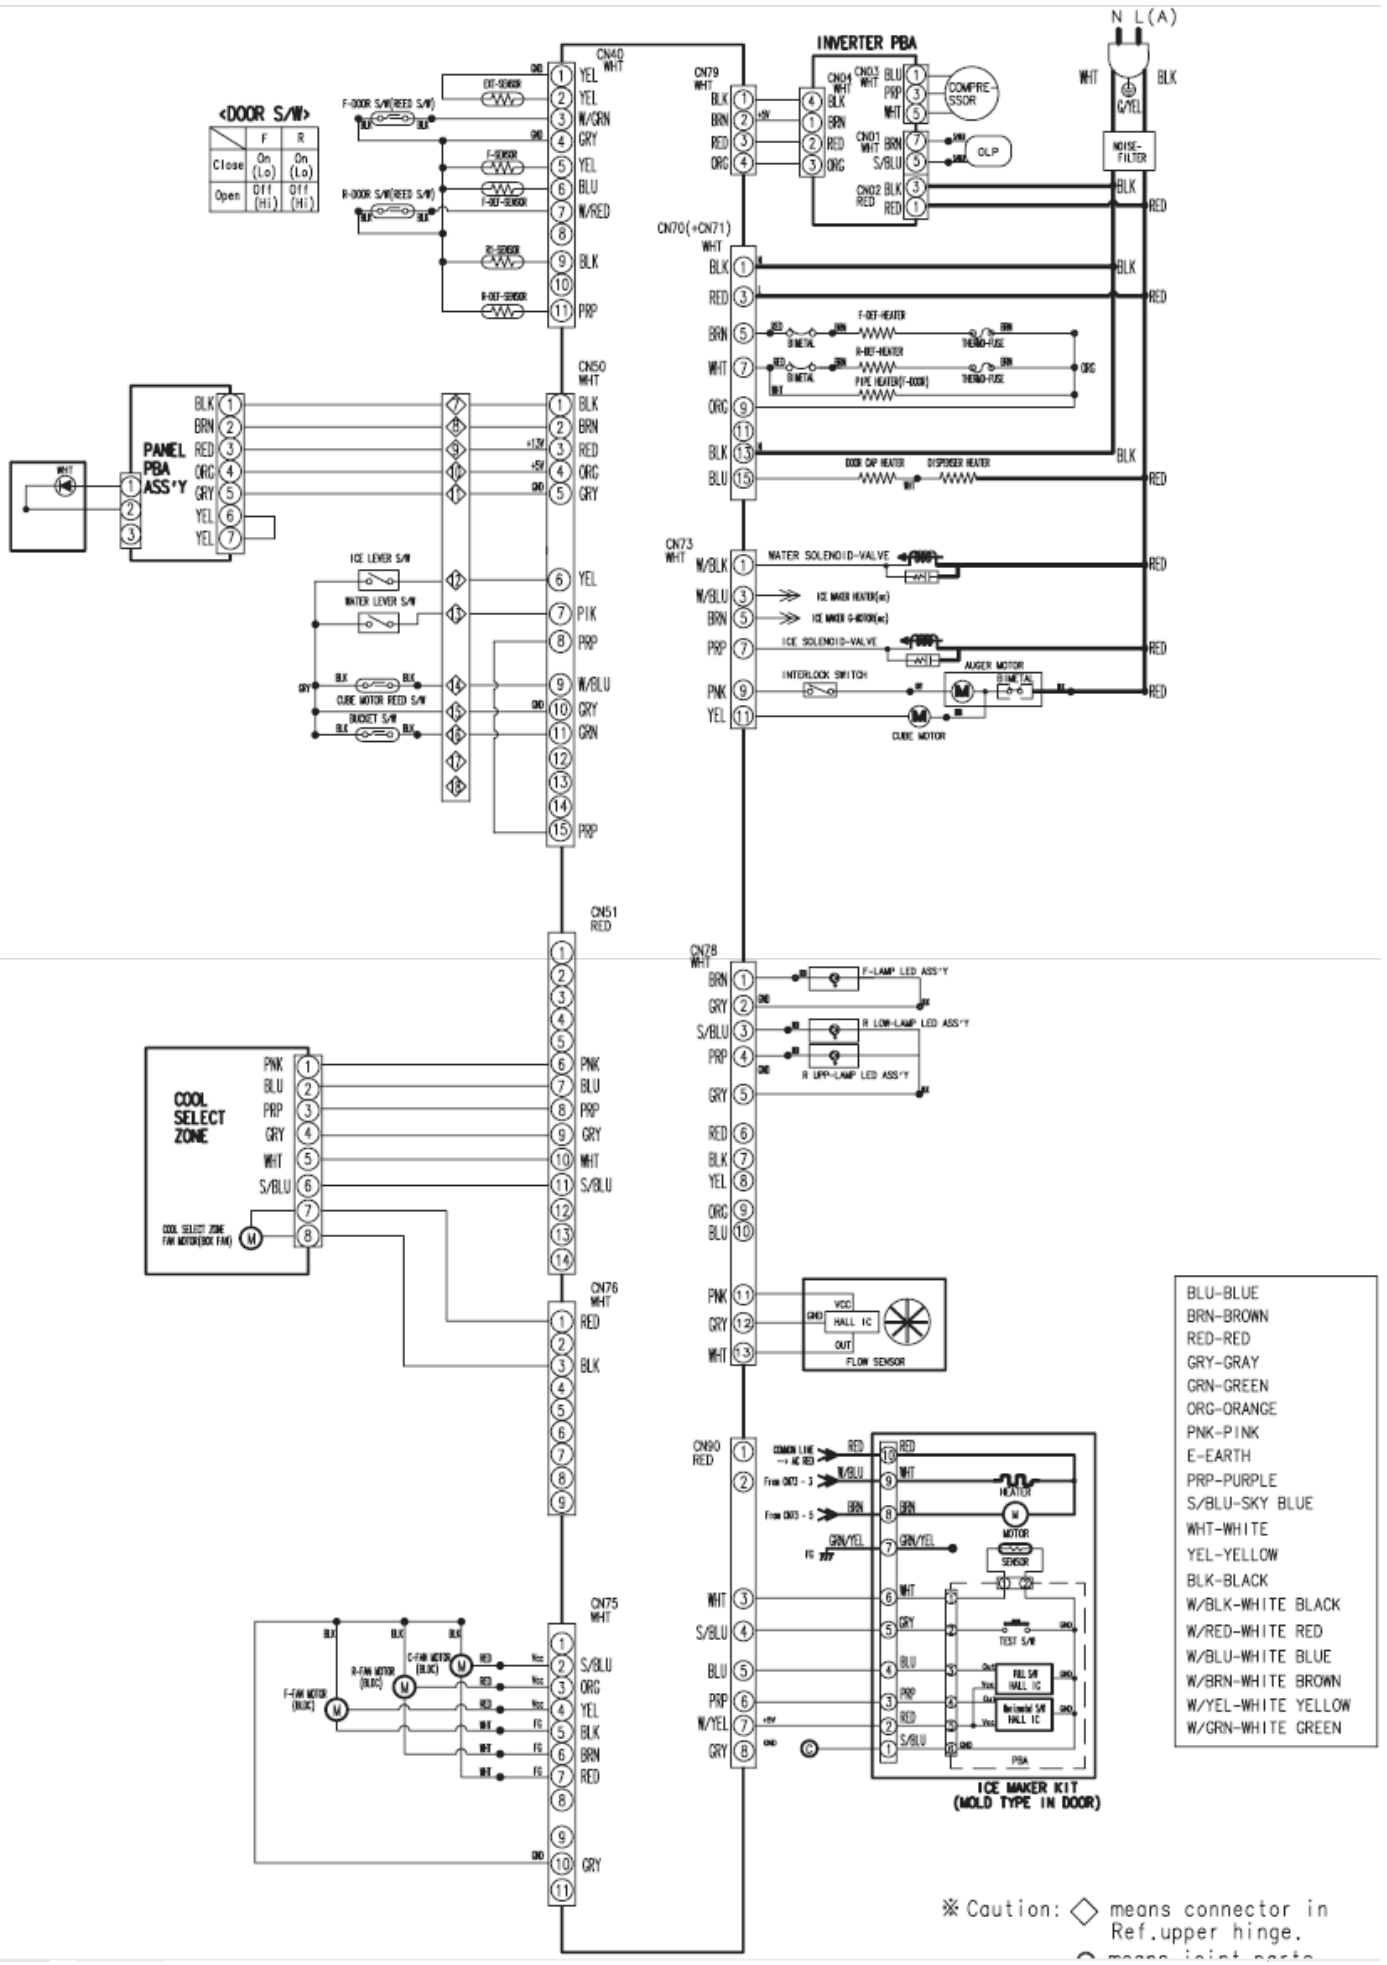


Compressor & System Operation Testing

TEST BEFORE INTERPRETING LED BLINKING FREQUENCY

Compressor not running

1. Activate Forced Compressor Operation, wait 2 minutes (in case of high head pressure)
2. If compressor doesn't start, check CN75 for 2~2.8vdc (if not there replace Main PCB)
3. Check for 120vac to inverter PCB CN02 L-N
4. If voltage is OK, remove power, disconnect CN03 (Inverter PCB) and check resistance to the windings. Aproxametly 10 ohms. If not correct , inspect wire harness, if OK replace compressor.
5. Disconnect CN02 (SMPS PCB), check resistance to Overload , if open replace overload.


CN76 To Comp Inverter Board
 2-(CN40-4) (Brn-Gry) 5vdc
 4-(CN40-4) Comp control (Org-Gry) 2~2.8vdc

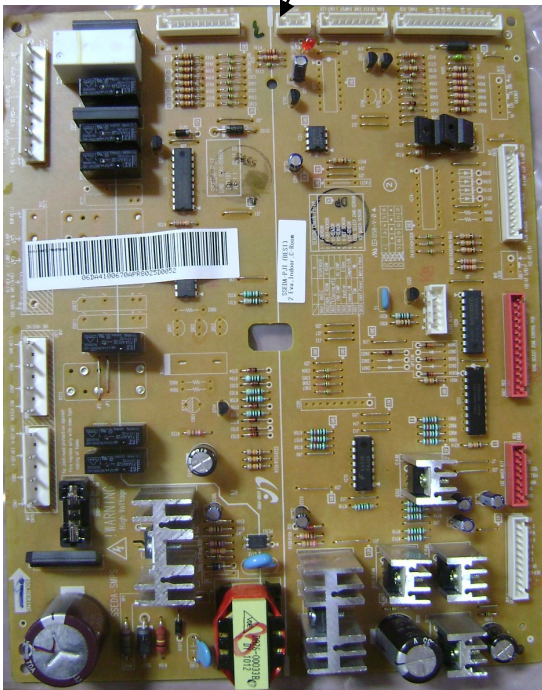

CN04 Compressor Control
 2- (CN40-4) 5vdc (Brn-Gry)
 4 Comp Signal (Org)


CN02 Overload & A/C Line
 1 OLP (Brn)
 3 OLP (S/Blu)
 3 L (Blk)
 1 N (Red)

CN03 Compressor Windings
 1 Compressor (Blue)
 3 Compressor (Prp)
 5 Compressor (Wht)

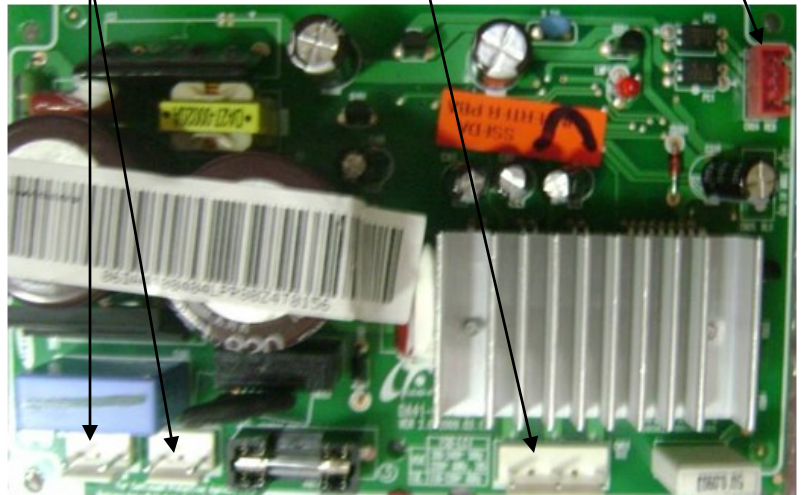


Protection Functions	LED Blinking Frequency	Test	Replace
Starting Failure	●	Check the Inverter PCB & Comp Relay Connectors	Connectors OK, replace Inverter PCB, if same, replace compressor
SPM Fault	● ●	If blinking after reset,	Check System for restriction & refrigerant, if OK replace Inverter, if same, replace compressor
Detecting Position Failure	● ● ●	Check Inverter Connectors,	Connectors measure OK, replace compressor, if same, replace Inverter PCB
Motor Locked	● ● ● ●	Compressor Locking	Compressor
Low Voltage	● ● ● ● ●	Compressor Locking, check input voltage	Replace Inverter PCB, if same, replace Compressor
Over Voltage	● ● ● ● ● ●	Compressor Locking, check input voltage	Replace Inverter PCB, if same, replace Compressor

RSG257AA / RS265TD / RS267TD Ice Maker/Auger Removal

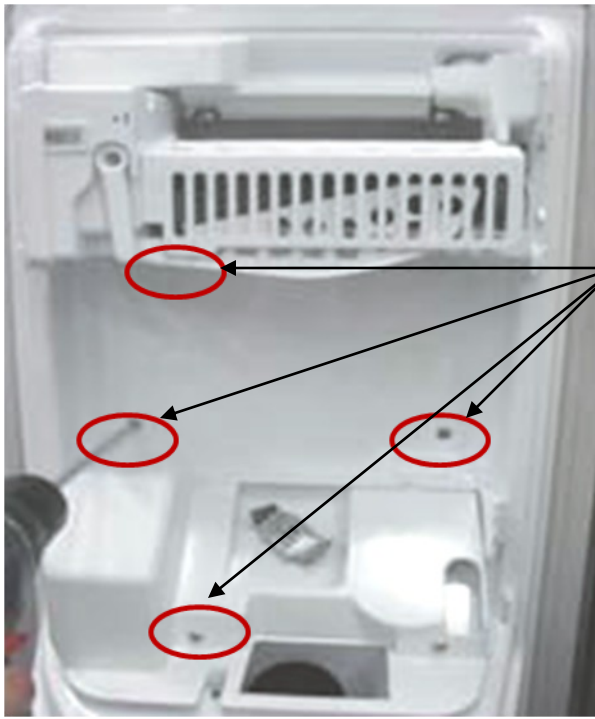

Remove 4 screws

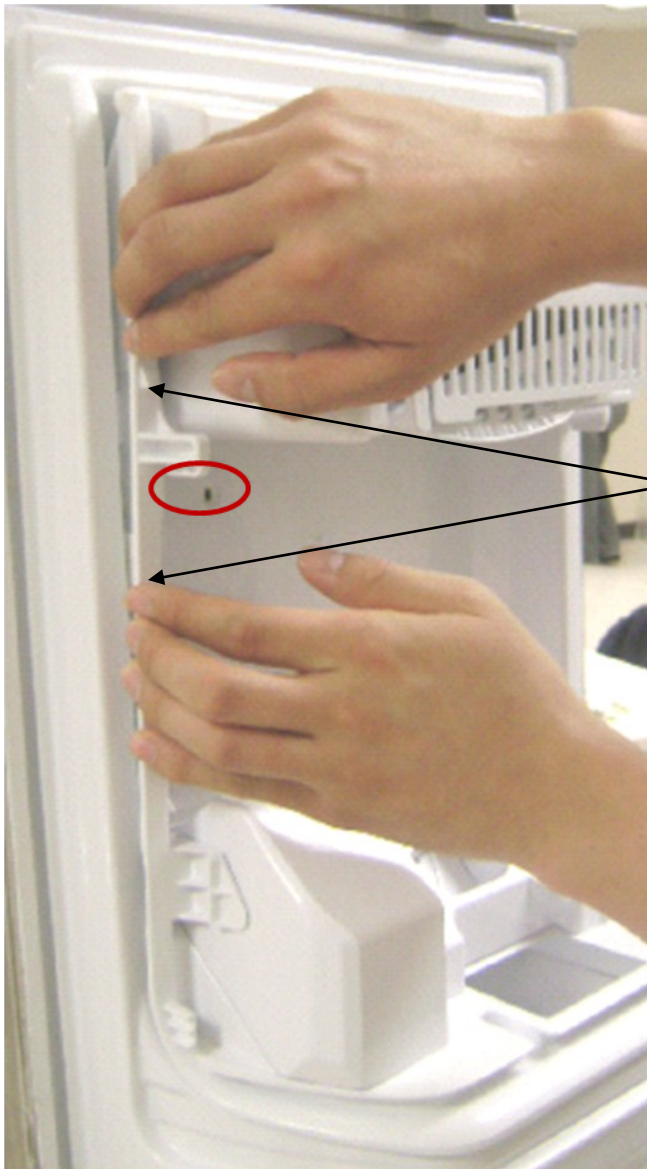

Pull inward to remove ass'y from
the liner

