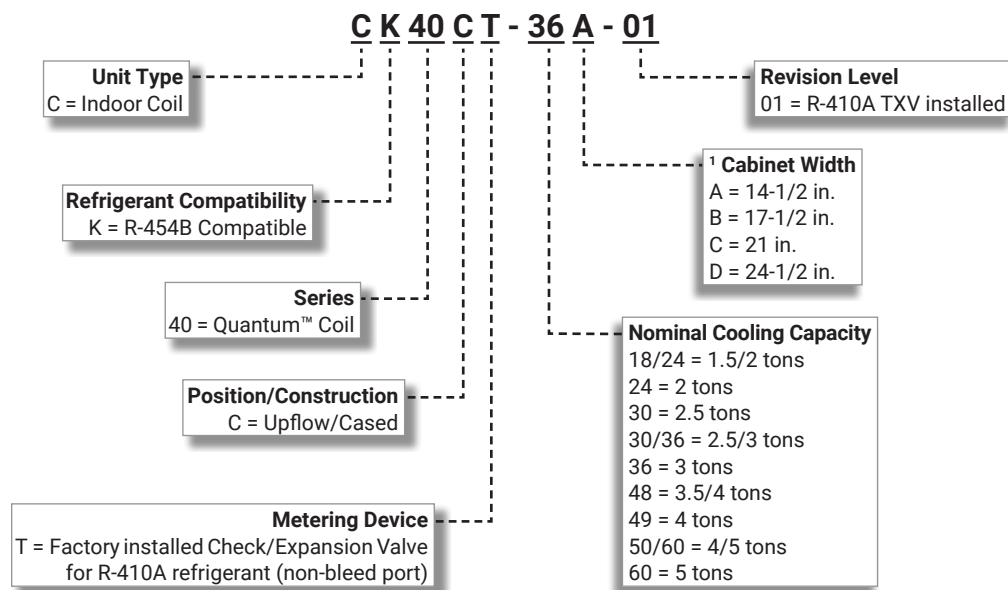


CK40CTUpflow | Cased | Quantum™ Coil | TXV Furnished | **R-410A** / **R-454B****RESIDENTIAL
PRODUCT SPECIFICATIONS (EHB)****1.5 to 5 Tons**

NOTE - Coils are furnished with a factory installed R-410A expansion valve. As an option, a R-454B expansion valve may be substituted. See page 5.

NOTE - See R-454B Refrigerant Conversion Table on page 5 for additional components required for conversion.

MODEL NUMBER IDENTIFICATION

¹ Furnaces with the same letter designation physically match the indoor coil.

CONTENTS

Air Resistance	6
Approvals And Warranty	2
Contents	2
Dimensions	7
Features	2
Model Number Identification.	1
Optional R-454B TXV Substitution	5
R-454B Refrigerant Conversion - Order Separately	5
Specifications	4

APPROVALS AND WARRANTY

APPROVALS

- Tested with matching air conditioners and heat pump units in the Lennox Research Laboratory environmental test room in accordance with AHRI Standard 210/240-2023
- AHRI Certified system match-ups and expanded ratings, visit www.LennoxPros.com
- Air resistance tests from Lennox Laboratory air test chamber

NOTE – Coils can be field configured for use with R-454B refrigerant during the initial installation only. Coils may not be modified after initial installation.

WARRANTY

- All other covered components:
 - Limited five years in residential installations
 - Limited one year in non-residential installations

NOTE - Refer to Lennox® Basic Limited Warranty at www.Lennox.com for additional details.

FEATURES

APPLICATIONS

- 1.5 to 5 ton nominal sizes
- Lennox designed upflow cased indoor coils can easily be installed with most Lennox upflow furnaces
- Factory installed R-410A check/expansion valve

NOTE - Coils can be field converted for use with R-454B refrigerant.

COIL CONSTRUCTION

Quantum™ Coil

- Lennox designed and fabricated coil
- Aluminum tubing, hairpins, distributor and header tubes
- Copper refrigerant sweat connections on both liquid and suction lines for easy brazing
- Ripple-edged aluminum fins
- Lanced fins provide maximum exposure of fin surface to air stream
- Helical grooved tubing provides superior heat transfer
- Twin coil construction assembled in an “A” configuration for large surface area
- High pressure testing insures leak-proof construction

Refrigerant Line Connections

- Copper refrigerant sweat connections on both liquid and suction lines for easy brazing
- Lines extend outside of the cabinet for ease of connection
- See dimension drawings for locations

Anti-Microbial Drain Pan

- Non-corrosive, UV-resistant polymer drain pan with dual FPT drain connections
- Anti-Microbial additive resists growth of mold and mildew on drain pan which improves indoor air quality and reduces drain line blockage

R-410A Check and Expansion Valve

- For use with R-410A systems
- Wide range valve with Chatleff style fitting
- Factory installed on all models

FEATURES

R-454B REFRIGERANT CONVERSION

Additional Components are required for conversion to R-454B Refrigerant:

- Refrigerant Detection System (RDS) Coil Sensor Kit
- Refrigerant Detection System (RDS) Blower Control Board
- R-454B Check and Expansion Valve

Optional Accessories

Refrigerant Detection System (RDS) Coil Sensor Kit

- Complies with UL 60335-2-40 approved standard
- Required for all systems using R-454B refrigerant
- Consists of Refrigerant Detection System (RDS) sensor, lineset sleeves, mounting brackets and A2L labeling
- Sensor ensures safe operation for systems equipped with R-454B refrigerant
- Indoor sensor will detect any R-454B refrigerant
- See R-454B Refrigerant Conversion Table on page 5

Refrigerant Detection System (RDS) Blower Control Board Communicating Blower Control Board (Universal)

- Communicating Blower Control Board and Sensor can be used universally with any Lennox® communicating furnace or any non-communicating 24 volt furnace

Non-Communicating Blower Control Board

- Non-Communicating Blower Control Board and Sensor can be used with any non-communicating 24 volt furnace

Standard Features

- Complies with UL 60335-2-40 approved standard
- Required for all systems using R-454B refrigerant
- Connects to the RDS sensor furnished with the RDS Coil Sensor Kit
- Supports up to two RDS Sensors (factory setting)
- Used as interface between indoor unit and thermostat to control system
- Ensures safe operation for systems equipped with R-454B refrigerant
- If R-454B refrigerant is detected the refrigerant detection system will prevent compressor and heating operation until R-454B refrigerant is no longer detected
- Refrigeration detection system also energizes the blower if R-454B refrigerant is detected to mitigate any concentrations of refrigerant from the conditioned space
- Multi-color LED for system status and as an aid in troubleshooting
 - Flashing LED codes for system status (Green/Blue) and diagnosing Sensor errors (Red)
- Alarm relay can trigger an external alarm if R-454B refrigerant is detected
- Zone relay opens all zone dampers (if part of a zoning system) if R-454B refrigerant is detected

- Power is disabled to non-communicating thermostats to prevent demand if R-454B refrigerant is detected
- On system start-up blower will run for five minutes and any thermostat demands are disabled
- Dimensions (H x W x D): 7-7/16 x 7-7/16 x 2-1/2 (189 x 189 x 127 mm)
- See R-454B Refrigerant Conversion Table on page 5

NOTE - Refer to the Installation Instructions for additional information.

R-454B Check and Expansion Valve

- For use with R-454B systems
- Wide range valve with Chatleff style fitting
- Replaces factory installed TXV, internal to cabinet
- See Optional R-454B TXV Substitution table on page 5

CABINET

- Pre-painted heavy gauge steel
- Insulated with thick fiberglass insulation
- Flanges provided in outlet for ease of duct connection
- Coil slides out of cabinet for ease of servicing
- Removable panels provide access to coil
- Refrigerant lines extend outside of cabinet for easy installation

Furnace Match-Up

- Coils exactly match corresponding furnaces with the same letter designation in model number
- No adaptor required
- Engaging holes furnished on cabinet for alignment with furnace

SPECIFICATIONS			1.5 TO 2 TON	
Size	18/24A	18/24B	24A	24B
Nominal Tonnage	1.5 / 2	1.5 / 2	2	2
Furnace Cabinet Matching Letter Width	A	B	A	B
Coil & Furnace Cabinet Width - in.	14-1/2	17-1/2	14-1/2	17-1/2
Connections	Liquid line (OD) sweat - in.	3/8	3/8	3/8
	Suction line (OD) sweat - in.	3/4	3/4	3/4
	Condensate drain (FPT) - in.	(2) 3/4	(2) 3/4	(2) 3/4
Indoor	Net face area - ft. ²	3.11	3.11	3.55
Coil	Tube diameter - in.	3/8	3/8	3/8
	Rows	2	2	3
	Fins - in.	18	18	14
Shipping Data - lbs.		30	34	38
				43

SPECIFICATIONS			2.5 TO 3 TON		
Size	30A	30B	30/36A	30/36B	30/36C
Nominal Tonnage	2.5	2.5	2.5 / 3	2.5 / 3	2.5 / 3
Furnace Cabinet Matching Letter Width	A	B	A	B	C
Coil & Furnace Cabinet Width - in.	14-1/2	17-1/2	14-1/2	17-1/2	21
Connections	Liquid line (OD) sweat - in.	3/8	3/8	3/8	3/8
	Suction line (OD) sweat - in.	3/4	3/4	3/4	3/4
	Condensate drain (FPT) - in.	(2) 3/4	(2) 3/4	(2) 3/4	(2) 3/4
Indoor	Net face area - ft. ²	4.44	4.44	4.89	4.89
Coil	Tube diameter - in.	3/8	3/8	3/8	3/8
	Rows	3	3	2	2
	Fins per inch	13	13	18	18
Shipping Data - lbs.		45	50	41	45
					48

SPECIFICATIONS			3 TO 4 TON		
Size	36A	36B	48B	48C	49C
Nominal Tonnage	3	3	4	4	4
Furnace Cabinet Matching Letter Width	A	B	B	C	C
Coil & Furnace Cabinet Width - in.	14-1/2	17-1/2	17-1/2	21	21
Connections	Liquid line (OD) sweat - in.	3/8	3/8	3/8	3/8
	Suction line (OD) sweat - in.	3/4	3/4	7/8	7/8
	Condensate drain (FPT) - in.	(2) 3/4	(2) 3/4	(2) 3/4	(2) 3/4
Indoor	Net face area - ft. ²	4.89	4.89	5.77	7.0
Coil	Tube diameter - in.	3/8	3/8	3/8	3/8
	Rows	3	3	3	3
	Fins per inch	14	14	13	15
Shipping Data - lbs.		46	50	55	60
					70

SPECIFICATIONS			4 TO 5 TON	
Size	50/60C	60C	60D	
Nominal Tonnage	4 / 5	5	5	
Furnace Cabinet Matching Letter Width	C	C	D	
Coil & Furnace Cabinet Width - in.	21	21	24-1/2	
Connections	Liquid line (OD) sweat - in.	3/8	3/8	
	Suction line (OD) sweat - in.	7/8	7/8	
	Condensate drain (FPT) - in.	(2) 3/4	(2) 3/4	
Indoor	Net face area - ft. ²	5.78	7.50	
Coil	Tube diameter - in.	3/8	3/8	
	Rows	3	3	
	Fins per inch	12	16	
Shipping Data - lbs.		60	73	

R-454B REFRIGERANT CONVERSION - ORDER SEPARATELY

Description		Order No.
Refrigerant Detection System (RDS) Coil Sensor Kit		26Z69
Refrigerant Detection System (RDS) Blower Control Board	Any Lennox® Communicating Furnace <u>or</u> any Non-Communicating 24V Furnace (Universal)	27A03
	Any Non-Communicating 24V Furnace	27A02

NOTE - Communicating Blower Control Board and Sensor can be used universally with Lennox® communicating furnace or any non-communicating 24 volt furnace.
Non-Communicating Blower Control Board and Sensor can be used with any non-communicating 24 volt furnace.

NOTE - Order R-454B Expansion Valve separately.

OPTIONAL R-454B TXV SUBSTITUTION

NOTE - Additional components are required for R-454B Conversion. See Optional Accessories table.


Size	Order Number
18/24	26Z70
24	26Z70
30	26Z70
30/36	26Z70
36	26Z70
48	26Z71
49	26Z71
50/60	26Z71
60	26Z72

AIR RESISTANCE

Size	Air Volume cfm	Total Resistance	
		Dry Coil	Wet Coil
		in. w.g.	in. w.g.
18/24A 18/24B	400	0.06	0.08
	600	0.11	0.17
	800	0.18	0.25
	1000	0.27	0.39
	1200	0.37	0.52
24A	400	0.05	0.05
	600	0.09	0.10
	800	0.16	0.18
	1000	0.23	0.26
	1200	0.32	0.36
24B	400	0.03	0.04
	600	0.07	0.09
	800	0.11	0.15
	1000	0.17	0.22
	1200	0.23	0.31
30A	600	0.07	0.08
	800	0.12	0.13
	1000	0.18	0.20
	1200	0.26	0.28
	1400	0.34	0.37
30B	600	0.06	0.06
	800	0.09	0.11
	1000	0.13	0.16
	1200	0.19	0.23
	1400	0.25	0.31
30/36A	800	0.13	0.14
	1000	0.19	0.21
	1200	0.27	0.30
	1400	0.34	0.39
	1600	0.45	0.51
30/36B 30/36C 36B	800	0.08	0.11
	1000	0.13	0.16
	1200	0.17	0.21
	1400	0.22	0.28
	1600	0.29	0.34

Size	Air Volume cfm	Total Resistance	
		Dry Coil	Wet Coil
		in. w.g.	in. w.g.
36A	800	0.13	0.14
	1000	0.19	0.21
	1200	0.27	0.30
	1400	0.34	0.39
	1600	0.45	0.51
48B	1000	0.13	0.13
	1200	0.18	0.18
	1400	0.23	0.24
	1600	0.30	0.31
	1800	0.37	0.40
48C	1000	0.07	0.09
	1200	0.10	0.12
	1400	0.13	0.16
	1600	0.16	0.20
	1800	0.20	0.24
49C	1200	0.08	0.12
	1400	0.13	0.17
	1600	0.17	0.22
	1800	0.22	0.28
	2000	0.28	0.35
50/60C	1200	0.13	0.17
	1400	0.18	0.23
	1600	0.23	0.29
	1800	0.28	0.37
	2000	0.34	0.43
60D	1400	0.11	0.15
	1600	0.14	0.18
	1800	0.17	0.21
	2000	0.21	0.27
	2200	0.25	0.32
	2400	0.30	0.37
60C	1400	0.15	0.19
	1600	0.19	0.23
	1800	0.24	0.28
	2000	0.29	0.34
	2200	0.33	0.40
	2400	0.39	0.46

CK40CT-18/24(A/B), -30/36(A/B/C) and -36(A/B) Coils

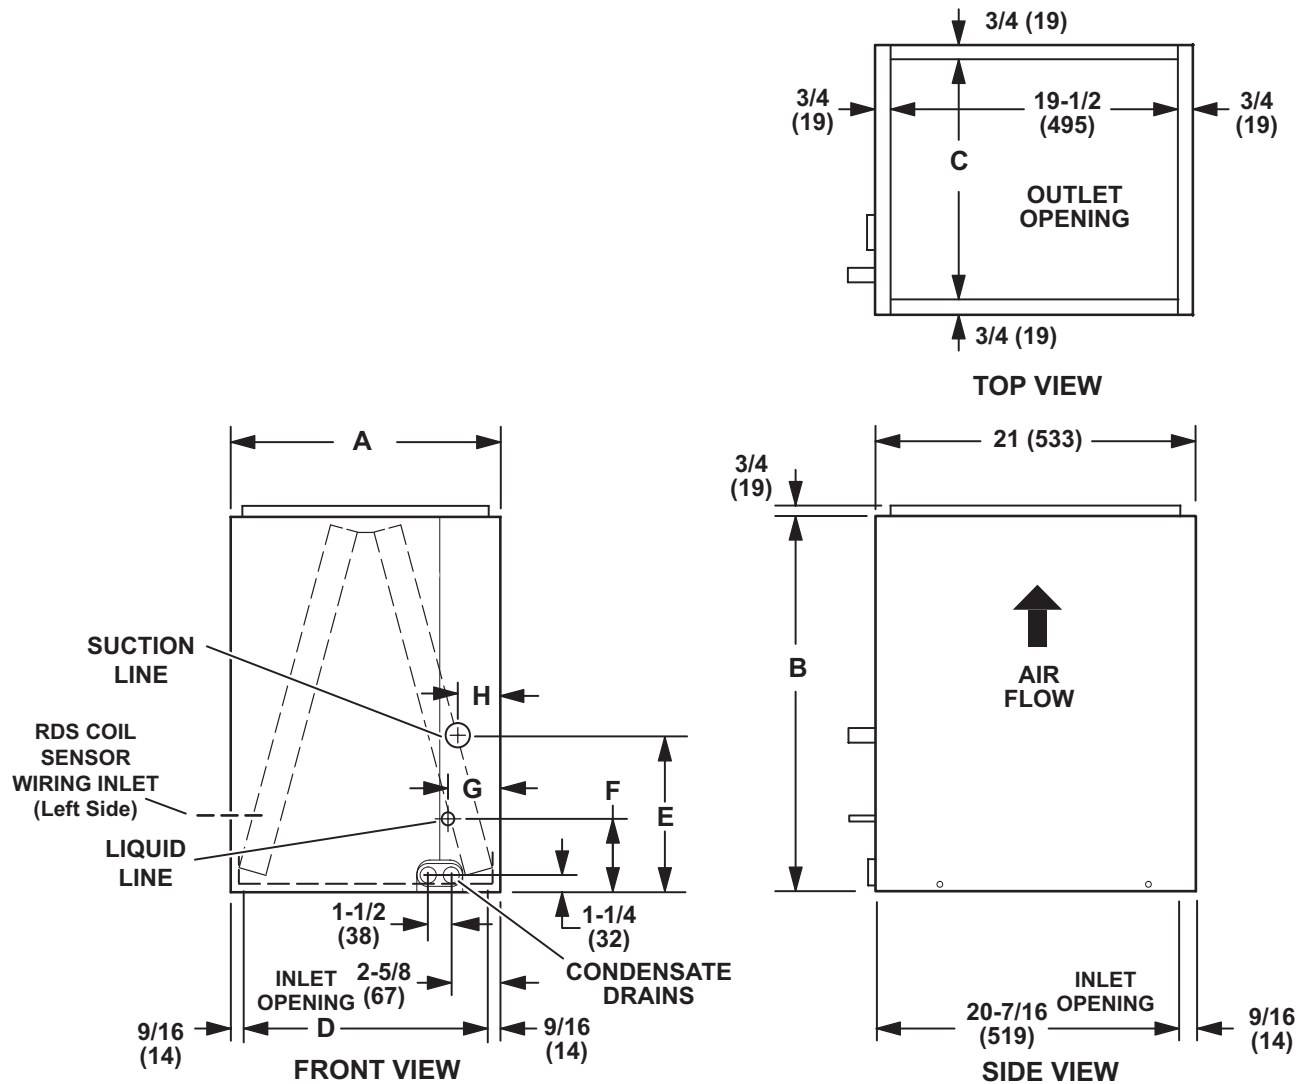


Size	A		B		C		D		E		F		G		H	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
18/24A	14-1/2	368	16-1/2	419	13	330	13-3/8	340	7-1/4	185	3-5/8	92	2-5/8	66	2-3/8	60
18/24B	17-1/2	445	16-1/2	419	16	406	16-3/8	416	7-1/4	185	3-5/8	92	2-5/8	66	2-3/8	60
30/36A	14-1/2	368	24-1/2	622	13	330	13-3/8	340	13-1/2	343	3-5/8	92	2-5/8	66	2-3/8	60
30/36B	17-1/2	445	24-1/2	622	16	406	16-3/8	416	13-1/2	343	3-5/8	92	2-5/8	66	2-3/8	60
30/36C	21	533	24-1/2	622	19-1/2	495	19-7/8	505	13-1/2	343	3-5/8	92	2-5/8	66	2-3/8	60
36A	14-1/2	368	24-1/2	622	13	330	13-3/8	340	13-1/2	343	3-5/8	92	2-5/8	66	2-3/8	60
36B	17-1/2	445	24-1/2	622	16	406	16-3/8	416	13-1/2	343	3-5/8	92	2-5/8	66	2-3/8	60

CK40CT-24(A/B), -30(A/B), -48(B/C), -50/60C and -60D Coils


(NOTE - See next page for CK40CT-49C-6F and CK40CT-60C-6F Coils)

NOTE- CK40CT-60D coil is positioned in cabinet with coil face running left to right, all other coil sizes are positioned like drawing.

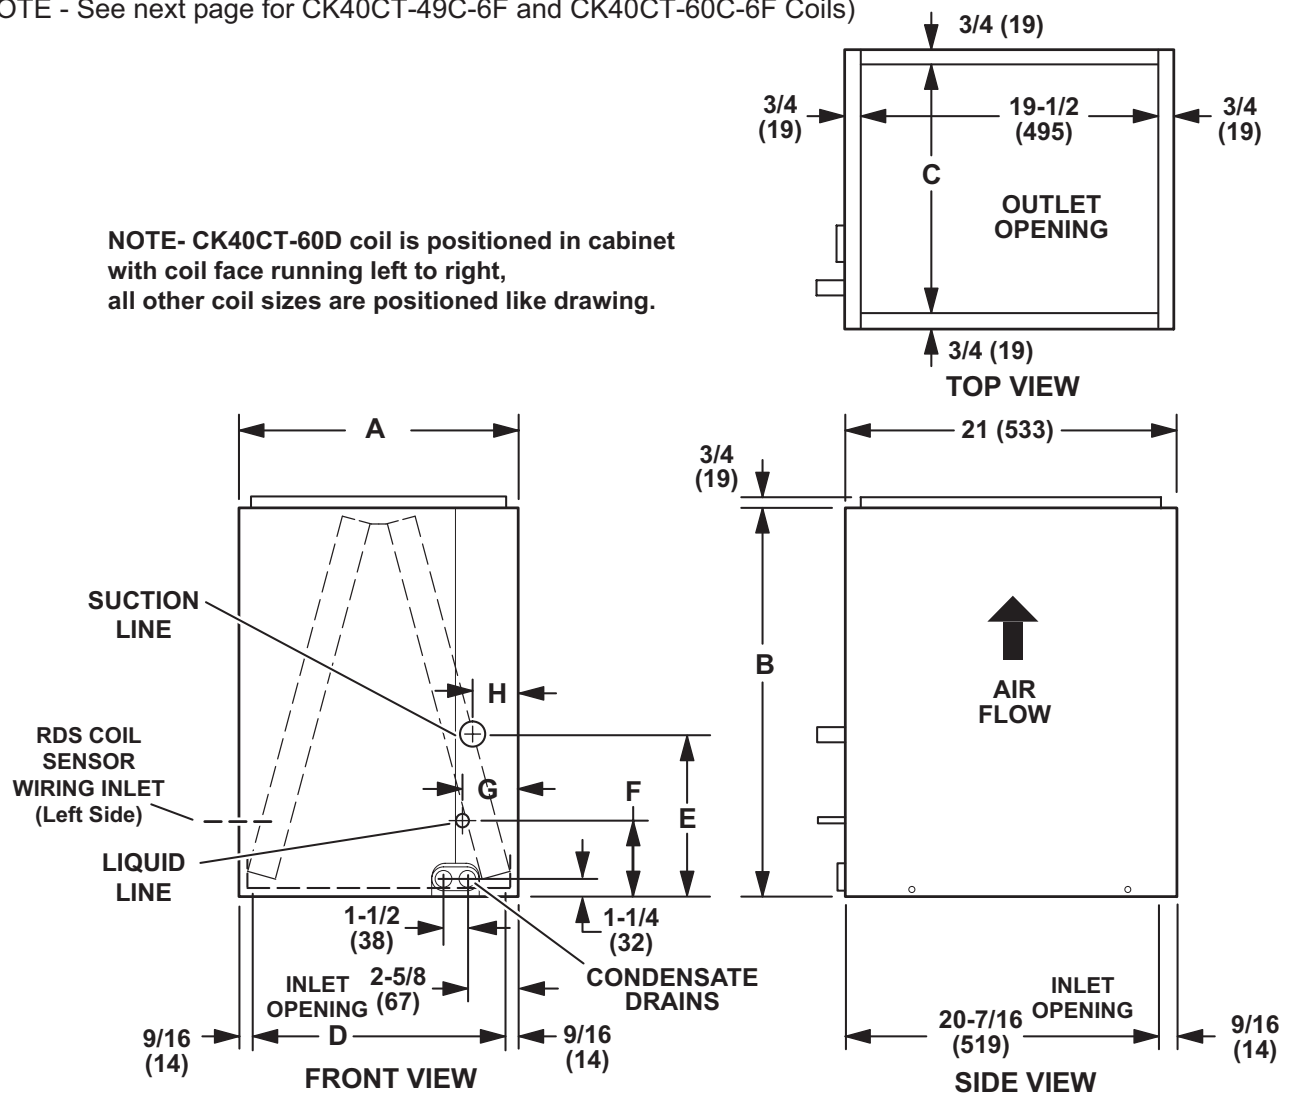

Size	A		B		C		D		E		F		G		H	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
24A	14-1/2	368	18-1/2	470	13	330	13-3/8	340	9-3/4	248	3-5/8	92	2-5/8	66	2-3/8	60
24B	17-1/2	445	18-1/2	470	16	406	16-3/8	416	9-3/4	248	3-5/8	92	2-5/8	66	2-3/8	60
-30A	14-1/2	368	22-1/2	572	13	330	13-3/8	340	11-1/2	292	3-5/8	92	2-5/8	66	2-3/8	60
30B	17-1/2	445	22-1/2	572	16	406	16-3/8	416	11-1/2	292	3-5/8	92	2-5/8	66	2-3/8	60
48B	17-1/2	445	27-1/2	699	16	406	16-3/8	416	12-1/2	318	3-5/8	92	2-5/8	66	2-3/8	60
48C	21	533	27-1/2	699	19-1/2	495	19-7/8	505	12-1/2	318	3-5/8	92	2-5/8	66	2-3/8	60
50/60C	21	533	27-1/2	699	19-1/2	495	19-7/8	505	12-1/2	318	3-5/8	92	2-5/8	66	2-3/8	60
60D	24-1/2	622	29-1/2	749	23	584	23-3/8	594	10	254	3-5/8	92	2-5/8	66	2-3/8	60

CK40CT-49C-6F and CK40-CT-60C-6F

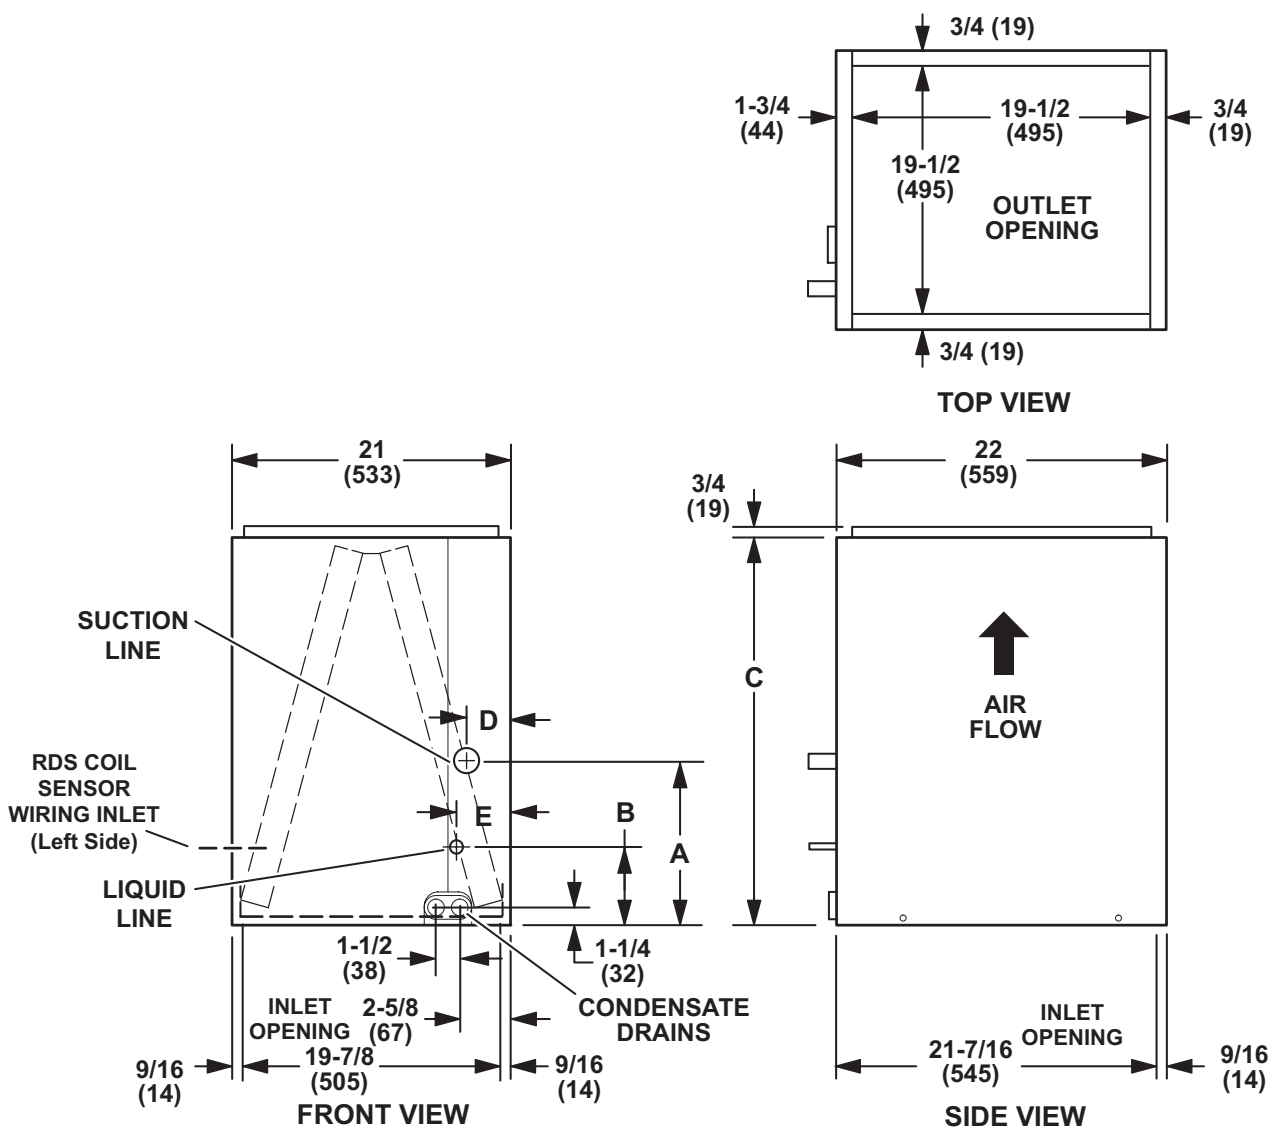

Size	A		B		C		D		E	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
49C	10	254	3-5/8	92	29-1/2	749	2-3/8	60	2-5/8	66
60C	14-1/2	368	3-5/8	92	31-1/2	800	2-3/8	60	2-5/8	66



Visit us at www.Lennox.com

For the latest technical information, www.LennoxPros.com

Contact us at 1-800-4-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2024 Lennox Industries, Inc.