

# Sainlogic Weather Station

## User Manual

Model: SA9

# **ACTIVATE WARRANTY AND CLAIM THE 1-YEAR FREE EXTENSION**

Activate within 14 days of purchase by  
visiting:

**[WWW.SAINLOGICWARRANTY.COM](http://WWW.SAINLOGICWARRANTY.COM)**

Have questions?

Reach us at:

[sainlogicwarranty01@gmail.com](mailto:sainlogicwarranty01@gmail.com)

# Sainlogic SA9 Weather Station User Manual

## Content

1.Introduction .....	3
2.Warning and Cautions .....	3
3.Quick Start Guide .....	3
4.Assembly of Sensor Arrays .....	3
4.1.Parts List .....	4
4.2.Recommended Tools .....	5
4.3. Remove/Install the Wind Vane .....	5
4.4.Remove/Install the Wind Cup .....	6
4.5.Remove/ Install the Rain Collector .....	7
4.6. Installation of Coil Filters .....	8
4.7.Install Battery .....	8
5. Installation of the Sensor Array .....	10
5.1. Pre-installation Check .....	10
5.2. Site Survey .....	10
5.3.Adjusting the Sensor Mounting Direction .....	11
5.3.1.Northern Hemisphere Reference .....	11
5.3.2.Southern Hemisphere Reference .....	12
5.4.Securing the Mounting Pole .....	13
5.4.1.Horizontal Mounting and Fixing Sensors .....	13
5.4.2.Vertical Mounting and Fixing Sensors .....	14
5.4.3.Best Practices for Wireless Communication .....	15
6.Install the Display Screen .....	15
7. Start the Display Console .....	16
7.1.Button Operation .....	17
7.2.Display Console .....	18
7.3.Display Restore Factory Settings .....	19
7.4.Search for Outdoor Sensor Signal .....	20
8. Display Connected to WiFi .....	20
8.1. Real-time Network Monitoring .....	20
8.2.APP Download .....	20
8.3.APP Account Register and Login .....	20
8.3.1. Registering Process .....	21
8.3.2. Login Process .....	21
8.4. MAC Address .....	22
8.5. IP Address .....	23
8.6. Connecting Steps .....	23
8.6.1 Bluetooth Distribution Network Mode .....	23
8.6.2. Wifi Distribution Network Mode .....	27
8.6.3. Web Page Distribution Network Mode .....	31
8.7.Firmware Upgrade .....	35
8.8. Sign Up on Wunderground.com .....	36
9. Display Console Operation .....	40
9.1. Quick Display Mode .....	40

9.2. Set Mode .....	41
9.3. Time Zone .....	43
9.4. Max/Min Mode .....	44
9.4.1. Viewing and Resetting Maximum Values .....	44
9.4.2. Viewing and Resetting Minimum Values .....	46
9.5. Alarm Mode .....	47
9.5.1. Alarm Trigger .....	48
9.5.2. Viewing High/Low Alarm Values .....	48
9.5.3. Setting High/Low Alarms .....	51
9.5.4. Alarm and Key Sound Switches .....	58
9.6. Calibration Mode .....	58
9.6.1. Temperature Calibration .....	58
9.6.2. Humidity Calibration .....	59
9.6.3. Sensor Mode Calibration .....	61
9.6.4. Calibration Discussion .....	63
9.7. Snooze Mode .....	66
10. Feels Like and AT Temperatures .....	66
10.1. Feels Like Temperatures .....	66
10.2. Apparent Temperature (AT) .....	67
11. Moon Phase .....	68
12. Weather Forecasting .....	68
12.1. Weather Icon .....	68
12.2. Weather Forecast Instructions and Limitations .....	69
12.3. Pressure Threshold .....	69
13. Backlight Operation .....	69
13.1. Connect the Power Adapter .....	69
13.2. Power Adapter Not Connected .....	70
14. Glossary of Terms .....	70
15. Specifications .....	72
15.1. Wireless Specifications .....	72
15.2. Measurement Specifications .....	72
15.3. Power Consumption .....	73
16. Maintenance .....	73
17. Troubleshooting Guide .....	74
18. Disclaimer .....	77
19. Warranty Information .....	77
20. FCC Statement .....	78

## 1. Introduction

Thank you for purchasing the Sainlogic Professional WiFi Wireless Weather Station. The following user guide provides detailed instructions on installation, operation, and troubleshooting. This product is continually evolving and improving, particularly in its online services and associated applications.


To download the latest manuals and other information, please contact Customer Support.


Customer Support E-mail: [info@sainlogic.com](mailto:info@sainlogic.com)


Website: [www.sainlogic.com](http://www.sainlogic.com)

Customer Support Phone: +1 (888) 513-9823 (Mon-Fri 10 a.m. - 6 p.m., Eastern Standard Time)

## 2. Warning and Cautions

 **WARNING:** Lightning strikes can be caused by any metal object, including your weather station mounting pole. Mounting your weather station during a storm is prohibited.

 **WARNING:** Installing a weather station in an elevated location may result in injury or death, so perform as many preliminary checks and operations as possible on the ground and inside a building or house.

 **WARNING:** Install the weather station on a clear, dry day.

## 3. Quick Start Guide

The following Quick Start Guide provides the necessary steps to install and operate the weather station.

1	Assembling and Activating the Outdoor Sensor Array	4-5
2	Installing and Activating the Display Console to Connect to the Outdoor Sensors	6-8
3	Connecting the Weather Station Console to Wi-Fi	8
4	Display Function Setup	9-13
5	Calibration Functions	9.6
6	Troubleshooting	17

## 4. Assembly of Sensor Arrays

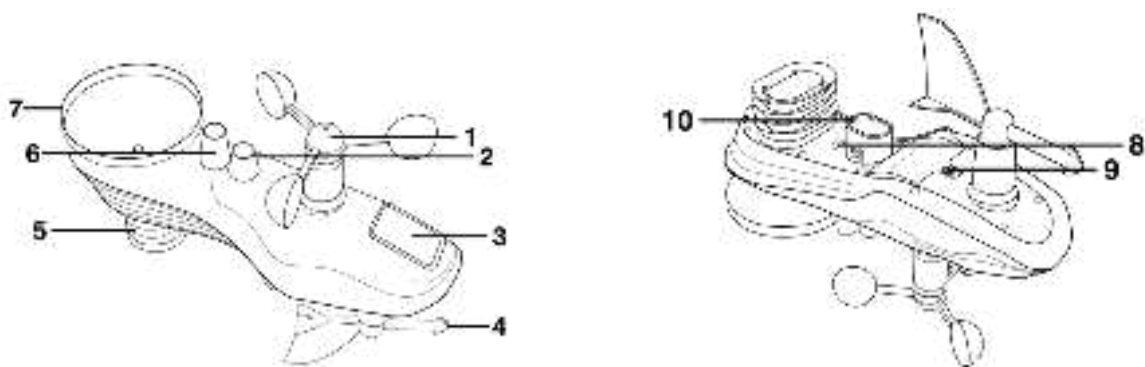








Figure 1

NO	Description	NO	Description
1	Wind Cup	7	Rain Collector
2	Bubble Level	8	Reset Button/LED Indicator
3	Solar Panel	9	Battery Door
4	Wind Vane	10	Mounting Pole Socket
5	Thermometer-Hygrometer Sensor		
6	UV/Light Sensor		

#### 4.1 Parts List




The weather station consists of the following parts:

QTY	Item	image
1	<b>Display Console Frame</b> <b>Dimensions:</b> 8.5x6.2x1inch (216x157x25mm) <b>LCD Dimensions:</b> 6.55x4.85inch (166x123mm)	
1	<b>Integrated Outdoor Transmitter</b> <b>Dimensions:</b> 12.9x4x9.8inch (327x101x249mm)	
1	<b>Foot Mounting (with pole insert)</b> <b>Dimensions:</b> 4.25x4.1x1.75inch (107x104x44.5mm)	
1	<b>Mounting Bracket Back Plate (pole mount)</b> <b>Dimensions:</b> 4x3.25x1inch (101x82x25mm)	

1	<b>Mounting Pole</b> <b>Dimensions:</b> 12.8x1.3x0.9inch (325x33x22mm)	
2	<b>Pole Mounting Nuts (M3) / Bolts Ø3)</b>	
4	<b>Pole Mounting Nuts (M5) / Bolts ( Ø5)</b>	
4	<b>Tapping Screws</b>	
1	<b>Manual</b>	
1	<b>Power Adapter</b>	

## 4.2 Recommended Tools

We recommend using the following tools to assist in the installation of the weather station:

1	<b>Precision Screwdriver (for small Phillips screws)</b>	
2	<b>Compass or GPS (for wind direction calibration)</b>	
3	<b>Adjustable Wrench</b>	

## 4.3. Remove/Install the Wind Vane

 **Note:** If you need to replace the wind cup and wind vane, follow the steps below.

### Remove the Wind Vane: (refer to Figure 2)

- (a) Locate the black, waterproof silicone plug in the center of the round cap at the top of the wind vane and remove it with a tool.
- (b) Use a precision screwdriver to loosen the set screw in the round hole until the wind vane can be easily removed.

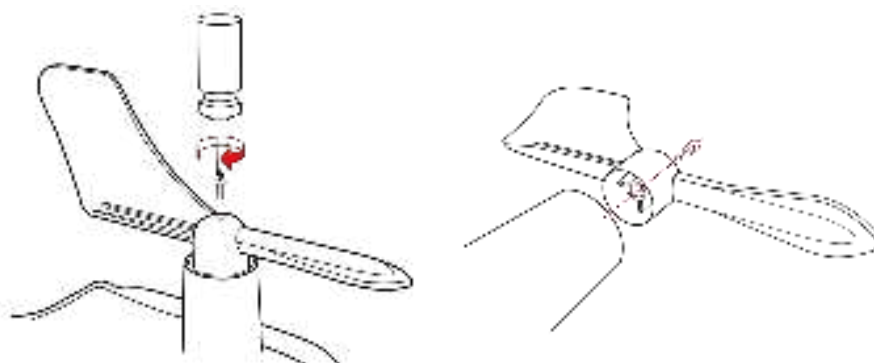



Figure 2

### Install the Wind Vane:

- (c) Place the round hole at the bottom of the wind vane against the wind vane shaft, then tighten the fixing screws with a precision screwdriver to ensure the wind vane can rotate freely.
- (d) Insert the black waterproof silicone plug into the round hole at the top of the wind vane. Ensure it fits snugly into the round hole to achieve a watertight seal.

 **Note:** The wind vane axis cannot rotate freely, unlike the wind cup, which was intentionally designed to do so.

## 4.4. Remove/Install the Wind Cup

### Remove the Wind Cup: (refer to Figure 3)

- (a) Locate the black waterproof silicone plug in the center of the round cap at the top of the wind cup, then remove it with a tool.
- (b) Use a precision screwdriver to loosen the set screw in the round hole until the wind cup can be easily removed.

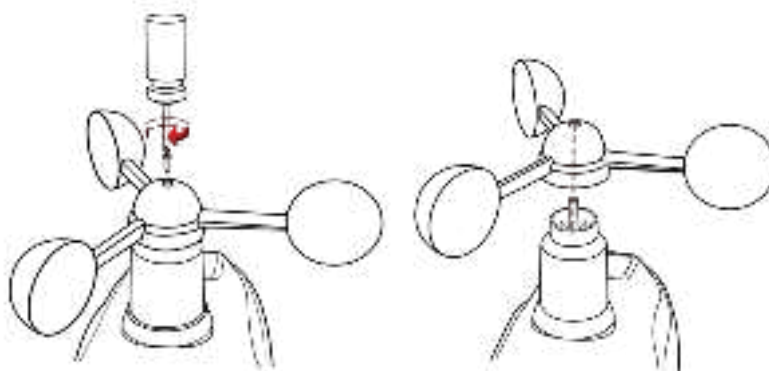


Figure 3



### Install the Wind Cup:

- (a) Place the round hole at the bottom of the wind cup against the wind vane axis, then tighten the fixing screw with a precision screwdriver to ensure that the wind cup can rotate freely.
- (b) Insert the black waterproof silicone plug into the round hole at the top of the wind cup. Ensure it fits snugly in the hole to achieve a watertight seal.

## 4.5. Remove/Install the Rain Collector

### Remove the Rain Collector: (refer to Figure 4)

- (a) Place your hand flat on the top of the rain collector. Grasp the entire collector and rotate it clockwise.
- (b) Remove the rain collector vertically upwards once a click is heard.

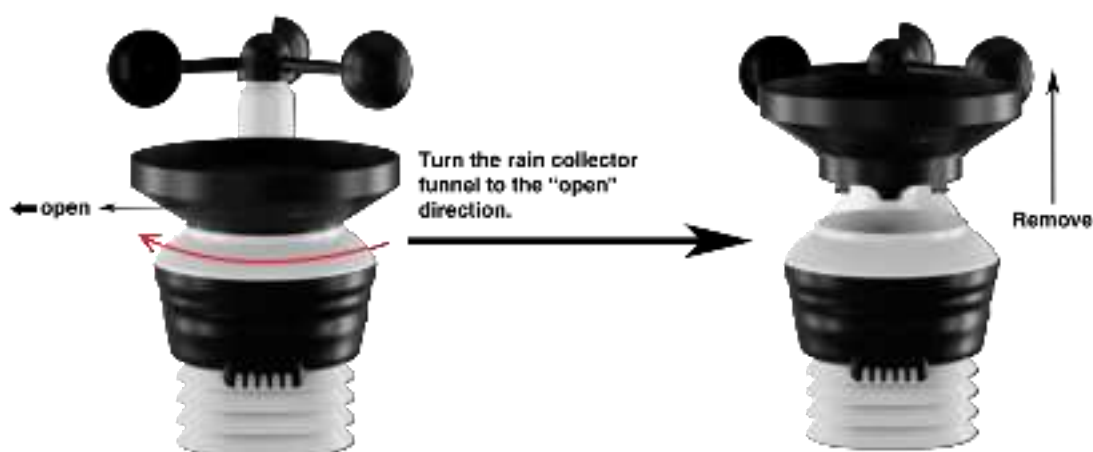


Figure 4

### Remove the Rain Collector: (refer to Figure 5)

- (a) Align the snap on the bottom edge of the rain collector with the snap notch on the transmitter so that the two fit perfectly. Then, press the rain collector down vertically.
- (b) After placing the rain collector into the groove, rotate it counterclockwise. The installation will be successful when you hear a click.

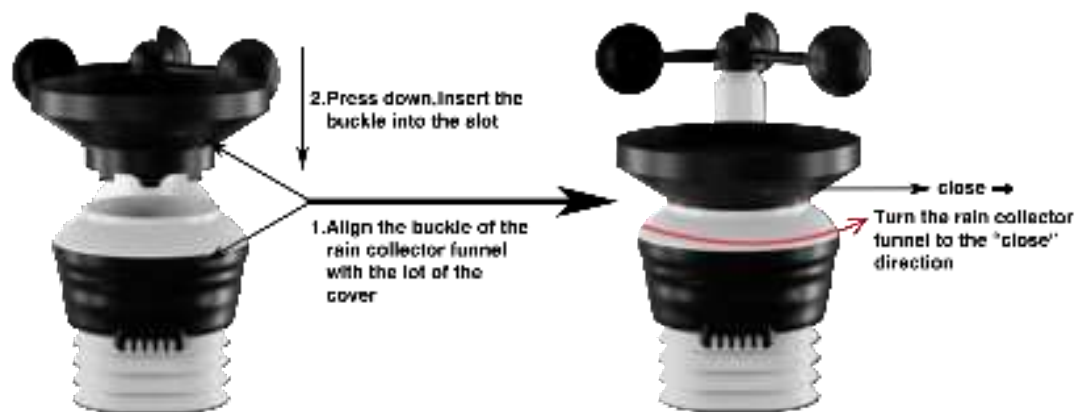


Figure 5

#### 4.6. Installation of Coil Filters

- Place the coil vertically into the rain collector (hook facing downward), so that the coil fits snugly against the bottom of the rain collector.
- Gently press the coil so that it hooks into the hole at the bottom of the rain collector and locks into place. The tension of the spring will keep the filter tightly fitted to the rain collector.


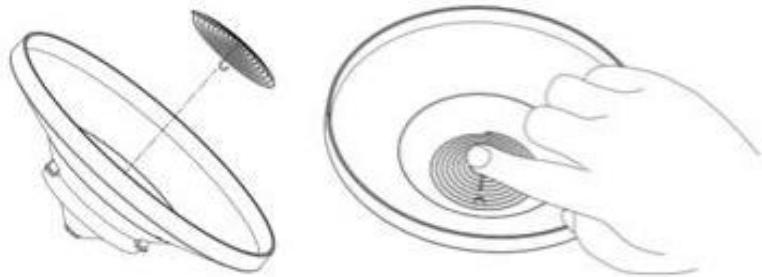



Figure 6

#### 4.7. Install Battery

Locate the battery door at the bottom of the transmitter, as shown in Figure 7.

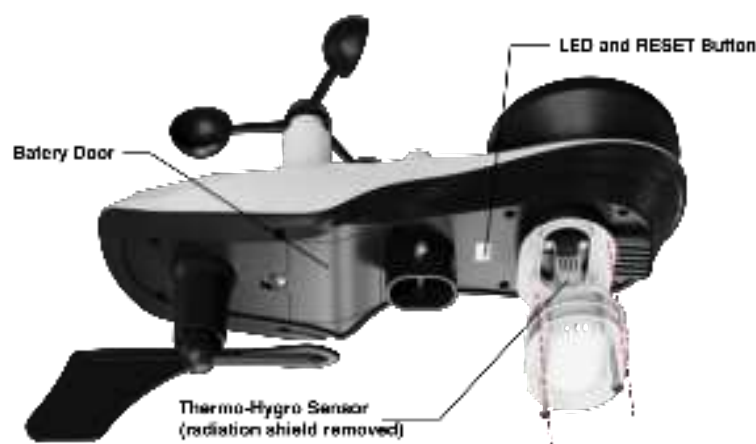

**Figure 7**

 **Note: Do not install the batteries backwards.** Doing so can permanently damage the outdoor sensors. The solar panel does not charge the batteries, so rechargeable batteries are not recommended.

Remove the battery door on the back of the sensor by removing the set screw, as shown in Figure 8.




**Figure 8**

Insert 3 new AA batteries and close the battery door as shown. Before closing the battery door and tightening the set screws, make sure the washers (around the inside perimeter of the battery door) are properly secured in their tracks.



**Figure 9**

 **Note: We recommend installing AA lithium batteries for the Outdoor Sensor in cold weather environments.**

Once the battery is installed, the Integrated Outdoor Sensor LED indicator will illuminate for 3 seconds and then blink every 60 seconds. The sensor is transmitting data each time it blinks.

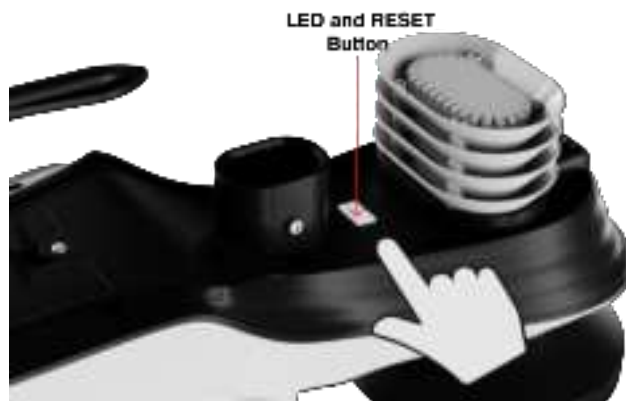



Figure 10

 **NOTE:** If the sensor LED does not flash after inserting the batteries, press the reset button located at the bottom of the sensor, as shown in Figure 10.

## 5. Installation of the Sensor Array

### 5.1. Pre-installation Check

Before installing the weather station in a permanent location, we recommend running it at a temporary, easily accessible location for one week. This allows you to check all functions in advance, ensure they are operating correctly, and familiarize yourself with the weather station and calibration procedures.

### 5.2. Site Survey

Before installing the weather station, consider the following during the site survey:

1. The rain gauge must be cleaned every 3 months, and the battery should be replaced every 3 months.
2. Avoid heat radiation transfer from buildings and structures. Generally, the sensor array should be installed at least 5 feet (1.5 meters) away from any buildings, structures, ground, or roofs.
3. Avoid influencing wind speed and rainfall measurements. The installation distance of the sensor array should be at least four times the height of the highest obstacle. For example, if a building is 20 feet (6 meters) high and the installation pole is 6 feet (2 meters) high, the installation distance should be  $4 \times (20 - 6) = 56$  feet (17 meters). If the weather station is installed near tall buildings, wind speed and rainfall measurements may be inaccurate.
4. Radio signal range. Assuming no interference from buildings, trees, vehicles, high-voltage lines, and other obstructions, the radio communication distance between the display console and the transmitter can reach up to 330 feet (100 meters). In most cases, due to interference from buildings and walls, most wireless applications can only reach up to 100 feet (30 meters). Radio signals cannot penetrate metal buildings.
5. In the worst-case scenario, radio interference from personal computers, radios, or televisions can completely cut off radio communication. Therefore, consider this when selecting a display console or determining the installation location.

### 5.3. Adjusting the Sensor Mounting Direction

This professional weather station is suitable for use in both the Northern and Southern Hemispheres. To ensure the accuracy of the wind direction display, please secure the direction of the integrated outdoor sensor before installation.

 **Note:** Wind direction is indicated by the letters N, E, S, and W. (N is north, E is east, S is south, W is west)



**Southern Hemisphere**


**Figure 11**

#### 5.3.1. Northern Hemisphere Reference

The body of the outdoor sensor is embossed with the four cardinal directions: N, E, S, W, which are applicable only in the Northern Hemisphere.

**Step 1:** As shown in the diagram, there is an "S" indicator on the wind vane representing south.

Using a compass, check the direction and adjust the orientation of the entire sensor to ensure the "S" mark on the sensor aligns with the south.

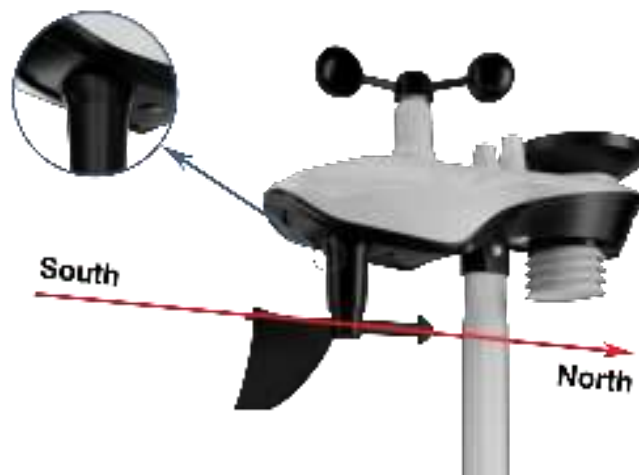

**Figure 12**

**Step 2:** On the display console, set the location region to the Northern Hemisphere (NOR will appear in the time zone).

(For detailed steps on setting the location region, see Step 18 in section 9.2).

### 5.3.2. Southern Hemisphere Reference

For installing the integrated outdoor sensor in the Southern Hemisphere, disregard the four directions (N, E, S, W) marked on the sensor body. When installing, adjust the orientation of the entire outdoor sensor to ensure the solar panel faces north (and is positioned to receive maximum sunlight), as shown in the diagram.

**Step 1:** Install the Integrated Outdoor Sensor

Ensure the solar panel is positioned to face north.




**Figure 13**

## Step 2: Set the Location Region on the Display Console

Set the location region to the Southern Hemisphere (SOU will appear in the time zone).


(For detailed steps on setting the location region, please refer to Step 18 in section 9.2).

 **Note:** The location region (NOR or SOU) on the display console and the sensor direction must be adjusted according to your actual location.


If the integrated outdoor sensor is not positioned correctly during installation, it will result in permanent wind direction errors.

## 5.4. Securing the Mounting Pole

Observe the bubble level next to the rain gauge to ensure the bubble is stable within the circle, keeping the sensor array completely level. If the sensor array is not level, the rain gauge, UV, and solar radiation sensors will not measure accurately.

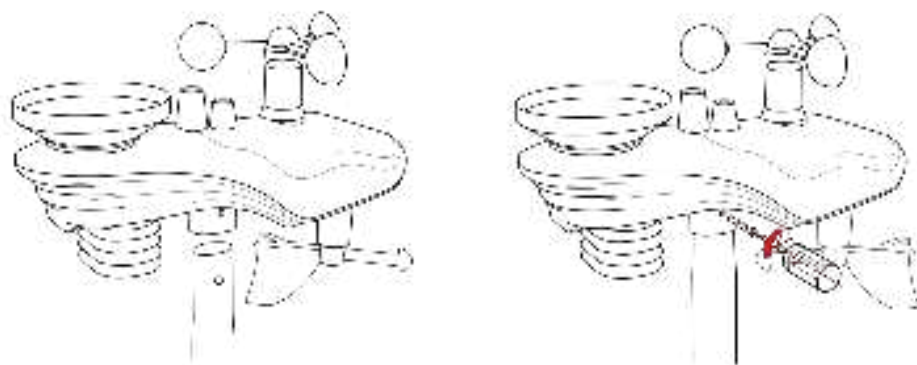


**Figure 14**

 **NOTE:** If the bubble level cannot be read due to mounting limitations, a horizontal line or level can be placed across the top of the rain gauge for easier viewing.

### 5.4.1. Horizontal Mounting and Fixing Sensors


Fasten the integrated outdoor sensor to the mounting bar bracket with two mounting bolts ( $\varnothing 4$ )/nuts (M3). Then, tighten the mounting bar to your existing mounting bar using four bolts ( $\varnothing 5$ ) and nuts (M5), or secure it to a flat surface with four self-tapping screws, as shown. (Figure 15)

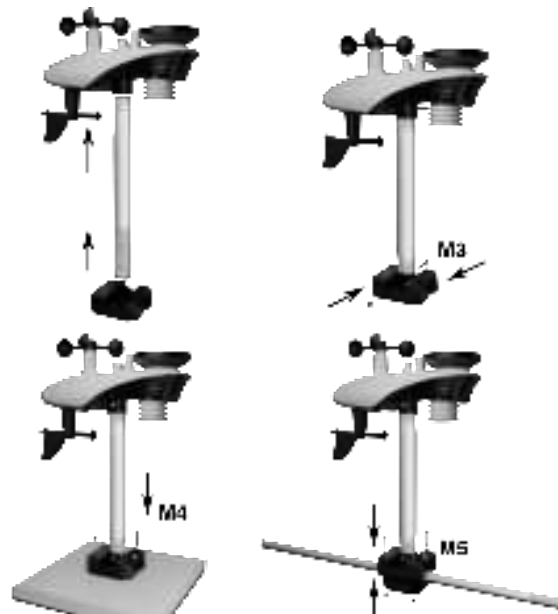

**Figure 15**

#### 5.4.2. Vertical Mounting and Fixing Sensors

Fasten the integrated outdoor sensor to the mounting bar bracket with two mounting bolts ( $\varnothing 4$ )/nuts (M3). Then, tighten the mounting bar to your existing mounting bar with four bolts ( $\varnothing 5$ ) and nuts (M5), or secure it to a flat surface with four self-tapping screws, as shown. (Figure 16)

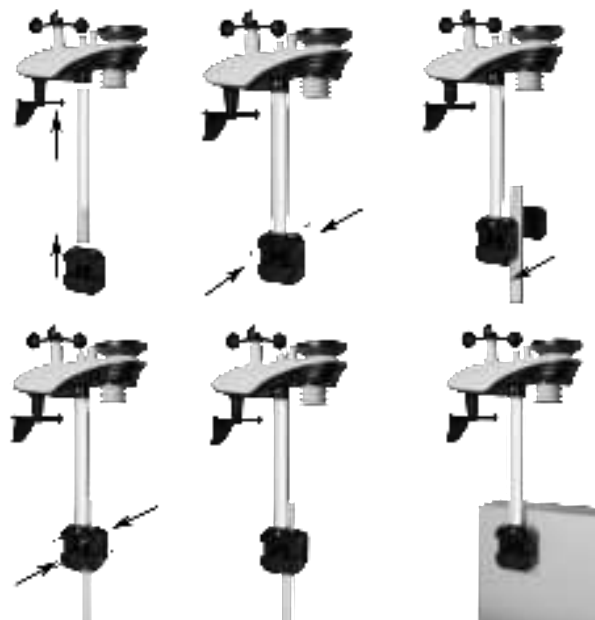

**Figure 16**



### 5.4.3. Best Practices for Wireless Communication

Wireless communication is susceptible to interference, distance, walls, and metal barriers. We recommend the following best practices for trouble-free wireless communication:

1. **Electro-Magnetic Interference (EMI):** Keep the console several feet away from computer monitors and TVs.
2. **Radio Frequency Interference (RFI):** If you have other 433 MHz devices and communication is intermittent, try turning off these other devices for troubleshooting purposes. You may need to relocate the transmitters or receivers to avoid intermittent communication.
3. **Line of Sight Rating:** This device is rated at 300 feet line of sight (no interference, barriers, or walls), but typically, you will get 100 feet maximum. [This is under most real-world installations, which include passing through barriers or walls.]
4. **Metal Barriers:** Radio frequency will not pass through metal barriers, such as aluminum siding. If you have metal siding, align the remote and console through a window to get a clear line of sight. The following table presents reception loss versus the transmission medium. Each “wall” or obstruction decreases the transmission range by the factor shown below:

Medium	Radio Frequency (RF) signal strength reduction
Glass (untreated)	5-15%
Plastic	10-15%
Wood	10-40%
Brick	10-40%
Concrete	40-80%
Metal	90-100%


## 6. Install the Display Screen

The front and back diagram of the console is shown in the figure below.



**Figure 17**

(1) Plug in the display console with the power adapter.

 **Note:** It is recommended that the power adapter be plugged in at all times to minimize display battery consumption and extend battery life. If you use battery power without the adapter, it will not remain on constantly and will likely only last approximately 2 hours.

(2) Install the display console batteries.

Remove the battery door on the back of the display (Figure 17) and install three AAA (alkaline or lithium) batteries. The display will beep, and all layouts on the display will light up for a few seconds as a verification that the display is working properly.

(3) Use the Display Stand.

The folding tabletop stand on the back of the display console is positioned at roughly 45 degrees to the display (Figure 18). We recommend viewing the console from a 20-degree to 30-degree angle from above for the best display of the screen.



**Figure 18**

## **7. Start the Display Console**

As shown in the figure, once the display console is powered up, it will display all layouts of the screen for three seconds. Then, it will automatically scan all nearby integrated outdoor sensors. The indoor data will be updated immediately, and the outdoor sensor data will be updated within a few minutes.

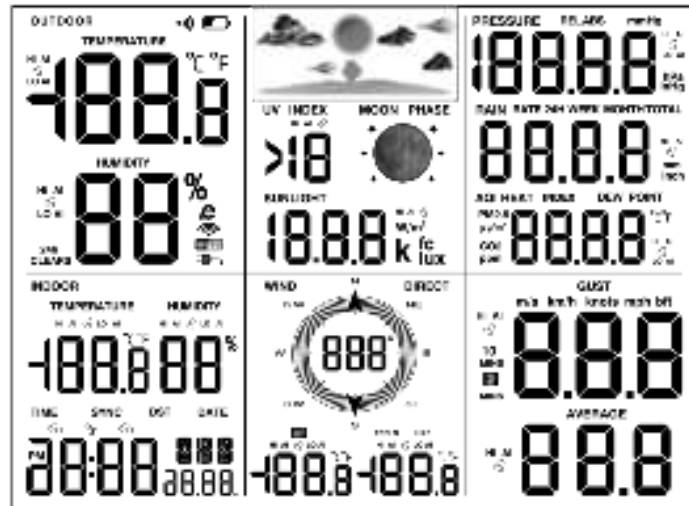




Figure 19


In Search Mode, the Remote Search icon  will blink continuously and will not stop until all measurements have been received; then it will remain permanently lit. The console will automatically switch to normal mode, where all other settings can be performed.

 **Note:** Do not touch any buttons on the display until all remote sensors have reported data on the display, or the display console will terminate the connection to the remote sensors.

When the integrated outdoor sensor is connected, the measured values (outdoor temperature, humidity, wind speed, wind direction, gusts and average wind, rainfall, UV and sunlight index, dew point, and sensory image) will be displayed on the display console.

 **Note:** Ensure that the distance between the weather station's sensor and the display console is between 10 feet (3 meters) and 100 feet (30 meters). If the weather station sensor is too close or too far away, it may not receive the proper signal.

## 7.1. Button Operation

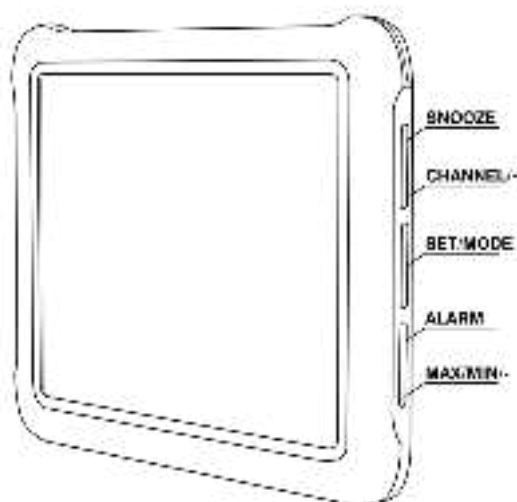

**Figure 20**

The following 5 keys can be found on the right side of the console (from top to bottom) and used to set the display functions by short press, long press, or double click.

 **Note: SET/MODE is the same key and has the same function.**

Key	Description
SNOOZE	1. In normal mode, short press to toggle between 3 levels of brightness. 2. In any setting mode, short press to return to normal mode.
CHANNEL/+	1. In normal mode, press and hold the SET key at the same time for 5 seconds to enter the temperature calibration mode; double-click to display the MAC address. 2. In any setting mode, short press to increase the value; long press to increase the value quickly.
SET/MODE	1. In normal mode, short press to enter fast display mode; long press to enter setting mode 2. In any setting mode, short press to skip any step to the next step.
ALARM	1. In normal mode, short press to view alarm parameters; long press to set alarm mode. 2. In calibration mode, short press to reset the calibration value.
MAX/MIN/-	1. In normal mode, short press to switch to view the maximum and minimum values; long press to enter the network mode; double-click to display the IP address. 2. In any setting mode, short press to reduce the value; long press to quickly reduce the value.

## 7.2. Display Console

The following figure shows the layout of all the data on the display.

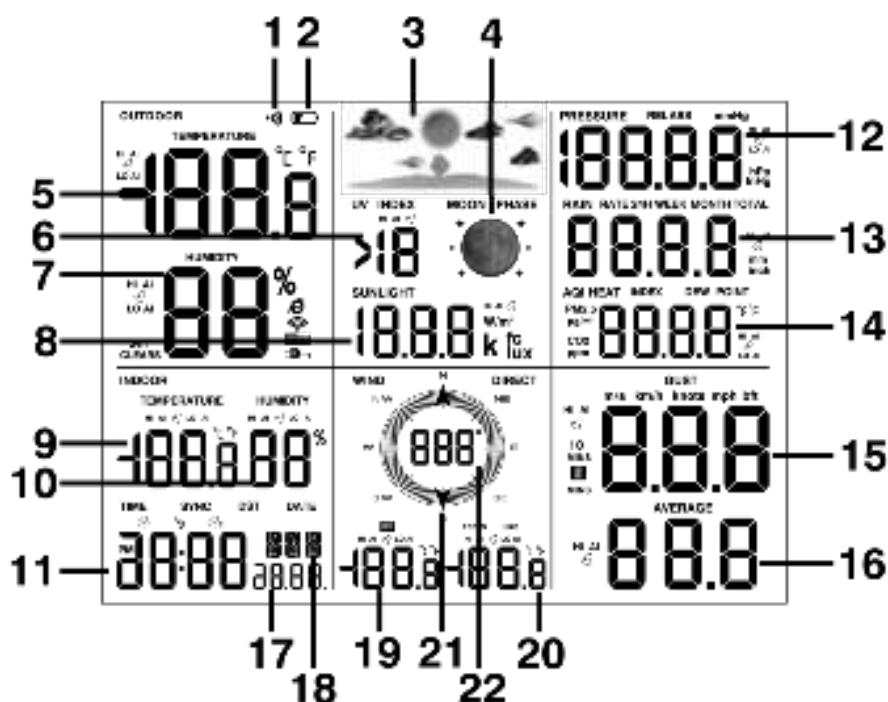


Figure 21

No	Description	No	Description
1	Search Icons	12	Barometric Pressure
2	Battery Power	13	Rainfall
3	Weather Icon	14	Indoor Dew Point
4	Moon Phase	15	Wind Gust
5	Outdoor Temperature	16	Average Wind Speed
6	UV	17	Year/Date
7	Outdoor Humidity	18	Week/Second
8	Sunlight	19	Outdoor AT/Outdoor Dew point
9	Indoor Temperature	20	Outdoor Feels Like
10	Indoor Humidity	21	Wind Arrow
11	Time	22	Wind Direction



### 7.3. Display Restore Factory Settings


To reset the console to factory default settings (including WiFi, weather server, and display settings), please follow these steps:

1. Remove the battery and disconnect the adapter to turn off the console power.
2. Connect the adapter and turn on the power.
3. When all layouts appear on the screen, simultaneously press and hold the MAX/MIN- button for three seconds until the console startup process is complete.
4. Replace the battery.

## 7.4. Search for Outdoor Sensor Signal

If the outdoor sensor data is not displayed on the screen, you can press and hold the CHANNEL/+ button for three seconds until you hear a beep, and all data displays dashes.



At this point, the display will re-receive the signal from the outdoor sensor, and the search icon  will start flashing. Once the signal is reacquired, all data will be displayed, the remote search icon  will remain lit, and the screen will show the current values.

 Note: Pressing the SNOOZE button briefly can exit signal search mode. If the search times out after 60 seconds, it will also exit signal search mode.

## 8. Display Connected to WiFi

### 8.1. Real-time Network Monitoring

The weather station can upload data to the following two platforms:

Application Services	Website	Description
Weatherseed App	Wunderground.com	Our weather stations feature the most user-friendly design to monitor data across different platforms. Use our animated expandable modules to quickly view the details you want.
		

\*Weather station uses WiFi connection to send data to the Internet.

\* Please **DO NOT** fill in any credit card information on Weather Underground website. If a pop-up window appears when you open the Weather Underground website, please be careful not to click it!

### 8.2. App Download

Please search for "Weatherseed " in the Google Play or IOS App Store.

After downloading, you can follow the steps to connect the weather station to WiFi and then view the data on the app.


### 8.3. App Account Register and Login


After successfully downloading the Weatherseed app, please open the app. The first time you open the app, the login or registration screen will appear. If you don't have an account, you need to register to create an account to log in with. If you have already registered a Weatherseed account, you can log in directly without registering again.

### 8.3.1. Registering Process

Follow the steps below to register your Weatherseed account:

- (1) Fill in your e-mail address.
- (2) Send the verification code to the e-mail address.
- (3) Go to the e-mail address to check the verification code and enter it.
- (4) Set a password.
- (5) Confirm the password (must be consistent with the set password).
- (6) Check the user agreement and proof of age.
- (7) Register an account.

 **Note:** Your account will be automatically logged into the app directly after the registration is completed.

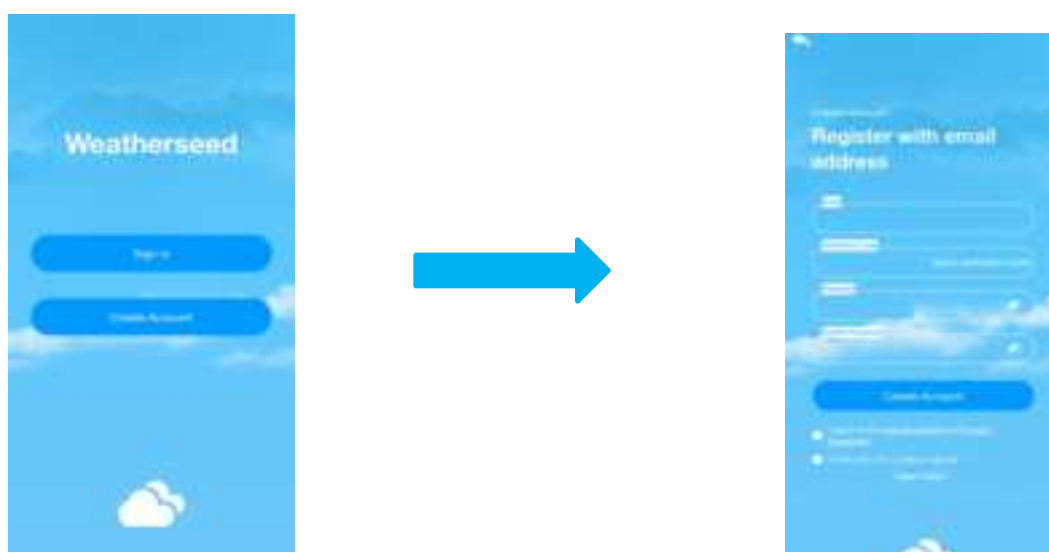

### 8.3.2. Login Process

Follow the steps below to log in to your Weatherseed account:


- (1) Enter your registered Weatherseed account (e-mail address).
- (2) Enter the password you have created.
- (3) Check the User Privacy Agreement.
- (4) Log in to your account.



## 8.4. MAC Address

In normal mode, double-click the CHANNEL/+ key on the display. The MAC icon will be shown in the date area (as shown in the figure). Then, the MAC addresses will flash one by one in sequence, and the device will automatically return to normal mode when all the addresses have been displayed.



 **Note:** Comparison table of numbers and letters

	0	1	2	3	4
Numbers	0	1	2	3	4
	5	6	7	8	9
	5	6	7	8	9

	A	b	C	d
Letters	A	b	C	d
	E	F		
	E	F		





## 8.5. IP Address


In normal mode, double-click the MAX/MIN/- key on the display. The IP icon will be shown in the date area (as shown in the figure). Then, the IP addresses will flash in sequence one by one, and the device will automatically return to normal mode when all the addresses have been displayed.



## 8.6. Connecting Steps


 **Note:** The display console only supports 2.4 GHz signals. If you have a dual-band router (supporting both 2.4 GHz and 5.0 GHz bands), ensure that the 2.4 GHz band is enabled and can be distinguished from the 5.0 GHz channel's SSID for accurate connection to the 2.4 GHz channel.

 **Note :** The power adapter must be plugged in to connect to WiFi. Battery power alone cannot connect the device to WiFi.


 **Note:** Please don't select the wrong device type or model. If you choose the wrong one, the network will not connect successfully.

 **Note:** The QR code is located on the back of the console.

### 8.6.1 Bluetooth Distribution Network Mode

To enter the distribution mode, press and hold the MAX/MIN/- key. The WiFi icon  will flash, and the BI icon will be shown in the date area, indicating that the display has entered the "Bluetooth Distribution Network" mode.


After the display has entered the "Bluetooth Distribution Network" mode, please open the app.

Select the second icon  on the lower left to enter the networking interface to start networking. The specific steps are as follows:


- (1) Enter the networking interface. Click "Add Device" to start connecting to the WiFi.




(2) Add the device in the app. Select the device type and model. Then, set a weather station name and enter your location.

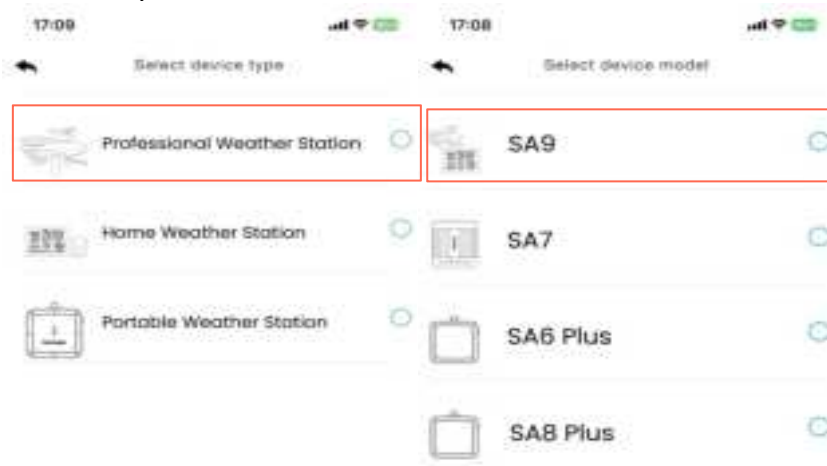


The screenshot shows a mobile app interface with a status bar at the top displaying '16:50' and signal icons. A back arrow is in the top left. The main content area has two sections: the first is titled 'Give your device a name' and contains a text input field with the placeholder 'Ex: My Weather Station'; the second is titled 'Where is your device located?' and contains a text input field with the placeholder 'Please enter your address'. At the bottom of the form is a blue 'Next' button. Below the form is a horizontal line.

 **Note:** Device and location naming requirements: Only numbers, upper and lower case letters. Maximum 20 characters, spaces allowed. Symbols prohibited. Spaces are included in the 20 characters.


(3) Enter the network configuration interface and click “Next” to complete the three steps of network configuration. Then, scan the QR code (MAC address) of the device.

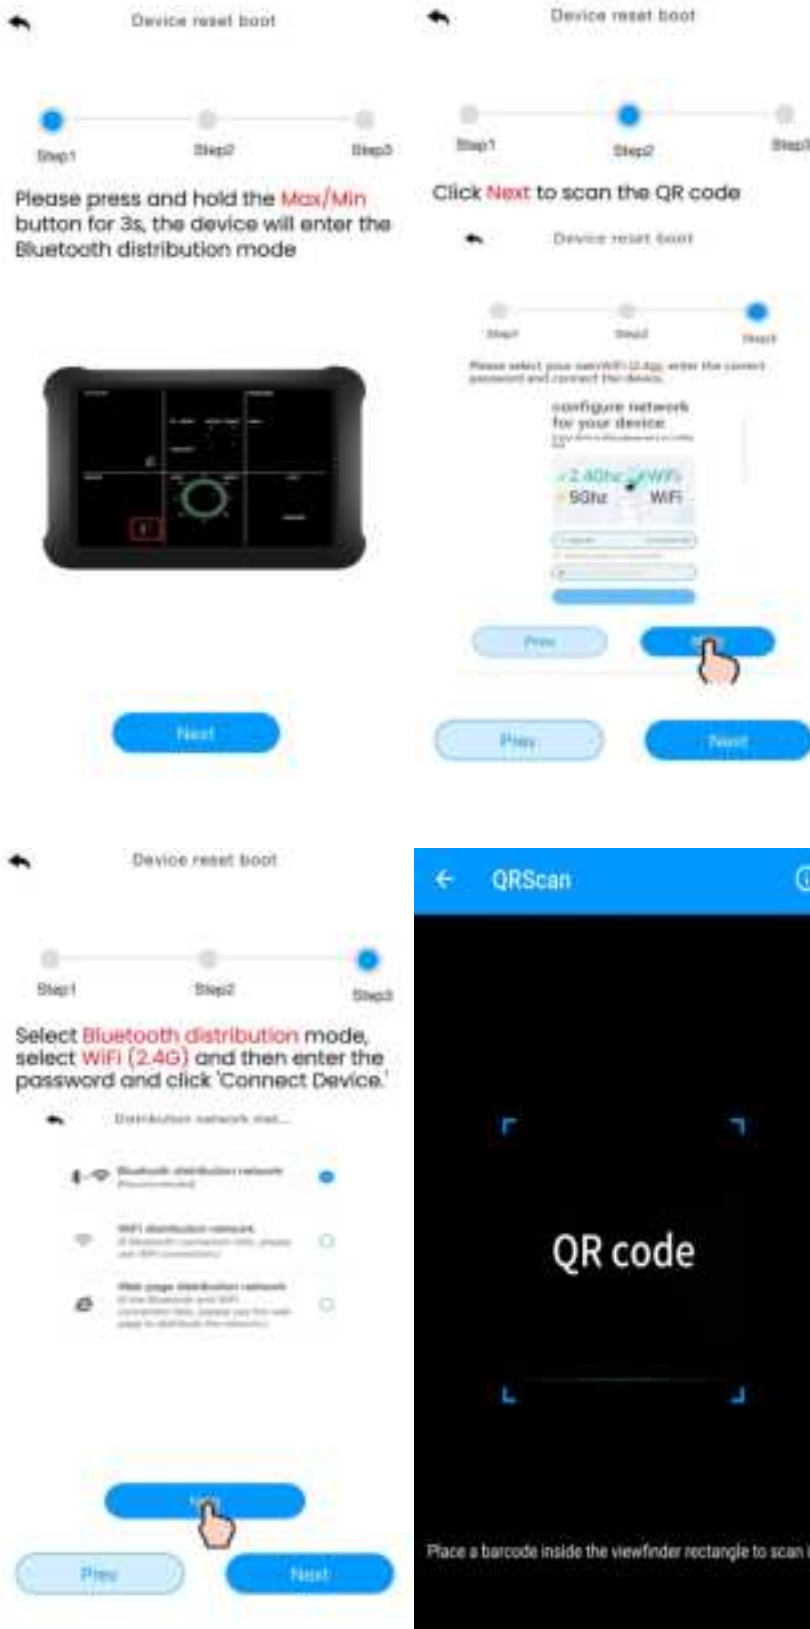


(4) Select “Bluetooth Distribution Network” mode to automatically search for Bluetooth signals and pairing. After successful pairing, jump to the WiFi interface. Please select 2.4Ghz WiFi, then enter the password.

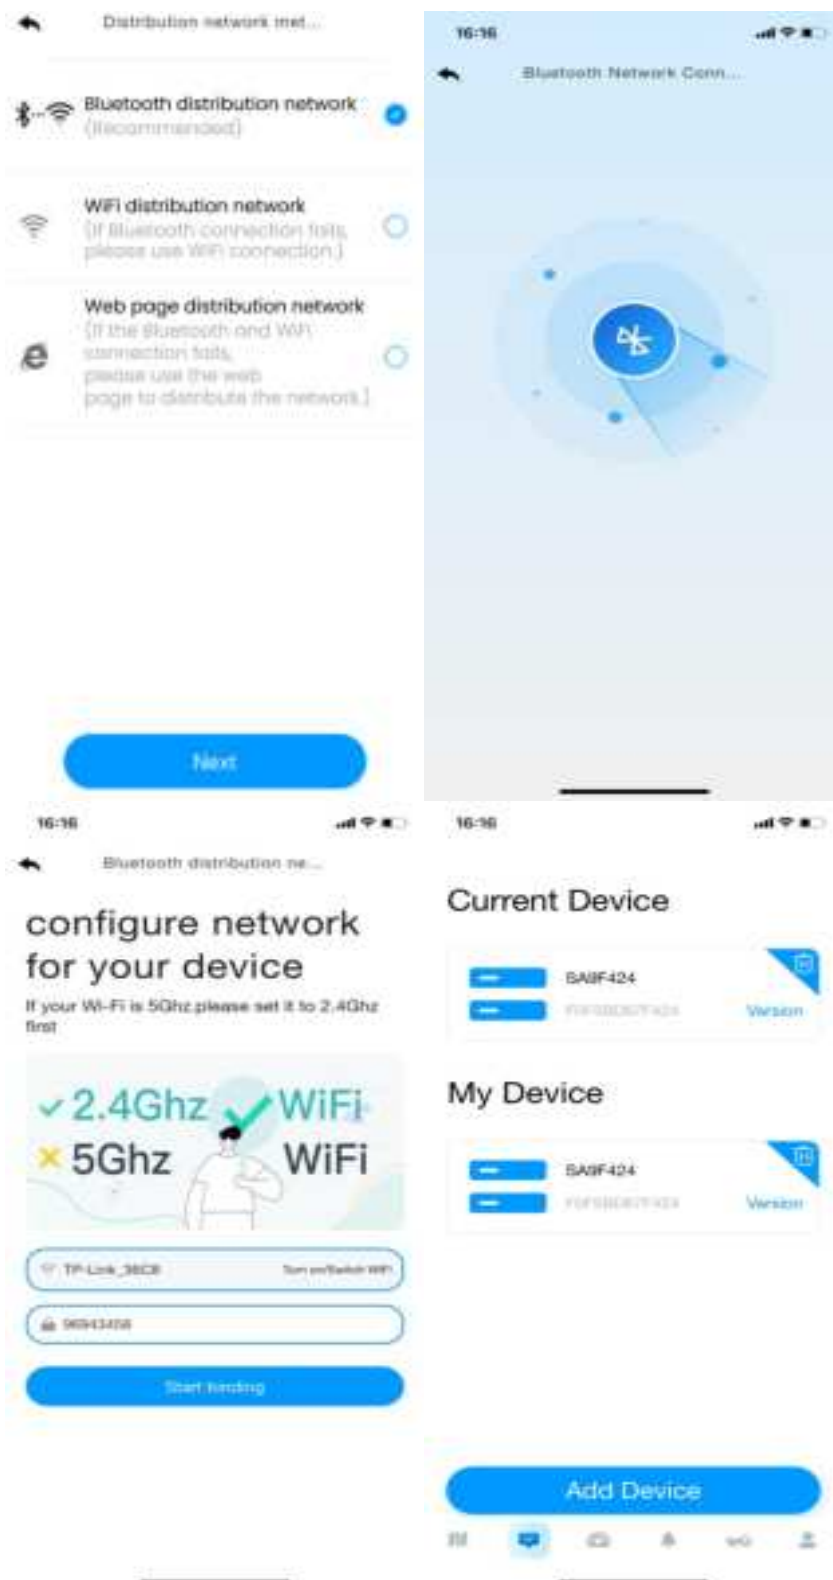

### 8.6.2. WiFi Distribution Network Mode


In normal mode, press and hold MAX/MIN/- key for at least 5 seconds to enter the “Bluetooth Distribution Network” Mode. The WiFi icon  will be flashing and the BI icon will be displayed in

the date area. Short-press the SET key once, then the BI icon will be converted to the SC icon , indicating that the display has entered the “WiFi Distribution Network” mode.

(1) Enter the networking interface. Click "Add Device" to start connecting to the WiFi.



(2) Add the device in the app. Select the device type and model, set a weather station name, and enter your location.

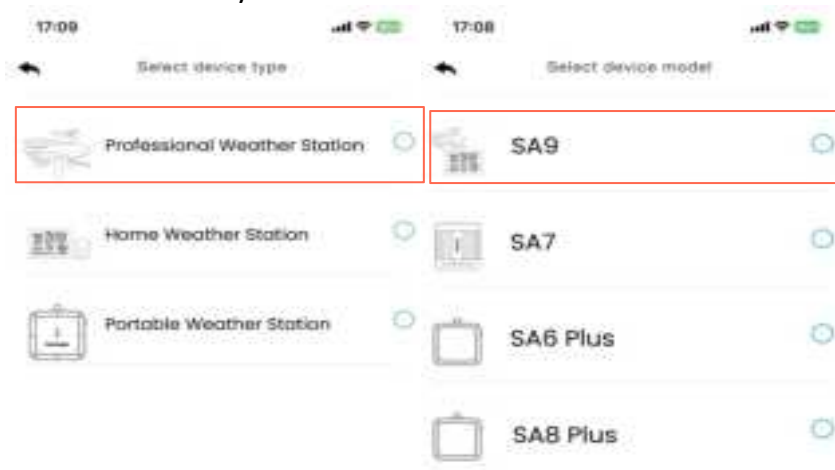

16:50

←

Give your device a name

Ecmy Weather Station

Where is your device located?

Please enter your address


Next

- (3) Enter the network configuration interface and click “Next” to complete the three steps of network configuration. Then, scan the QR code (MAC address) of the device.

← Device reset boot

Step1 Step2 Step3

Please press and hold the **Max/Min** button for 3s, the device will enter the Bluetooth distribution mode



Next

← Device reset boot

Step1 Step2 Step3

Click **Next** to scan the QR code

← Device reset boot

Step1 Step2 Step3

Please select your WiFi (2.4G), enter the correct password and connect the device.

configure network for your device

2.4GHz WiFi 5GHz WiFi

Next

← Device reset boot


Step1 Step2 Step3

Please select your WiFi (2.4G), enter the correct password and connect the device.

configure network for your device


2.4GHz WiFi 5GHz WiFi

Next

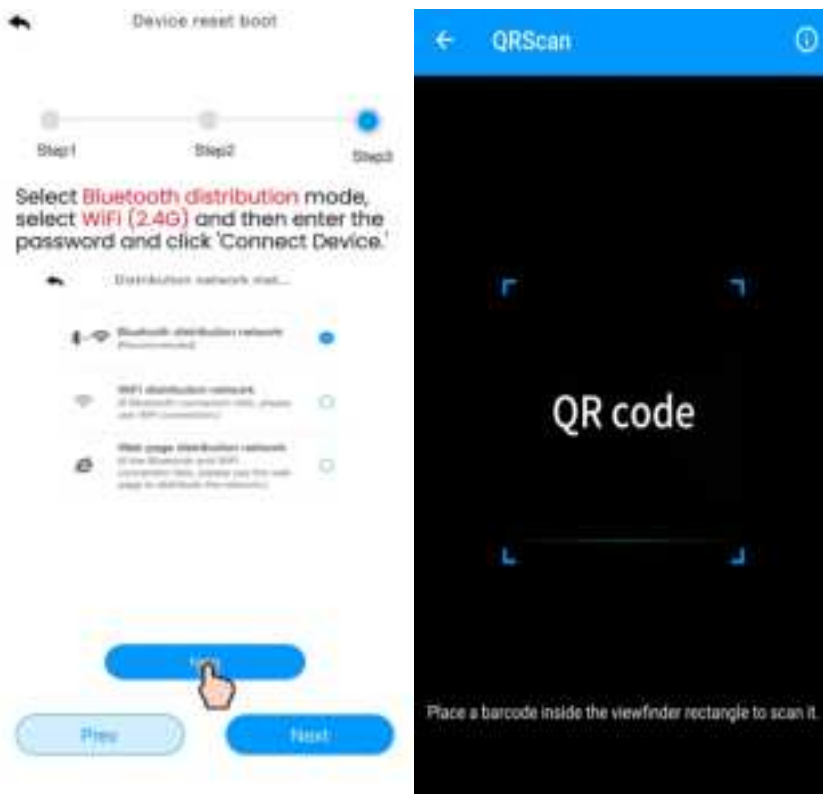


(4) Select “WiFi Distribution Network” mode.

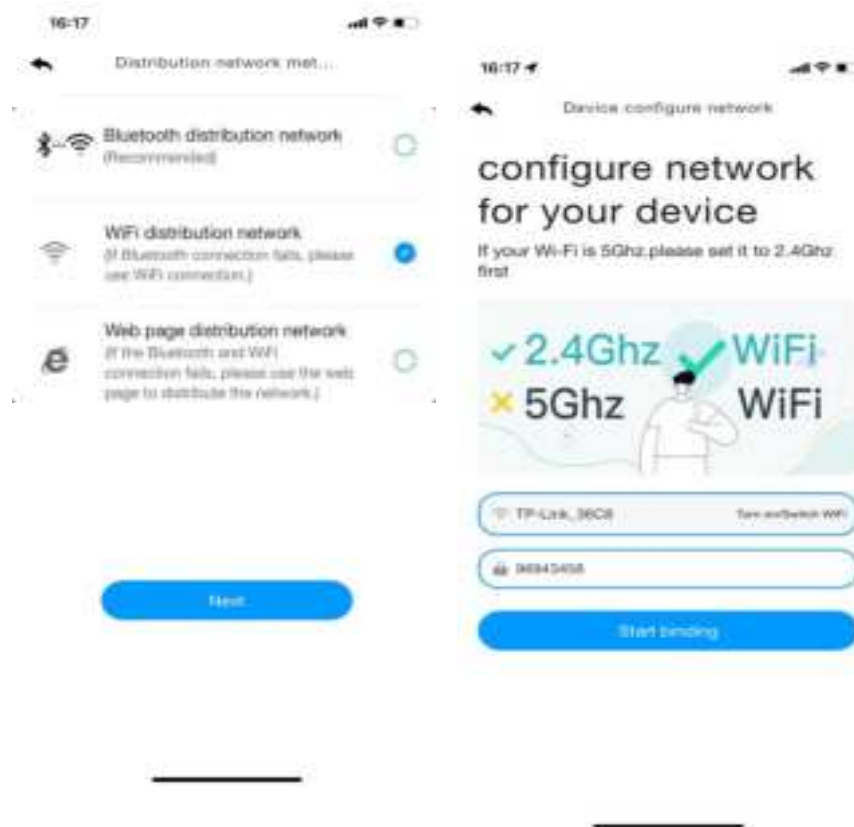

Select your WiFi (2.4g), enter the password, and connect the device. After the connection is successful, return to the Device page.



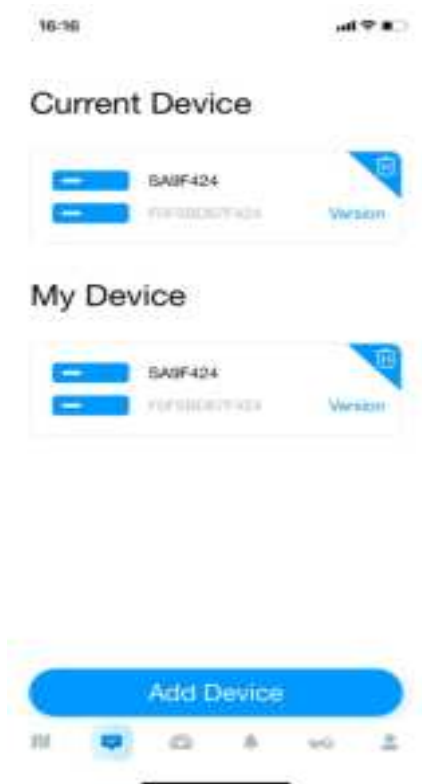




### 8.6.3. Web Page Distribution Mode


In normal mode, press and hold MAX/MIN/- key for at least 5 seconds to enter “Bluetooth Distribution Network” mode. The WiFi icon  will be flashing and the BI icon will be displayed in the date area. Short-press the SET key twice, then the icon will be converted to the WC icon , indicating that the display has entered the “WiFi Distribution Network” mode.

After the display has entered the “Web Page Distribution Network” mode, please follow the steps below to connect:



(1) Add a device in the dashboard interface. Select device type and model, set a weather station name, and enter your location. Enter the network configuration interface, then click “Next” to complete the three steps of network configuration.

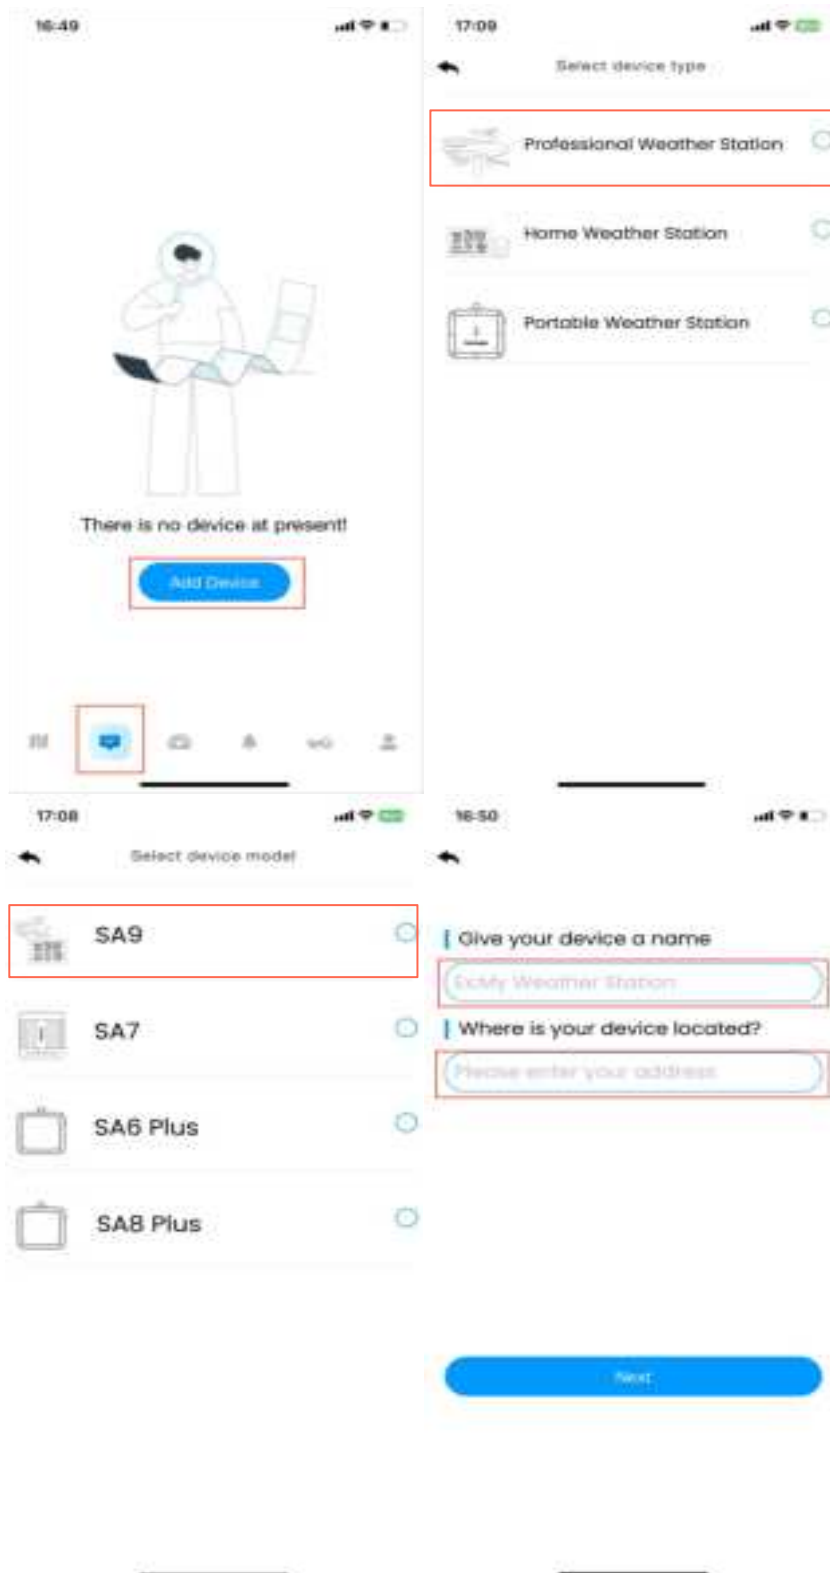


(2) Enter the network configuration interface and click “Next” to complete the three steps of network configuration. Scan the QR code.

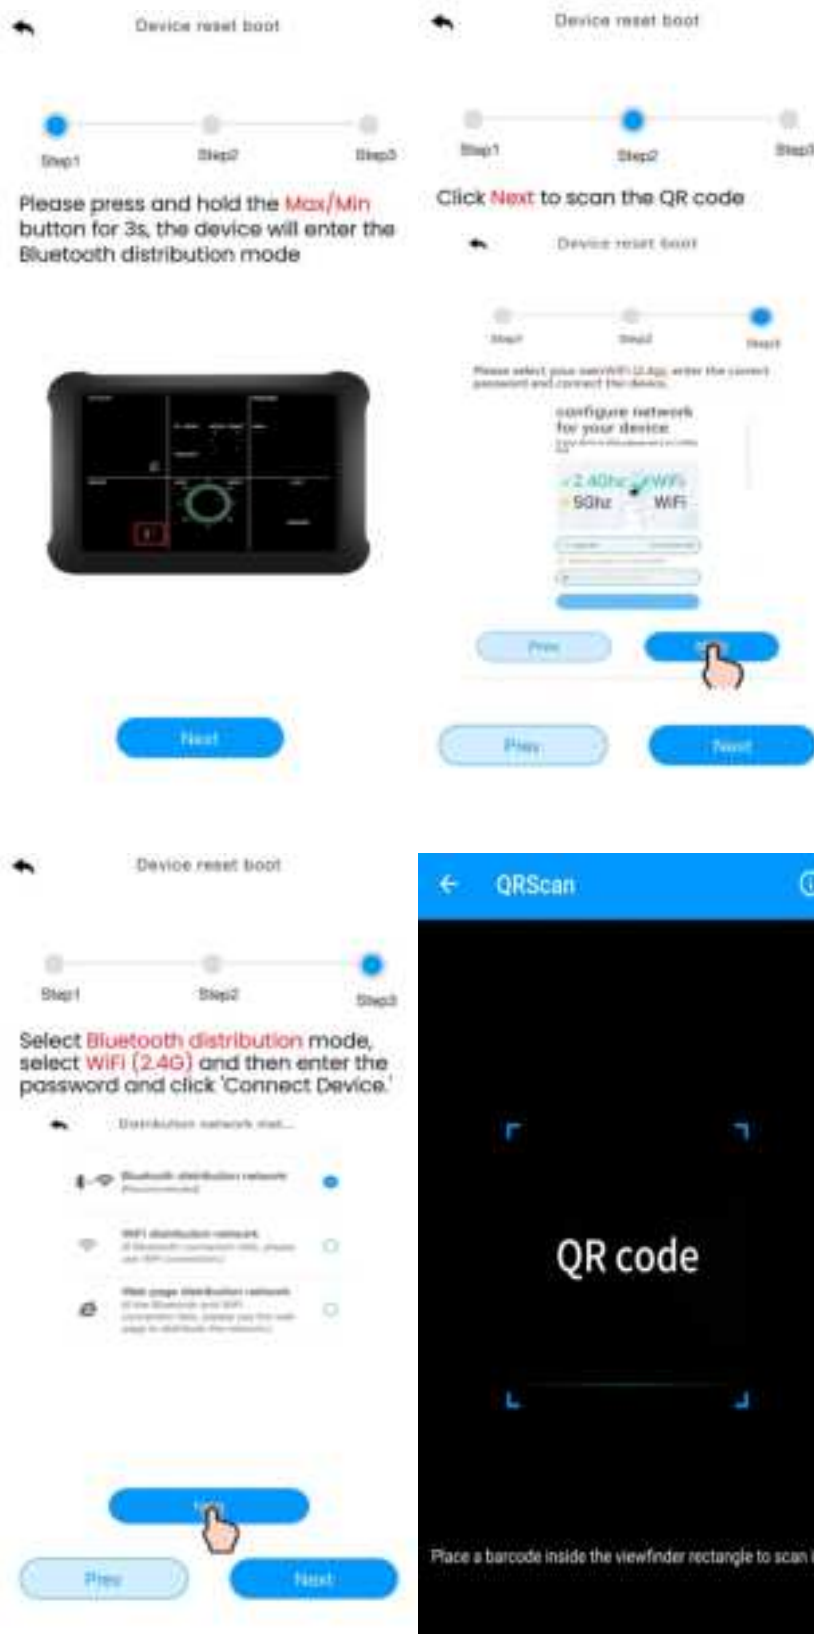

(3) Select “Web Page distribution network” mode. Click “Go” to connect WiFi. The device will automatically jump to the WiFi list screen. Connect to the “weatherseed” WiFi.

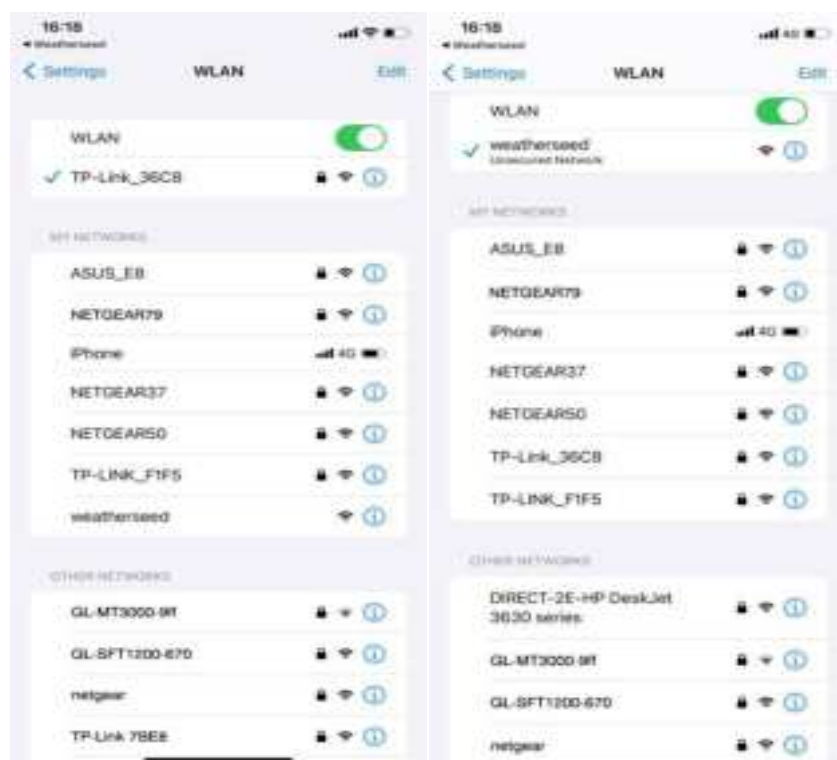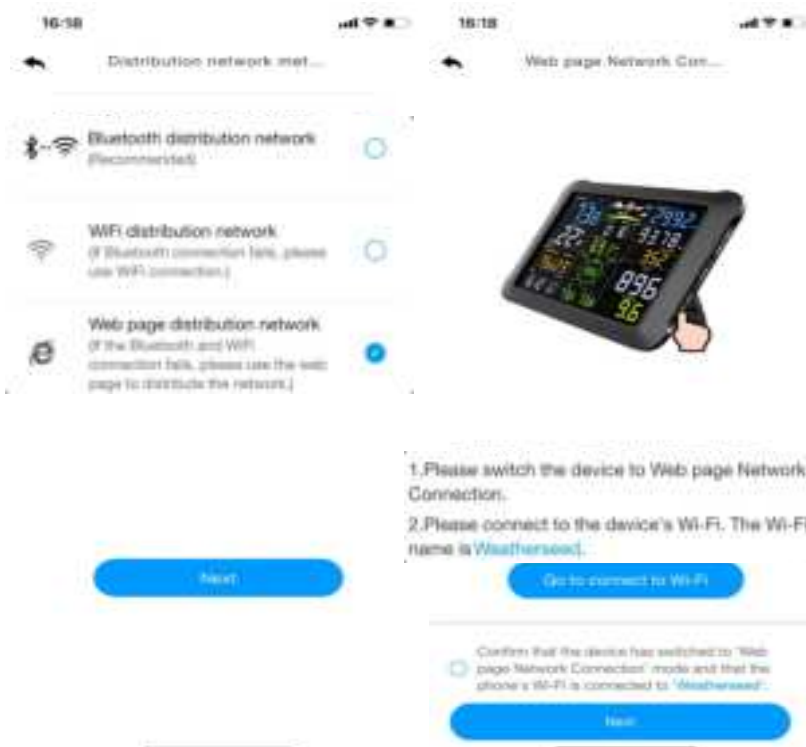


Return to the app. Click the confirmation dot, and click "Next". Please select 2.4Ghz WiFi. Enter the password, and click "Connect".

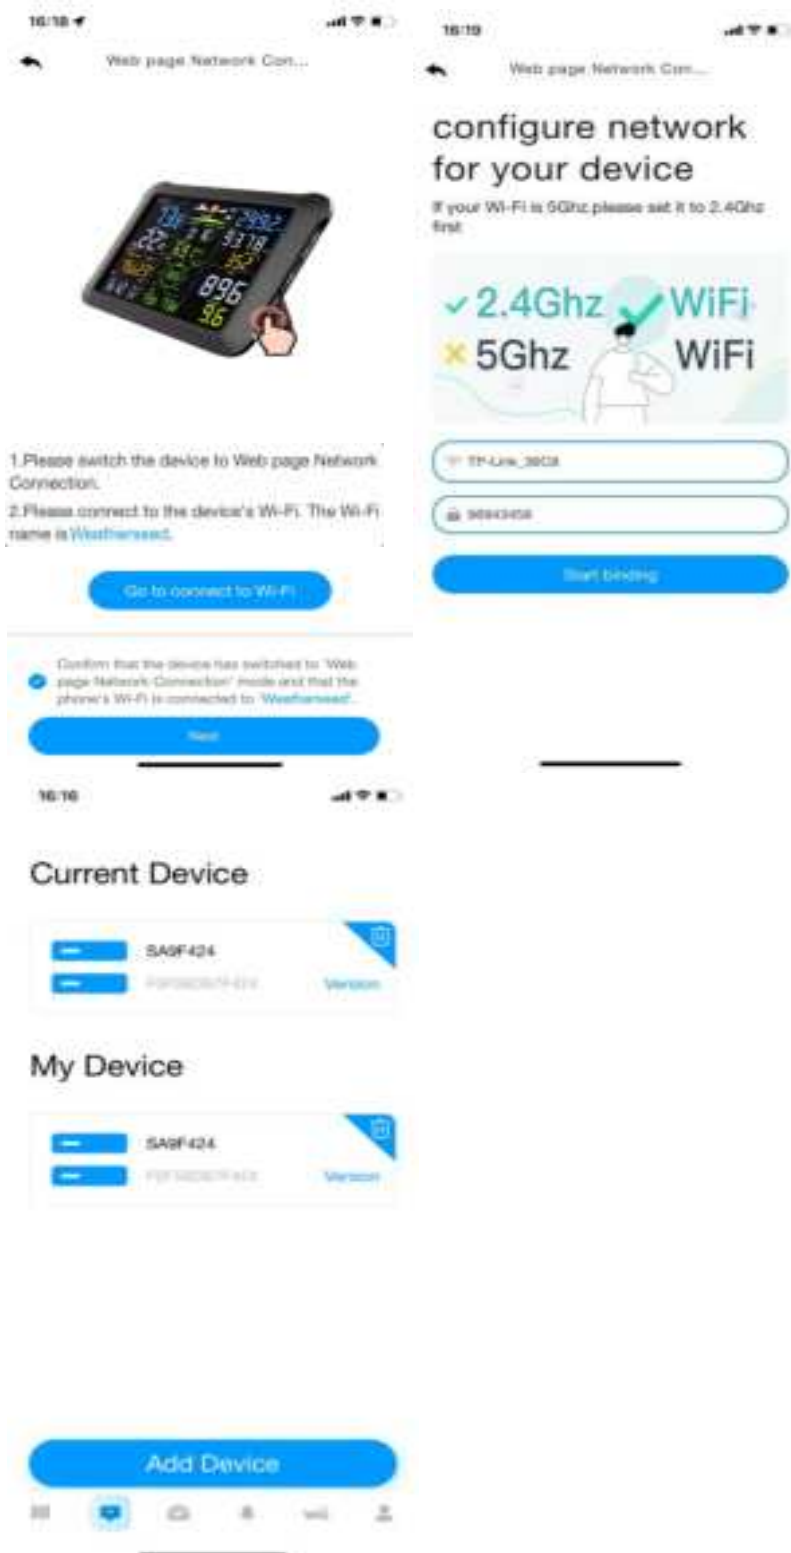

## 8.7. Firmware Upgrade

When your app receives a firmware upgrade notification, follow the steps below to upgrade the firmware remotely:

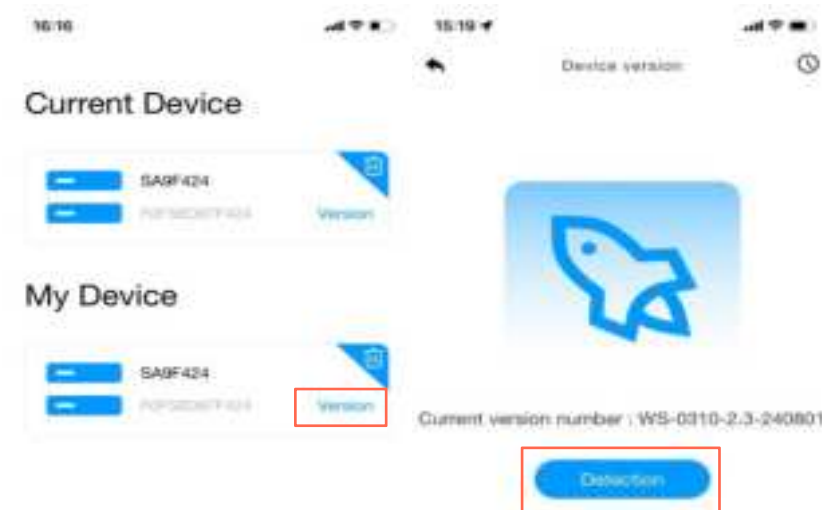

## 8.8. Sign Up on Wunderground.com

1. Visit the "<https://www.wunderground.com>" website. Click the "Join" button, input your e-mail and password, and select the "Sign up for free" button to create your own account.

Search Locations | Log in | **Join**

### Member Account

#### Join Weather Underground

- Choose adding your webcam or personal weather station.
- You can delete your account at any time from your member settings.

The Weather Company needs your email to create your Weather Underground account.

Email: myweather@...com ✓

Password (5-50 characters): [REDACTED] ✓

Confirm New Password: [REDACTED]

☐ I agree to the Terms of Use

**Sign up for free**

Already have an account? Sign in

2. Click the **“Sign in”** button to log in, and switch to the **Member Settings** page.

WU WEATHER UNDERGROUND | Internet Network | Maps & Radar | Today's Weather | News & Blogs | Mobile Apps | More

Search Locations | Log in | **Join**

### Member Account

#### Sign in to Weather Underground!

Email: myweather@...com ✓

Password: [REDACTED] Forgot your password? ✓

**Sign in**


Don't have an account? Sign up

[Terms of Use](#) | [Privacy Policy](#)


Please read these terms carefully. By using Weather Underground or signing up for an account, you're agreeing to these terms.

3. Select the **My Devices** tab and click **“Add New Devices”**.


**Note:** On the **“Add New Devices”** page, set the **“TYPE”**, **“LOCATION”**, **“DETAILS”**, and **“DONE”** pages step-by-step until 100% completed.

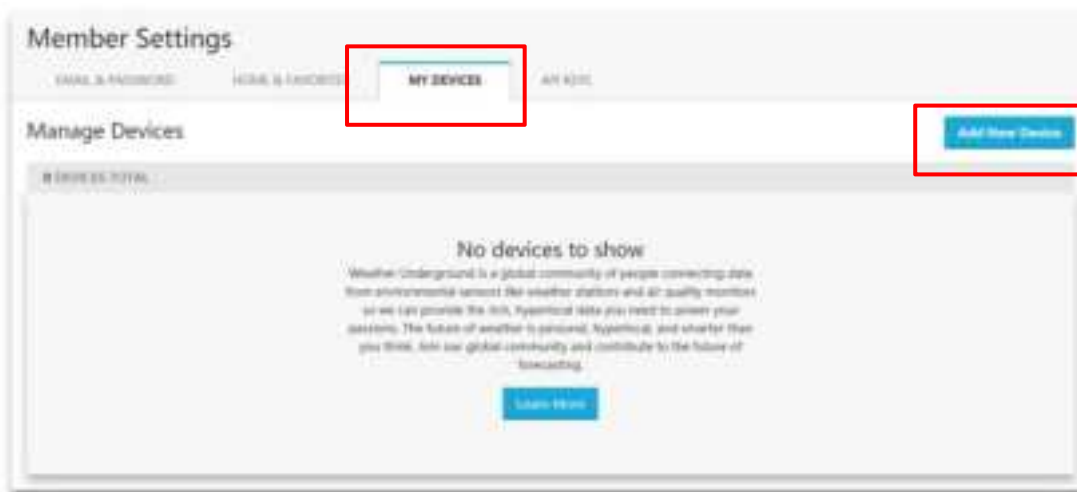

4. On the **TYPE** page, click the “**Personal Weather Station**” drop-down list to select “**Other**”.

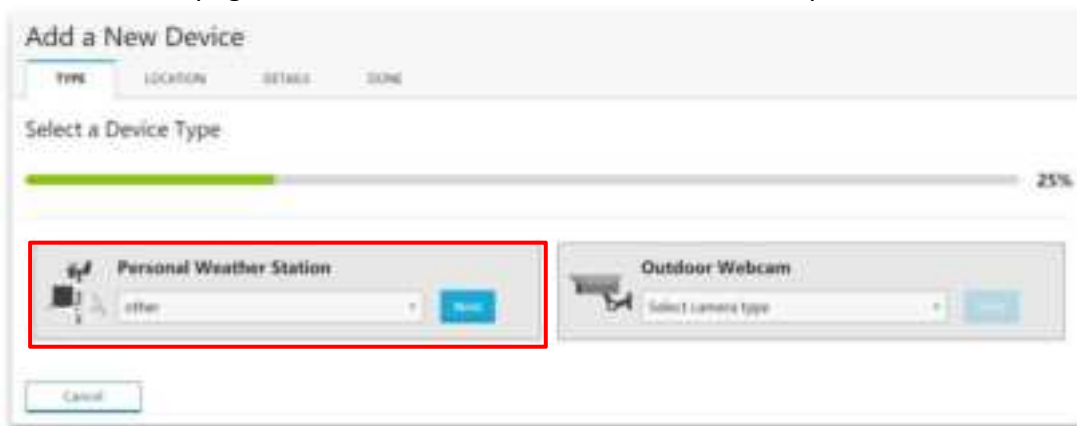

5. On the **LOCATION** page, select the “**Address**” or “**Manual**” Option, find and input your local position, then press “**Next**”.

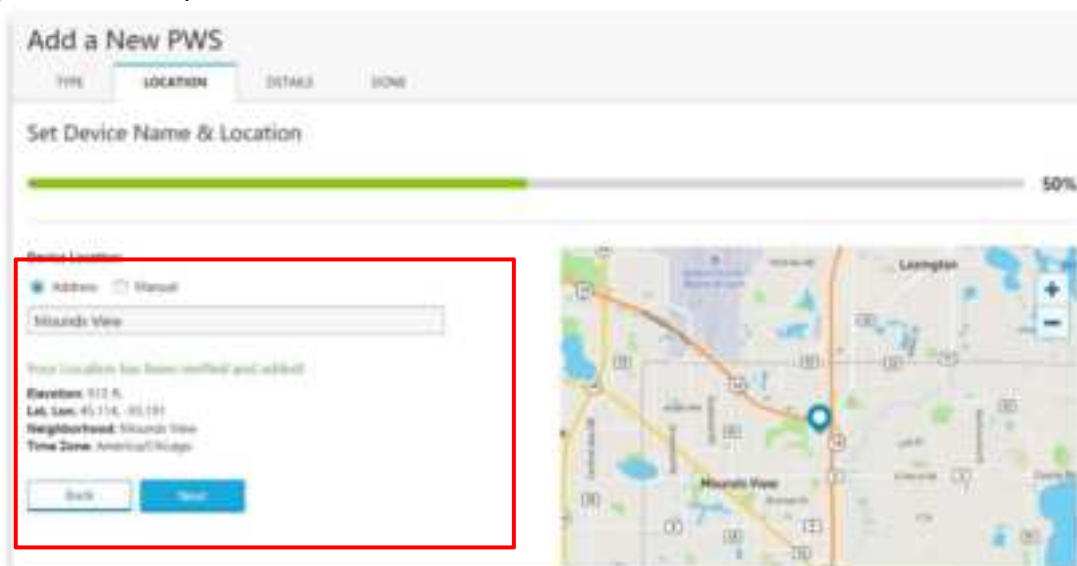

6. On the **DETAILS** page, fill in the “**Required**” information, then press “**Next**”.



## Add a New PWS

TWE LOCATION **DETAILS** DONE

Tell Us More About Your Device

75%

**Station ID (required)**  
W50001

**Station Type**  
[Dropdown menu]

**Barcode (required)**  
4885

**Associate Webcam**  
Select Webcam

**Device Hardware (required)**  
Other

**Height Above Ground**  
10, Above Ground

**You Make Our Forecasts More Accurate. We Respect Your Privacy**  
 Contribute to the Weather Underground community by sharing some information about yourself and your sensor. We use this information to manage your account and to improve the experience from the Weather Underground community. We may also share certain data for commercial purposes, such as your sensor location.  
[Learn more about how we take your privacy seriously](#)

☒ I Accept ☐ I Deny

**Send Preferences**  
☐ I would like to receive PWS notifications

[Back](#) [Next](#)

7. On the **DONE** page, the device “**Station ID**” and “**Station Key**” are shown. Copy and record the information for later use.

## Add a New PWS

TWE LOCATION DETAILS **DONE**

Registration Complete!

100%

Congratulations! Your personal weather station is now registered with Weather Underground.

Enter the information below to your weather station software


**Your PWS**

Station ID: [Redacted]

Station Key: [Redacted]

[Export Details](#)

[View Details](#)



Configure Your Software

## 9. Display Console Operation

### 9.1. Quick Display Mode

In normal mode, press (do not hold) the SET/MODE key to enter Quick Display mode. To skip any step to the next setting, press the SET/MODE key continuously, and the current setting parameter will flash.

 **NOTE:** To exit Quick Display mode at any time, press the SNOOZE key on the display console.


The sequence and commands for the Quick Display mode are summarized in the following charts:

NO	Command	Mode	Settings	Image
1	[SET]	Time/Week and Seconds	Press the CHANNEL/+ or MAX/MIN/- key to toggle between time/week and seconds.	
2	[SET]	Outdoor Dew Point	Press the CHANNEL/+ or MAX/MIN/- key to toggle between AT (surface temperature) and dew point.	
3	[SET]	Absolute and Relative Pressure	Press the CHANNEL/+ or MAX/MIN/- key to toggle between absolute and relative pressure.	
4	[SET]	Rain Period View Mode	Press the CHANNEL/+ or MAX/MIN/- key to toggle between rainfall, 24-hour, weekly, monthly, and total rainfall.  To clear the rainfall for each time period, press the CHANNEL/+ or MAX/MIN/- key to display to the time period you want to clear. When the rain amount is flashing, press and hold the SET/MODE key for five seconds until the rain amount is displayed as 0.0.	
5	[SET]	Average Wind Speed	Press the CHANNEL/+ or MAX/MIN/- key to toggle between current, 2 minutes, and 10 minutes.	

\*[SET] means press the SET button.






## 9.2. Set Mode

In normal mode, press and hold the SET/MODE key for at least 3 seconds to enter set mode and the first setting will flash. To skip any step to the next setting, keep pressing the SET/MODE key and the current setting parameter will flash.



 NOTE: In Set Mode, press the CHANNEL/+ key or the MAX/MIN/- key to change or scroll the setup value. Press and hold the CHANNEL/+ key or MAX/MIN/- key for three seconds to quickly increase or decrease.

 NOTE: To exit Set Mode at any time, press the SNOOZE key on the display console.

The sequence and commands for the Set mode are summarized in the following charts:

NO	Comm and	Mode	Settings	Image
1	[SET]+3 sec	Time SYNC (default: ON)	- Press the CHANNEL/+ key or MAX/MIN/- key to toggle the synchronized time on/off. - Synchronize the device with the time and date via WiFi.	
2	[SET]	DST (default: ON)	Press the CHANNEL/+ key or MAX/MIN/- key to toggle DST on/off.	
3	[SET]	12/24-Hour Format (default: 12h)	Press the CHANNEL/+ key or MAX/MIN/- key to toggle between 12-hour and 24-hour.	
4	[SET]	Hour	Press the CHANNEL/+ key or MAX/MIN/- key to adjust the hours up or down. The PM icon will be displayed during afternoon hours.	
5	[SET]	Minute	Press the CHANNEL/+ key or MAX/MIN/- key to adjust the minutes up or down.	
6	[SET]	Date Format (default: M-D)	Press the CHANNEL/+ or MAX/MIN/- key to toggle between M-D and D-M.	
7	[SET]	Month	Press the CHANNEL/+ or MAX/MIN/- key to adjust the calendar month.	

8	[SET]	Day	Press the CHANNEL/+ or MAX/MIN/- key to adjust the calendar day.	
9	[SET]	Year	Press the CHANNEL/+ key or MAX/MIN/- key to adjust the calendar year.	
10	[SET]	Max/Min Clearing (default: ON)	<p>The maximum/minimum value can be set to daily (midnight) or manually cleared.</p> <p>Press the CHANNEL/+ key MAX/MIN/- key to toggle between ON (24-hour clearing) and OFF (manual).</p>	
11	[SET]	Temperature Measurement Unit (default value: °F)	Press the CHANNEL/+ or MAX/MIN/- keys to toggle between °F and °C measurement units.	
12	[SET]	Sunlight Unit (default value: W/m2)	Press the CHANNEL/+ key or MAX/MIN/- key to toggle the daylight display unit between W/m2, fc, or lux.	
13	[SET]	Barometric Pressure Unit (default value: InHg)	Press the CHANNEL/+ key or the MAX/MIN/- key to toggle the pressure unit between mmhg, inHg, or hPa.	
14	[SET]	Rainfall Measurement Unit (default value: inch)	Press the CHANNEL/+ key or MAX/MIN/- key to toggle the rainfall unit between mm and inch.	
15	[SET]	Wind Speed Measurement Unit (default value: mph)	Press the CHANNEL/+ key or MAX/MIN/- key to toggle the wind speed unit between m/s, km/h, mph, knots bft, or ft/s.	
16	[SET]	Pressure Threshold Setting (default value: 2 levels)	Press the CHANNEL/+ key or the MAX/MIN/- key to change the pressure threshold from 2 hPa to 4 hPa. (See 12.3 for more information on this section.)	

17	[SET]	Weather Icon Settings (default value: few clouds)	Press the CHANNEL/+ key or the MAX/MIN/- key to select the initial weather icon for a sunny, less cloudy, cloudy, or rainy day (see 12.1 for more information on this section). Note: The weather icon does not change immediately; wait 4 hours for it to change.	
18	[SET]	Location Area (default value: Northern Hemisphere)	Press the CHANNEL/+ key or the MAX/MIN/- key to toggle the geographic location of the Northern Hemisphere (NOR) or Southern Hemisphere (SOU). (Refer to 5.3 Sensor Mounting Orientation).	
19	[SET]	Exit Set Mode	Press the SET/MODE or SNOOZE key to exit setup mode.	

\*[SET] + 3 seconds means press and hold the SET button for three seconds.

\*[SET] means press the SET button.

### 9.3. Time Zone

The following table summarizes time zones around the world:

Hours from GMT	Time Zone	Cities
-12	IDLW: International Date Line West	---
-11	NT: Nome	Nome, AK, USA
-10	AHST: Alaska-Hawaii Standard CAT: Central Alaska HST: Hawaii Standard	Honolulu, HI, USA
-9	YST: Yukon Standard	Yukon Territory
-8	PST: Pacific Standard	Los Angeles, CA, USA
-7	MST: Mountain Standard	Denver, CO, USA
-6	CST: Central Standard	Chicago, IL, USA
-5	EST: Eastern Standard	New York, NY, USA
-4	AST: Atlantic Standard	Caracas, Venezuela
-3.5	Newfoundland Time (NT)	Newfoundland, Canada
-3	---	São Paulo, Brazil
-2	AT: Azores	Azores, Cape Verde Islands
-1	WAT: West Africa	---

0	GMT: Greenwich Mean WET: Western European	London, England
1	CET: Central European	Paris, France
2	EET: Eastern European	Athens, Greece
3	BT: Baghdad	Moscow, Russia
3.5	Iran Standard Time (IRST)	Tehran, Iran
4	---	Abu Dhabi, UAE
5	---	Tashkent, Uzbekistan
5.45	Nepal Standard Time	Nepal
5.5	Indian Standard Time (IST)	India
6	---	Astana, Kazakhstan
7	---	Bangkok, Thailand
8	CCT: China Coast	Beijing, China
9	JST: Japan Standard	Tokyo, Japan
9.5	Australian Central Standard Time (ACST)	Adelaide, Australia
10	GST: Guam Standard	Sydney, Australia
11	---	Magadan, Russia
12	IDLE: International Date Line East NZST: New Zealand Standard	Wellington, New Zealand

## 9.4. Max/Min Mode

### 9.4.1. Viewing and Resetting Maximum Values

In normal mode, press the MAX/MIN/- key once briefly. The MAX icon will be displayed in the date area, and the display will show the maximum values for rainfall rate, gust and average wind speed, UV and sunshine, ABS barometric pressure, outdoor temperature, humidity, sensory image, outdoor AT temperature, indoor temperature, humidity, and dew point.

Press SET/MODE to toggle through the maximum values of rainfall (24 hours, week, or month), REL barometric pressure, and outdoor dew point (the rest of the parameters remain unchanged).






Figure 22


Press the MAX/MIN/- key for three seconds to clear all maximum values (rainfall, wind speed, gusts, barometric pressure, UV and sunshine, temperature, and humidity maximums).

Press the SNOOZE key to exit the Maximum View and Reset mode and return to the normal display mode.

The following charts summarize the sequence and instructions for viewing and resetting the mode settings in Maximum:

Command	Mode	Settings	Image
[MAX/MIN/-]	Maximum View Mode	The MAX icon is displayed in the date area. The display shows a portion of the parameter maximum: Rainfall rate, gust and average wind speed, UV and insolation, ABS barometric pressure, outdoor temperature, AT temperature, sensory image, indoor temperature, humidity and dew point.	
[SET]		The display switches to show the maximum value of another part of the parameter (the rest of the parameters remain unchanged): 24-hour rainfall, REL air pressure, and outdoor dew point.	

[SET]		The display switches to show the maximum value of the other part of the parameter (the rest of the parameters remain unchanged): Rainfall for a week.	
[SET]		The display switches to show the maximum value of another part of the parameter (the rest of the parameters remain unchanged): Rainfall in January	
[MAX/MIN/-] +3 Sec	Reset Maximum Mode	The date area will show the CLR icon. Clears all maximum (rainfall, wind speed, gusts, barometric pressure, UV and sunshine, temperature, and humidity).	
[SNOOZE]	Exiting Maximum View and Reset Mode	Return to normal mode.	

 **NOTE:** After resetting the maximum values, the display maximums will show the current values.

\*[MAX/MIN/-] means press the MAX/MIN/- button.

\*[SET] means press the SET button.

\*[MAX/MIN/-] + 3 seconds means press and hold the SET button for three seconds.

#### 9.4.2. Viewing and Resetting Minimum Values


In normal mode, press the MAX/MIN/- key briefly once, and the date area will show the MAX icon. Press the MAX/MIN/- key once more. The date area will show the MIN icon, and the display will show the ABS barometric pressure, outdoor temperature, humidity and sensory image, outdoor AT temperature, indoor temperature, and humidity and dew point minimum values.

Press SET/MODE to toggle the view of REL barometric pressure and outdoor dew point minimum (the rest of the parameters remain unchanged).





Press the MAX/MIN/- key for three seconds to clear all minimum (barometric pressure, temperature, humidity, dew point, and sensory image).

Press the SNOOZE key to exit the Minimum Values View and Reset mode and return to the normal display mode.



 **NOTE:** After resetting the minimum value, the display minimum value will show the current value.

The following charts summarize the sequence and instructions for viewing and resetting the mode settings in Minimum:

Command	Mode	Settings	Image
[MAX/MIN/-]	Minimum View Mode	The MAX icon is displayed in the date area.	
[MAX/MIN/-]		<ul style="list-style-type: none"> <li>- The MIN icon is displayed in the date area.</li> <li>- The display shows a portion of the parameter minimum values: ABS air pressure, outdoor temperature and humidity, AT temperature and sensory image, indoor temperature, and humidity and dew point.</li> </ul>	
[SET]		The display switches to show the minimum value of another part of the parameter (the rest of the parameters remain unchanged): REL air pressure, and outdoor dew point.	
[MAX/MIN/-] +3 Sec	Reset Minimum Mode	<p>A CLR icon will be displayed in the date area.</p> <p>Clear all minimum (barometric pressure, temperature and humidity, dew point, and sensory image).</p>	
[SNOOZE]	Exiting Maximum View and Reset Mode	Return to normal mode.	

\*[MAX/MIN/-] means press the MAX/MIN/- button.

\*[SET] means press the SET button.

\*[MAX/MIN/-] + 3 seconds means press and hold the SET button for three seconds.

## 9.5. Alarm Mode

The weather station contains the following alarms:

No	Parameter	Default	No	Parameter	Default
----	-----------	---------	----	-----------	---------

1	Time (Alarm 1 and Alarm 2)	00:00	10	24-hour Rainfall	50.0mm
2	Outdoor Temperature	HI: 30°C Low: -10°C	11	Absolute Pressure	HI: 1040.0hpa Low: 960.0hpa
3	Outdoor Humidity	HI: 75% Low: 45%	12	Relative Pressure	HI: 1040.0hpa Low: 960.0hpa
4	Outdoor Apparent Temperature	HI: 26.7°C Low: 0.0°C	13	Indoor Temperature	HI: 20.0°C Low: 0.0°C
5	Outdoor Dew Point	HI: 10.0°C Low: -10.0°C	14	Indoor Humidity	HI: 65% Low: 35%
6	Outdoor “Feels Like” Temperature	HI: 26.7°C Low: 0.0°C	15	Indoor Dew Point	HI: 10.0°C Low: -10.0°C
7	Wind Speed	HI: 10.0 m/s	16	UV	6
8	Average Wind Speed	HI: 5.0 m/s	17	Sunlight	789 W/m <sup>2</sup>
9	Rainfall Rate	1.0 mm/h			

#### 9.5.1. Alarm Trigger

If the current value reaches the alarm condition, the alarm icon will flash (visual), and the alarm buzzer will sound (audible).

To turn off the buzzer, press any key.

#### 9.5.2. Viewing High/Low Alarm Values

##### (1) Viewing High Alarm Values

To view the current alarm value, press the ALARM key to enter Alarm View mode, which defaults to High Alarm View mode.

As shown, the date area will display HI AL 1 and Alarm 1 time. The display shows indoor temperature and humidity, outdoor temperature and humidity, rain rate, AT, “feels like” temperature, gust, average wind speed, absolute pressure, UV index, and sunshine high alarm parameters.

Press SET/MODE, then the date area will show HI AL 2 and Alarm 2 time. The display will toggle to show the high alarm parameters for rainfall (24 hours, week, or month), outdoor dew point, and relative barometric pressure (the remaining parameters remain unchanged).







Figure 23

 **Note:** Press the ALARM key again to return to normal mode.

 **Note:** Press the SNOOZE key at any time during the High/Low Alarm mode to return to Normal mode.

The following chart summarizes the sequence and commands for the High Alarm View mode setting:

Command	Mode	Settings	Image
[ALARM]	High Alarm View Mode	The date area will show the HI AL 1 icon and the Alarm 1 time. The display will show high alarm values for some parameters: Indoor temperature and humidity, outdoor temperature and humidity, rain rate, AT, “feels like” temperature, gust, average wind speed, absolute pressure, UV index, and sunlight.	
[SET]		The date area displays the HI AL 2 icon and the time of Alarm 2. The display switches to show another part of the parameter high alarm values: High alarm parameters for 24-hour rainfall, outdoor dew point, and relative barometric pressure (the rest of the parameters remain unchanged).	

[SET]		The display switches to show the high alarm value for another part of the parameter (the rest of the parameters remain unchanged): Weekly rainfall.	
[SET]		The display switches to show the high alarm value for another part of the parameter (the rest of the parameters remain unchanged): Monthly rainfall.	
[ALARM]/ [SNOOZE]	Exit High Alarm View Mode	Return to normal mode.	

\*[ALARM] means press the ALARM button.

\*[SET] means press the SET button.

\*[ALARM]/[SNOOZE] means press the ALARM or SNOOZE button.

## (1) Viewing Low Alarm Values

To view the current alarm value, press the ALARM key to enter Alarm View mode, which defaults to High Alarm View mode. Press the ALARM key again to enter the Low Alarm View mode.

The date area will display LOW AL 1 and the Alarm 1 time as shown. The display shows the low alarm parameters for indoor temperature and humidity, outdoor temperature and humidity, indoor dew point, AT, sensation, and ABS pressure.

Press the SET/MODE key, then the date area will show LOW AL 2 and Alarm 2 time. The display will toggle to show the low alarm parameters for outdoor dew point and REL barometric pressure (the remaining parameters remain unchanged).






Figure 24

Press ALARM again to return to normal mode.

 **NOTE:** In High/Low Alarm mode, press the SNOOZE key at any time to return to normal mode.

The following diagrams summarize the sequence and instructions for setting up the Low Alarm View mode:

Command	Mode	Settings	Images
[ALARM]	High Alarm View Mode	The date area will display the HI AL 1 icon and the Alarm 1 time.	
[ALARM]	Low Alarm View Mode	The date area will show the LOW AL 1 icon and the Alarm 1 time. The display will show low alarm values for some parameters: Indoor temperature and humidity, outdoor temperature and humidity, indoor dew point, AT temperature, "feels like" temperature, and ABS pressure.	
[SET]		The date area will show LOW AL 2 and Alarm 2 times. The display will toggle to show another portion of the parameter low alarm values: Outdoor dew point and REL air pressure (the rest of the parameters remain unchanged).	
[ALARM]/[SNOOZE]	Exit Low Alarm View Mode	Return to normal mode.	

\*[ALARM] means press the ALARM button.

\*[SET] means press the SET button.

\*[ALARM]/[SNOOZE] means press the ALARM or SNOOZE button.

### 9.5.3. Setting High/Low Alarms




Press the ALARM key to enter Alarm View mode. Then, press and hold the SET/MODE key for three seconds to enter Alarm Setting mode. The first parameter will start flashing (hourly). To save the setting and proceed to the next parameter, briefly press the SET/MODE key continuously.





To adjust an alarm parameter, press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value, or press and hold the CHANNEL/+ key or the MAX/MIN/- key for three seconds for a quick increase or decrease.





Press the ALARM key to turn the alarm on (the alarm icon will display) or off (the alarm icon will disappear).

Press the SNOOZE key at any time to return to normal mode. If no action is taken within 30 seconds, the alarm mode will time out and revert to normal mode.





The following diagrams summarize the sequence and instructions for setting alarms.





Command	Mode	Settings
[ALARM]	Enter Alarm Viewing Mode	
[SET]+3 sec	Enter Alarm Setting Mode Hour Setting (Alarm 1)	<p>· Press the CHANNEL/+ button or the MAX/MIN/- button to increase or decrease the value. Long press to increase or decrease quickly.</p> <p>· Press the ALARM button to turn the time alarm on or off. When the alarm is on, the alarm time icon  will be displayed. When the alarm is off, the alarm time icon will disappear.</p>
[SET]	Minute Setting (Alarm 1)	
[SET]	Hour Setting (Alarm 2)	
[SET]	Minute Setting (Alarm 2)	
[SET]	Outdoor Temperature High Alarm	<p>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</p> <p>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is turned on, an icon  will be displayed next to the parameter. If the alarm is turned off, the icon will disappear.</p>
[SET]	Outdoor Temperature Low Alarm	<p>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</p> <p>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</p>





[SET]	Outdoor Humidity High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Outdoor Humidity Low Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Outdoor AT High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Outdoor AT Low Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>

[SET]	Outdoor Dew Point High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Outdoor Point Low Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Outdoor “Feels Like” High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Outdoor “Feels Like” Low Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>



[SET]	Indoor Temperature High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Indoor Temperature Low Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Indoor Humidity High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Indoor Humidity Low Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>


[SET]	Indoor Dew Point High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Indoor Dew Point Low Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	UV Index High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Sunlight High Alarm	
[SET]	Absolute Air Pressure High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>



[SET]	Absolute Air Pressure Low Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Relative Air Pressure High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Relative Air Pressure Low Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display LOW ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Rainfall (RATE) High Alarm	<ul style="list-style-type: none"> <li>· Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the value. Long press to increase or decrease quickly.</li> <li>· Press the ALARM key to turn the alarm on or off. The time area will display HI ON/OFF. If the alarm is on, an icon  will be displayed next to the parameter. If the alarm is off, the icon will disappear.</li> </ul>
[SET]	Rainfall (24H) High Alarm	
[SET]	Gust High Alarm	
[SET]	Average Wind Speed High Alarm	

\*[ALARM] means press the ALARM button.

\*[SET] means press the SET button.

\*[SET]+3 sec means press and hold the SET key for three seconds.

 NOTE: A tolerance of 0.9 °F (0.5°C) is set to prevent repeated temperature alarms. For example, if a high temperature alarm is set to 26.7°C (80.0°F) and the alarm is silenced, the alarm icon will continue to flash until the temperature drops below 26.7°C (80.0°F). At this point, the alarm will reset and must rise above 26.7°C (80.0°F) to activate again.

-  NOTE: To prevent repeated humidity alarms, the humidity alarm has a 4% tolerance range.
-  For example, if the high alarm is set to 60% and the alarm is silenced, the alarm icon will continue to flash until the humidity drops below 56%. At this point, the alarm will reset and must rise above 60% to become active again.

#### 9.5.4. Alarm and Key Sound Switches

If the alarm sounds, press any key to silence the alarm.


In normal mode, press and hold the ALARM key for three seconds to turn the alarm/key sound on or off according to the current setting. BZ ON and BZ OFF will be displayed in the date area correspondingly.

The display console will return to normal mode automatically within three seconds, without requiring any action.

### 9.6. Calibration Mode

#### 9.6.1. Temperature Calibration

In normal mode, press and hold the SET key and the CHANNEL/+ key simultaneously for 5 seconds to enter Temperature Calibration mode. The CRL icon will be displayed in the date area, and the room temperature will begin to flash.

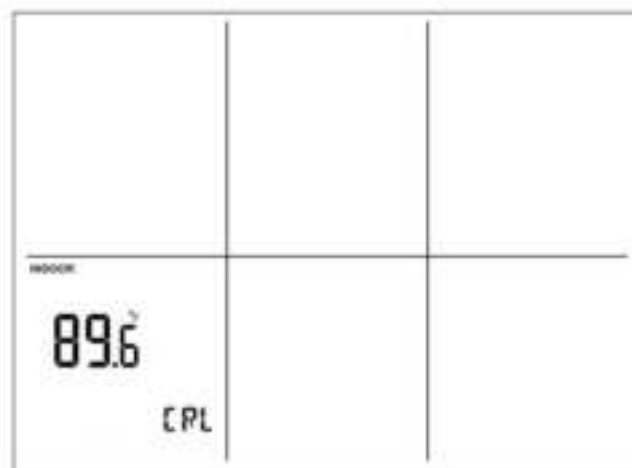

**Figure 25**

Press the CHANNEL/+ key or MAX/MIN/- key to increase or decrease the temperature reading (in 0.1 increments).

Press and hold the CHANNEL/+ key or MAX/MIN/- key for three seconds to quickly increase or decrease the temperature reading.

Press the ALARM key to reset the current value. Press the SET key to switch to Outdoor Temperature Calibration mode.

To exit Temperature Calibration mode at any time, press the SNOOZE key. If no action is performed, the Calibration mode will time out and automatically exit after 30 seconds.

The following chart summarizes the Temperature Calibration mode sequence and commands.

Command	Mode	Settings
[SET] and [CHANNEL/+] +5 sec	Enter the temperature calibration mode.  Indoor Temperature Calibration	<ul style="list-style-type: none"> <li>- Press the CHANNEL/+ key or MAX/MIN/- key to increase or decrease the temperature reading (in 0.1 increments).</li> <li>- Press and hold the CHANNEL/+ key or MAX/MIN/- key for three seconds to quickly increase or decrease the temperature reading.</li> <li>- Press the ALARM key to reset the current value.</li> </ul>
[SET]	Outdoor Temperature Calibration	<ul style="list-style-type: none"> <li>- Press the CHANNEL/+ key or MAX/MIN/- key to increase or decrease the temperature reading (in 0.1 increments).</li> <li>- Press and hold the CHANNEL/+ key or MAX/MIN/- key for three seconds to quickly increase or decrease the temperature reading.</li> <li>- Press the ALARM key to reset the current value.</li> </ul>
[SNOOZE]	Exit Temperature Calibration Mode	If no operation is performed, the calibration mode will time out and automatically exit after 30 seconds.

\*[SET] and [CHANNEL/+]+5 sec means press and hold the SET and CHANNEL/+ keys for at least 5 seconds;

\*[SET] means press the SET button.

### 9.6.2. Humidity Calibration

In normal mode, press and hold the SET key and the MAX/MIN/- key simultaneously for 5 seconds to enter the Humidity Calibration mode. The CRL icon will be displayed in the date area, and the indoor humidity will begin to flash.



**Figure 26**

Press the CHANNEL/+ key or MAX/MIN/- key to increase or decrease the temperature reading in 1% increments.

Press and hold the CHANNEL/+ key or MAX/MIN/- key for three seconds to quickly increase or decrease the humidity reading.

Press the ALARM key to reset the current value. Press the SET key to switch to Outdoor Humidity Calibration mode.

To exit the Humidity Calibration mode at any time, press the SNOOZE key. If no action is performed, the calibration mode will time out and automatically exit after 30 seconds.

The following chart summarizes the sequence and commands for the humidity calibration mode.

Command	Mode	Settings
[SET] and [MAX/MIN/-] +5 sec	Enter the Humidity Calibration Mode.  Indoor Humidity Calibration	<ul style="list-style-type: none"> <li>- Press the CHANNEL/+ key or MAX/MIN/- key to increase or decrease the humidity reading (in 1% increments).</li> <li>- Press and hold the CHANNEL/+ key or MAX/MIN/- key for three seconds to quickly increase or decrease the humidity reading.</li> <li>- Press the ALARM key to reset the current value.</li> </ul>
[SET]	Outdoor Humidity Calibration	<ul style="list-style-type: none"> <li>- Press the CHANNEL/+ key or MAX/MIN/- key to increase or decrease the humidity reading (in 1% increments).</li> <li>- Press and hold the CHANNEL/+ key or MAX/MIN/- key for three seconds to quickly increase or decrease the humidity reading.</li> <li>- Press the ALARM key to reset the current value.</li> </ul>
[SNOOZE]	Exiting Humidity Calibration Mode	If no operation is performed, the calibration mode will time out and automatically exit after 30 seconds.

\*[SET] and [MAX/MIN/-] +5 sec means press and hold the SET and CHANNEL/+ keys for at least 5 seconds.

\*[SET] means press the SET button.

### 9.6.3. Sensor Mode Calibration

In Normal Mode, press and hold the SET and ALARM keys simultaneously for 5 seconds to enter Pressure, Gust, Rainfall, and Sunshine Calibration modes.

The CRL icon will be displayed in the date area, then the first calibration parameter (Absolute Pressure) will flash. Press the SET key to skip any parameter and proceed to the next parameter calibration setting.



**Figure 27**

Press the CHANNEL/+ key or MAX/MIN/- key to increase or decrease the value.

Press and hold the CHANNEL/+ key or MAX/MIN/- key for three seconds to quickly increase or decrease the value.

Press the ALARM key to reset the current value. To exit the calibration mode at any time, press the SNOOZE key. If no action is performed, the calibration mode will time out and automatically exit after 30 seconds.

The following chart summarizes the setup sequence and commands for Sensor Calibration mode.

Command	Mode	Settings
[SET] and [ALARM]+5 sec	Enter Sensor Calibration Mode.	- The Pressure Section will display the "ABS" symbol and the absolute pressure value will flash. (Default value is 0.00 inHg.)
	Absolute Pressure Calibration	- Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the absolute pressure value (in increments of 0.01 inHg). - Press and hold the CHANNEL/+ or MAX/MIN/- key for three seconds to quickly increase or decrease the absolute pressure value.

		<p>-Press the ALARM key to reset the current value. Example: Calibration pressure source measures 28.37 inHg. Display console pressure reading is 28.75 inHg. Offset = <math>28.37 - 28.75 = -0.38</math> inHg.</p>
[SET]	Relative Pressure Calibration	<p>- The pressure section will display the "REL" symbol and the relative pressure value will flash. (Default value is 0.00 inHg).</p> <p>- Press the CHANNEL/+ key or the MAX/MIN/- key to increase or decrease the relative pressure value (in increments of 0.01 inHg).</p> <p>- Press and hold the CHANNEL/+ or MAX/MIN/- key for three seconds to quickly increase or decrease.</p> <p>-Press the ALARM key to reset the current value.</p> <p>Example: The calibration pressure source measured 25.00 inHg. The display console pressure reading is 24.85 inHg. Offset = <math>25.00 - 24.85 = 0.15</math> inHg.</p>
[SET]	Wind Speed Calibration	<p>- The wind speed value will flash (default value is 1.00).</p> <p>- Press the CHANNEL/+ key or the MAX/MIN/- key to adjust the wind speed calibration factor from 0.5 to 1.5. (Calibrated Wind Speed = Calibration Factor x Measured Wind Speed)</p> <p>- Press and hold the CHANNEL/+ or MAX/MIN/- key for three seconds to quickly increase or decrease.</p> <p>- Press the ALARM key to reset the current value.</p>
[SET]	Rainfall Calibration	<p>- The rainfall value will flash (default value is 1.00).</p> <p>- Press the CHANNEL/+ key or the MAX/MIN/- key to adjust the rainfall calibration factor from 0.5 to 1.5 (Calibrated Rain = Calibration Factor x Measured Rain)</p> <p>- Press and hold the CHANNEL/+ or MAX/MIN/- key for three seconds to quickly increase or decrease.</p> <p>- Press the ALARM key to reset the current value.</p>
[SET]	Sunlight Calibration	<p>- The sunlight value will blink (default value is 1.00).</p> <p>- Press the CHANNEL/+ key or the MAX/MIN/- key to adjust the insolation calibration factor from 0.5 to 1.5. (Calibrated Insolation = Calibration Factor x Measured Insolation)</p> <p>- Press and hold the CHANNEL/+ or MAX/MIN/- key for three seconds to quickly increase or decrease.</p> <p>- Press the ALARM key to reset the current value.</p>



[SNOOZE]	Exit Calibration Setting	Sensor Mode	If no operation is performed, the calibration mode will automatically time out after 30 seconds.
----------	--------------------------	-------------	--


\*[SET] and [ALARM] +5 sec means press and hold the SET and ALARM keys for at least 5 seconds.

\*[SET] means press the SET button.

### \*Calibration Ranges

The following chart summarizes the calibration ranges allowed for weather stations.

Parameter	Range
Indoor Temperature	$\pm 9^{\circ}\text{F}$ ( $\pm 5^{\circ}\text{C}$ )
Outdoor Temperature	$\pm 9^{\circ}\text{F}$ ( $\pm 5^{\circ}\text{C}$ )
Indoor Humidity	$\pm 9\%$
Outdoor Humidity	$\pm 9\%$
Absolute pressure	$\pm 0.27\text{ inHg}$ ( $\pm 6.8\text{hpa}$ )
Relative Pressure	$\pm 0.27\text{ inHg}$ ( $\pm 6.8\text{hpa}$ )
Wind Speed	0.5-1.5
Rainfall	0.5-1.5
Sunlight	0.5-1.5

 **Note:** The calibration range (0.5-1.5) for wind speed, rainfall, and sunlight are coefficients, and the calibration formula is: Calibration value = Calibration coefficient x Measured value.

#### 9.6.4. Calibration Discussion

 **NOTE:** The calibration value can only be adjusted on the display console; the outdoor remote sensor always displays an uncalibrated or measured value.

The purpose of calibration is to fine-tune or correct any sensor errors associated with the device's error range. Errors can result from electronic changes (e.g., temperature sensors are resistive thermistors or RTDs, humidity sensors are capacitive devices), mechanical changes, or degradation (e.g., moving parts wear or sensor contamination). Calibration is only useful when there is a known calibration source to compare it to.

This section will discuss practices, procedures, and sources for sensor calibration to minimize manufacturing and degradation errors. Do not compare data with results obtained from sources such as the Internet, radio, television, or newspapers.

The purpose of a weather station is to measure the surrounding environmental conditions, which vary greatly from location to location.

Parameter	Type of Calibration	Default	Typical Calibration Source
-----------	---------------------	---------	----------------------------

Temperature	Offset	Current Value	Red Spirit or Mercury Thermometer (1)
Humidity	Offset	Current Value	Sling Psychrometer (2)
ABS Barometer	Offset	Current Value	Calibrated Laboratory-Grade Barometer
REL Barometer	Offset	Current Value	Local Airport (3)
Wind Speed	Gain	1.0	Calibrated Laboratory-Grade Wind Meter (4)
Rainfall	Gain	1.0	Sight Glass Rain Gauge with an Aperture of at Least 4" (5)

(1)

Temperature errors can occur when a sensor is placed too close to a heat source (such as a building/structure, the ground, or trees).

To calibrate temperature, we recommend a mercury or red spirit (fluid) thermometer. Bi-metal (dial) and digital thermometers (from other weather stations) are not a good source and have their own margin of error.


Using a local weather station in your area is also an unreliable source due to changes in location and timing (airport weather stations are only updated once per hour).

Place the sensor in a shaded, controlled environment next to the fluid thermometer, and allow it to stabilize for 48 hours. Compare this temperature to the fluid thermometer and adjust the console accordingly to match the reading.

(2)

Humidity is a difficult parameter to measure electronically and can drift over time due to contamination. Additionally, location has an adverse effect on humidity readings (such as installation over dirt versus a lawn).

Official stations recalibrate or replace humidity sensors on a yearly basis. Due to manufacturing tolerances, the humidity is accurate to  $\pm 5\%$ . To improve this accuracy, the indoor and outdoor humidity can be calibrated using an accurate source, such as a sling psychrometer.

 NOTE: The measured humidity range is between 10% and 99%. Humidity cannot be measured accurately outside of this range. Therefore, it is not possible to calibrate humidity below 10% or above 99%.

(3)


The display console shows two different pressures: absolute pressure (measured value) and relative pressure (corrected for sea level).

To compare air pressure conditions at different locations, meteorologists adjust air pressure to sea level pressure. Because barometric pressure decreases with elevation, the sea level corrected pressure (the pressure at your location if you are at sea level) is usually higher than your measured pressure.

Thus, at an elevation of 1,000 feet (305 meters), the absolute barometric pressure may be 28.62 inHg (969 mb), but the relative barometric pressure is 30.00 inHg (1016 mb).

The standard sea level pressure is 29.92 inHg (1013 mb). This is the average sea level pressure for the entire world. A relative pressure measurement greater than 29.92 inHg (1013 mb) is considered high pressure, and a relative pressure measurement less than 29.92 inHg is considered low pressure.

To determine the relative barometric pressure at your location, look for an official reporting station near you (the Internet is the best source for real-time barometric conditions, such as the Weather.com or Wunderground.com websites) and set your weather station to match the official reporting station.

 **NOTE:** The calibration settings will be saved to the display console until a factory reset is performed. If the console location altitude is changed, the barometric pressure will need to be recalibrated.

(4)

Wind speed is the most sensitive to installation constraints. A properly installed wind speed sensor must be 4x the distance of the tallest obstruction. For example, if your house is 20' tall and you mount the sensor on a 5' pole:

$$\text{Distance} = 4 \times (20 - 5)' = 60'$$

Many installations are not perfect and installing the weather station on a roof can be difficult. Thus, you can calibrate for this error with a wind speed multiplier.

In addition to the installation challenges, wind cup bearings (moving parts) wear over time. Without a calibrated source, measuring wind speed can be challenging. We recommend using a calibrated wind meter and a consistent, high-speed fan.


(5)

The rain collector is calibrated to the funnel diameter at the factory. The internal unit of the rain collector records 0.01 inches of rainfall (called resolution) for each pour. Accumulated rainfall can be compared to a sight glass rain gauge with an aperture of at least 4 inches.

The rain cycle view is calculated as follows:

View Period	Description	Example
1H	One hour delay from current time	If the current time is 08:25, the 1-hour rainfall refers to the rainfall from 08:25 to 09:25.
24H	Same time from current time to the day after	If the date is October 20 and the time is 08:25, the 24-hour rainfall is the amount of rainfall from 08:25 (10.20) to 08:25 (10.21).

Week	From the beginning of the week to the current time	If the current time is 08:25 on Thursday, the weekly rainfall refers to the rainfall from 00:00 on this Sunday to 08:25 on this Thursday.
Month	From the beginning of the month to the current time	If the current time is 08:25 on October 20, the monthly rainfall refers to the rainfall from 00:00 on October 1 to 08:25 on October 20.
Total	Total rainfall since the most recent start	If the start time is October 20, 2024, then the total rainfall is October 20, 2024 to October 20, 2025.

 **NOTE:** Debris and insects can collect in the dump unit (they can form spider nests). Carefully remove the rain collector and check for debris in the dump unit before calibrating.

## 9.7. Snooze Mode

If the alarm sounds and you wish to silence the display, press the SNOOZE key. The alarm icon will continue to flash, the alarm will be silent for five minutes, and the backlight will turn on.

Press any key (MAX/MIN/-, SET/MODE, ALARM, CHANNEL/+) to permanently exit Sleep mode.

## 10. Feels Like and AT Temperatures

### 10.1. Feels Like Temperatures

The Feels Like Temperature is a combination of the Heat Index and the Wind Chill Index.

(1) When the air temperature is below 4.4°C (40°F), the Wind Chill Index is displayed, as shown in the following National Weather Service Wind Chill Index table:

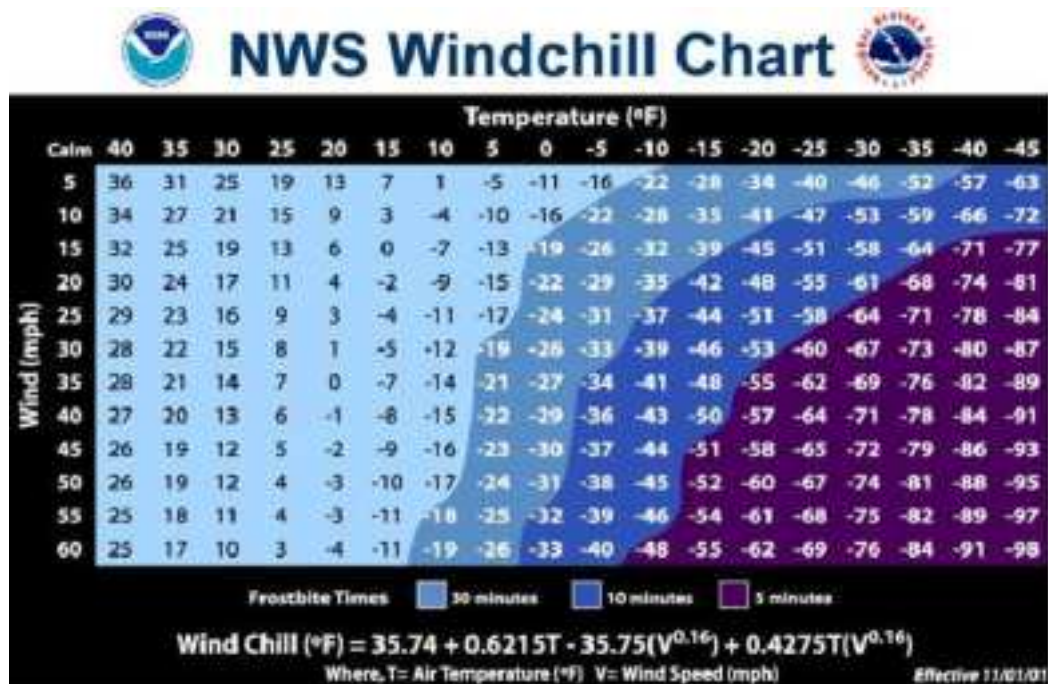


Figure 28

(2) When the temperature is above 26.7°C (80°F), the heat index is displayed, as shown in the following National Weather Service heat index chart:

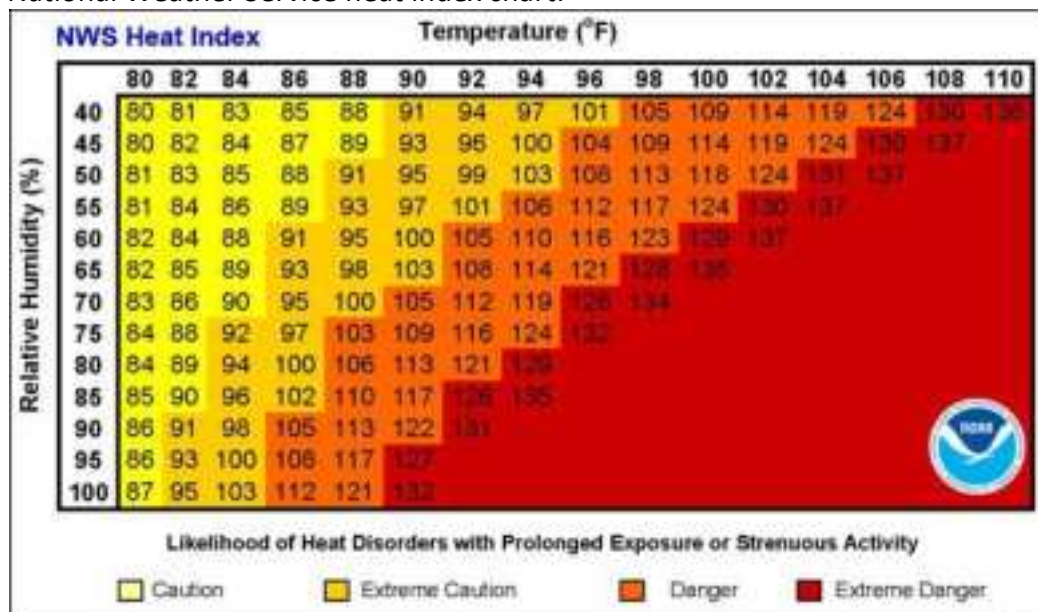


Figure 29

Note: Both the Wind Chill and Heat Index are displayed uniformly as the Feels Like Temperature.

## 10.2. Apparent Temperature (AT)

AT is a linear regression that is not restricted. It is more appropriate for outside conditions because it includes wind and was intended as an assessment of what exposed body surfaces feel like in cold, windy conditions.

Regression equations of this universal scale are formulated for indoors, outdoors in shade exposed to wind, and outdoors exposed to wind and solar radiation. Of these, outdoors in shade exposed to wind has been chosen as the most informative.

## 11. Moon Phase

The following moon phases are displayed according to the calendar date.


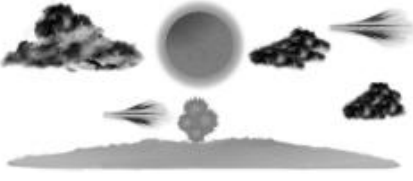




Figure 30

 **Note:** The new moon does not show the phases of the moon.


## 12. Weather Forecasting

### 12.1. Weather Icon

Conditions	Icon	Description
Sunny		The pressure rises, and the weather in the previous period was less cloudy.
Partly Cloudy		The pressure drops, and the weather in the previous period was sunny. The pressure rises, and the weather in the previous period was cloudy.
Cloudy		The pressure drops, and the weather in the previous period was less cloudy. The pressure rises, and the weather in the previous period was rainy.

Rainy		The pressure drops, and the weather was cloudy in the previous period.
-------	---	--

## 12.2. Weather Forecast Instructions and Limitations

 **Note:** Weather forecasts or pressure trends are based on the rate of change of air pressure. Generally speaking, as air pressure increases, the weather improves (from partly cloudy to sunny), and as air pressure decreases, the weather deteriorates (from cloudy to rainy).

If the current conditions don't match the forecast icon, it is because the forecast is an estimate or summary of how the weather is expected to change over the next 24-48 hours, which varies from place to place. Weather trends are only a tool for predicting how the weather will change and should never be relied upon as an accurate method of forecasting the weather. In most areas, these predictions are only 70% accurate, so it's best to consult the National Weather Service for a more accurate weather forecast.

## 12.3. Pressure Threshold

The pressure threshold (the rate of negative or positive pressure change that indicates weather changes) can be adjusted between 2 hPa and 4 hPa (default is 2 hPa).

The lower the pressure threshold is set, the more sensitive it becomes to changes in the weather forecast. Locations where pressure changes frequently require a higher pressure threshold than those where the pressure is usually stagnant.

## 13. Backlight Operation

### 13.1. Connect the Power Adapter

The display will remain on only when the power adapter is connected. The display backlight has 3 levels of brightness.

When the backlight is on, short-press the SNOOZE button to switch between the 3 levels of backlight.

When the backlight is off, press and hold the SNOOZE button for 3 seconds, and the backlight will turn on permanently. The BL ON icon will be displayed in the date area for 3 seconds.

To turn off the display backlight at any time, press and hold the SNOOZE button for two seconds. The BL OFF icon will appear in the date area for 3 seconds.



## 13.2. Power Not Connected


When the display is not connected to the power adapter and is operated solely by batteries, we do not recommend leaving the display backlight on for extended periods; otherwise, the batteries will be depleted quickly.



**Note: To save power, the backlight operates differently when using batteries.**

If the display console is powered only by batteries and the backlight is off, briefly press the SNOOZE key once. The backlight will turn on for 5 seconds and will turn off after 3 seconds of inactivity.

## 14. Glossary of Terms

Terms	Definition
Absolute pressure	<p>Absolute pressure is the measured atmospheric pressure and is a function of altitude and, to a lesser extent, changes in weather conditions.</p> <p>Absolute air pressure is not corrected for sea level conditions. See relative air pressure for details.</p>
Relative pressure	The measured air pressure relative to your location or environmental conditions.
HectoPascals (hPa)	A unit of pressure measured in the SI (International System of Units). Same as the millibar (1 hPa = 1 mbar).
Inches of Mercury (inHg)	Pressure expressed in imperial units (1 inHg = 33.86 mbar).
Dew point	<p>Dew point refers to the temperature at which water vapor condenses into water after cooling in air of a certain humidity under constant air pressure. The condensed water is called dew, and the dew point is a saturation temperature.</p> <p>Dew point is related to relative humidity. A high relative humidity means the dew point is closer to the current air temperature. A relative humidity of 100% means the dew point is equal to the current temperature and the water in the air reaches maximum saturation. When the dew point remains constant and the temperature rises, the relative humidity decreases.</p>
Apparent temperature (heat index)	<p>The heat index, sometimes called the apparent temperature, is a measure of how hot it feels when the relative humidity is compared to the actual air temperature. To find the heat index temperature, look at the heat index chart (reference 10.1).</p> <p>For example, if the air temperature is 96°F and the relative humidity is 65%, the heat index (how hot it feels) is 121°F.</p> <p> <b>NOTE: Because heat index values are designed for shaded, breezy</b></p>



	<p><b>conditions, heat index values may increase by up to 15 degrees Fahrenheit in full sun conditions.</b></p> <p>In addition, strong winds and especially hot, dry air can be extremely hazardous. The shaded area above 105 degrees Fahrenheit shows levels where continued exposure or physical activity could lead to increasingly severe heat disorders.</p> <p>The heat index is not calculated for temperatures below 80 degrees Fahrenheit.</p>
Rain gauge	<p>A rain gauge is a device that measures liquid precipitation (rain) over a period of time, rather than solid precipitation (snow, hail, or ice).</p> <p>All digital rain gauges are self-emptying or self-dumping (also called dumping rain gauges). The accuracy of a rain gauge depends on the amount of rain that falls during each emptying cycle.</p>
Accuracy	Precision is defined as the ability of a measurement to match the actual value of the quantity being measured.
Calibration	Calibration is the comparison between measurements made by a device (standard) of known magnitude or correctness with another device (instrument) in a manner as similar as possible.
Range	Range is defined as the number and interval of measurable values.
Resolution	Resolution is defined as the number of significant digits (decimal digits) that can be reliably measured.
Solar radiation	<p>Solar radiation sensors measure solar energy from the sun.</p> <p>Solar radiation is the radiant energy emitted by the sun through the production of electromagnetic energy from nuclear fusion reactions. The spectrum of solar radiation is close to that of a black object with a temperature of about 5,800 K. The other half is mainly in the near infrared part, with some in the ultraviolet part of the spectrum.</p>
Wind vane	A wind vane is a device that measures wind direction, usually in conjunction with an anemometer. Wind direction refers to the direction the wind is blowing from. For example, if the display shows the wind direction as south, it means the wind is blowing from the south.

## 15. Specifications

### 15.1. Wireless Specifications


Wireless transmission	Specifications
Line of sight wireless sensor array RF transmission (open air)	330 ft, 100 ft in most cases
Line of sight Wi-Fi RF transmission (open air)	80 ft
Outdoor sensor update frequency	60 sec
Sensor array RF frequency	433 MHz
Wi-Fi console RF frequency	2.4 GHz

### 15.2. Measurement Specifications

The table below provides the specifications of the measured parameters.


Measurement	Range	Accuracy	Resolution
Indoor Temperature	0 to 60 °C (32 to 140°F)	± 1 °C (± 2°F)	0.1 °C(°F)
Outdoor Temperature	-40 to 60 °C (-40 to 140°F)	± 1 °C (± 2°F)	0.1 °C(°F)
Indoor Humidity	10 to 99 %	± 5% (only guaranteed between 20 to 90%)	1%
Outdoor Humidity	10 to 99 %	± 5% (only guaranteed between 20 to 90%)	1%
UV	1 to 15+	± 1	± 1
Sunlight	0 to 200klux	± 15%	± 15%
Rainfall	0 to 9999mm	<15mm: ±1 mm, 15mm to 9999mm: ±7%	<1000mm (0.3mm) >1000mm (1mm)
Wind Direction	0 - 360°	± 10° (16-point compass)	± 1° (16-point compass)
Wind Speed	0 to 50 m/s	2 m/s ~10 m/s:±0.3m/s , 10m/s ~50 m/s: ±10% (Whichever is greater)	0.1 m/s
Barometric Pressure	300 to 1100 hpa	± 3 hpa	0.1 hpa

### 15.3. Power Consumption

Display Console	3 x AAA 1.5V alkaline or lithium batteries (not included)
Integrated Outdoor Sensor:	3xAA alkaline or lithium batteries (not included) provide backup power when solar power is limited.   Note: Solar panels can charge the batteries.
Power Adapter	5V ~ 1000mA (included)
Battery Life	If the base station signal reception is good, the transmitter battery can last at least 3 months. If the base station reception signal is intermittent, the transmitter battery life may be reduced. We recommend using lithium batteries for the transmitter in cold climates below -20°C (-4°F).

## 16. Maintenance

(1) We recommend cleaning the rain gauge once every 3 months. Twist the funnel clockwise and lift it vertically to expose the rain gauge assembly (see image below). Then, wipe the internal rain gauge assembly with a damp cloth to remove any dirt, debris, or insects. If insect infestation is a concern, you can lightly spray the array with an insecticide.

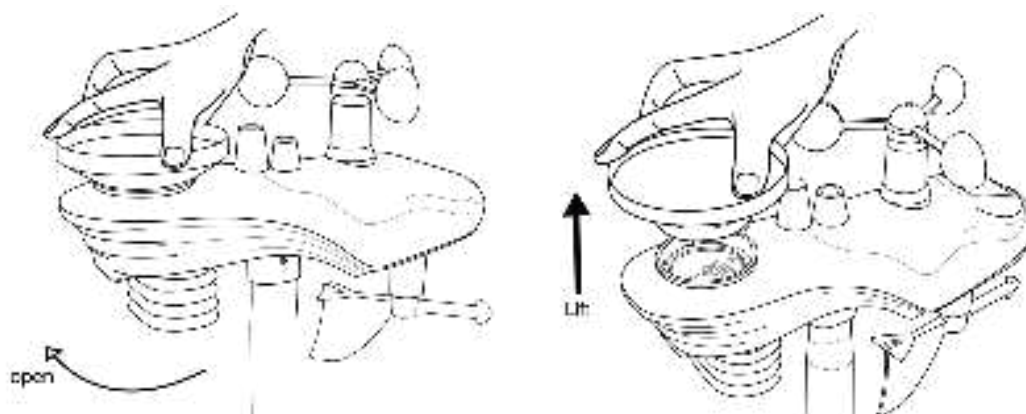

**Figure 31**

(2) Clean the solar radiation sensor and solar panel with a damp cloth every 3 months. Replace the battery every 3 months. If left for too long, the battery may leak due to environmental factors. In harsh environments, check the battery every 3 months (when cleaning the solar panel).

(3) When replacing the battery, apply anti-corrosion compound to the battery terminals, which is available on Amazon and most hardware stores.

(4) In snowy conditions, spray the top of the weather station with anti-icing silicone spray to prevent snow accumulation.

(5) Over time, the smoothness of the rain gauge funnel surface will degrade due to dirt, debris, and UV rays. We recommend spraying Teflon spray on the rain gauge funnel and coil filter to reduce the surface tension of the water.

## 17. Troubleshooting Guide

If your question is not answered here, you can contact us by E-mail, Phone, and on our Website:

- (1) Customer Support E-mail: [info@sainlogic.com](mailto:info@sainlogic.com)
- (2) Website: <https://www.sainlogic.com/>
- (3) Customer Support Phone: +1 (888) 513-9823 (Mon-Fri:10 a.m. - 6 p.m. EST)


Problem	Solution
The wireless remote control is not reporting to the console.  The display console has dotted lines; dashes (--.-).	<p>If any sensor communication is lost, dashes (--.-) will appear on the screen. To reacquire the signal, press and hold the CHANNEL/+ button for 3 seconds, select the lost sensor, and the remote search icon will display continuously. When the signal is reacquired, the remote search icon will turn off and the current value will be displayed.</p> <p>You can also reset the transmitter. After the transmitter is powered on, if the indicator light blinks every 16 seconds it means the outdoor unit is working properly.</p> <p>After the transmitter is powered on and working properly, The display must be re-plugged in to re-receive the transmitter signal. It usually takes 1-3 minutes to receive the data. Do not operate the keys or power off until the transmitter data is received.</p> <p>If this still does not help, please follow the steps below to reconnect the transmitter and display to troubleshoot poor connections:</p> <ol style="list-style-type: none"><li>1. Remove the batteries of the transmitter and the display.</li><li>2. Unplug the display from the power supply.</li><li>3. Put batteries in the transmitter.</li><li>4. Plug in the power of the display.</li><li>5. Put the batteries in the display after the display lights up and the data show dashes.</li></ol> <p>Also, you can try to replace the batteries in the transmitter with new ones.</p>

	<p>In most cases, the maximum line-of-sight communication distance is 100 meters (330 feet) and 30 meters (100 feet). Move the sensor assembly closer to the display console, if possible.</p> <p>If the sensor assembly is too close (less than 1.5 meters/5 feet), move the sensor assembly away from the display console.</p> <p>Install a new set of batteries for the remote sensor. In cold weather environments, install lithium batteries.</p> <p>Make sure the remote sensor is not transmitting through solid metal (as an RF shield) or earth barriers (under a mountain).</p> <p>Keep the display console away from devices that generate electrical noise, such as computers, televisions, and other wireless transmitters or receivers.</p>
Display console has weak contrast	Replace the console batteries with a new set of batteries.
Indoor temperature and humidity data is incorrect/the display shows incomplete data	<p>You can reset the display console to factory defaults by pressing and holding the MAX/MIN/- key for at least three seconds while plugging in the power supply. Then, unplug the display and plug it back in. (Remove the batteries before doing this.)</p> <p>If any data is not displayed, press and hold the CHANNEL/+ key for three seconds until a click is heard and all data is displayed as dashed lines.</p> <p>The display will reacquire the signal from the transmitter. Once the signal is reacquired, all data will be displayed.</p>
Display brightness is very dim	<p>Adjust the backlight (refer to Section 13).</p> <p>If the brightness cannot be adjusted, it means that the power adapter or the display interface has a poor contact problem.</p>
Weather forecast is inaccurate	<p>The weather icon is a weather forecast, an estimate or summary of weather changes in the next 24 to 48 hours, which varies from place to place. This trend is only a tool to predict how the weather will change, and it should never be used as an accurate method to predict the weather.</p> <p>If you are just starting to use the weather station, wait for about a week for the pressure sensor to slowly adapt to the environment, and then adjust the data and weather forecast.</p>

		After using it for a while, if the weather forecast is still inaccurate, follow the steps in the manual to manually set the weather icon to show the actual weather. (Refer to 9.2)
Rainfall display is incorrect/zero		<p>Check and verify the following points when you find you rainfall is not working or inaccurate:</p> <ol style="list-style-type: none"> <li>1. Make sure that the level bubble is seated in the small black circle in the installation. Sloping installation might cause incorrect readings or device failure.</li> <li>2. Shake the sensor array back and forth. After hearing a click inside the sensor array, observe whether the rainfall reading in the console changes.</li> <li>3. Check whether the funnel in the rain collector was blocked by tree leaves or debris. Then, remove the rain collector to check whether the rain tip was blocked by insects or debris.</li> <li>4. Check whether different rainfall histories are correct. Additionally, check the Quick Mode part in the instruction manual to know how to get rainfall histories in different periods.</li> <li>5. An example on how rainfall histories for different periods are calculated:  Presume that the current time is 08:42 22nd September 2023 Rainfall Hour: 08:42-09:42 Rainfall Day: 08:42 on September 22 to 08:42 on September 23 Rainfall Week: 00:00 Sunday to 08:42 today Rainfall Month: 00:00 1st September to 08:42 today Rainfall Total: Total rainfall amount from the latest powering on</li> <li>6. How to verify the rainfall accuracy: A: Use a bottle containing 500g or 500ml of water. B: Drip water slowly into the rain collector. DO NOT POUR WATER QUICKLY. C. Observe the rainfall reading of the console after the water is completely poured out. It should be 5.46cm +/-5%. (5.46cm=54.6mm)</li> </ol>

	7. The rain gauge can not measure rainfall below 0.3mm due to limited resolution.
--	---

 **Note: One transmitter can connect to multiple displays of the same model, but a single display cannot be connected to multiple transmitters simultaneously.**

 **Note: Please carefully verify that the model is consistent before making a purchase. If you have any questions before purchase, please consult the after-sales service in advance.**

## 18. Disclaimer

Please protect the environment by returning used batteries to an authorized recycling station. Electrical and electronic waste contains hazardous substances. Disposal of e-waste in the natural environment and/or in unauthorized locations can harm the environment.

Reading the user manual is strongly recommended. The manufacturer and supplier cannot be held responsible for any incorrect readings or consequences resulting from failure to read the manual carefully.

This product is intended for home use only and is not intended for medical purposes or public safety information. This product is not a toy and should be kept out of the reach of children.

We assume no liability for accidental, consequential, punitive, or other similar damages related to operation or malfunction.

## 19. Warranty Information

Sainlogic provides a 1-year limited warranty against manufacturing defects in materials and workmanship on this product.

This limited warranty takes effect on the date of original purchase and is valid only for the product purchased and for the original purchaser of this product. To obtain warranty service, the purchaser must contact Sainlogic to determine the problem and service procedure.

Warranty service can only be performed by Sainlogic. The original dated bill of sale must be presented to Sainlogic upon request as proof of purchase.

Sainlogic's warranty covers all defects in materials and workmanship except:

- (1) Damage caused by accident, unreasonable use, or neglect (lack of reasonable and necessary maintenance).
- (2) Damage caused by failure to follow the instructions in the user's manual.
- (3) Damage caused by self-repair or alteration.
- (4) Equipment not intended for personal use.
- (5) Applications and uses of this product that do not correspond to the intended use.
- (6) The product is unable to receive signals due to any source of interference or metal obstruction.

If you need to register or apply for a warranty, please get in touch with us through Customer Support.

Customer Support E-mail: [info@sainlogic.com](mailto:info@sainlogic.com)

Website: <https://www.sainlogic.com/>

Customer Support Phone: +1 (888) 513-9823 (Mon-Fri: 10 a.m. - 6 p.m. EST)

## 20. FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCCID: 2A7KU-SA9