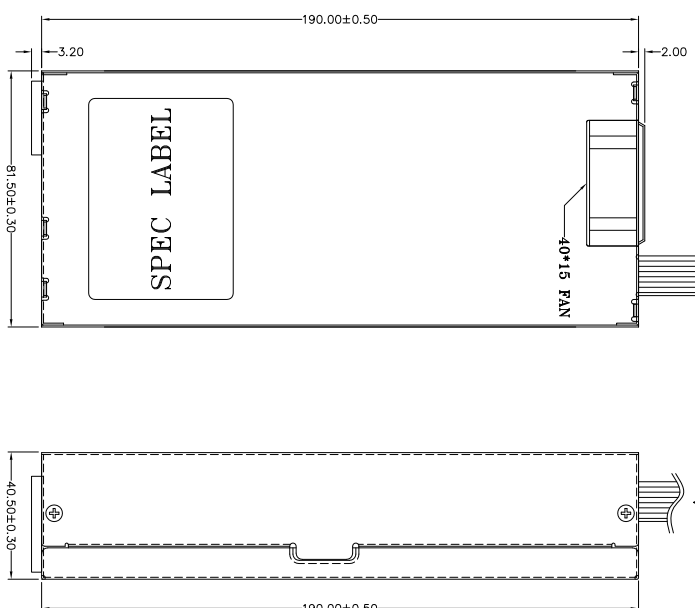
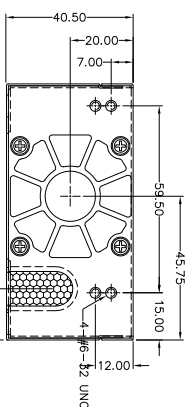
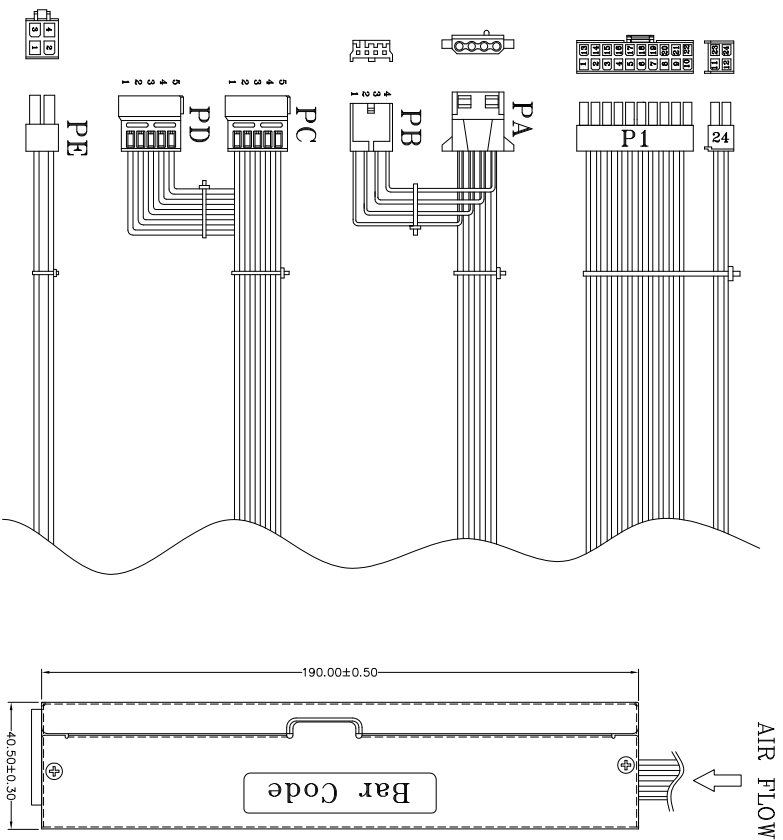


NOTE:

修正面圖

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 產地標籤依業務指示加貼。

UNIT:mm

REF. ID	PIN NO.	SIGNAL	WIRE COLOR	GUAGE	CONNECTOR TYPE	LENGTH	
P1 / 24	1	+3.3V	ORANGE	20	JMT C4202H02	200±15mm	
	2	+3.3V	ORANGE	20	-420P+		
	3	COM	BLACK	20			
	4	+5V	RED	20			
	5	COM	BLACK	20			
	6	+5V	RED	20	or EQUIV.		
	7	COM	BLACK	20			
	8	PW-OK	GRAY	22			
	9	+5Vsb	PURPLE	20			
	10	+12V	YELLOW	20			
	11	+12V	YELLOW	20			
	12	+3.3V	ORANGE	20			
	13	+3.3V	ORANGE	20			
P2	14	-12V	BLUE	22			
	15	COM	BLACK	20			
	16	PS-ON	GREEN	22			
	17	COM	BLACK	20			
	18	COM	BLACK	20			
	19	COM	BLACK	20			
	20	-5V	WHITE	22			
	21	+5V	RED	20			
	22	+5V	RED	20			
	23	+5V	RED	20			
	24	COM	BLACK	20			
	PA	1	+12V	YELLOW	20	AMP-1460±24-0 or EQUIV.	250±15mm
		2	COM	BLACK	20		
3		COM	BLACK	20			
PB	4	+5V	RED	20			
	1	+5V	RED	20	AMP-1716±22-4 or EQUIV.	150±10mm	
	2	COM	BLACK	20			
PC	3	COM	BLACK	20			
	4	+12V	YELLOW	20			
	1	+3.3V	ORANGE	20	C41270H00-15P or EQUIV.	310±15mm	
PD	2	COM	BLACK	20			
	3	+5V	RED	20	C41270H00-15P or EQUIV.	150±10mm	
	4	COM	BLACK	20			
PE	5	+12V	YELLOW	20			
	1	COM	BLACK	20	MOLEX-390-01-340 or EQUIV.	310±15mm	
	2	COM	BLACK	20			
PF	3	+12V	YELLOW	20			
	4	+12V	YELLOW	20			

P/N.:9PA250DC00

MODEL NO. : FSP250-60MPC	TITLE: ASSY	SHEET: 1 OF 1	REV:04
R&D(2)	PE	DRAWN	DATE
		樂家龍	MAR.31.2014
INTERIOR COUNTERSIGN:			