



Economical cylinders with field adjustable options to fit any indoor or outdoor application.  
Color: White Weight: 6.0 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	30W
120V	0.27A	Color Temp	Field Adjustable
208V	0.17A		2700K/3000K/3500K/4000K/5000K
240V	0.14A	Color Accuracy	90 CRI
277V	0.12A	L70 Lifespan	100,000 Hours
Input Watts	30W	Lumens	2,348 lm
		Efficacy	81

Technical Specifications

Performance

Description:

This 6-inch CD34 cylinder is dimmable and ideal for surface or pendant mounting in indoor applications. This fixture provides superior downward facing light with a clear lens and field adjustable color temperates from 5000/4000/3500/3000/2700K

Product Type:

Economy Cylinder

Wattage Equivalency:

Equivalent to 150W Incandescent

Input Wattage:

30W

Lumens:

2,348lm

Efficacy:

81lm/W

Note:

Lumens and efficacy values are based on the highest wattage output at 3000K

L70 Lifespan:

100,000-Hour LED lifespan based on IES LM-70 results

Electrical

Driver:

Constant Current, Non-Isolated Driver, 50/60 Hz, 120-277V, 120V: 0.27A, 208V: 0.17A, 240V: 0.14A, 277V: 0.12A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 5%.

THD:

<20%

Power Factor:

>0.9

Dimmable:

Yes, 0-10V continuous dimming

Input Voltage:

120-277V

Operating Frequency:

50/60Hz

Operating Temperature:

-22°F to 122°F (30°C to 50°C)

Flicker:

<30%

LED Characteristics

LEDs:

LED array provides a uniform source with high efficiency and no pixilation

Color Temperature:

Field Adjustable: 2700K,3000K,3500K,4000K,5000K

Color Accuracy (CRI):

90 CRI

R9 Value:

High color performance with R9 greater than or equal to 50

Color Consistency:

<4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Installation

Mounting:

Surface Mount. Pendant mount accessories available (sold separately).

Construction

Size:

6"

Shape:

Cylinder

**Technical Specifications (continued)****Finish:**

Formulated for high durability and long-lasting color

**Housing Material:**

Cylinder aluminum extrusion/cover aluminum die casting

**Lens:**

Regressed lens constructed from impact resistant polycarbonate. Convex lens gives the optic a similar lamp-like appearance. Provides smooth and diffuse light distribution.

**Lens Finish:**

Clear

**Optical****Beam Angle:**

70°

**Compliance****ETL Listed:**

This product has been tested by Intertek and found in compliance with accepted national standards.

**Indoor/Outdoor:**

Suitable for indoor and outdoor use

**Environment:**

Suitable for use in dry, damp, and wet environments.

**Fixture Rating:**

Open

**California Energy Commission (CEC) Status:**

Lawful for Sales in California

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**RoHS:**

Mercury and UV free. RoHS-compliant components.

**FCC:**

Complies with Part 15B of the FCC Rules

**Energy Star Approved:**

ENERGY STAR® Version 1.0 Certified

**Certification Model Number:**

CD1024(CD34FA4SP-20-509-SF)

**Energy Star ID:**

3417637

**Other****Accessories:**

[CD34STEM-W](#)

White stem for pendant mount

**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


**Note:**

All values are typical (tolerance +/- 10%)

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

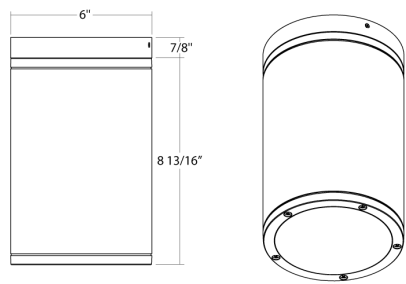

Features

- Aluminum extrusion housing and die-casting covers
- Field adjustable color temperatures between 5000/4000/3500/3000/2700K
- Smooth, diffused downward light output
- Pendant mount accessory sold separately
- 0-10V dimming
- 90 CRI provides high color rendering

Ordering Matrix

Family	Size	Mounting	Wattage	Optic	Color Temp	CRI	Finish	Voltage	Lens
CD34FA	6	SP	30	70		9	W		C
	4 = 4" 6 = 6"	SP = Surface/Pendant	20 = 20W (4" only) 30 = 30W (6" only)	50 = 50° beam <sup>1</sup> 70 = 70° beam <sup>3</sup>	Blank = 2700K/3000K/3500K/4000K/5000K CCT Adjustable	9 = 90 CRI	W = White K = Black Z = Bronze	Blank = 120-277V	C = Clear F = Frosted

<sup>1</sup> \*Pendant accessory must be purchased for pendant mounts (CD34STEM-K, CD34STEM-W, CD34STEM-Z)

<sup>2</sup> 4" models only available in 50Å°

<sup>3</sup> 6" models only available in 70Å°