




MARKING:

GearIt.com 350MHz (UL) E305668 TYPE CM 24AWG 75°C
CSA 204790 CM 75°C ETL VERIFIED TIA/EIA-568-C.2
UTP CAT.5E RoHS COMPLIANCE BATCH NO.

PACKING:
1PCS IN A PRINTED BAG

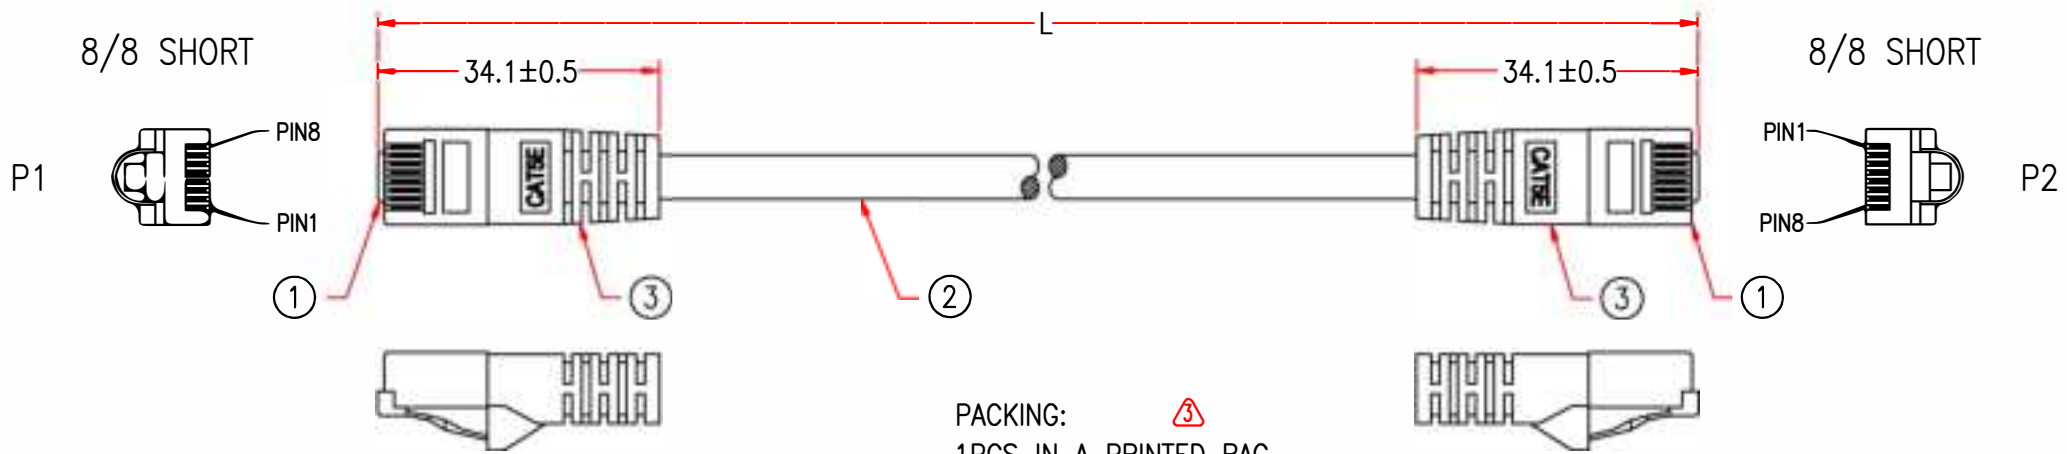

xPCS IN A BIG PLAIN BAG



8148-64			
P1		P2	
1		1	WHITE/ORANGE
2		2	ORANGE
3		3	WHITE/GREEN
6		6	GREEN
4		4	BLUE
5		5	WHITE/BLUE
7		7	WHITE/BROWN
8		8	BROWN

NOTE: All relevant materials are complied with RoHS directive .

3	MOLDED PVC SEE LIST	H1BP01-0304		M304
2	4 TWISD PAIRS CAT.5E 24AWG(7/0.19AS) UTP, OD 5.3mm, JACKET SEE LIST, DRAWING No. EU002404P-945	H5AH97-0304	L+10mm	M304
1	8P8C MODULAR PLUG, GOLD PLATING 50u" ON CONTACTS, SHORT TYPE	A1NA42-0205	2	M205
No.	DESCRIPTION		Q'TY	Supplier
APPROVED				
CHECKED	HU			
DESIGNER	JIANG			
DRAWING	YU			
DATE	23/SEP/20	ITEM NO.	8148-64	
				UNIT:mm

Cable Length Unless Other Spec.



Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

REV.4 2019.09.18	MODIFY LABEL CONTENT & PRINTED BAG	REV.5 2020.09.23	ADD LABEL C
REV.2 2019.06.04	MODIFY CABLE & MARKING	REV.3 2019.07.10	MODIFY PRINTED BAG
REV.1 2019.03.07	MODIFY LABEL	CHECKED	

JACKET & MOLDED COLOR	P/N	LENGTH(L)
BLACK GRAY(PT401C) ORANGE(PT158C) PURPLE(PT2756U) GREEN(PT336C) BLUE(PT301U) RED(PT1795C) YELLOW(PT115U) WHITE(RAL9010)	1CAT-COLOR-20PACK-FBA-COMV	305mm
	1CAT-COLOR-24PACK-FBA-COMV	305mm
	1CAT-COLOR-50PACK-FBA-COMV	305mm
	1CAT-COLOR-100PACK-FBA-COMV	305mm
	1.5CAT-COLOR-20PACK-FBA-COMV	457mm
	2CAT-COLOR-20PACK-FBA-COMV	610mm
	2CAT-COLOR-50PACK-FBA-COMV	610mm
	3CAT-COLOR-20PACK-FBA-COMV	915mm
	3CAT-COLOR-24PACK-FBA-COMV	915mm
	3CAT-COLOR-50PACK-FBA-COMV	915mm
	5CAT-COLOR-20PACK-FBA-COMV	1524mm
	5CAT-COLOR-24PACK-FBA-COMV	1524mm
	6CAT-COLOR-10PACK-FBA-COMV	1830mm
	6CAT-COLOR-20PACK-FBA-COMV	1830mm
	6CAT-COLOR-24PACK-FBA-COMV	1830mm
	7CAT-COLOR-20PACK-FBA-COMV	2134mm
	10CAT-COLOR-10PACK-FBA-COMV	3048mm

xCAT-COLOR-xxPACK-FBA-COMV
 LENGTH
 COLOR SEE LIST
 PACKING(xx IS QUANTITY PER BIG PLAIN BAG)

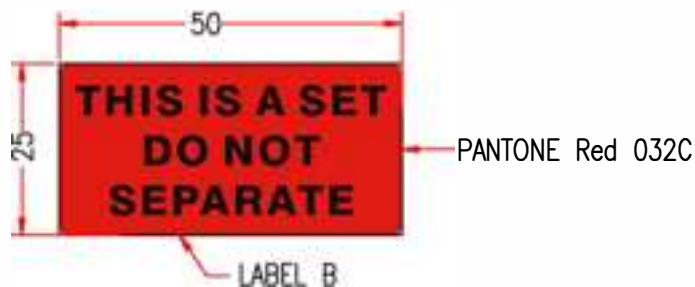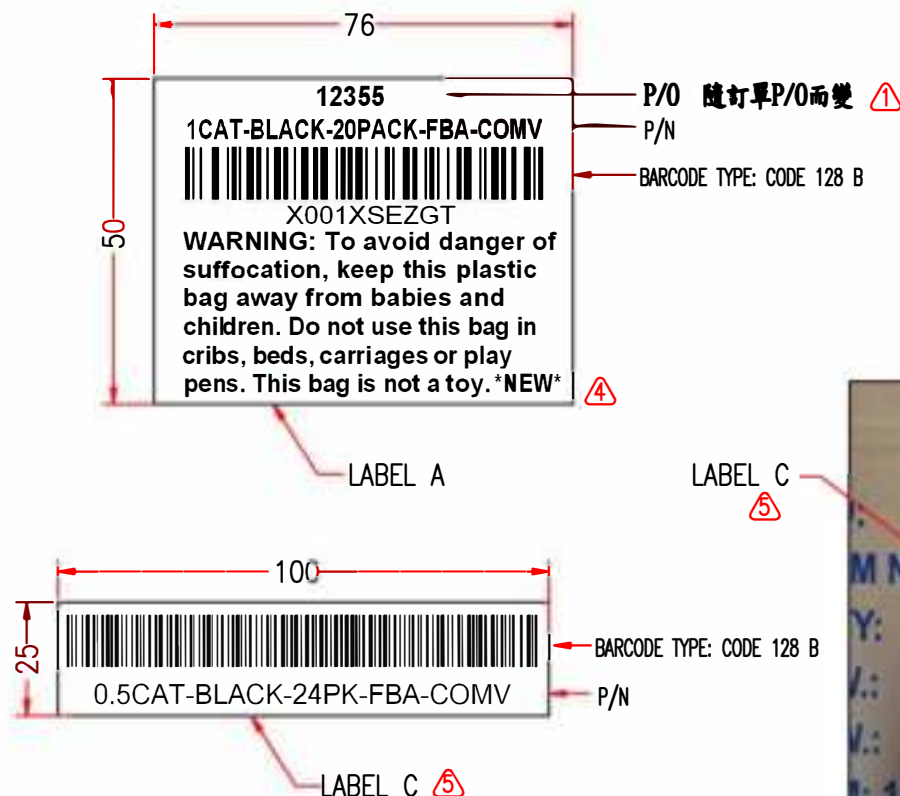

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU		
DESIGNER	JIANG		
DRAWING	YU		
DATE	23/SEP/20	ITEM NO.	8148-64
		UNIT:mm	

PAGE: 2 of 2

REV.4 2019.09.18	MODIFY LABEL CONTENT & PRINTED BAG	REV.5 2020.09.23	ADD LABEL C
REV.2 2019.06.04	MODIFY CABLE & MARKING	REV.3 2019.07.10	MODIFY PRINTED BAG
REV.1 2019.03.07	MODIFY LABEL	CHECKED	