

Getting Started with AURIX™ Development Studio

Installation and first steps

AURIX™ Development Studio Training
V1.0.5



Scope of work

This tutorial provides a guide for the user to:


- › Install AURIX™ Development Studio V1.4.0
- › Create new project
- › Import project (Infineon Code Examples Repository)
- › Build project
- › Debug project
- › Additional material

Download

- › The installation package of AURIX™ Development Studio can be found here: <https://www.infineon.com/aurixdevelopmentstudio>






Install AURIX™ Development Studio - 1

- › To install AURIX™ Development Studio, launch the installation package and follow the steps:

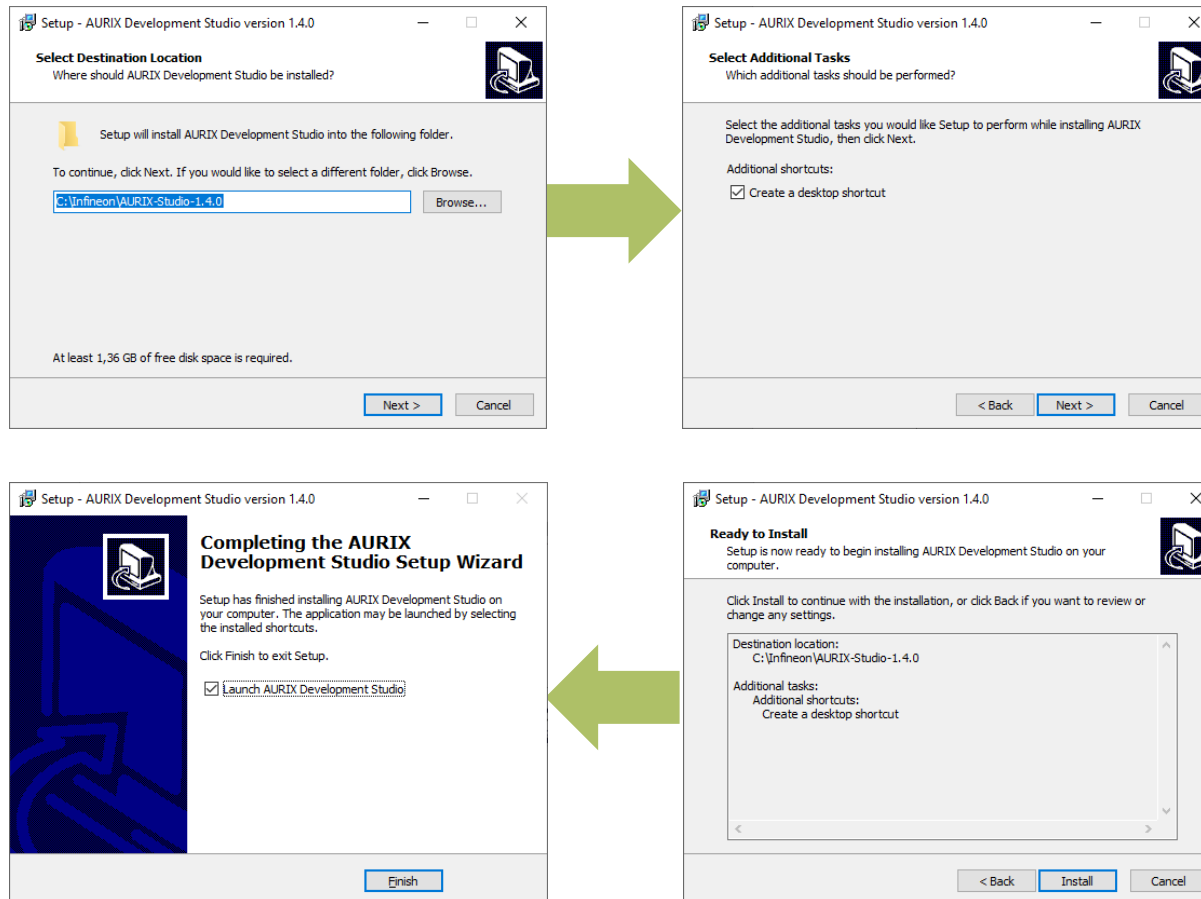


Install AURIX™ Development Studio - 2

- › If DAS64 is not installed or outdated, it will be installed automatically during the AURIX™ Development Studio installation:

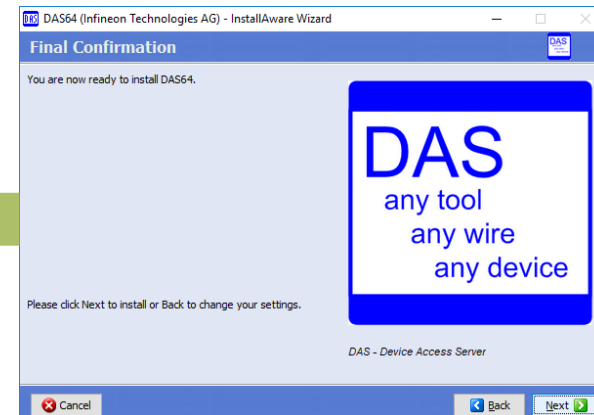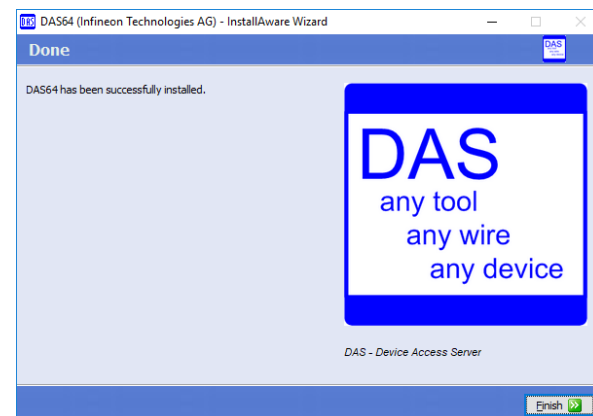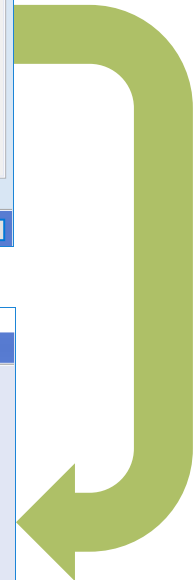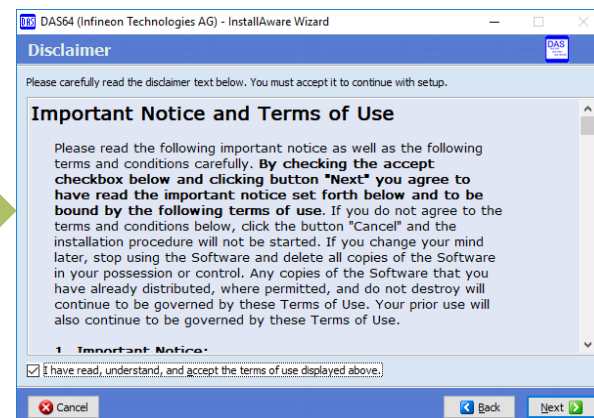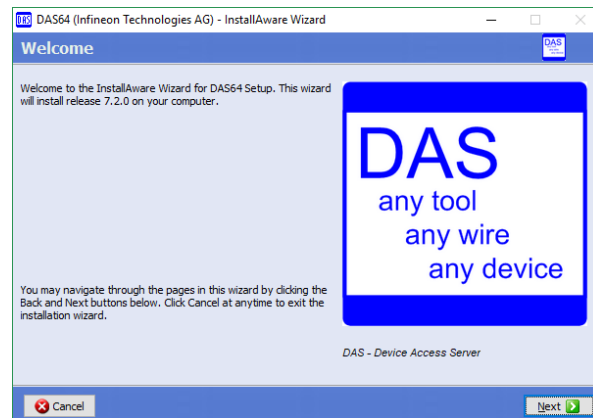


Workspace definition

- › After launching the AURIX™ Development Studio, it is necessary to select a workspace.

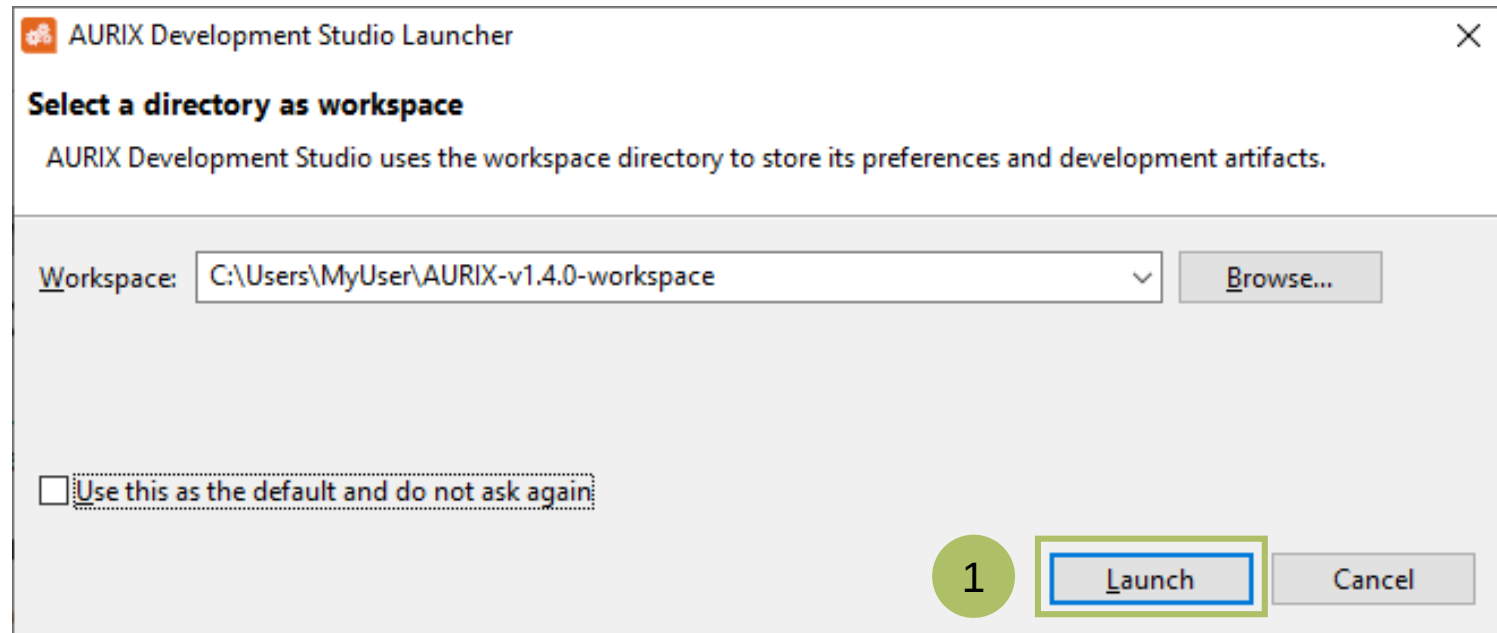


Create new project - 1

- Once the program is started, a new project can be created by selecting File >> New >> “New AURIX™ Project”.

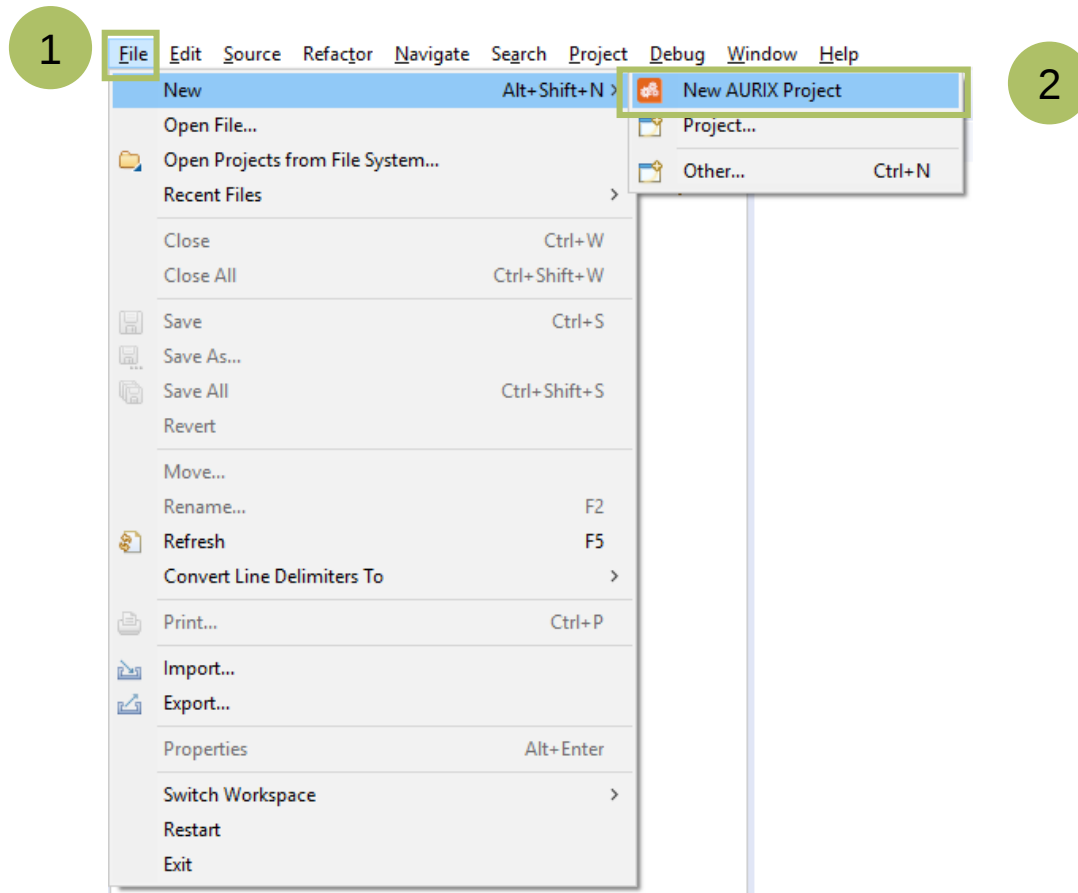


Create new project - 2

- › From the “New AURIX™ Development Studio Project” window, choose a name for the new project (3).
- › The “Use default location” checkbox should be set in order to create the project inside the current selected workspace.

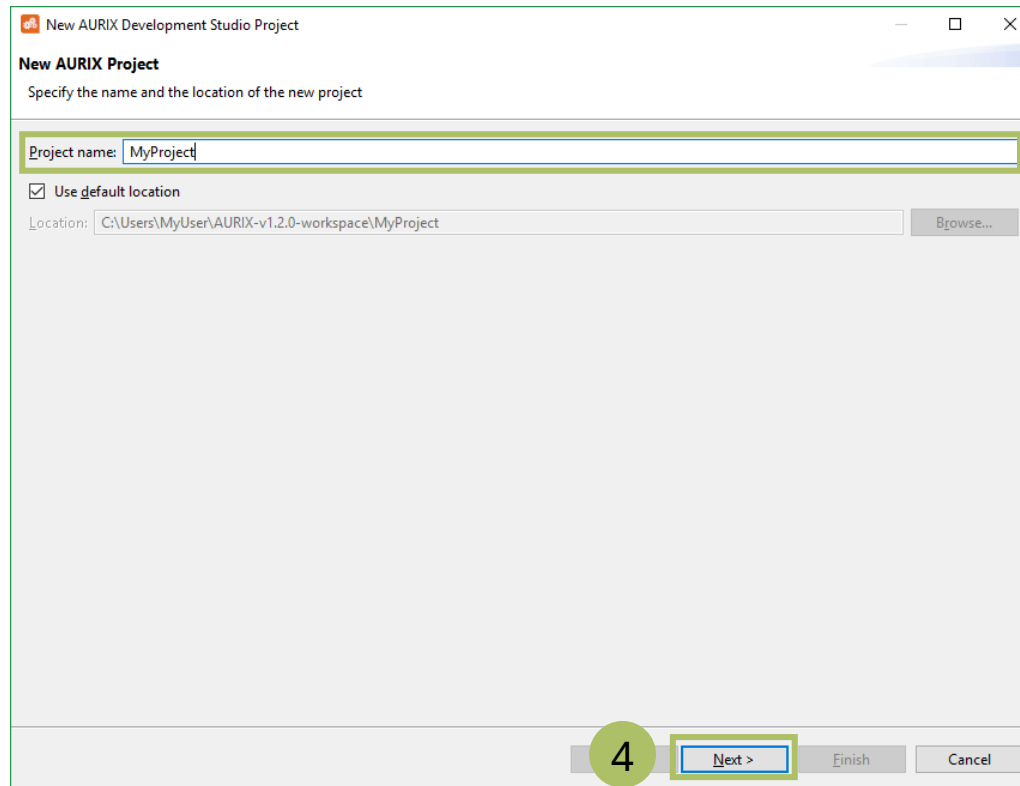



Create new project - 3

- From the “New AURIX™ Development Studio Project” window, choose the device or the board. A specific device (5) or board (6) can be chosen from the left or right list. Furthermore, while selecting a board, the tool highlights the supported devices for that board and vice versa.

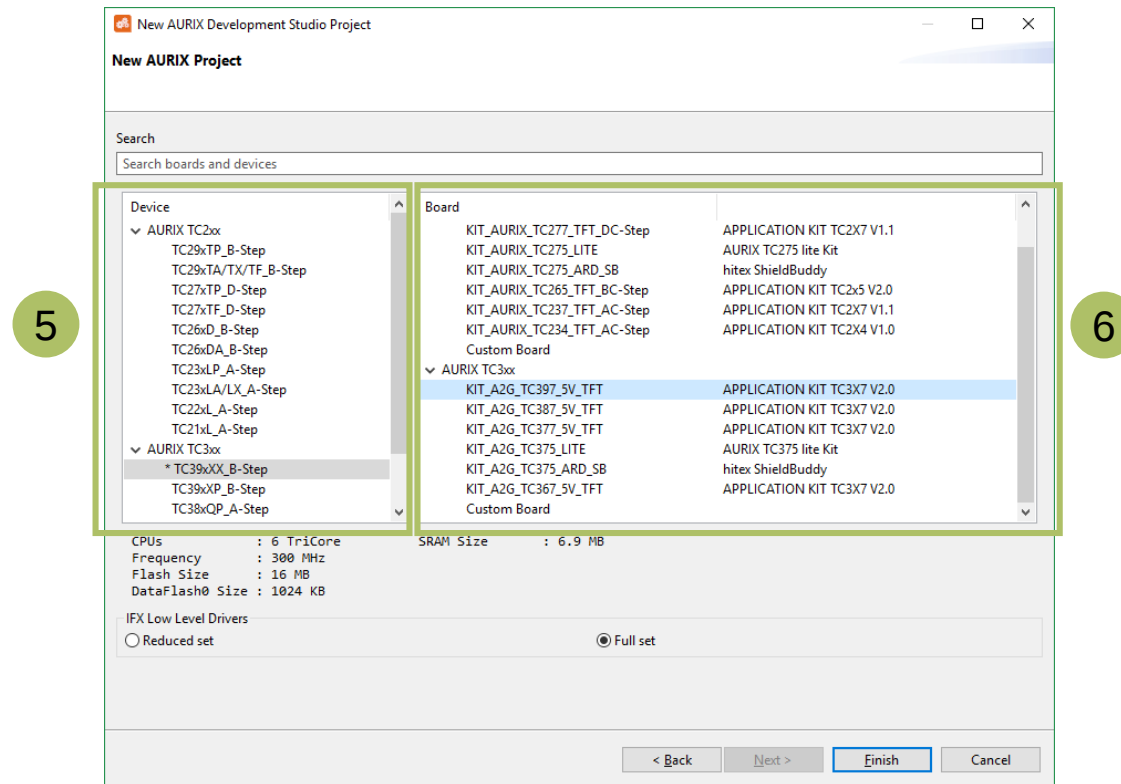


Create new project - 4

- › Depending on the complexity of the project, the reduced or full set of drivers can be imported (7).
- › By pressing “Finish” (8), a new project is created.

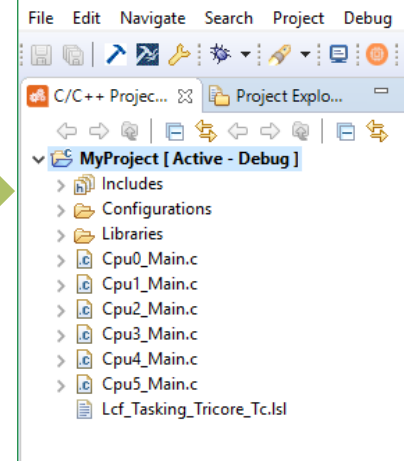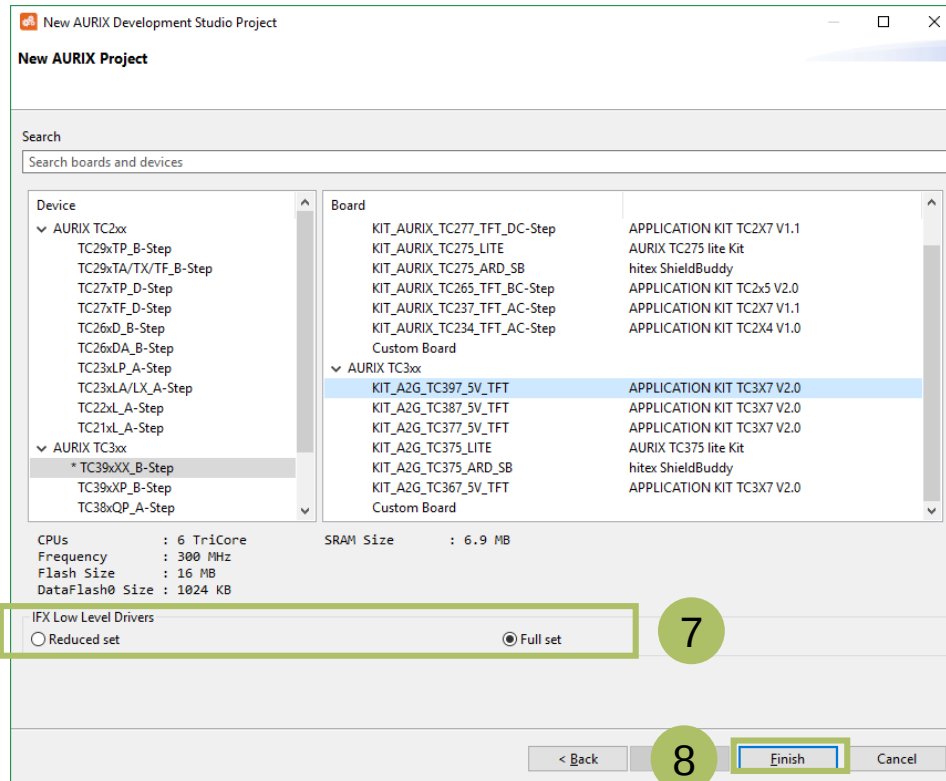


Import project (Infineon Code Examples Repository) - 1

- › Alternatively, it is possible to import an example project using File >> “Import...” utility (1-2) and selecting Infineon >> “AURIX™ Development Studio Project” type (3).
- › At the end, press “Next” (4).

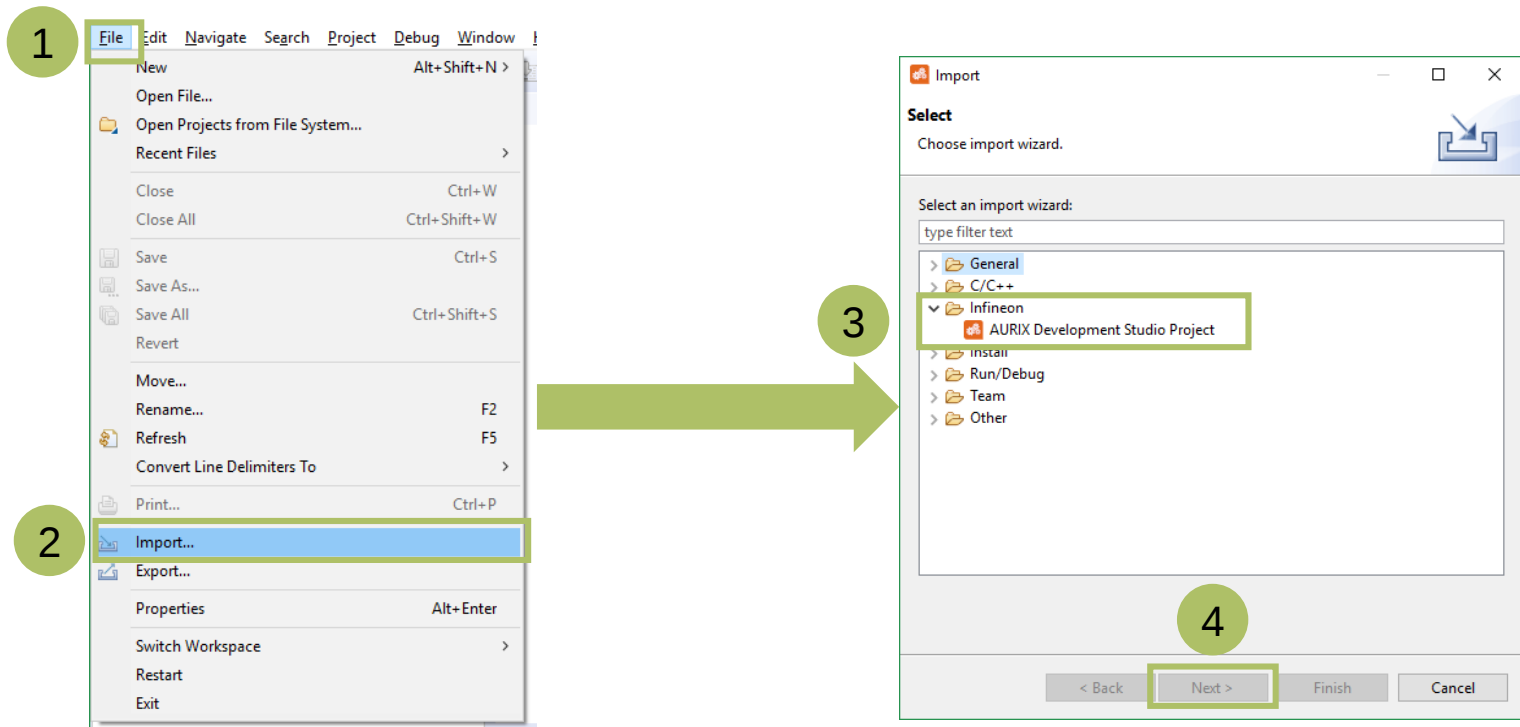


Import project (Infineon Code Examples Repository) - 2

- Hint: Clicking on an example project (5) in the list shows the example description (6).

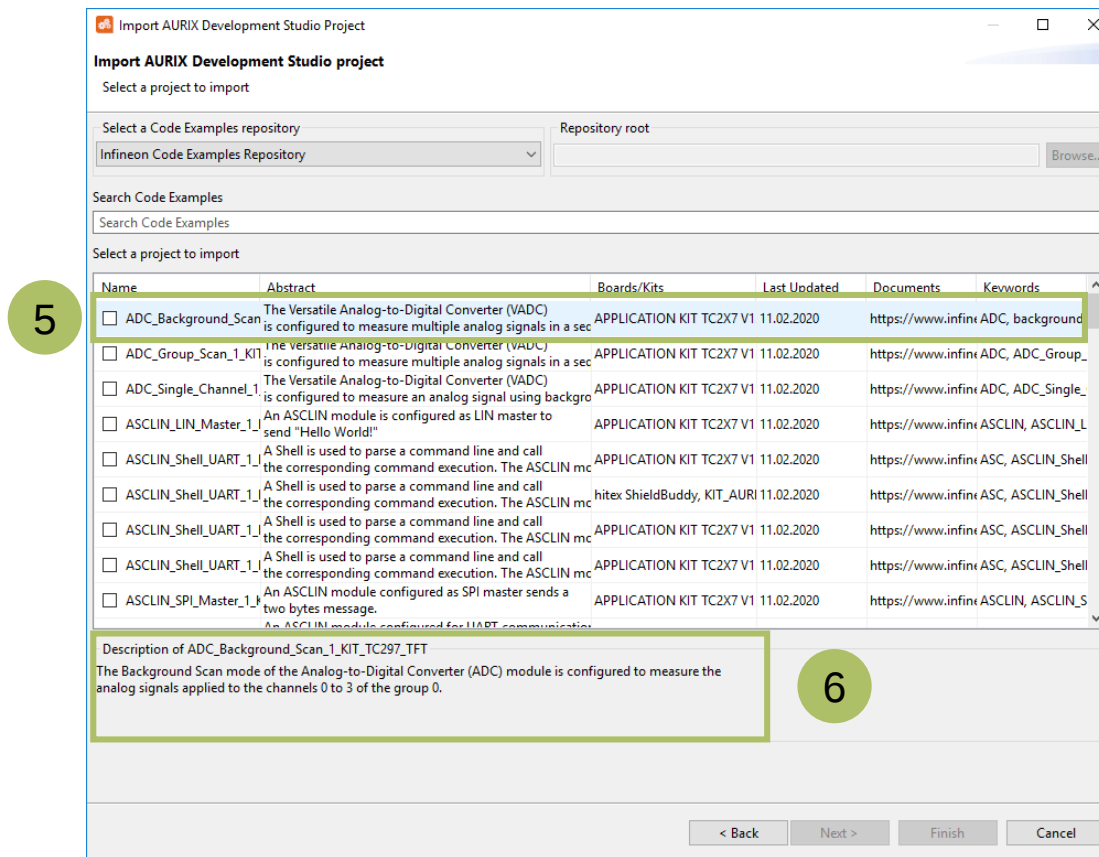



Import project (Infineon Code Examples Repository) - 3

- › Select (double-click) an example project (7) from the list and press “Finish” (8). This creates a local copy of the example in your workspace directory and opens the project.

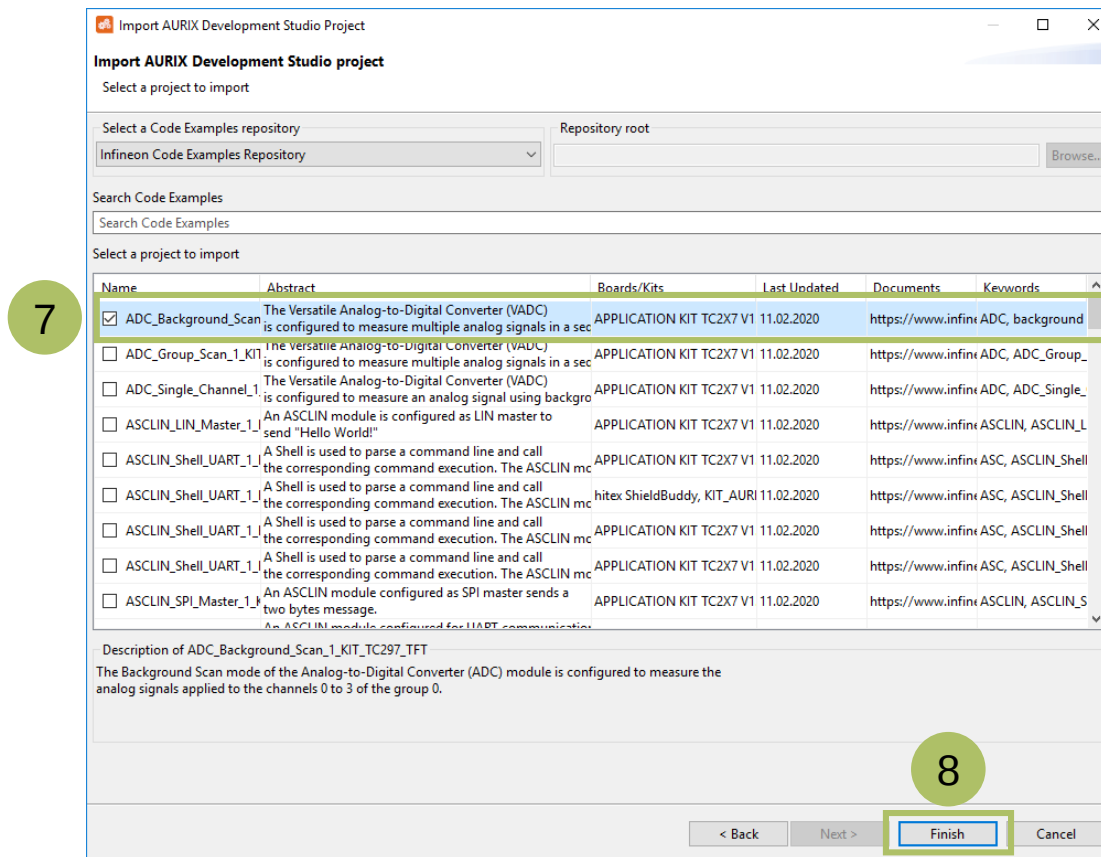

Build project


- Before debugging, it is necessary to build the project. Press the “Build Active Project” icon (1) and when the build is finished, check that there are no compiling errors (2).

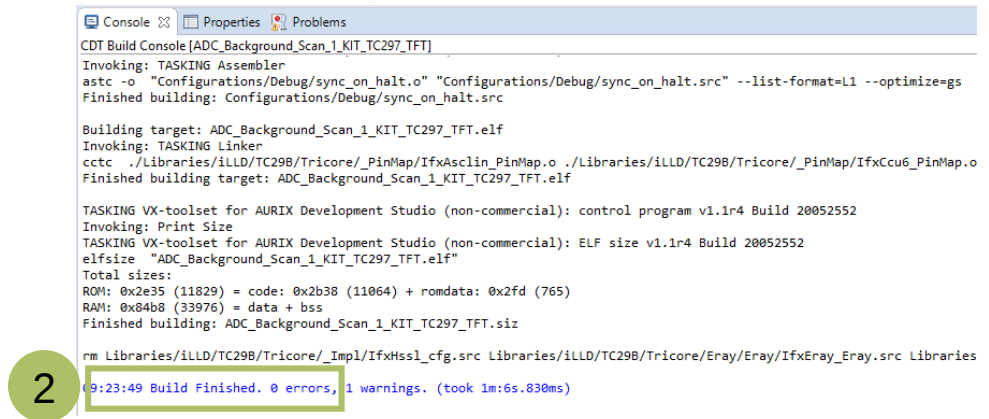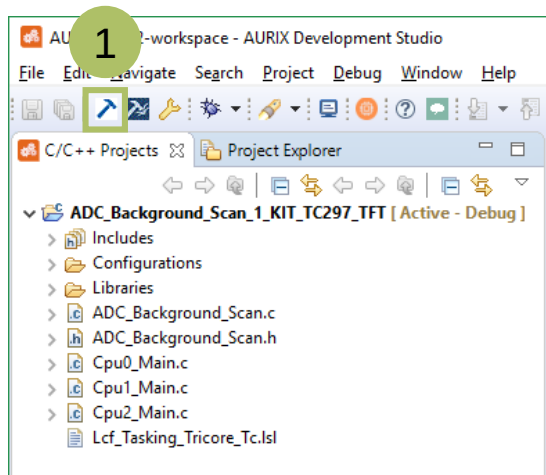

Check


Debug project - 1

- › Connect your device via an USB cable to the PC.

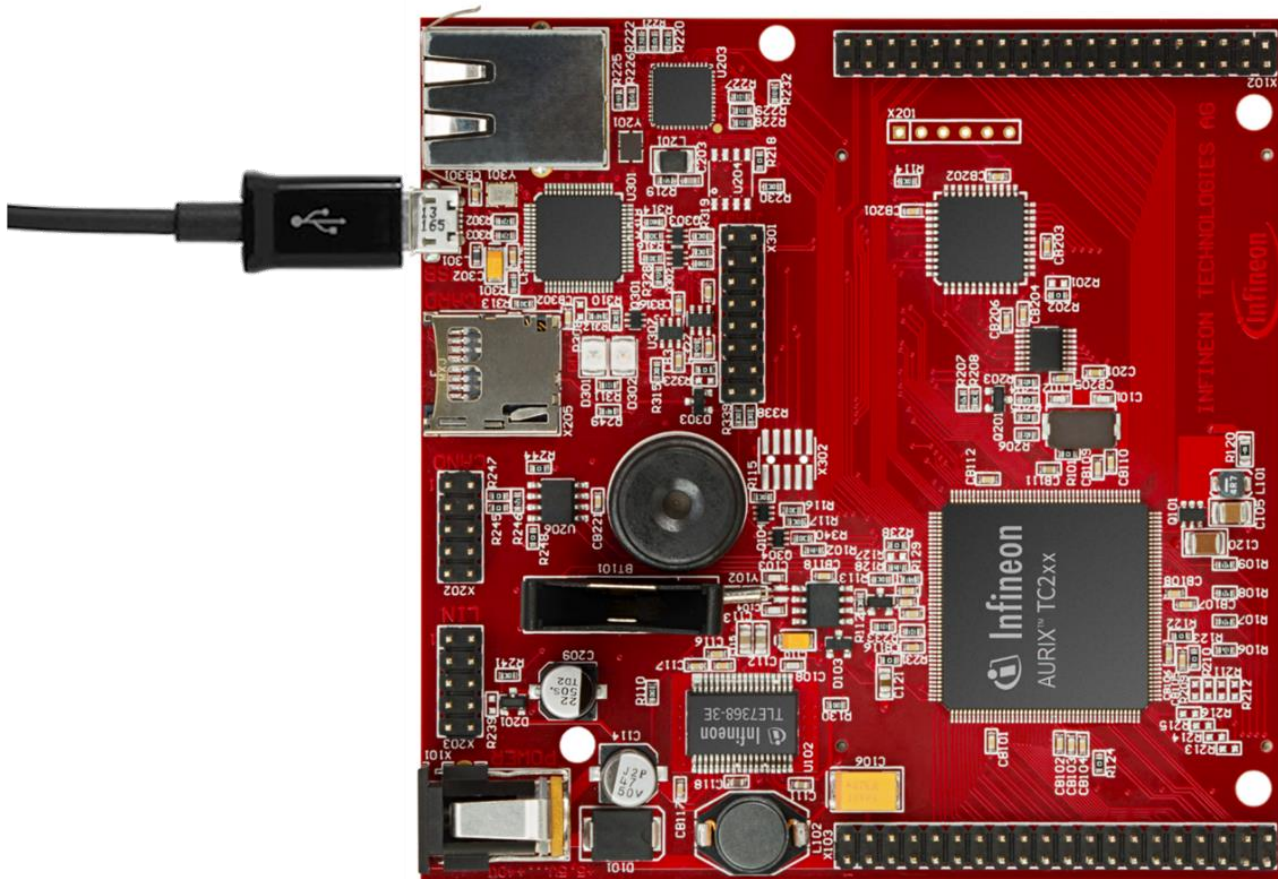



Debug project - 2

- › In order to flash and debug the code, press the “Debug Active Project” icon (1) and then the “Debug” button on the “Debug Configurations” window (2).

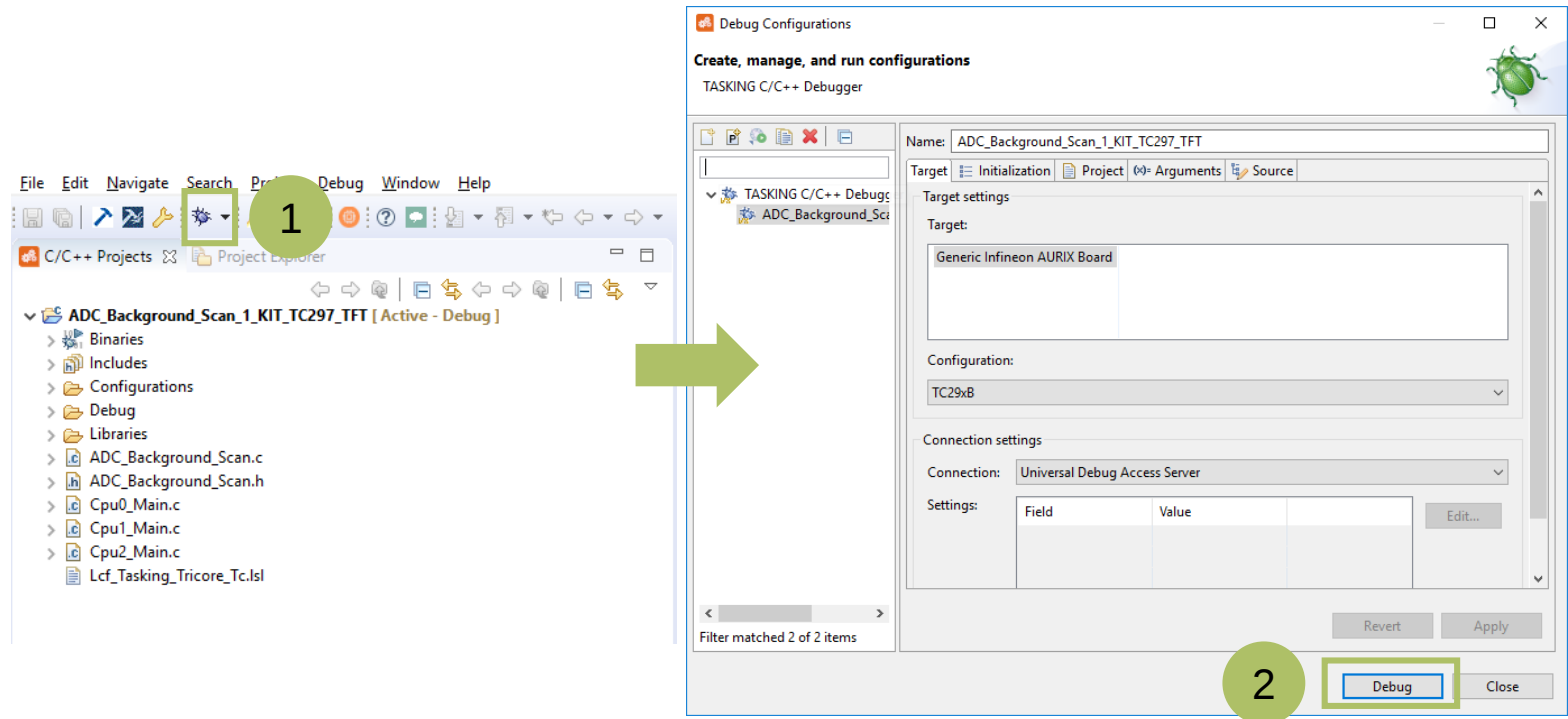


Debug project - 3

- › Switch the perspective (3) and press “Resume” (4) to run the code.
- › While running, the code can be stopped with the “Suspend” button (5).
- › To terminate the debug session, press the “Terminate” button (6).
- › Additionally, in the Debug perspective, it is also possible to run the code in single or multiple steps with the buttons “Step Into” (7), “Step Over” (8) and “Step Return” (9).

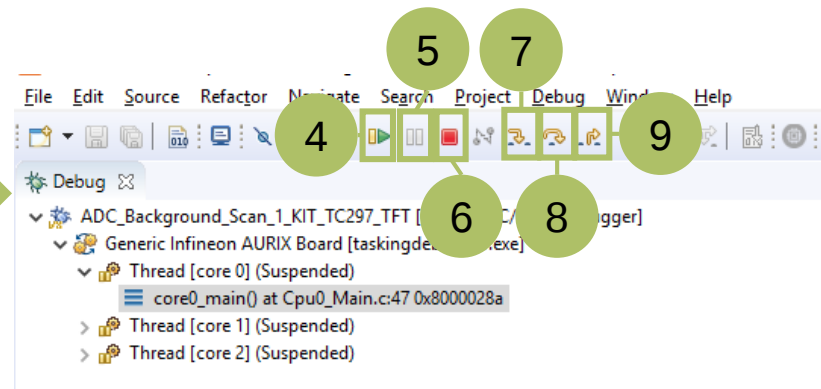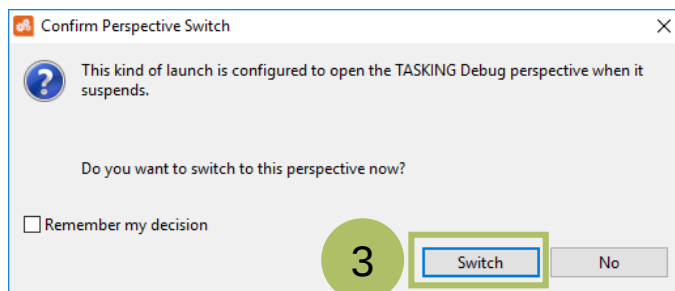


Debug project - 4

- › A serial monitor is open by default (1) in the Debug Perspective inside the AURIX™ Development Studio, or it can be open manually from the terminal icon (3).

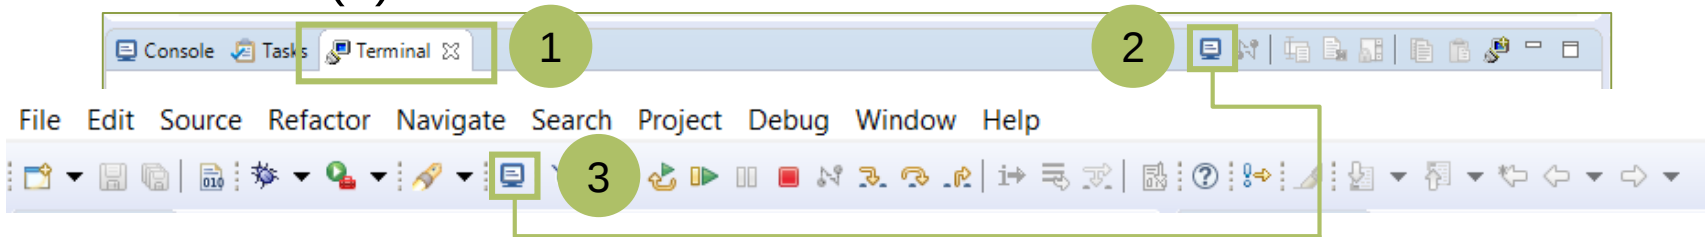

- › The serial monitor must be configured (2-3) with the following parameters to enable the communication between the board and the PC:

- Serial port number
- Speed (baud rate)
- Data size
- Parity
- Stop bits

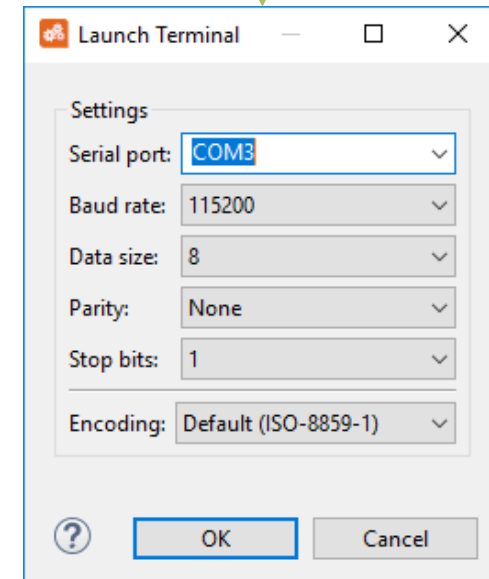

- ```
Cpu0_Main.c
```
- ```
22 * WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE
23 * COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN
24 * CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS
25 * IN THE SOFTWARE.
26 *****/
27 /*\title ADC background scan source
28 *\abstract The Versatile Analog-to-Digital Converter (VADC) is configured to measure multiple analog signals in a sequence using background scan request.
29 *\description The Background Scan mode of the Analog-to-Digital Converter (ADC) module is configured to measure the
30 *      analog signals applied to the channels 0 to 3 of the group 0.
31 *
32 *\name ADC_Background_Scan_1_KIT_TC297_TFT
33 *\version V1.0.0
34 *\board APPLICATION KIT TC2x7 V1.1, KIT_AURIX_TC297_TFT_BC-Step, TC29xTA/TX_BC-step
35 *\keywords ADC_background_scan_conversion_VADC_ADC_Background_Scan_1_AURIX
36 *\documents https://www.infineon.com/aurix-expert-training/Infineon-AURIX_ADC_Background_Scan_1_KIT_TC297_TFT-TR-v01_00-EN.pdf
37 *\documents https://www.infineon.com/aurix-expert-training/TC297_ttc0_0n_1_0_1_11_0.cmm
38 *\lastUpdated 2020-02-11
39 *****/
40 #include "Ifx_Types.h"
41 #include "IfxCpu.h"
42 #include "IfxScuWdt.h"
43 #include "ADC_Background_Scan.h"
44
45 IfxCpu_syncEvent g_cpuSyncEvent = 0;
46
47 int core0_main(void)
48 {
49     IfxCpu_enableInterrupts();
50
51     /* !!WATCHDOG0 AND SAFETY WATCHDOG ARE DISABLED HERE!!
52      * Enable the watchdogs and service them periodically if it is required
53      */
54     IfxScuWdt_disableCpuWatchdog(IfxScuWdt_getCpuWatchdogPassword());
55     IfxScuWdt_disableSafetyWatchdog(IfxScuWdt_getSafetyWatchdogPassword());
56
57     /* Wait for CPU sync event */
58     IfxCpu_emitEvent(&g_cpuSyncEvent);
```

Additional material - 2

- From the same Cpu0_main.c file, it is possible to download the Infineon Low Level Drivers documentation (2) for the specific device used in the example.

```


Cpu0_Main.c
22  * WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE
23  * COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN
24  * CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS
25  * IN THE SOFTWARE.
26  *****/
27  /*\title ADC background scan source
28  * \abstract The Versatile Analog-to-Digital Converter (VADC) is configured to measure multiple analog signals in a sequence using background scan request.
29  * \description The Background Scan mode of the Analog-to-Digital Converter (ADC) module is configured to measure the
30  *         analog signals applied to the channels 0 to 3 of the group 0.
31  *
32  * \name ADC_Background_Scan_1_KIT_TC297_TFT
33  * \version V1.0.0
34  * \board APPLICATION KIT TC2X7 V1.1, KIT_AURIX_TC297_TFT_BC-Step, TC29xTA/TX_BC-step
35  * \keywords ADC, background scan, conversion, VADC, ADC_Background_Scan_1, AURIX
36  * \documents https://www.infineon.com/aurix-expert-training/Infineon-AURIX\_ADC\_Background\_Scan\_1\_KIT\_TC297\_TFT-TR-v01\_00\_00-EN.pdf
37  * \documents https://www.infineon.com/aurix-expert-training/TC29B\_iLLD\_UM\_1\_0\_1\_11\_0.chm
38  * \lastUpdated 2020-02-11
39  *****/
40  #include "Ifx_Types.h"
41  #include "IfxCpu.h"
42  #include "IfxScuWdt.h"
43  #include "ADC_Background_Scan.h"
44
45  IfxCpu_syncEvent g_cpuSyncEvent = 0;
46
47  int core0_main(void)
48  {
49      IfxCpu_enableInterrupts();
50
51      /* !!WATCHDOG0 AND SAFETY WATCHDOG ARE DISABLED HERE!!
52       * Enable the watchdogs and service them periodically if it is required
53       */
54      IfxScuWdt_disableCpuWatchdog(IfxScuWdt_getCpuWatchdogPassword());
55      IfxScuWdt_disableSafetyWatchdog(IfxScuWdt_getSafetyWatchdogPassword());
56
57      /* Wait for CPU sync event */
58      IfxCpu_emitEvent(&g_cpuSyncEvent);

```

2

Additional material - 3

- › Hint: both the example's tutorial and the iLLD documentation can be opened by Right clicking on the project name and pressing the "Open documentation" utility (3).

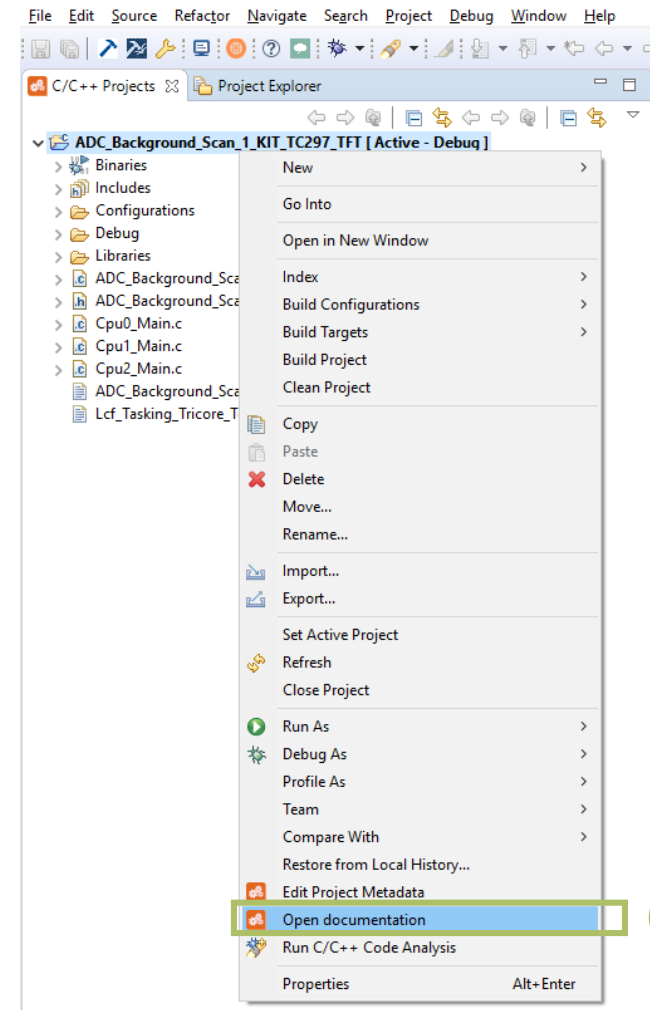

3

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2021-03

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2020 Infineon Technologies AG.

All Rights Reserved.

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

Getting_Started_with_AURIX™_Development_Studio

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”).

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies’ products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.