

7.3 cu. ft. Rear Control Dryer with AI Sensing and ThinQ® Smart Features

- 7.3 cu. ft. Ultra Large Capacity
- Built-In Intelligence: AI Sensor Dry™ / Smart Pairing™
- Wrinkle Care Option
- LoDecibel® Quiet Operation
- Reversible Door
- FlowSense® Duct Clogging & Lint Filter Indicators

AVAILABLE COLORS



LG ThinQ®


Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



SUMMARY		FABRIC CARE FEATURES		MATERIALS AND FINISHES	
Type	Rear Control Top Load Dryer	AI Sensor Dry	Yes	Aluminized Alloy Steel Drum	Yes
Vent Type	Vented	Precise Temperature Control with Variable Heater	Yes	NeveRust® Stainless Steel Drum	No
Dryer Type	Electric / Gas	Steam	No	Drum Rear	Painted Steel
Capacity	7.3 cu. ft.	CONVENIENCE FEATURES		Cabinet	Painted Steel
Matching Washer	WT8200C_ / WT8205C_	3 Minute Installation Check	Yes	Door / Trim	Glass / Black
Sensor Dry	Yes	LoDecibel® Quiet Operation	Yes	Top Cover Material	Plastic
Steam	No	End of Cycle Signal	Yes	All Available Colors	Platinum Black (L) Alpine White (W)
Color	Platinum Black (L) Alpine White (W)	Drum Light (Door open)	Yes	POWER SOURCE	
APPEARANCE		Reversible Door	Yes	Ratings	CSA Listed
EasyLoad® Door	No	FlowSense® Duct Clogging Indicator	Yes	Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
Control & Display	Electronic Control Panel with LED Display	Wrinkle Care Option	Yes	Plug	Elec: Not Included Gas: Included
Dial-A-Cycle®	Yes	Control Lock	Yes	Plug Type	Elec: 4-Wire or 3-Wire (Homes built after 1996 require 4-Wire) Gas: 3 Prong
DRYER PROGRAMS		Venting Option	Yes		Type
No. of Programs	8	4 Adjustable Legs	Yes	BTU	Elec : N/A / Gas : 20,000
No. of Options	13	Remaining Time Display/ Status Indicator(s)	Yes	OPTIONS	
		SMART FEATURES (ThinQ® TECHNOLOGY)		LP Conversion Kit	383EEL3002R
Temp. Dryness, Time, More Time, Less time, Damp Signal, Air Dry, Wrinkle Care, Energy Saver, Control Lock(3sec), Wi-Fi(3sec), Remote Start(3sec), Signal(3sec)		Smart Diagnosis (v3.0)	Yes	Side Venting Kit	383EEL9001B
		WiFi	Yes	LIMITED WARRANTY	
		NFC Tag On Technology	No	Parts & Labor	1 Year
		ThinQ Care	Yes	Drum	3 Years
		ThinQ Up	Yes	UPC CODES	
		Remote Start/Cycle Monitor	Yes	DLE8200L (Platinum Black)	195174089064
		Energy Monitoring	Yes	DLG8201L (Platinum Black)	195174089071
		Smart Pairing	Yes	DLE8200W (Alpine White)	195174089088
		ENERGY		DLG8201W (Alpine White)	195174089095
		ENERGY STAR® Certified	Yes		
Temperature Setting	Low / Med. Low / Normal / Med. High / High	CEF	Elec: 3.94 / Gas:3.49		
Drying Levels	Damp/ Less/ Normal/ More/ Very				
Manual Dry Times	20/30/40/50/60min				

DIMENSION / CLEARANCES

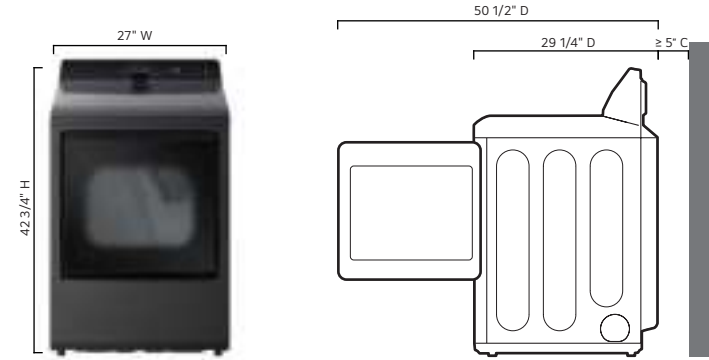

DIMENSIONS	
Product (WxHxD)	27" x 42 3/4" x 29 1/4"
Depth with Door Open	50 1/2" D
Carton Dimensions (WxHxD)	29 1/8" x 45 1/2" x 31 1/2"
Product Weight (lbs.)	Electric: 116.8/ Gas: 117.4
Carton Weight (lbs.)	Electric: 123.5 / Gas: 123.8

DIMENSION / CLEARANCES


CLOSET VENTILATION REQUIREMENTS

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm2) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm2) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

DIMENSION / CLEARANCES

INSTALLATION SPACING FOR CABINET AND CLEARANCES WITH OPTIONAL PEDESTAL BASE

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

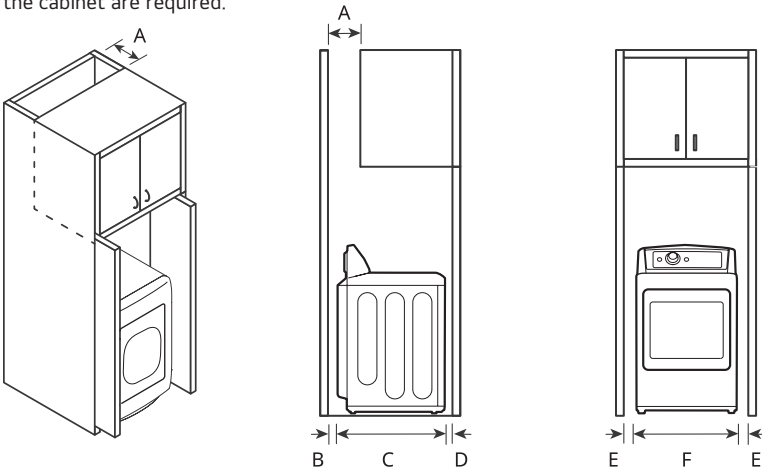


DIMENSIONS	
A Depth of Ventilation Opening	≥ 7" (178mm)
B Back Clearance	≥ 5" (127mm)
C Depth	29 1/4" (743mm)
D Front Clearance	≥ 1" (25 mm)
E Side Clearance	≥ 1" (25 mm)
F Width	27" (686 mm)

DIMENSION / CLEARANCES

SPACING FOR RECESSED AREA OR CLOSET INSTALLATION

These clearance are recommended for this dryer.

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

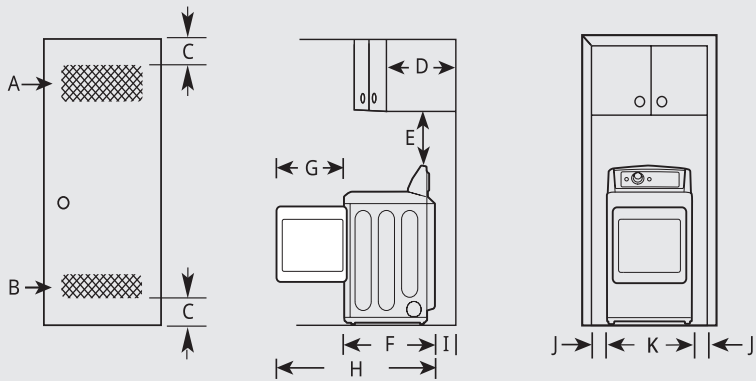

DIMENSIONS	
A Upper Ventilation Opening	≥ 48 sq. in. (310 cm2)
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm2)
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Overhead Cabinet Depth	≤ 14" (356 mm)
E Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F Depth	29 1/4" (743 mm)
G Length of Door Swing	22" (558 mm)
H Maximum Depth with Door Open	50 1/2" (1284 mm)
I Back Clearance	≥ 5" (127 mm)
J Side Clearance	≥ 1" (25 mm)
K Width	27" (686 mm)

LEVELING THE APPLIANCE

CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

- 1 Level
- 2 Level Feet

