


# Quick Start Guide

## 快速操作指南

# FS-G11P

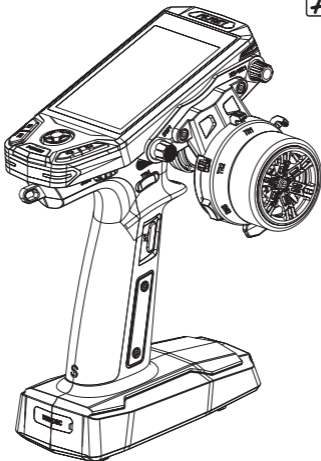

[Http://www.flysky-cn.com](http://www.flysky-cn.com)  
Copyright © 2024 Flysky Technology Co., Ltd.

Thank you for purchasing the products of Flysky! To find out more about our products, visit our website at [www.flysky-cn.com](http://www.flysky-cn.com). If you encounter any problems during using, please refer to the manual first. If the problem is still not resolved, contact your local dealer directly or contact the customer service staff via Flysky official website.

## Precautions

Read the safety messages listed below before operation!

- Do not use the product at night or during bad weather conditions, like rain or thunderstorms. It can cause erratic operation or loss of control.
- Do not use the product when visibility is limited.
- Do not expose the product to rain or snow. Any exposure to moisture (water or snow) may cause erratic operation or loss of control.
- Interference may cause loss of control. To ensure the safety of you and others, do not operate in the following places:



Near any sites where other radio control activity may occur



Near people or roads



On any pond/lake when passenger boats are present



Near power lines or communication broadcasting antennas


- Do not use this product when you are tired, uncomfortable, or under the influence of alcohol or drugs. Doing so may cause serious injury to yourself or others.
- The 2.4GHz radio band is limited to line of sight. Always keep your model in sight as a large can block the RF signal and lead to loss of control.
- Never grip the transmitter antenna during operation. It significantly degrades signal quality and strength and may cause loss of control.
- Do not touch any part of the model that may generate heat during operation, or immediately after use. The engine or motor, may be very hot and can cause serious burns.
- Misuse of this product may lead to serious injury or death. To ensure the safety of you and your equipment, read this manual and follow the instructions carefully.

- Make sure the product is properly installed in your model. Failure to do so may result in serious injury.
- Make sure that the receiver's battery is disconnected before turning off the transmitter. Failure to do so may lead to unintended operation and cause an accident.
- Ensure that all servos operate in the correct direction. If not, adjust the direction first.
- Make sure that the model stays within range in order to prevent loss of control.
- The ce warns that the installation of the antenna used in this transmitter must be kept in distance from all the personnel and shall not be used or used with any other transmitter. The end user and the installer must provide antenna installation instructions and transmitter operating conditions to meet the requirements for rf exposure compliance.

### CAUTION!


- RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

## Transmitter Overview


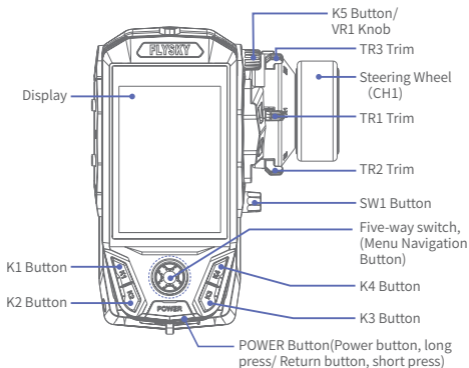




Lower Ambient Light



Upper Ambient Light

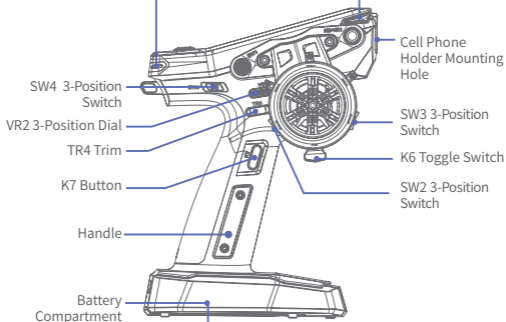



JST Port

Balanced Charging Port  
(2.54mm\*3P)

Carring Handle

Neck Strap Hook


SD Card Slot



Throttle Trigger (CH2)

Throttle Trigger Size Adjustment


Throttle Trigger Tension Adjustment



Throttle Trigger Structure Travel Adjustment

Steering Wheel Tension Adjustment


Steering Wheel Rotate Travel Adjustment



Neck Strap Hook

Grip

USB Type-C Port




3.5mm Audio Jack (DSC)

## Basic Operations

### ► Installing the 18650 Battery

Follow the steps below to install the 18650 battery:

1. Open the battery compartment cover as shown.
2. Insert 2 batteries into the compartment. Make sure that the batteries are well set according to the polarities marked on the battery compartment.
3. Close the battery compartment cover.



### ► Installing the LiPo Battery

The transmitter supports LiPo batteries which are equipped one JST connector or one balanced charging connector of the battery wiring. Follow the steps below to install the LiPo batteries:


1. Open the battery compartment cover.
2. Remove the battery holder for installing 18650 batteries.
3. Insert 2S LiPo batteries into the compartment.
4. Plug the battery wiring of the LiPo battery into the JST port or balanced charging port accordingly.
5. Close the battery cover, pay attention to avoid pinching the battery wiring.

Notes:

1. Only the balanced charging port can be used for charging.
2. Once the transmitter has the battery installed, you can use a USB Type-C cable to connect to the transmitter's USB Type-C port for power supply.

## ► Five-way Switch(Menu Navigation Button) and POWER button (Power/Return Button)

The functions of five-way switch (Menu Navigation Button) and the POWER button (Power/Return Button) are described as follows.



### Five-way Switch(Menu Navigation Button)

In the Home state,

- Long press the Middle button for 2s to lock the screen, and long press it again to unlock;
- Long press the Middle button for 1s to select the sensor, short press the Left/Right buttons to select the function item, and short press the Middle button to enter the Sensors Set interface;
- Short press the Up button to enter the Home1, and short press the Middle button to activate the servo testing function; short press the Down button to enter the Home2; short press the Up, Down, Left and Right buttons to select function items; short press the Middle button to enter the selected function item;
- Short press the Middle button to enter the Main Menu interface.

In the Main Menu state,

- Short press the Up, Down, Left and Right buttons to select function items; short press the Middle button to enter the selected function item.

In the Function Menu state,

- Short press the Up, Down, Left and Right buttons to select functions; short press the Middle button to confirm; long press the Middle button to reset all the functional data on the current page to default values.

In the Function Menu Settings state (the function item is flashing),

- Short press the Down or Up button to adjust the value or function item; long press to accelerate adjustment; short press the Middle button to confirm; long press the Middle button to reset the current item to its default value.



### POWER Button (Power/Return Button)

Short press the POWER button to return to the previous interface or Home interface; long press the POWER button to shut down.

## ► Powering On

Follow the steps below to turn on the transmitter:

1. Check to make sure that the batteries are fully charged and installed correctly.
2. Long press the POWER button, and follow the prompts on the screen to successfully power on.
  - If the built-in RF module is not detected or needs to be updated, the system will prompt a pop-up window. Please follow the instructions in the pop-up window to proceed.
  - The system will pop up a window prompting whether the failsafe is set for the current model. To turn off the failsafe prompt, select No or turn off the Failsafe Tips through System.
  - If the system is powered on using the USB Type-C port without a battery installed, a pop-up window will appear, "Please use after installing the battery!"

## ► Powering Off

Follow the steps below to turn off the transmitter:

1. Turn off the receiver first.
2. Long press the POWER button until the screen turns off, indicating that the transmitter is powered off.

- ❶ **Make sure to disconnect the receiver power before turning off the transmitter. Failure to do so can result out of control. Unreasonable setting of the Failsafe may cause accidents.**

## ► LED

This transmitter's LED includes the upper ambient lights (located on both sides of the cell phone holder mounting hole) and lower ambient lights (located on both sides of the POWER button).

### Upper Ambient Lights

Set the colors and brightness levels of the upper ambient lights. You can set whether to turn off the upper ambient lights, be as the battery indicator, and adjust the color types and brightness levels of the ambient lights.

- **Battery indicator:** When the light is in green, it indicates that the battery voltage is greater than or equal to the alarm value; otherwise, it will be in red.
- **Ambient light color:** Red, Green, Blue, Yellow, Cyan, Purple or Dazzle optional.
- **Brightness level:** default to be 50%, and can be adjusted within the range of 0~100%.

### Setup:

1. On the Home interface, short press the Middle button to enter the Main Menu.
2. Short press the Left/Down button to select System, and short press the Middle button to enter the system settings interface.
3. Select Set Up > Up Light, and the function item will begin to flash.
4. Short press the UP or Down button to select the appropriate function item, and then short press the Middle button.
5. Short press the POWER button to return to the previous interface.

## Lower Ambient Lights

Set the colors and brightness levels of the lower ambient lights. The functions and settings are the same as the upper ambient lights, refer to the description of Upper Ambient Lights.

### ► Stick Calibration

Use this function to correct for the mechanical deviation of the throttle trigger, steering wheel and VR2 3-Position Dial, for example, deviation occurred in the self-centering or maximum/minimum travel. By default, the calibration is finished. If you need to calibrate again, follow the steps below:

1. Go to Home > Main Menu > System, and select Stick Calibration, short press the Middle button, and select Yes on the pop-up interface to enter the function interface.
2. Turn the steering wheel to the max and min travel clockwise/counterclockwise respectively, then release it. Push/pull the throttle trigger to forward/backward as far as it will go, and then release it.
3. Rotate the VR2 3-Position Dial to the max and min travel, then rotate it to its middle position.
4. Short press the POWER button, the system will pop up a prompt interface. If the calibration is successful, a calibration successful prompt interface will pop up. Short press the Middle button to exit.

If the calibration fails, select No to recalibration, otherwise to cancel the calibration.

### ► Failsafe

The failsafe function is used when the receiver loses radio signal and is out-of-control. The receiver performs channel output according to the set failsafe value to protect the safety of the model and personnel.

For i-BUS/PPM/PWM signal. It can be set to No Set, No Output or With Output.

No Set: The failsafe has not been set, and there is no output in case of out-of-control.



No Output: It is no output for i-BUS/PPM/PWM channel.

With Output: i-BUS/PPM/PWM channel output respectively the set value. Namely, you can set a value respectively for each channel from 1 to 11.

By default, this value is the reading of current channel output value.

### Setup:

1. Enter the function interface through the Home > Main Menu > RX Set > Failsafe. Short press the Middle button, and the function item will start flashing.
2. Select With Output, short press the Middle button, and the system will pop up a prompt interface, then adjust the corresponding controls to the desired positions and hold them if needed. Select Yes on the pop-up prompt interface, and short press the Middle button again.
3. To set an individual channel, select the channel to be set, short press the Middle button, and the function item will flash.
4. Select the appropriate value or adjust the corresponding control to the desired position and hold it. Short press the Middle button to save the settings.



### Notes:

1. Because the S.BUS signal information contains failsafe flag bits, the failsafe information can be transmitted to the subsequent devices by the failsafe flag bits rather than by No Output state. The subsequent devices give response according to the analysed information for the failsafe flag bits.
2. For the signal PWM/PPM/i-BUS without failsafe flag bits, it supports the setting of the output signal to OFF in case of failsafe, transmitting the failsafe information to the subsequent devices by No Output state.
3. It is No Set by default, then the receiver will not output when RC signal is lost.

## ► Binding

The transmitter and the receiver have been pre-bound before delivery. If you need to use other receivers, follow the steps below to bind the transmitter and the receiver. The transmitter supports both ANT 2 Way and ANT 1 Way binding, and ANT 2 Way binding is the default setting. The transmitter will display the information returned by the receiver after the ANT 2 Way binding is completed. Before binding, it is necessary to set RF System, RF Standard, RX Type, Output, and Frequency according to the actual application scenario.

**RF System** Two modes are available: Routine and Fast. In Routine mode, it presents strong anti-interference performance against other devices, while Fast mode provides better coexistence with lower latency and power consumption.

**RF Standard** To select RF protocol, either ANT 2 Way or ANT 1 Way.

**RX Type** When the RF Standard is set to ANT 2 Way, the receiver type can be set to Standard or ESC.

**Output** Two combined output options are available, including four output modes, namely PWM/S.BUS, PPM/i-BUS, PWM/i-BUS and PPM/S.BUS. Choose according to your needs.

**Frequency** Set the frequency of channels. Options include Digital Servo, Analog Servo, and Other.

After the above settings, complete ANT 2 Way binding following the steps below:

### Setup:

1. Select Start, and short press the Middle button, the transmitter will enter binding state.
2. Press and hold the BIND button of the receiver while powering on the receiver, the LED of the receiver should be flashing, indicating that the receiver is in bind mode.
  - For other binding ways, please refer to the FS-R11P receiver manual.
3. When the receiver LED is solid on, it indicates successful binding.
4. Check whether the transmitter and receiver are operating properly. For re-binding, please repeat the above steps.



Notes:

1. If the transmitter that has its RF standard set to ANT 1Way enters bind mode, put the transmitter to exit binding state when the status of the receiver LED changes to slow flash, and at the same time, the receiver LED is solid on, indicating that the binding is completed.
2. The binding mode may vary according to the receiver model. Visit the Flysky official website to check the receiver manual or other relevant information.

## ► Firmware Update

To put the transmitter into updating state. In case of updating the firmware of the transmitter, use this function to put the transmitter into updating mode first, then upgrade the transmitter's firmware.



### Warning

- Do not unplug the USB Type-C cable while the firmware is updating.

This firmware can be updated via the following two ways.

- The firmware of this transmitter can be updated through the Flysky Assistant (The firmware of Flysky Assistant is available on the Flysky official website [www.flysky-cn.com](http://www.flysky-cn.com)).
- Or update it by following the steps below:
  1. Download and open the latest official firmware.
  2. Connect the transmitter to the computer via the USB Type-C cable.
  3. Go to Home > Main Menu > System, and select TX Firmware Update, then short press the Middle button, a prompt screen will pop up, then select Yes, and short press the Middle button to enter updating state.
  4. After completing the above steps, click Update in firmware window on the computer to start the update.
  5. The transmitter will power on again when the updating process is finished. Then remove the USB Type-C cable and close the firmware.



### Attention

- After a firmware update the receiver may not be connected. If this is the case the receiver firmware needs to be updated.

## ► Receiver Firmware Update

The FS-R11P receiver firmware update should be done through FlySkyAssistant (only supported by version 3.0 and later, FlySkyAssistant firmware can be got from the official website [www.flysky-cn.com](http://www.flysky-cn.com)).


This receiver firmware can be updated via the following two ways:

**Mode I :** After the binding between the transmitter and the receiver (the LED of the receiver is solid on), connect the transmitter to the computer, then open the FlyskyAssistant on the computer to update the firmware.

**Mode II :** Connect the transmitter to the computer. Then put the receiver to enter the forced update mode by referring to the following three ways (The LED of the receiver operates in three-flash-one-off manner repeatedly). Afterwards, open the FlyskyAssistant on the computer to update the firmware.

There are three ways to put the receiver into the forced update state:

- Power on the receiver while pressing and holding the BIND button for more than ten seconds, until the LED of the receiver operates in three-flash-one-off manner repeatedly, then release the BIND button.
- Power on the receiver first, then press and hold the BIND button for more than ten seconds, when the LED of the receiver operates in three-flash-one-off manner repeatedly, then release the BIND button.
- Connect the signal pins of the CH5 and BIND by using the binding cable, then power on the receiver.

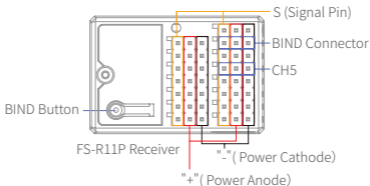

**Note:** the way of entering the forced update state may vary for the receivers. Please refer to the manual of the specific receiver.

- For more information, please read the full user manual.

## Specifications

- Product Model: FS-G11P
- Compatible Receiver: FS-R11P and other receivers with ANT protocol
- Compatible RC Model: Cars or boats
- Number of Channels: 11
- Number of Bands:133
- RF: 2.4GHz ISM
- Maximum Power: < 20dBm (e.i.r.p.) (EU)
- RF Protocol: ANT
- Resolution: 4096
- Data Connector: USB Type-C, 3.5mm Audio Jack(DSC), SD card slot
- Antenna: Two built-in antennas
- Input Power: 6-9V/DC; 18650\*2PCS/2S LiPo
- Distance: No less than 300m (Ground distance without interference)
- Display: 3.5 inch 320\*480 full dot color non-touch IPS screen
- Online Update: Yes
- Temperature Range: -10°C ~ +60°C
- Humidity Range: 20% ~ 95%
- Color: Black
- Language: Chinese or English
- Dimensions: 150.0\*120.8\*197.1mm
- Weight: 371g
- Charging Jack: Yes (Type-C Port)
- Certifications: CE, FCC ID: 2A2UNG11P00

# Certifications

## FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## EU DoC Declaration

Hereby, [ShenZhen FLYSKY Technology Co., Ltd.] declares that the radio equipment type [FS-G11P] is in compliance with Directive 2014/53/EU.

The full text of the EU DoC is available at the following internet address:  
[www.flyskytech.com/info\\_detail/10.html](http://www.flyskytech.com/info_detail/10.html)

## **Environmentally friendly disposal**

Old electrical appliances must not be disposed of together with the residual waste, but have to be disposed of separately. The disposal at the communal collecting point via private persons is for free. The owner of old appliances is responsible to bring the appliances to these collecting points or to similar collection points. With this little personal effort, you contribute to recycle valuable raw materials and the treatment of toxic substances.

## **CAUTION**

RISK OF EXPLOSION IF BATTERY IS  
REPLACED BY AN INCORRECT TYPE.

DISPOSE OF USED BATTERIES ACCORDING  
TO THE INSTRUCTIONS



## **CE SAR statement**

This equipment complies with Directive 2014/53/EU radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance.

This transmitter must not be colocated or operating in conjunction with any other antenna or transmitter.

The portable device is designed to meet the requirements for exposure to radio waves established by European Union market(France). These requirements set a SAR limit of 2W/kg averaged over ten gram of tissue.

The highest SAR value 0.112W/kg reported under this standard during

product certification for use when properly worn on the body.

## **FCC SAR**

For body-worn operation, the device has been tested and meets the FCC RF exposure, the maximum sar value is 0.246W/Kg at 0mm

## **CAUTION**

- replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types);
- disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
- leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas; and
- a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

感谢您购买富斯公司的产品!欲知更多产品信息,请浏览以下官方网站:[www.flyskytech.com](http://www.flyskytech.com)。如果您在使用中遇到任何问题,请先查阅发射机使用说明书。如果问题仍未得到解决,请直接联系当地经销商或者访问官网联系客服人员。

## 注意事项!

开始操作前请务必阅读以下安全信息!

- 请不要在夜晚或雷雨天气使用本产品,恶劣的天气环境有可能导致遥控设备失灵。
- 请不要在能见度有限的情况下使用本产品。
- 请不要在雨雪或有水的地方使用本产品。如果有液体进入到系统内部,可能会导致运行不稳定或设备失灵。
- 信号干扰可能导致设备失控。为保证您和他人的安全,请不要在以下地点使用本产品:



基站附近或  
其他无线电  
活跃的地方



人多的地方  
或道路附近



有客船的  
水域



高压电线或  
通信广播天  
线附近

- 当你感到疲倦、不舒服,或在摄入酒精或服食导致麻醉或兴奋的药物后,不要操作本产品,否则可能对自己或他人造成严重的伤害。
- 2.4GHz 无线电波段完全不同于之前所使用的低频无线电波段。使用时请确保模型产品在您的视线范围内,大的障碍物将会阻断无线电频率信号从而导致遥控失灵模型失控。
- 在使用过程中,严禁紧握发射机天线,否则将会大大减弱无线电传播信号的质量和强度,导致遥控失灵模型失控。
- 在操作或使用模型后,请勿触摸任何可能发热的部位,如发动机、电机等。这些部件可能非常热,容易造成严重的烧伤。

- 遥控设备使用不恰当可能导致操作者或他人严重受伤，甚至死亡。为保证您和设备的安全，请仔细阅读使用说明书并按照要求进行操作。
- 使用前必须确保本产品与模型安装正确，否则可能导致模型发生严重损坏。
- 关闭时，请务必先关闭接收机电源，然后关闭发射机。如果关闭发射机电源时接收机仍然在工作，将有可能导致遥控设备失控或者引擎继续工作而引发事故。
- 操控时，请先确认模型所有舵机的动作方向与操控方向一致。如果不一致，请调整好正确的方向。
- 当遥控距离持续较远时，有发生失控的可能。请适当缩短遥控的距离。


**注意：**使用类型不正确的电池可能发生爆炸风险，请妥善处理使用完的电池。

## 发射机概览







下氛围灯



上氛围灯

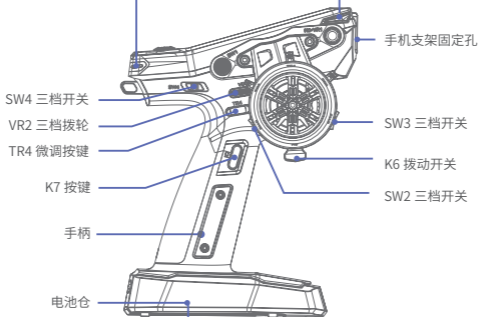



JST 接口

平衡充接口 (2.54mm\*3P)

提手

挂绳孔

SD 卡槽




油门扳机 (CH2)

挂绳孔

调节扳机尺寸  
大小


调节扳机松  
紧度



调节整个扳  
机结构的行  
程


调节手轮  
松紧度

调节手轮转动行程



手胶

USB Type-C  
接口




3.5mm 音频口 (DSC)

### ► 18650 电池安装

请按照以下步骤安装 18650 电池：

1. 打开电池仓盖（如图所示）；
2. 将 2 颗电池按标注的极性方向装入 18650 电池座内；
3. 盖好电池仓盖。



### ► LiPo 锂电池安装

本发射机支持电池导线为 JST 接口或平衡充接口的 2S 锂电池，请按照以下步骤安装锂电池：

1. 打开电池仓盖；
2. 取出用于安装 18650 电池的电池座；
3. 将 2S 锂电池放入电池仓内；
4. 将电池导线接入 JST 接口或平衡充接口；
5. 盖好电池仓盖，注意避免夹到电池导线。

注：

1. 仅平衡充接口能够用于充电。
2. 当安装电池后，才能使用 USB Type-C 线连接发射机的 USB Type-C 接口供电。


### ► 五向开关（菜单导航键）和 POWER 按键（电源 / 返回键）介绍

以下是五向开关（菜单导航键）和 POWER 按键（电源 / 返回键）相关功能介绍。

#### 五向开关（菜单导航键）

首页状态下，

- 长按中键 2 秒锁住屏幕，再次长按即解锁；
- 长按中键 1 秒选择传感器，短按左键 / 右键可选择功能项，短按中键进入设置界面；
- 短按上键进入副首页 1，短按中键启动舵机测试功能；短按下键进入副首页 2，短按上键、下键、左键和右键可选择功能项；短按中键进入功能项；



## ▶ 关机

请按照以下步骤开机：

1. 先断开接收机电源；
2. 长按发射机电源键，直至屏幕熄灭，表示关机成功。

**!** 关闭发射机之前，请务必先断开接收机电源，然后关闭发射机。如果强行关闭发射机，将会导致遥控设备失控，失控保护设置不合理可能引起事故。

## ▶ LED

本发射机 LED 包括上氛围灯（位于手机支架固定孔两侧）和下氛围灯（位于 POWER 按键两侧）。

### [ 上氛围灯 ]

设置上氛围灯颜色类型和亮度等级。可设置是否关闭上氛围灯、指示电量、以及设置氛围灯颜色和亮度等级。

- 电量指示：灯为绿色时，代表电池电压 $\geq$ 报警值；低于报警值则为红色。
- 氛围灯颜色：可设置为 [ 红色 ]、[ 绿色 ]、[ 蓝色 ]、[ 黄色 ]、[ 青色 ]、[ 紫色 ] 或 [ 炫彩 ]。
- 亮度等级：默认 50%，调节范围 0-100%。

功能设置：

1. 首页下，短按中键进入主菜单；
2. 短按左键 / 下键选择 [ 系统设置 ]，短按中键进入系统设置界面；
3. 选择 [ 设置 ]>[ 上氛围灯 ]，此时功能项为闪烁状态；
4. 短按上键或下键选择合适的功能项，然后短按中键；
5. 短按 POWER 按键返回上一级界面。

### [ 下氛围灯 ]

设置下氛围灯颜色类型和亮度等级。功能和设置与上氛围灯相同，参考 [ 上氛围灯 ] 描述。

## ► 摇杆校准

当手轮、摇杆和 VR2 三档拨轮发生机械性偏离，如回中或最大 / 最小行程出现偏差时，使用此功能修正。出厂默认校准完成，若需再次校准，则按如下步骤

1. 通过首页 > 主菜单 > [ 系统设置 ]，选择 [ 摇杆校准 ]，短按中键，在弹出的界面上选择 [ 是 ] 即进入功能界面；
2. 按照提示分别将手轮和扳机移动至最大和最小行程处后松开，回至中位；
3. 将 VR2 三档拨轮分别旋转到最大 / 最小行程处，然后旋转回至中位；
4. 短按 POWER 按键，系统弹出提示界面，若校准成功弹出校准成功的提示界面，短按中键即退出。  
若校准失败，在弹出的界面上选 [ 否 ] 即重新校准；选 [ 是 ] 则取消摇杆校准。

## ► 失控保护

当接收机无法正常收到发射机的信号时，接收机按设置好的失控保护值进行通道输出以保护模型和操作人员的安全。

对于 i-BUS/PPM/PWM 信号，可将失控保护设置为 [ 未设置 ]、[ 无输出 ] 或 [ 有输出 ]。


[ 未设置 ]：表示未设置失控保护值，失控后无信号输出。

[ 无输出 ]：i-BUS/PPM/PWM 通道接口为无输出状态；

[ 有输出 ]：i-BUS/PPM/PWM 通道接口输出设置的固定值。即通道 1~11 分别设置一个失控保护的固定值，默认为读取当前通道的输出值。

功能设置：

1. 通过首页 > 主菜单 > [ 接收设置 ] > [ 失控保护 ] 进入功能界面，短按中键，此时功能项为闪烁状态；
2. 选择 [ 有输出 ]，短按中键，系统弹出提示界面；然后将所有通道所对应的控件拨到需要的位置并保持，然后选择 [ 是 ]，短按中键，所有通道失控保护设置完成；
3. 若要设置单独通道，则选择要设置的通道，短按中键，此时功能项为闪烁状态；
4. 选择合适的数值或将对应的控件拨到需要的位置



并保持，短按中键，即保存设置。

注：

1. 因为 S.BUS 信号包含失控标志位，所以接收机可通过失控标志位将“失控状态”信息传递到后续设备，而无需通过 [ 无输出 ] 状态传递（后续设备通过解析失控标志位信息做出相应地应对即可）；
2. 对于无失控标志位的信号 PWM/PPM/i-BUS，支持设置失控时信号 [ 无输出 ]，通过 [ 无输出 ] 状态将“失控状态”信息传递给后续设备；
3. 失控保护出厂默认 [ 未设置 ]，失控后的接收机无有效信号输出。

## ► 对码

本发射机和接收机在出厂前已对码成功。若需使用其他的接收机，请按照如下步骤进行对码。本发射机支持双向对码与单向对码，默认双向，双向对码完成后发射机将显示接收机回传的信息。对码前需先根据实际应用场景设置 [ RF 系统 ]、[ 高频标准 ]、[ 接收类型 ]、[ 输出模式 ] 和 [ 响应速度 ]。

[ RF 系统 ]：提供两种模式，包括 Routine 与 Fast。对于 [ Routine ]，抗他机干扰性能强。而 [ Fast ]，抗本机共存性能强，延时更低，且功耗低。

[ 高频标准 ]：选择 RF 协议，可选 [ ANT 单向 ] 或 [ ANT 双向 ]。

[ 接收类型 ]：高频标准设置为 ANT 双向时，可选择接收机的类型为 [ 标准 ] 或 [ 二合一 ]。

[ 输出模式 ]：提供两种组合输出模式，分别是 PWM/S.BUS，PPM/i-BUS，PWM/i-BUS，PPM/S.BUS 四种输出模式，根据需要选择即可。

[ 响应速度 ]：设置通道输出控制舵机频率，可选 [ 数字舵机 ]、[ 模拟舵机 ] 和 [ 其它 ]。

以上设置后，依以下步骤完成双向对码：

1. 选择 [ 开始 ]，短按中键，发射机即进入对码状态；
2. 按住接收机对码按键同时上电，接收机 LED 灯快闪表示进入对码状态；
  - 其他对码方式可参考 FS-R11P 接收机说明书。
3. 当接收机 LED 灯变为常亮时，表示对码成功；
4. 检查发射机、接收机是否正常工作。如需重新对码，请重复以上步骤。



注：

1. 当对码的发射机是单向模式进入对码状态时，接收机 LED 灯变为慢闪后将发射机退出对码状态，此时接收机 LED 灯常亮，表示对码成功。
2. 不同的接收机对码方式不同，具体对码方式请访问 FLYSKY 官网查询接收机说明书或其他相关资料。

## ► 固件更新

让发射机进入固件更新状态。当使用固件更新程序更新时，需要先通过此功能，让发射机进入更新状态后，然后通过固件更新程序执行更新。



**警告**

- 当固件正在更新时请勿断开 USB Type-C 线。

固件更新可通过如下两个途径完成。

- 可使用“遥控管家”进行更新（富斯遥控管家固件可从官网 [www.flyskytech.com](http://www.flyskytech.com) 获取）；
- 或通过如下步骤更新：
  1. 下载并打开最新的官方固件；
  2. 将发射机通过 USB Type-C 线与电脑连接；
  3. 通过首页 > 主菜单 > [ 系统设置 ]，选择 [ 遥控器固件更新 ]，短按中键，系统弹出提示更新提示界面，选择 [ 是 ]，短按中键，即可进入更新状态；
  4. 完成以上步骤后，在电脑端固件窗口点击 [Update] 后开始更新；
  5. 更新完成后，发射机将会自动退出更新状态，重新开机。（断开 USB Type-C 线连接，并关闭电脑端固件）。



**注意**

- 系统更新完成后可能会导致接收机无法连接，此时需要更新接收机固件。

### ► 更新接收机固件

FS-R11P 接收机固件更新需通过富斯遥控管家 (FlySkyAssistant) 完成 (仅 3.0 及以上版本支持, 富斯遥控管家固件可从官网 [www.flyskytech.com](http://www.flyskytech.com) 获取)。


本接收机可以通过以下两种方式进入更新：

方式一：先将发射机与接收机对码后（接收机 LED 灯常亮），再将发射机与电脑连接，然后在电脑端打开富斯遥控管家，通过富斯遥控管家进行固件更新。

方式二：将发射机与电脑连接，参考如下方式使接收机进入强制更新状态（接收机 LED 灯状态三闪一灭），然后在电脑端打开富斯遥控管家，通过富斯遥控管家进行固件更新。

进入强制更新状态的操作方式有如下三种方式:

- 按下对码按键，接收机通电，十秒钟后接收机 LED 灯状态三闪一灭，然后松开对码按键。
- 先给接收机通电，长按对码键十秒后接收机 LED 灯状态三闪一灭，然后松开对码按键。
- 先将接收机 BIND 接口信号端和 CH5 接口信号端相连接，然后接通接收机电源。



注：不同接收机进入强制更新状态方式不同，请参考具体接收机的说明书。

- 关于 FS-G11P 发射机的更多操作请阅读使用说明书。

## 产品规格

- 产品型号: FS-G11P
- 适配接收机: FS-R11P 等 ANT 协议接收机
- 适配模型: 车、船
- 通道个数: 11
- 波段个数: 133
- 无线频率: 2.4GHz ISM
- 发射功率: 小于 20dBm
- 无线协议: ANT
- 通道分辨率: 4096 级
- 数据接口: USB Type-C、3.5mm 音频口 (DSC)、SD 卡槽
- 天线类型: 内置双天线
- 输入电源: 6-9V/DC; 18650\*2PCS/2S LiPo
- 遥控距离: 不小于 300 米 (空旷无干扰地面距离)
- 显示方式: 3.5 英寸 320\*480 全点阵彩色非触摸 IPS 显示屏
- 在线更新: 支持
- 温度范围: -10°C ~ +60°C
- 湿度范围: 20% ~ 95%
- 机身颜色: 黑色
- 系统语言: 中文或英文
- 外形尺寸: 150.0\*120.8\*197.1mm
- 机身重量: 371g
- 充电接口: 有 (USB Type-C 接口)
- 认证: CE, FCC ID: 2A2UNG11P00

本说明书中的图片和插图仅供参考, 可能与实际产品外观有所不同。产品设计和规格可能会有所更改, 恕不另行通知。

*Figures and illustrations in this manual are provided for reference only and may differ from actual product appearance. Product design and specifications may be changed without notice.*

# FLYSKY



微信公众号



Bilibili



Website



Facebook

[Http://www.flysky-cn.com](http://www.flysky-cn.com)

Copyright © 2024 Flysky Technology Co., Ltd.

Release Date: 2024-12-20



FCC ID: 2A2UNG11P00

Manufacturer: ShenZhen FLYSKY Technology Co., Ltd.

Address: 16F, Huafeng Building, No. 6006 Shennan Road, Futian District, Shenzhen, Guangdong, China