

Kwikset

ENGLISH

HALO

WI-FI TOUCHSCREEN SMART LOCK

Installation and User Guide

Required tools



Additional Tools (depending on application)



Kwikset
1-800-327-5625
www.kwikset.com

Parts List

Mounting Plate




Adapter Ring



Exterior Assembly



Interior Assembly



Batteries



Keys



Latch A



For Latch / Strike




03809



For Lock



48654




Latch B



"B" is not included.
If needed, please contact
Kwikset to order a drive-in
latch for your lock.

46780



49191



64109



68611




1 Prepare the door and check dimensions


If drilling a new door, use the supplied template and the complete door drilling instructions available at kwikset.com/doorprep

A Make sure your door is compatible. If you have a standard deadbolt mounted separately from the handle below it, your door is compatible.


Compatible




Not Compatible




Not Compatible




Not Compatible



B Remove your existing deadbolt from your door.

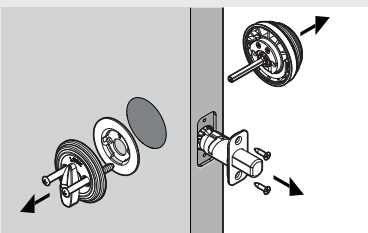


C Measure to confirm that the hole in the door is either 2-1/8" (54 mm) or 1-1/2" (38 mm).




Note: Additional door preparation may be required for doors with 1-1/2" (38 mm) holes. Consult the deadbolt drilling instructions at kwikset.com/doorprep


D Measure to confirm that the backset is either 2-3/8" or 2-3/4" (60 or 70 mm).



E Measure to confirm that the hole in the door edge is 1" (25 mm).







F Measure to confirm that the door is between 1-3/8" and 2" (35 mm and 51 mm) thick.

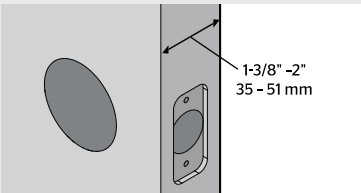


2 Install the latch and strike

For Latch / Strike Bag







A Is the door edge chiseled?


YES







Use latch "A". If the latch bolt is not already extended, extend the latch bolt as shown.





NO



Use latch "B" (not included). If the latch bolt is not already extended, extend the latch bolt as shown.




B Hold the latch in front of the door hole, with the latch face flush against the door edge.



C Is the D-shaped hole centered in the door hole?


YES



D-shaped hole



No adjustment is required. Proceed to next step.

NO



D-shaped hole

Rotate latch face as shown to extend latch.




D Which latch are you installing?

Latch "A"

Latch "B"


or




UP is on top.

03809* (2x)


*Use longer screws if holes are worn out.



B




UP is on top.



wood block

E Install the strike on the door frame.

! Make sure the hole in the door frame is drilled a minimum of 1" (25 mm) deep.

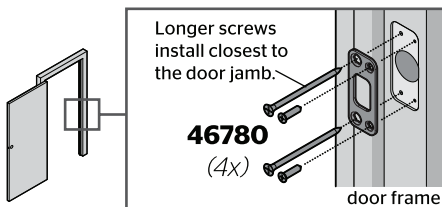


Longer screws install closest to the door jamb.

46780 (4x)


door frame

3 Install the exterior keypad


For
Lock
Bag




A What is the diameter of the hole in the door?

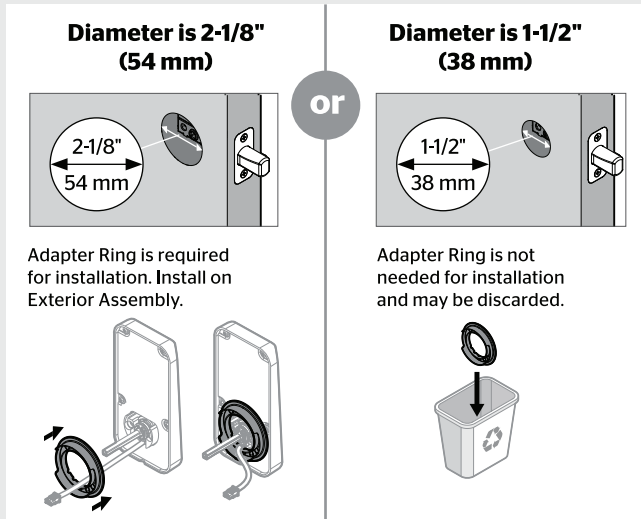


B Locate the screws for step 3D and keep them within reach.



C Remove the mounting plate from the interior assembly.

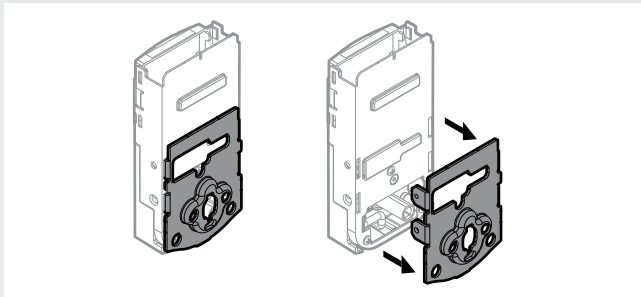


D Install the exterior keypad and mounting plate.

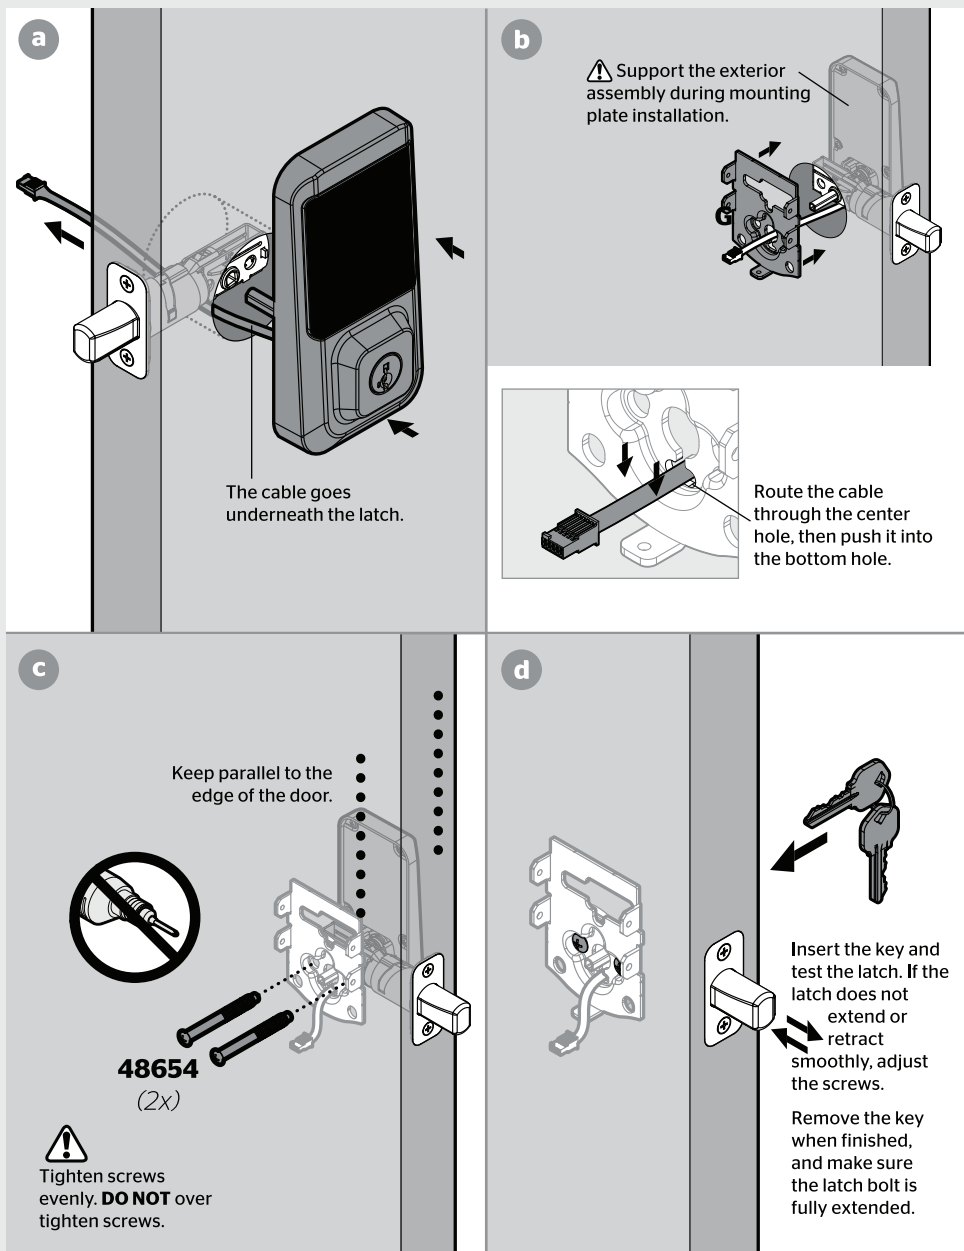


4 Install the interior assembly


For
Lock
Bag



A Ensure the turnpiece shaft is pointing up, and remove the interior cover and battery pack from the interior assembly.

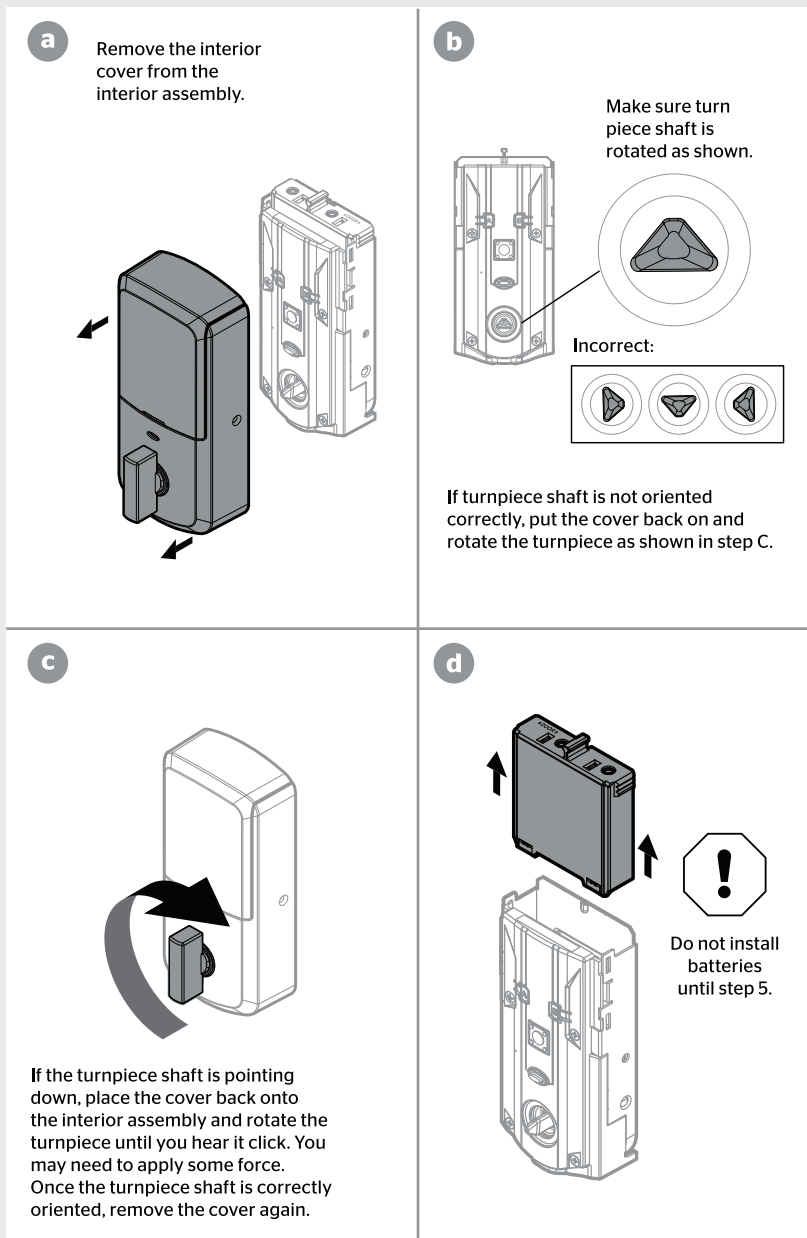


B Install the interior assembly onto the mounting plate.

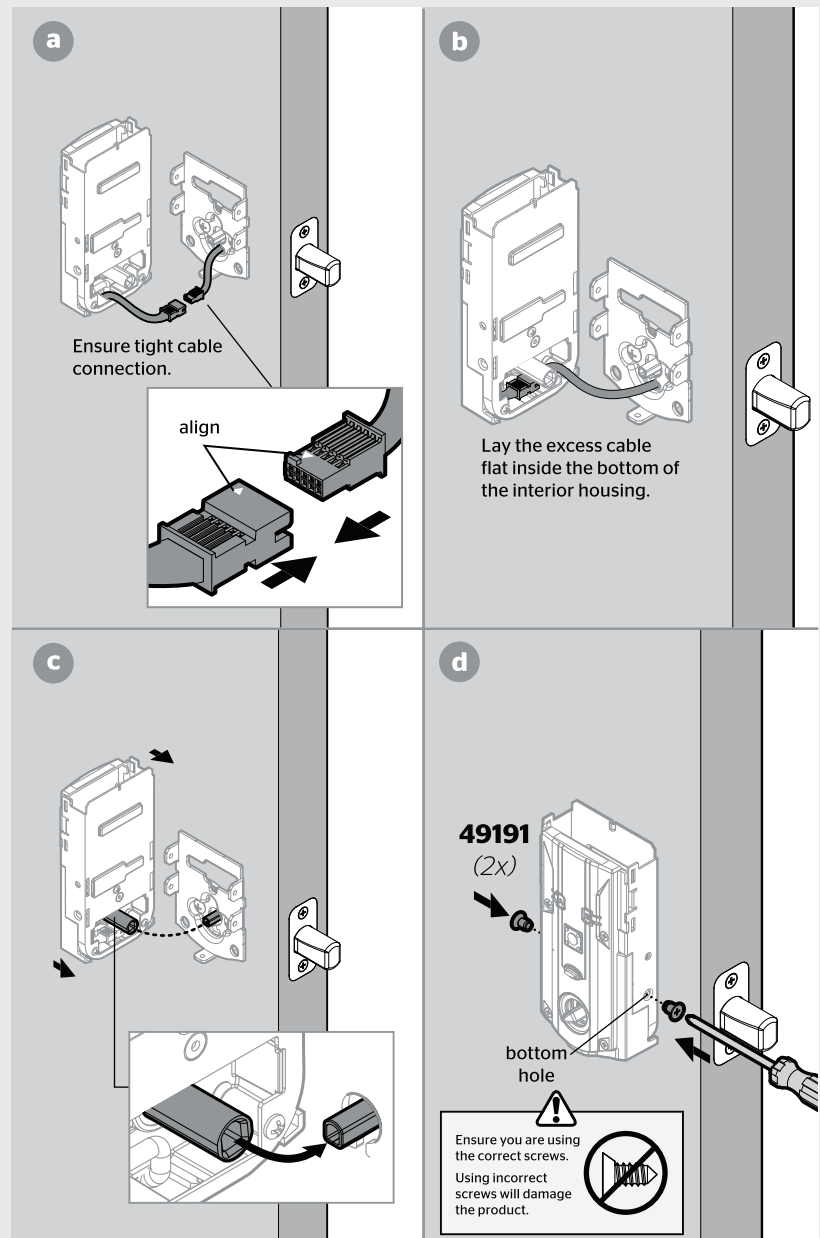


5 Install the batteries and perform the door handing process

This step will teach your lock the orientation of your door and is crucial to lock operation.


A Install 4 AA batteries in the battery pack.

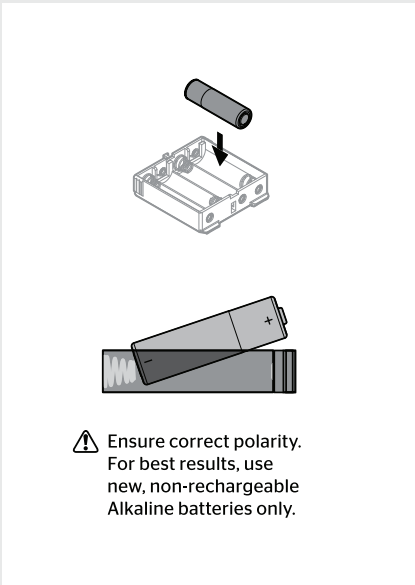

B With the door open, install the battery pack to initiate auto-handing.

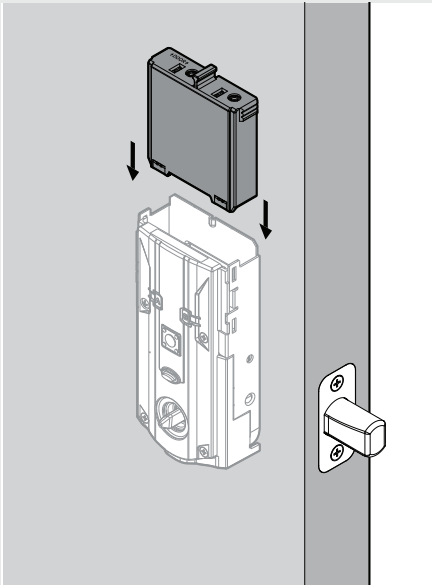


C After a few seconds, the latch bolt will retract and extend on its own to learn the orientation of the door. This is called the **door handing process**, and it is crucial to lock operation.

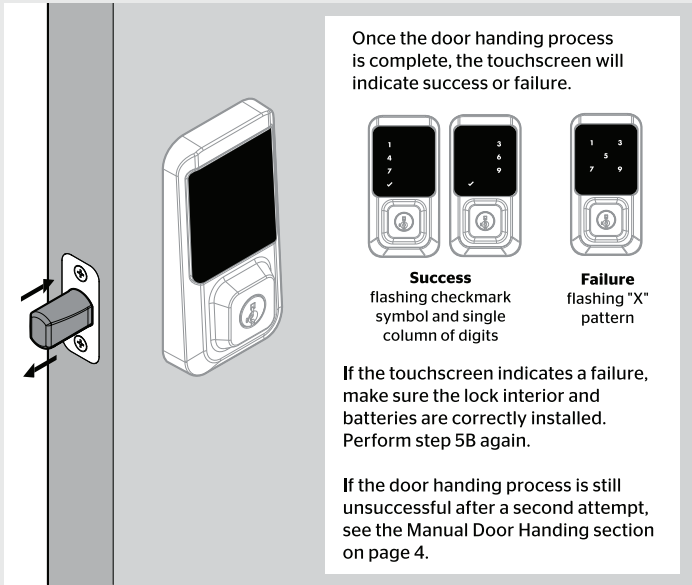


6 Test the lock and check door alignment


A With the door open, insert the key to extend the latch. Ensure that the latch extends smoothly.

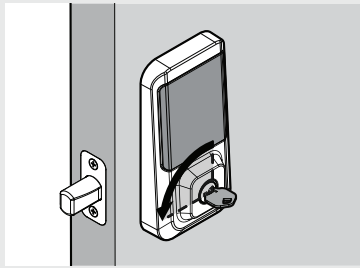


B Turn the key 180° to retract the latch. Ensure that the latch retracts smoothly.

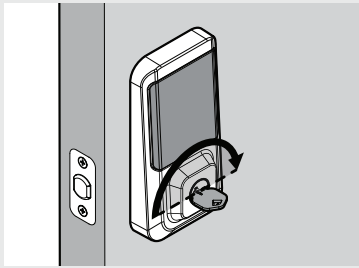

C Close the door. Insert and rotate the key to lock the door. Ensure that the door locks smoothly.

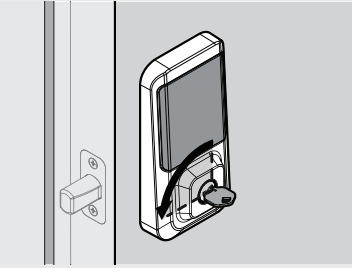

D Turn the key 180° to retract the latch. Ensure that the door unlocks smoothly.

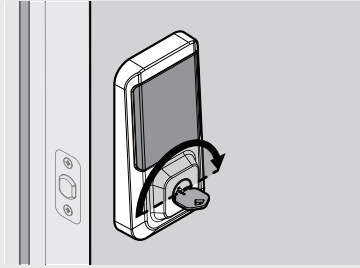


If your door does not lock and unlock smoothly, make sure you replaced your previous latch and strike with those supplied in the box. If you still experience locking errors, call Kwikset Support to order a Warped Door Service Kit.
Kwikset Support: 1-800-327-5625


7 Install the interior cover

Important Information about the interior cover


The window on the interior cover is unlocked by default for easier access to the battery pack and buttons.




For additional security, you may choose to lock the window by installing the security screw.

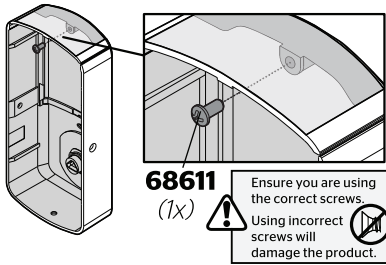


When the window is locked, you will need to remove the entire interior cover and screws to access the battery pack and buttons.



For Lock Bag




Cover Installation

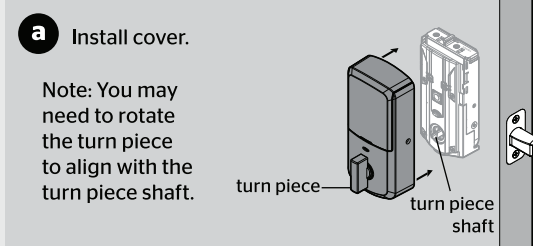


Battery Pack Access

If the window is unlocked, slide up the window to access the battery pack.



If the window is locked, remove the interior cover and screws to access the battery pack.



8 Download the app and create an account



The Kwikset app is needed to use this lock. If this lock was professionally installed (or installed by someone other than the homeowner), make sure this step is performed by the homeowner.

A

Download the Kwikset app by scanning the QR code or visiting www.kwikset.com/app on your smartphone.




B


Create your account and follow the setup instructions in the Kwikset app.

Halo Touchscreen at a Glance

Exterior

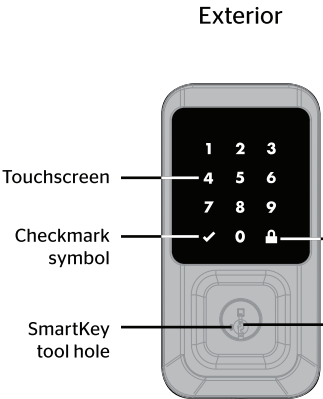

Interior (cover removed)

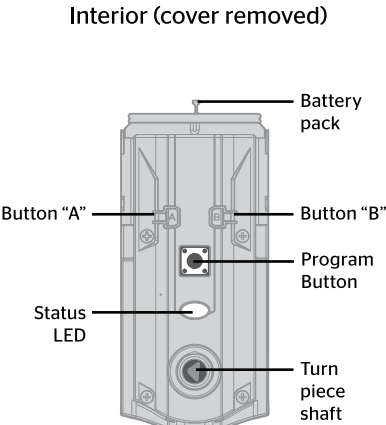


System Alerts

Display	Alert	Reason	Solution
	"X" pattern flashes once with one beep*.	One incorrect code entered.	Re-enter code.
	"X" pattern flashes three times with three beeps*.	No user code programmed.	Program at least one user code.
	"X" pattern flashes red 15 times with 15 beeps*	Three incorrect codes entered.	Re-enter code after 60 second keypad lockout.
	Checkmark and lock symbols flash simultaneously five times with five beeps*.	Low battery.	Replace batteries.
	Checkmark and lock symbols alternate flashing five times with five beeps*.	Door jammed while attempting to lock.	Manually re-lock door. If needed, reposition strike.
N/A	Lock beeps continuously.	Interior assembly is disconnected from exterior.	Remove battery pack, reconnect the interior to the exterior, then reinstall battery pack.

*Beeping sounds will only be heard if Lock Sounds have not been disabled in the app.

Status LED colors

These features can be adjusted in some smart home apps.

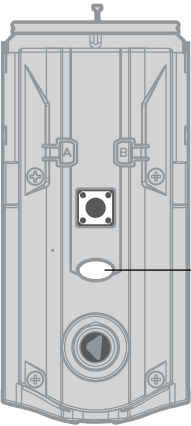

Color	Lock Status
Green (solid)	Action successful
Green (blinking)	Unlocked
Red (solid)	Door handing process unsuccessful
Red (blinking)	Action unsuccessful or incomplete
	Low battery
Blue (solid)	Bluetooth Pairing successful
Blue (blinking)	Bluetooth Pairing Mode
Amber (solid)	Entering Network Reset mode
	Network or System Reset mode.
Amber (blinking)	Action required.
	Locked


Manual Door Handing

If needed, the door handing process can be initiated manually. This is useful if the lock is being moved to a different door.


1 Remove battery pack.



2 Press and HOLD the Program button while reinserting the battery pack. Release the Program button after 3 seconds. The status LED will flash red and green.



3 Press the Program button once more.




4 The latch bolt will extend and retract to learn the orientation of the door. The LED will flash green if handing is successful or red if handing is unsuccessful.

Network Reset


Network Reset will delete all Wi-Fi settings, Bluetooth pairings, user associations, and remove the lock from the account.

1 Press and HOLD "A" for 10 seconds. You will hear 1 short beep and see an amber LED.

Note: After 3 seconds, you will hear 1 short beep and see a blue LED. You should continue to hold "A" to enter network reset mode.



2 Release "A." You will see a blinking amber LED to indicate it is in network reset mode.




3 Press and release the Program button to confirm network reset.




The Program button must be pressed within 10 seconds of releasing "A" or the function will time out.

4 If successful, you will hear 1 long beep and see a green LED. If unsuccessful, you will hear 5 rapid beeps and see a blinking red LED. If unsuccessful, repeat from step 1.

Successful:



Unsuccessful:



System Reset

System Reset will delete all access codes and lock settings including lock handing. The lock will run the handing process at the end of the System Reset.

1 Press "A" 10 times. You will hear 1 short beep and see a blinking amber LED to indicate it is in system reset mode.



2 Press and release the Program button to confirm system reset.




3 If successful, you will hear 1 long beep and see a green LED, and the reset process will begin. During the reset process, the LED will blink green/red a few times and will beep when complete.

If unsuccessful, you will hear 5 rapid beeps and see a blinking red LED. If unsuccessful, repeat from step 1.

Successful:




Unsuccessful:




Factory Reset

Factory Reset will delete all Wi-Fi settings, Bluetooth pairings, user associations, remove the lock from the account, and reset all lock settings including handing.

1 Remove battery pack.



2 Press and HOLD the Program button while reinserting the battery pack. Keep holding the button for 30 seconds until the lock beeps and the status LED flashes red.



3 Press the Program button once more. The LED will flash green and red, and the auto-handing process will begin.



4 The latch will retract and extend to learn the orientation of the door. The LED will flash green if auto-handing is successful or red if auto-handing is unsuccessful.


Troubleshooting

A complete Halo Touchscreen Programming and Troubleshooting Guide is available at www.kwikset.com/halo/support

SmartKey Re-Keying

Re-key the lock to work with your existing key. See the supplied SmartKey Re-key instructions for more information.

Note: If Auto-Lock is enabled, remove the battery pack before re-keying your lock.

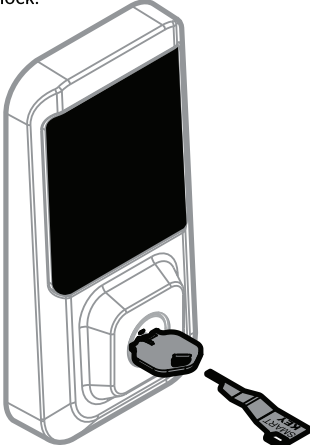

Important Safeguards

- Read all instructions in their entirety.
- Familiarize yourself with all warning and caution statements.
- Remind all family members of safety precautions.
- Protect your user codes.
- Dispose of used batteries according to local laws and regulations.

⚠ WARNING: This Manufacturer advises that no lock can provide complete security by itself. This lock may be defeated by forcible or technical means, or evaded by entry elsewhere on the property. No lock can substitute for caution, awareness of your environment, and common sense. Builder's hardware is available in multiple performance grades to suit the application. In order to enhance security and reduce risk, you should consult a qualified locksmith or other security professional.

4 / 4

© 2020 Spectrum Brands, Inc.