



Deploying Avaya Aura[®] Appliance Virtualization Platform

Release 8.1.x
Issue 9
December 2020

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Documentation disclaimer

"Documentation" means information published in varying mediums which may include product information, operating instructions and performance specifications that are generally made available to users of products. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of Documentation unless such modifications, additions, or deletions were performed by or on the express behalf of Avaya. End User agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or Documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on Avaya hardware and software. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language, as well as information regarding support for this product while under warranty is available to Avaya customers and other parties through the Avaya Support website: <https://support.avaya.com/helpcenter/getGenericDetails?detailId=C20091120112456651010> under the link "Warranty & Product Lifecycle" or such successor site as designated by Avaya. Please note that if You acquired the product(s) from an authorized Avaya Channel Partner outside of the United States and Canada, the warranty is provided to You by said Avaya Channel Partner and not by Avaya.

"Hosted Service" means an Avaya hosted service subscription that You acquire from either Avaya or an authorized Avaya Channel Partner (as applicable) and which is described further in Hosted SAS or other service description documentation regarding the applicable hosted service. If You purchase a Hosted Service subscription, the foregoing limited warranty may not apply but You may be entitled to support services in connection with the Hosted Service as described further in your service description documents for the applicable Hosted Service. Contact Avaya or Avaya Channel Partner (as applicable) for more information.

Hosted Service

THE FOLLOWING APPLIES ONLY IF YOU PURCHASE AN AVAYA HOSTED SERVICE SUBSCRIPTION FROM AVAYA OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE), THE TERMS OF USE FOR HOSTED SERVICES ARE AVAILABLE ON THE AVAYA WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/LICENSEINFO) UNDER THE LINK "Avaya Terms of Use for Hosted Services" OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, AND ARE APPLICABLE TO ANYONE WHO ACCESSES OR USES THE HOSTED SERVICE. BY ACCESSING OR USING THE HOSTED SERVICE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE DOING SO (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THE TERMS OF USE. IF YOU ARE ACCEPTING THE TERMS OF USE ON BEHALF A COMPANY OR OTHER LEGAL ENTITY, YOU REPRESENT THAT YOU HAVE THE AUTHORITY TO BIND SUCH ENTITY TO THESE TERMS OF USE. IF YOU DO NOT HAVE SUCH AUTHORITY, OR IF

YOU DO NOT WISH TO ACCEPT THESE TERMS OF USE, YOU MUST NOT ACCESS OR USE THE HOSTED SERVICE OR AUTHORIZE ANYONE TO ACCESS OR USE THE HOSTED SERVICE.

Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/LICENSEINFO), UNDER THE LINK "AVAYA SOFTWARE LICENSE TERMS (Avaya Products)" OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM AVAYA INC., ANY AVAYA AFFILIATE, OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AVAYA CHANNEL PARTNER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA CHANNEL PARTNER; AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE ("AVAYA").

Avaya grants You a license within the scope of the license types described below, with the exception of Heritage Nortel Software, for which the scope of the license is detailed below. Where the order documentation does not expressly identify a license type, the applicable license will be a Designated System License as set forth below in the Designated System(s) License (DS) section as applicable. The applicable number of licenses and units of capacity for which the license is granted will be one (1), unless a different number of licenses or units of capacity is specified in the documentation or other materials available to You. "Software" means computer programs in object code, provided by Avaya or an Avaya Channel Partner, whether as stand-alone products, pre-installed on hardware products, and any upgrades, updates, patches, bug fixes, or modified versions thereto. "Designated Processor" means a single stand-alone computing device. "Server" means a set of Designated Processors that hosts (physically or virtually) a software application to be accessed by multiple users. "Instance" means a single copy of the Software executing at a particular time: (i) on one physical machine; or (ii) on one deployed software virtual machine ("VM") or similar deployment.

License types

Designated System(s) License (DS). End User may install and use each copy or an Instance of the Software only: 1) on a number of Designated Processors up to the number indicated in the order; or 2) up to the number of Instances of the Software as indicated in the order, Documentation, or as authorized by Avaya in writing. Avaya may require the Designated Processor(s) to be identified in the order by type, serial number, feature key, Instance, location or other specific designation, or to be provided by End User to Avaya through electronic means established by Avaya specifically for this purpose.

Shrinkwrap License (SR). End User may install and use the Software in accordance with the terms and conditions of the applicable license agreements, such as "shrinkwrap" or "clickthrough" license accompanying or applicable to the Software ("Shrinkwrap License") as indicated in the order, Documentation, or as authorized by Avaya in writing.

Heritage Nortel Software

"Heritage Nortel Software" means the software that was acquired by Avaya as part of its purchase of the Nortel Enterprise Solutions Business in December 2009. The Heritage Nortel Software is the software contained within the list of Heritage Nortel Products located at <https://support.avaya.com/LicenseInfo> under the link "Heritage Nortel Products" or such successor site as designated by Avaya. For Heritage Nortel Software, Avaya grants Customer a license to use Heritage Nortel Software provided hereunder solely to the extent of

the authorized activation or authorized usage level, solely for the purpose specified in the Documentation, and solely as embedded in, for execution on, or for communication with Avaya equipment. Charges for Heritage Nortel Software may be based on extent of activation or use authorized as specified in an order or invoice.

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, Hosted Service, or hardware provided by Avaya. All content on this site, the documentation, Hosted Service, and the product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, and or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Virtualization

The following applies if the product is deployed on a virtual machine. Each product has its own ordering code and license types. Unless otherwise stated, each Instance of a product must be separately licensed and ordered. For example, if the end user customer or Avaya Channel Partner would like to install two Instances of the same type of products, then two products of that type must be ordered.

Third Party Components

"Third Party Components" mean certain software programs or portions thereof included in the Software or Hosted Service may contain software (including open source software) distributed under third party agreements ("Third Party Components"), which contain terms regarding the rights to use certain portions of the Software ("Third Party Terms"). As required, information regarding distributed Linux OS source code (for those products that have distributed Linux OS source code) and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply is available in the products, Documentation or on Avaya's website at: <https://support.avaya.com/Copyright> or such successor site as designated by Avaya. The open source software license terms provided as Third Party Terms are consistent with the license rights granted in these Software License Terms, and may contain additional rights benefiting You, such as modification and distribution of the open source software. The Third Party Terms shall take precedence over these Software License Terms, solely with respect to the applicable Third Party Components to the extent that these Software License Terms impose greater restrictions on You than the applicable Third Party Terms.

The following applies only if the H.264 (AVC) codec is distributed with the product. THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE [HTTP://WWW.MPEGLA.COM](http://www.mpegla.com).

Service Provider

THE FOLLOWING APPLIES TO AVAYA CHANNEL PARTNER'S HOSTING OF AVAYA PRODUCTS OR SERVICES. THE PRODUCT OR HOSTED SERVICE MAY USE THIRD PARTY COMPONENTS SUBJECT TO THIRD PARTY TERMS AND REQUIRE A SERVICE PROVIDER TO BE INDEPENDENTLY LICENSED DIRECTLY FROM THE THIRD PARTY SUPPLIER. AN AVAYA CHANNEL PARTNER'S HOSTING OF AVAYA PRODUCTS MUST BE AUTHORIZED IN WRITING BY AVAYA AND IF THOSE HOSTED PRODUCTS USE OR EMBED CERTAIN THIRD PARTY SOFTWARE, INCLUDING BUT NOT LIMITED TO MICROSOFT SOFTWARE OR CODECS, THE AVAYA CHANNEL PARTNER IS REQUIRED TO INDEPENDENTLY OBTAIN ANY APPLICABLE LICENSE

AGREEMENTS, AT THE AVAYA CHANNEL PARTNER'S EXPENSE, DIRECTLY FROM THE APPLICABLE THIRD PARTY SUPPLIER.

WITH RESPECT TO CODECS, IF THE AVAYA CHANNEL PARTNER IS HOSTING ANY PRODUCTS THAT USE OR EMBED THE H.264 CODEC OR H.265 CODEC, THE AVAYA CHANNEL PARTNER ACKNOWLEDGES AND AGREES THE AVAYA CHANNEL PARTNER IS RESPONSIBLE FOR ANY AND ALL RELATED FEES AND/OR ROYALTIES. THE H.264 (AVC) CODEC IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO: (I) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (II) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION FOR H.264 (AVC) AND H.265 (HEVC) CODECS MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE [HTTP://WWW.MPEGLA.COM](http://www.mpegla.com).

Compliance with Laws

You acknowledge and agree that it is Your responsibility for complying with any applicable laws and regulations, including, but not limited to laws and regulations related to call recording, data privacy, intellectual property, trade secret, fraud, and music performance rights, in the country or territory where the Avaya product is used.

Preventing Toll Fraud

"Toll Fraud" is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If You suspect that You are being victimized by Toll Fraud and You need technical assistance or support, call Technical Service Center Toll Fraud Intervention Hotline at +1-800-643-2353 for the United States and Canada. For additional support telephone numbers, see the Avaya Support website: <https://support.avaya.com> or such successor site as designated by Avaya.

Security Vulnerabilities

Information about Avaya's security support policies can be found in the Security Policies and Support section of <https://support.avaya.com/security>.

Suspected Avaya product security vulnerabilities are handled per the Avaya Product Security Support Flow (<https://support.avaya.com/css/P8/documents/100161515>).

Downloading Documentation

For the most current versions of Documentation, see the Avaya Support website: <https://support.avaya.com>, or such successor site as designated by Avaya.

Contact Avaya Support

See the Avaya Support website: <https://support.avaya.com> for product or Hosted Service notices and articles, or to report a problem with your Avaya product or Hosted Service. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: <https://support.avaya.com> (or such successor site as designated by Avaya), scroll to the bottom of the page, and select Contact Avaya Support.

Trademarks

The trademarks, logos and service marks ("Marks") displayed in this site, the Documentation, Hosted Service(s), and product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its affiliates, its licensors, its suppliers, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the Documentation, Hosted Service(s) and product(s) should be construed as granting, by implication, estoppel,

or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party.

Avaya is a registered trademark of Avaya Inc.

All non-Avaya trademarks are the property of their respective owners. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Contents

Chapter 1: Introduction	10
Purpose	10
Prerequisites	10
Change history	10
Chapter 2: Appliance Virtualization Platform overview	13
Avaya Aura® Virtualized Appliance overview	13
Appliance Virtualization Platform overview	13
Solution Deployment Manager	15
Solution Deployment Manager overview	15
Capability comparison between System Manager Solution Deployment Manager and the Solution Deployment Manager client	17
Solution Deployment Manager Client	17
Solution Deployment Manager	20
Chapter 3: Network	23
Appliance Virtualization Platform networking	23
Appliance Virtualization Platform NIC ports	25
Teaming NICs from CLI	27
NIC teaming modes	29
Monitoring team and link status	30
Enabling or disabling alarms in NIC teaming	30
NIC teaming alarms description	31
Setting the Ethernet port speed	31
Supported TLS version	32
Chapter 4: Planning and preconfiguration	33
Configuration tools and utilities	33
Supported servers	33
Software details of Appliance Virtualization Platform	34
Installing the Solution Deployment Manager client on your computer	34
Chapter 5: Appliance Virtualization Platform deployment and configuration	37
Appliance Virtualization Platform deployment	37
Appliance Virtualization Platform deployment in unattended mode	37
Generating the Appliance Virtualization Platform kickstart file	37
Configuring the Appliance Virtualization Platform USB drive	40
Deploying Appliance Virtualization Platform on same or different hardware	40
Appliance Virtualization Platform deployment in attended mode	43
Deploying Appliance Virtualization Platform using a setup script	43
Host IP address assignment	44
Assigning host IP address using System Customization	44
Configuring the Appliance Virtualization Platform network and other parameters	44

Configuring IPv6 using System Customization.....	46
Configuring servers preinstalled with Appliance Virtualization Platform.....	47
Enabling IP forwarding using Services Port VM for AVP Utilities.....	50
Password policy.....	51
Activating SSH from AVP Utilities.....	51
Enabling and disabling SSH on Appliance Virtualization Platform from Solution Deployment Manager.....	52
Chapter 6: Administration.....	53
Managing the location.....	53
Viewing a location.....	53
Adding a location.....	53
Editing the location.....	54
Deleting a location.....	54
New and Edit location field descriptions.....	54
Adding an Appliance Virtualization Platform or ESXi host.....	55
Changing the network parameters for an Appliance Virtualization Platform host.....	57
Changing the network settings for an Appliance Virtualization Platform host from Solution Deployment Manager.....	58
Changing the IP address and default gateway of the host.....	61
Enabling or disabling IPv6.....	62
Changing the password for an Appliance Virtualization Platform host.....	62
Shutting down the Appliance Virtualization Platform host.....	63
Shutting down Appliance Virtualization Platform host from CLI.....	63
Restarting Appliance Virtualization Platform or an ESXi host.....	64
Rebooting the Appliance Virtualization Platform host from CLI.....	65
Host Network / IP Settings field descriptions.....	65
Change Network Parameters field descriptions.....	67
Change Password field descriptions.....	68
AVP and AVPU alarming.....	69
Customizing the Appliance Virtualization Platform banner through CLI.....	69
Configuring log rotation on Appliance Virtualization Platform from CLI.....	70
Snapshot retention command.....	71
Enabling snapshot retention time.....	71
Disabling snapshot retention time.....	72
Viewing the snapshot retention status.....	72
Chapter 7: Installing and configuring Appliance Virtualization Platform licensing.....	73
Appliance Virtualization Platform license.....	73
Appliance Virtualization Platform licenses for supported servers.....	74
WebLM overview.....	75
Obtaining the license file.....	76
Installing a license file.....	76
Install license field descriptions.....	77

Configuring WebLM Server for an Appliance Virtualization Platform host using Solution Deployment Manager.....	77
WebLM Configuration field descriptions.....	78
Configuring WebLM Server for an Appliance Virtualization Platform host from CLI.....	79
Viewing the Appliance Virtualization Platform host license status using Solution Deployment Manager.....	80
Verifying the Appliance Virtualization Platform license status from host CLI.....	80
Chapter 8: Security	81
Security Recommendations.....	81
Extended security hardening.....	81
Appliance Virtualization Platform security hardening policies.....	82
Commercial grade hardening checklist.....	83
Enabling commercial grade hardening for the Appliance Virtualization Platform host.....	83
Adding SSH users and disabling unauthorized network access.....	84
Configuring syslog server for remote logging.....	85
Configuring encrypted syslog forwarding for Appliance Virtualization Platform.....	86
Verifying hardening status and completing remaining hardening settings.....	87
Checking for extraneous device and unauthorized Setuid or Setgid files.....	88
Appliance Virtualization Platform certificate management.....	89
Certification validation.....	89
Generating and accepting the Appliance Virtualization Platform host certificates.....	90
Creating or editing generic CSR.....	91
Create or edit CSR field descriptions.....	92
Applying third-party certificates to Appliance Virtualization Platform.....	92
Load Certificate field descriptions.....	94
Chapter 9: Post-deployment and upgrade tasks	95
Verifying the Appliance Virtualization Platform software release and the ESXi version.....	95
Virtual Machine snapshot on Appliance Virtualization Platform.....	95
Deleting the virtual machine snapshot by using Solution Deployment Manager.....	96
Snapshot Manager field descriptions.....	96
Enhanced Access Security Gateway.....	97
Enhanced Access Security Gateway (EASG) overview.....	97
Chapter 10: Troubleshooting	100
Troubleshooting Appliance Virtualization Platform.....	100
Unable to connect to Appliance Virtualization Platform host from vSphere Web Client.....	101
Viewing installation log traces.....	101
Restarting Appliance Virtualization Platform or an ESXi host.....	102
Rebooting the Appliance Virtualization Platform host from CLI.....	102
Clearing system event logs from CLI.....	103
Chapter 11: Appliance Virtualization Platform alarms	104
Alarm classifications.....	104
AVP Alarms.....	104
TEST_ALARM.....	104

FAN_FAULT.....	105
FAN_CLEAR.....	105
MEM_FAULT.....	105
MEM_CLEAR.....	106
DISK_FAULT.....	106
DISK_CLEARED.....	107
POWER_FAULT.....	107
POWER_CLEAR.....	108
TEMP_FAULT.....	108
TEMP_CLEAR.....	109
LOG_FAULT.....	109
LOG_CLEAR.....	110
DISKBATTERY_FAULT.....	110
DISKBATTERY_CLEAR.....	111
ETH_FAULT.....	111
ETH_CLEAR.....	112
SYS_FAULT.....	112
SYS_CLEAR.....	113
PROC_FAULT.....	113
PROC_CLEAR.....	113
VOLTAGE_FAULT.....	114
VOLTAGE_CLEAR.....	114
CHASSIS_FAULT.....	115
CHASSIS_CLEAR.....	115
WATCHDOG_FAULT.....	115
WATCHDOG_CLEAR.....	116
BATTERY_FAULT.....	116
BATTERY_CLEAR.....	117
CABLE_FAULT.....	117
CABLE_CLEAR.....	118
ASG_FAULT.....	118
ASG_CLEAR.....	118
BOOT_CLEAR.....	119
LICENSE_ERROR.....	119
LICENSE_FAULT.....	120
LICENSE_CLEAR.....	121
SNAPSHOT_FAULT.....	121
SNAPSHOT_CLEAR.....	121
NIC_TEAM_DEGRADED.....	122
NIC_TEAM_FAULT.....	122
NIC_TEAM_CLEAR.....	122
CERT_FAULT.....	123
CERT_CLEAR.....	123

- Chapter 12: Resources**..... 124
 - Appliance Virtualization Platform documentation..... 124
 - Finding documents on the Avaya Support website..... 124
 - Accessing the port matrix document..... 125
 - Avaya Documentation Center navigation..... 125
 - Training..... 126
 - Viewing Avaya Mentor videos..... 126
 - Support..... 127
 - Using the Avaya InSite Knowledge Base..... 127
- Appendix A: Deploying AVP Utilities and other virtual machines**..... 129
 - Deploying AVP Utilities and virtual machines when Out of Band Management is enabled..... 129
 - Deploying AVP Utilities and virtual machines using services port..... 130

Chapter 1: Introduction

Purpose

This document contains checklists and procedures for:

- Deploying Appliance Virtualization Platform
- Configuring Appliance Virtualization Platform
- Administering Appliance Virtualization Platform
- Troubleshooting Appliance Virtualization Platform

The primary audience for this document is anyone who deploys Appliance Virtualization Platform and configures a system with Appliance Virtualization Platform preinstalled at a customer site.

Prerequisites

Before deploying or upgrading Appliance Virtualization Platform, ensure that you have the following knowledge, skills, and tools.

Knowledge

- Linux® Operating System
- Appliance Virtualization Platform

Skills

To administer the System Manager web console and Appliance Virtualization Platform.

Tools

For information about tools and utilities, see “Configuration tools and utilities”.

Change history

The following changes have been made to this document since the last issue:

Issue	Date	Summary of changes
9	December 2020	Updated the following section: • Changing the IP address and default gateway of the host on page 61
8	October 2020	For Release 8.1.3, updated the following sections: • Create AVP Kickstart field descriptions on page 38 • Deploying Appliance Virtualization Platform on same or different hardware on page 40 • Configuring servers preinstalled with Appliance Virtualization Platform on page 47 • Generating and accepting the Appliance Virtualization Platform host certificates on page 90 • Applying third-party certificates to Appliance Virtualization Platform on page 92 • Managing EASG from CLI on page 97 For Release 8.1.3, added the following sections: • Monitoring team and link status on page 30 • Security Recommendations on page 81 • Appliance Virtualization Platform alarms on page 104
7	July 2020	Updated the section: Configuring servers preinstalled with Appliance Virtualization Platform on page 47
6	March 2020	Updated the section: Appliance Virtualization Platform overview on page 13
5	March 2020	For Release 8.1.2, added the following sections: • Customizing the Appliance Virtualization Platform banner through CLI on page 69 • Configuring log rotation on Appliance Virtualization Platform from CLI on page 70 • Clearing system event logs from CLI on page 103 • Snapshot retention command on page 71 • Enabling snapshot retention time on page 71 • Disabling snapshot retention time on page 72 • Viewing the snapshot retention status on page 72
4	October 2019	Updated the section: Software details of Appliance Virtualization Platform on page 34
3	July 2019	Updated the section: Appliance Virtualization Platform overview on page 13
2	June 2019	Added the section: Accessing the port matrix document on page 125

Table continues...

Issue	Date	Summary of changes
1	June 2019	Release 8.1 document.

Chapter 2: Appliance Virtualization Platform overview

Avaya Aura® Virtualized Appliance overview

Avaya Aura® Virtualized Appliance is a turnkey solution. Avaya provides the hardware, all the software including the VMware hypervisor, and also offers the customer support of the setup.


The Virtualized Appliance offer is different from Avaya Aura® Virtualized Environment, where Avaya provides the Avaya Aura® application software and the customer provides and supports the VMware hypervisor and the hardware on which the hypervisor runs.

Deployment on the Appliance Virtualization Platform server is performed using the System Manager Solution Deployment Manager or the Solution Deployment Manager client.

Appliance Virtualization Platform overview

From Avaya Aura® Release 7.0 and later, Avaya provides the VMware®-based Avaya Aura® Appliance Virtualization Platform to provide virtualization for Avaya Aura® applications. The Appliance Virtualization Platform replaces the System Platform.

Avaya Aura® Appliance Virtualization Platform is the customized OEM version of VMware® ESXi 6.5. With Avaya Aura® Appliance Virtualization Platform, customers can run any combination of supported applications on Avaya-supplied servers. Avaya Aura® Appliance Virtualization Platform provides greater flexibility in scaling customer solutions to individual requirements.

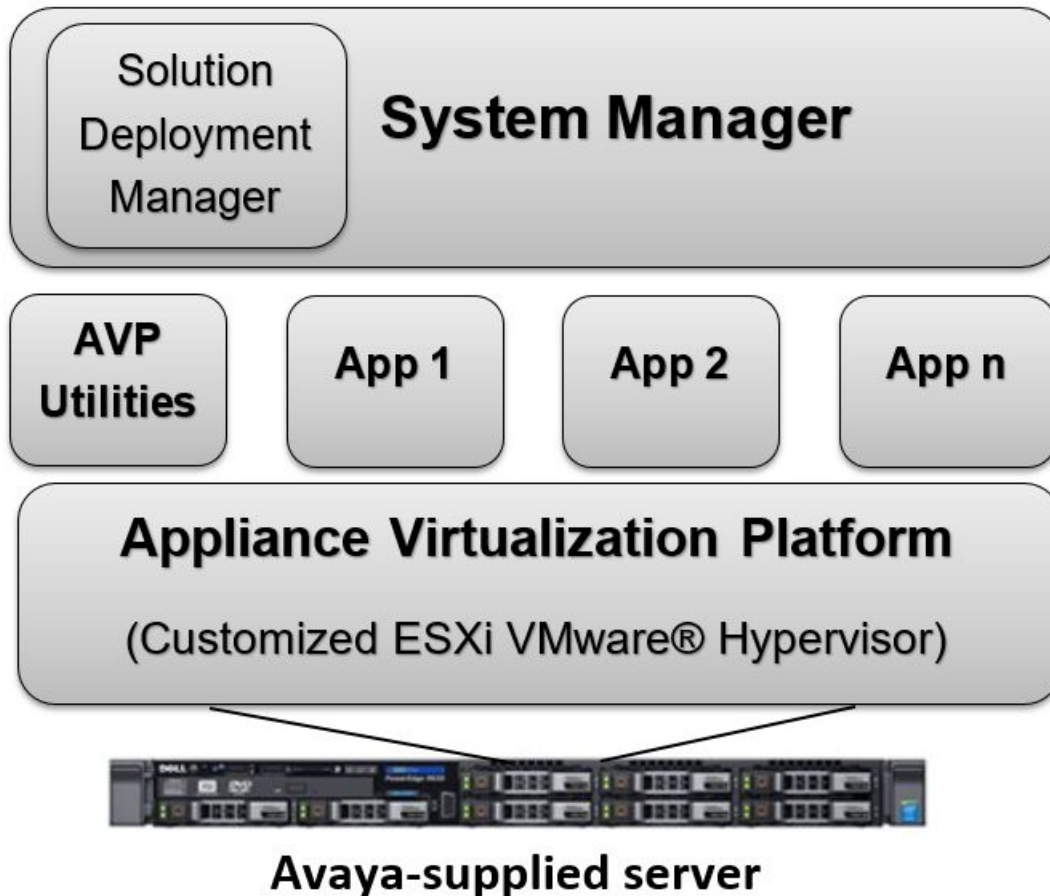

Avaya Aura® Virtualized Appliance offer includes:

- Common Servers: Dell™ PowerEdge™ R620, Dell™ PowerEdge™ R630, HP ProLiant DL360p G8, and HP ProLiant DL360 G9
- Avaya Solutions Platform 120 Appliance: Dell PowerEdge R640
- Avaya S8300E

*** Note:**

- With WebLM Release 7.x and later, you cannot deploy WebLM on S8300E Server running on Avaya Aura® Appliance Virtualization Platform.
- Common Servers using ESXi 6.0 or 6.5 can require more memory than System Platform or ESXi 5.5. For information about Avaya Aura® Appliance Virtualization Platform memory requirements and memory validation process, see PSN027060u and the Avaya Aura® Release Notes on the Avaya Support website.

You can deploy the following applications on Appliance Virtualization Platform:

- AVP Utilities 8.1.3
- System Manager 8.1.3
- Session Manager 8.1.3

- Branch Session Manager 8.1.3
- Communication Manager 8.1.3
- Application Enablement Services 8.1.3
- WebLM 8.1.3
- Communication Manager Messaging 7.0

*** Note:**

Communication Manager Messaging 7.0 is available for upgrades only.

For information about other Avaya product compatibility information, go to <https://support.avaya.com/CompatibilityMatrix/Index.aspx>.

*** Note:**

For deploying Avaya Aura® applications on Appliance Virtualization Platform only use Solution Deployment Manager.

! Important:

Due to Avaya enhanced customizations, Appliance Virtualization Platform (aka Avaya Solutions Platform120) does not support administration on vCenter. For the Appliance Virtualization Platform administration, System Manager and Solution Deployment Manager are the only management platform supported by Avaya.

Besides not being a supported configuration, if vCenter is connected to any appliance running the Appliance Virtualization Platform, the Avaya hypervisor customization and specific data (such as, logins, Datastore and VM information among others) will be overwritten and corrupted. This can result in making the situation unrecoverable and requires complete fresh re-installation of Appliance Virtualization Platform on the appliance.

Solution Deployment Manager

Solution Deployment Manager overview

Solution Deployment Manager is a centralized software management solution in System Manager that provides deployments, upgrades, migrations, and updates to Avaya Aura® applications. Solution Deployment Manager supports the operations on the customer's Virtualized Environment and the Avaya Aura® Virtualized Appliance model.

Solution Deployment Manager provides the combined capabilities that Software Management, Avaya Virtual Application Manager, and System Platform provided in earlier releases.

From Release 7.1 and later, Solution Deployment Manager supports migration of Virtualized Environment-based 6.x, 7.0.x, and 7.1.x applications to Release 8.x and later in the customer's Virtualized Environment. For migrating to Release 8.x, you must use Solution Deployment Manager Release 8.x.

Release 7.0 and later supports a standalone version of Solution Deployment Manager, the Solution Deployment Manager client. For more information, see *Using the Solution Deployment Manager client*.

System Manager with Solution Deployment Manager runs on:

- Avaya Aura® Virtualized Appliance: Contains a server, Appliance Virtualization Platform, and Avaya Aura® application OVA. Appliance Virtualization Platform includes a VMware ESXi 6.5 hypervisor.
- Customer-provided Virtualized Environment solution: Avaya Aura® applications are deployed on customer-provided, VMware® certified hardware.
- Software-Only environment: Avaya Aura® applications are deployed on the customer-owned hardware and the operating system.

With Solution Deployment Manager, you can do the following in Virtualized Environment and Avaya Aura® Virtualized Appliance models:

- Deploy Avaya Aura® applications.
- Upgrade and migrate Avaya Aura® applications.

 Note:

When an application is configured with Out of Band Management, Solution Deployment Manager does not support upgrade for that application.

For information about upgrading the application, see the application-specific upgrade document on the Avaya Support website.

- Download Avaya Aura® applications.
- Install service packs, feature packs, and software patches for the following Avaya Aura® applications:
 - Communication Manager and associated devices, such as gateways, media modules, and TN boards.
 - Session Manager
 - Branch Session Manager
 - AVP Utilities
 - Avaya Aura® Appliance Virtualization Platform, the ESXi host that is running on the Avaya Aura® Virtualized Appliance.

The upgrade process from Solution Deployment Manager involves the following key tasks:

- Discover the Avaya Aura® applications.
- Refresh applications and associated devices and download the necessary software components.
- Run the preupgrade check to ensure successful upgrade environment.
- Upgrade Avaya Aura® applications.
- Install software patch, service pack, or feature pack on Avaya Aura® applications.

For more information about the setup of the Solution Deployment Manager functionality that is part of System Manager 8.1.x, see *Avaya Aura® System Manager Solution Deployment Manager Job-Aid*.

Capability comparison between System Manager Solution Deployment Manager and the Solution Deployment Manager client

Centralized Solution Deployment Manager	Solution Deployment Manager Client
Manage virtual machine lifecycle.	Manage virtual machine lifecycle.
Deploy Avaya Aura® applications.	Deploy Avaya Aura® applications.
Deploy hypervisor patches only for Appliance Virtualization Platform.	Deploy hypervisor patches only for Appliance Virtualization Platform.
Upgrade Avaya Aura® applications. Release 7.x and later support upgrades from Linux-based or System Platform-based applications to Virtualized Environment or Appliance Virtualization Platform. Release 7.1 and later support Virtualized Environment to Virtualized Environment upgrades.	Upgrade System Platform-based and Virtualized Environment-based System Manager.
Install software patches for Avaya Aura® applications excluding System Manager application.	Install System Manager patches.
Discover Avaya Aura® applications.	Deploy System Manager.
Analyze Avaya Aura® applications.	-
Create and use the software library.	-

Solution Deployment Manager Client

For the initial System Manager deployment or when System Manager is inaccessible, you can use the Solution Deployment Manager client. The client must be installed on the computer of the technician. The Solution Deployment Manager client provides the functionality to deploy the OVAs or ISOs on an Avaya-provided server, customer-provided Virtualized Environment, or Software-only environment.

A technician can gain access to the user interface of the Solution Deployment Manager client from the web browser.

Use the Solution Deployment Manager client to:

- Deploy System Manager and Avaya Aura® applications on Avaya appliances, VMware-based Virtualized Environment, and Software-only environment.
- Upgrade System Platform-based System Manager.
- Upgrade VMware-based System Manager from Release 6.x, 7.x, or 8.0.x to Release 8.1 and later.

- Install System Manager software patches, service packs, and feature packs.
- Configure Remote Syslog Profile.
- Create the Appliance Virtualization Platform Kickstart file.
- Install Appliance Virtualization Platform patches.
- Restart and shutdown the Appliance Virtualization Platform host.
- Start, stop, and restart a virtual machine.
- Change the footprint of Avaya Aura® applications that support dynamic resizing. For example, Session Manager and Avaya Breeze® platform.

*** Note:**

- You can deploy or upgrade the System Manager virtual machine only by using the Solution Deployment Manager client.
- You must always use the latest Solution Deployment Manager client for deployment.
- You must use Solution Deployment Manager Client 7.1 and later to create the kickstart file for initial Appliance Virtualization Platform installation or recovery.

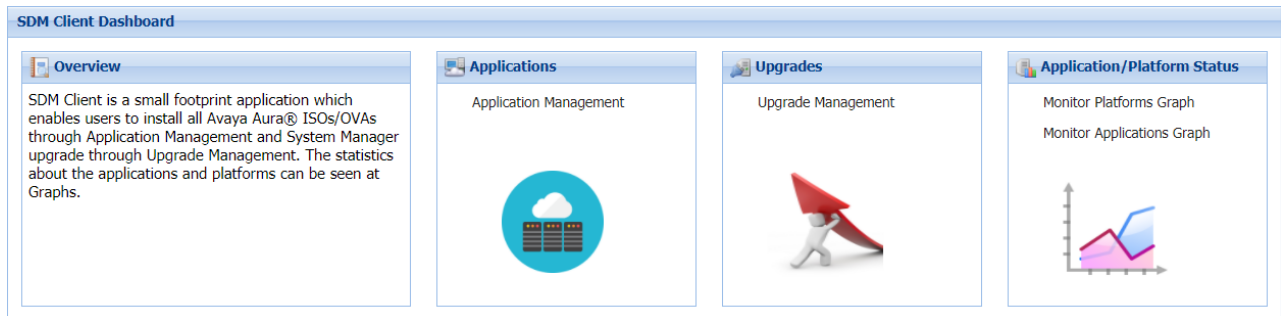


Figure 1: Solution Deployment Manager Client dashboard

Related links

[Solution Deployment Manager client capabilities](#) on page 18

Solution Deployment Manager client capabilities

The Solution Deployment Manager client provides the following capabilities and functionality:

- Runs on the following operating systems:
 - Windows 7, 64-bit Professional or Enterprise
 - Windows 8.1, 64-bit Professional or Enterprise
 - Windows 10, 64-bit Professional or Enterprise
 - Windows Server 2016, 64-bit Professional or Enterprise
- Supports the same web browsers as System Manager.
- Provides the user interface with similar look and feel as the central Solution Deployment Manager in System Manager.

- Supports deployment of System Manager. The Solution Deployment Manager client is the only option to deploy System Manager.
- Supports the Flexible footprint feature. The size of the virtual resources depends on the capacity requirements of Avaya Aura® applications.
- Defines the physical location, Avaya Aura® Appliance Virtualization Platform or ESXi host, and discovers virtual machines that are required for application deployments and virtual machine life cycle management.
- Manages lifecycle of the OVA applications that are deployed on the Avaya Aura® Appliance Virtualization Platform or ESXi host. The lifecycle includes start, stop, reset virtual machines, and establishing trust for virtual machines.

*** Note:**

For the Avaya Aura® Messaging element, trust re-establishment is not required.

- Deploys the Avaya Aura® applications that can be deployed from the central Solution Deployment Manager for Avaya Aura® Virtualized Appliance and customer Virtualized Environment. You can deploy one application at a time.

*** Note:**

- System Manager must be on the same or higher release than the application you are upgrading to. For example, you must upgrade System Manager to 7.1.3.2 before you upgrade Communication Manager to 7.1.3.2.

All the applications that are supported by System Manager do not follow the general Avaya Aura® Release numbering schema. Therefore, for the version of applications that are supported by System Manager, see Avaya Aura® Release Notes on the Avaya Support website.

- Solution Deployment Manager Client must be on the same or higher release than the OVA you are deploying. For example, if you are deploying Communication Manager 7.1.3 OVA, Solution Deployment Manager Client version must be on Release 7.1.3, 7.1.3.1, 7.1.3.2, or 8.0. Solution Deployment Manager Client cannot be on Release 7.1.
- Configures application and networking parameters required for application deployments.
- Supports selecting the application OVA file from a local path or an HTTPS URL. You do not need access to PLDS.
- Supports changing the hypervisor network parameters, such as IP Address, Netmask, Gateway, DNS, and NTP on Appliance Virtualization Platform.
- Supports installing patches for the hypervisor on Appliance Virtualization Platform.
- Supports installing software patches, service packs, and feature packs only for System Manager.

 Note:

To install the patch on System Manager, Solution Deployment Manager Client must be on the same or higher release as the patch. For example, if you are deploying the patch for System Manager Release 7.1.1, you must use Solution Deployment Manager Client Release 7.1.1 or higher.

However, to install the patch on System Manager Release 7.0.x, Solution Deployment Manager Client must be on Release 7.0.x.

Avaya Aura® applications use centralized Solution Deployment Manager from System Manager to install software patches, service packs, and feature packs. For the applications that cannot be patched from centralized Solution Deployment Manager, use the application Command Line Interface or web console.

For more information about supported releases and patching information, see Avaya Aura® Release Notes on the Avaya Support website.

- Configures Remote Syslog Profile.
- Creates the Appliance Virtualization Platform Kickstart file.

Related links

[Solution Deployment Manager Client](#) on page 17

Solution Deployment Manager

Solution Deployment Manager simplifies and automates the deployment and upgrade process.

With Solution Deployment Manager, you can deploy the following applications:

- AVP Utilities 8.1.3
- System Manager 8.1.3
- Session Manager 8.1.3
- Branch Session Manager 8.1.3
- Communication Manager 8.1.3
- Application Enablement Services 8.1.3
- WebLM 8.1.3
- Communication Manager Messaging 7.0

For information about other Avaya product compatibility information, go to <https://support.avaya.com/CompatibilityMatrix/Index.aspx>.

With Solution Deployment Manager, you can migrate, upgrade, and update the following applications:

- Hardware-based Session Manager 6.x

- System Platform-based Communication Manager
 - Duplex CM Main / Survivable Core with Communication Manager
 - Simplex CM Main / Survivable Core with Communication Manager, Communication Manager Messaging, and Utility Services
 - Simplex Survivable Remote with Communication Manager, Branch Session Manager, and Utility Services
 - Embedded CM Main with Communication Manager, Communication Manager Messaging, and Utility Services
 - Embedded Survivable Remote with Communication Manager, Branch Session Manager, and Utility Services
- System Platform-based Branch Session Manager
 - Simplex Survivable Remote with Communication Manager, Branch Session Manager, and Utility Services
 - Embedded Survivable Remote with Communication Manager, Branch Session Manager, and Utility Services


*** Note:**

You must manually migrate the Services virtual machine that is part of the template.

The centralized deployment and upgrade process provides better support to customers who want to upgrade their systems to Avaya Aura® Release 8.1.3. The process reduces the upgrade time and error rate.

Solution Deployment Manager dashboard

You can gain access to the Solution Deployment Manager dashboard from the System Manager web console or by installing the Solution Deployment Manager client.

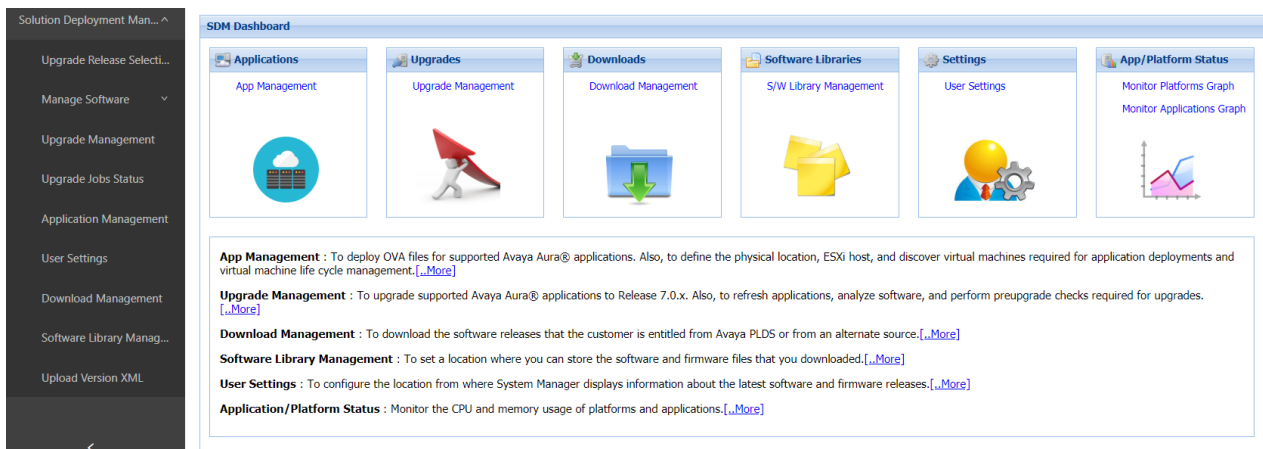

Solution Deployment Manager capabilities

With Solution Deployment Manager, you can perform deployment and upgrade-related tasks by using the following links:

- **Upgrade Release Setting:** To select **Release 7.x Onwards** or **6.3.8** as the target upgrade. Release 8.1.3 is the default upgrade target.

- **Manage Software:** To analyze, download, and upgrade the IP Office, Unified Communications Module, and IP Office Application Server firmware. Also, you can view the status of the firmware upgrade process.
- **Application Management:** To deploy OVA files for the supported Avaya Aura® application.
 - Configure Remote Syslog Profile.
 - Generate the Appliance Virtualization Platform Kickstart file.
- **Upgrade Management:** To upgrade Avaya Aura® applications to Release 8.1.3.
- **User Settings:** To configure the location from where System Manager displays information about the latest software and firmware releases.
- **Download Management:** To download the OVA files and firmware to which the customer is entitled. The download source can be the Avaya PLDS or an alternate source.
- **Software Library Management:** To configure the local or remote software library for storing the downloaded software and firmware files.
- **Upload Version XML:** To save the `version.xml` file to System Manager. You require the application-specific `version.xml` file to perform upgrades.

Chapter 3: Network

Appliance Virtualization Platform networking

Overview

Appliance Virtualization Platform supports both public and management traffic over the same network interface or separation of public and management traffic over separate interfaces. The default configuration is public and management traffic using the same network interface. When you install Appliance Virtualization Platform, the public network of virtual machines is assigned to vmnic0 or Server Ethernet port 1 of the server.

- If the **Out of Band Management Setup** check box is clear on Create AVP Kickstart, the public and management interfaces of virtual machines are assigned on the public network. Assign public and management interfaces of virtual machines on the same network.

The management port of Appliance Virtualization Platform is assigned to the public interface.

- If the **Out of Band Management Setup** check box is selected on Create AVP Kickstart, the public interfaces of virtual machines are assigned to vmnic0 or Server Ethernet port 1, and the Out of Band Management interfaces are assigned to vmnic2 or Server Ethernet port 3. Assign separate network ranges to the public and management interfaces of virtual machines. The management port must be given an appropriate IP address of the public and Out of Band Management network.

The management port of Appliance Virtualization Platform is assigned to the Out of Band Management network.

Note:

All virtual machines on an Out of Band Management enabled Appliance Virtualization Platform host must support and implement Out of Band Management.

The vmnic1 or Server Ethernet port 2 of the server is assigned to the services port.

The internal Appliance Virtualization Platform hypervisor IP address from the services port is 192.168.13.6. After deploying the Appliance Virtualization Platform OVA, launch an SSH client while connected to the services port. Configure your computer for direct connection to the server with the following:

- IP Address: 192.168.13.5
- Subnet Mask: 255.255.255.248
- Gateway: 192.168.13.1

After deploying the AVP Utilities OVA, the services port IP address for the AVP Utilities shell is 192.11.13.6. Configure your computer for direct connection to the server with the following:

- IP address: 192.11.13.5
- Subnet Mask: 255.255.255.252
- Gateway: 192.11.13.6

You can access the AVP Utilities shell by using the IP Address 192.11.13.6.

 Note:

An Avaya Aura® Appliance Virtualization Platform host and all virtual machines running on the host must be on the same subnet mask.

If Out of Band Management is configured in an Avaya Aura® Appliance Virtualization Platform deployment, you need two subnet masks, one for each of the following:

- Public or signaling traffic, Avaya Aura® Appliance Virtualization Platform, and all virtual machines public traffic.
- Management, Avaya Aura® Appliance Virtualization Platform, and all virtual machine management ports.

Common servers

When Appliance Virtualization Platform is installed, VMNIC0 is assigned to the public interface of virtual machines.

When deploying or reconfiguring Appliance Virtualization Platform:

- If the **Out of Band Management Setup** check box is clear on Create AVP Kickstart, VMNIC0 is used for both network and management traffic.
- If the **Out of Band Management Setup** check box is selected on Create AVP Kickstart, VMNIC2 is used for management by all the virtual machines on that hypervisor.

S8300E

When Appliance Virtualization Platform installs the connection through the media gateway, Ethernet ports are assigned to the public interface of virtual machines. When Appliance Virtualization Platform installs the connection through the media gateway backplane, the LAN port on the G4x0 Gateway is assigned to the public interface of virtual machines.

If Out of Band Management is enabled, the Out of Band Management network is on the LAN2 interface on the S8300E faceplate.

The Appliance Virtualization Platform management interface is assigned to:

- The public VLAN if Out of Band Management is disabled
- The Out of Band Management network if Out of Band Management is enabled

Appliance Virtualization Platform NIC ports

Terminology

- The OS VMNIC ports numbering starts from 0 and refers to the NIC ports from the operating system.
- The server NIC ports numbering starts from 1 and refers to the external physical NIC ports.

 Note:

Avaya servers might contain up to 8 NIC ports.

The table provides the first four ports. The numbering continues in the same way for values greater than 4.

NIC port	Server NIC	VMNIC port
First NIC port	Server NIC 1	VMNIC 0 or eth0
Second NIC port	Server NIC 2	VMNIC 1 or eth1
Third NIC port	Server NIC 3	VMNIC 2 or eth2
Fourth NIC port	Server NIC 4	VMNIC 3 or eth3

General

- Appliance Virtualization Platform is installed with a fixed network configuration.

 Important:

Do not change the vSwitch and port group network configuration on Appliance Virtualization Platform. If you change the Appliance Virtualization Platform network configuration, the deployment or the connection to the deployed virtual machines might fail. Solution Deployment Manager maps and creates port groups while deploying the virtual machines as required.

- Appliance Virtualization Platform is installed with a normal or Out of Band Management configuration setup.
- Appliance Virtualization Platform is installed with Out of Band Management disabled or enabled.
 - If you are installing Appliance Virtualization Platform, you can enable Out of Band Management by using the **Out of Band Management Setup** check box on Create AVP Kickstart for generating the kickstart generator file.
 - If the server has Appliance Virtualization Platform preinstalled, Out of Band Management will be disabled. Enable Out of Band Management only if you require.
- Appliance Virtualization Platform is installed on a common server with the following network configuration if Out of Band Management is disabled:
 - Server NIC 1 (VMNIC0): Public and management port. Appliance Virtualization Platform management port is enabled on this Ethernet, and applications are deployed with both Public and Out of Band Management ports assigned to this interface. All IP addresses must be on the same network.
 - Server NIC 2 (VMNIC1): Services Port for use with the technician laptop. Initial Appliance Virtualization Platform installation must use the IP address 192.168.13.5, subnet mask


255.255.255.248. Connections after AVP Utilities is deployed, use the IP address 192.11.13.5, subnet mask 255.255.255.252 with the gateway set as 192.11.13.6.

- Server NIC 3 (VMNIC2): Out of Band Management port. This port is not used in this setup.
- Server NIC 4–8 (VMNIC3–7): Additional network interfaces for virtual machines, such as duplex Communication Manager and Application Enablement Services private interface. These interfaces can be assigned to a free VMNIC of the installers during the virtual machine deployment.
- Server NIC 4–8 (VMNIC 8 and later): Any other Ethernet ports that can be used for NIC teaming.
- Appliance Virtualization Platform is installed on a common server with the following network configuration if Out of Band Management is enabled:
 - Server NIC 1 (VMNIC0): Public port and applications Public VMNICs are deployed to this interface. All public virtual machine IP addresses must be on the same network.
 - Server NIC 2 (VMNIC1): Services Port for use with a technician's laptop. Initial Appliance Virtualization Platform installation must use the IP address 192.168.13.5, subnet mask 255.255.255.248. Connections after AVP Utilities is deployed must use 192.11.13.5, subnet mask 255.255.255.252 with the gateway set as 192.11.13.6.
 - Server NIC 3 (VMNIC2): Out of Band Management port. The Appliance Virtualization Platform management port is assigned to this Ethernet. On virtual machines, application interfaces of Out of Band Management are assigned to this Ethernet. The following IP addresses must be on the same network and different from the Public network:
 - Appliance Virtualization Platform management IP address
 - Out of Band Management network IP address of AVP Utilities
 - Out of Band Management IP address of all virtual machines on this Appliance Virtualization Platform host
 - Server NIC 4–8 (VMNIC3–7): Additional network interfaces for virtual machines to a free VMNIC: During the virtual machine deployment, the installer can assign additional network interfaces for virtual machines to a free VMNIC. Duplex Communication Manager and Application Enablement Services private interfaces require additional network interfaces.
 - Server NIC 4–8 (VMNIC 8 and later): Any other Ethernet ports that can be used for NIC teaming.


You can change the Out of Band Management state after deployment with the `set_oobm` command after you install 7.0.1 on the Appliance Virtualization Platform host. You must perform the configuration through the Services Port on the Appliance Virtualization Platform system and in a very specific order to prevent losing connection to the virtual machines other than is expected during the process.

You must enable Out of Band Management on all virtual machines running on the Appliance Virtualization Platform host. On the same Appliance Virtualization Platform host, you cannot run some virtual machines with Out of Band Management enabled and some with Out of Band Management disabled. Out of Band Management must be enabled from the `ks.cfg` file on the USB stick or on the Appliance Virtualization Platform by using the `set_oobm` command from the Appliance Virtualization Platform shell.

AVP networking in normal or Out of Band Management disabled mode

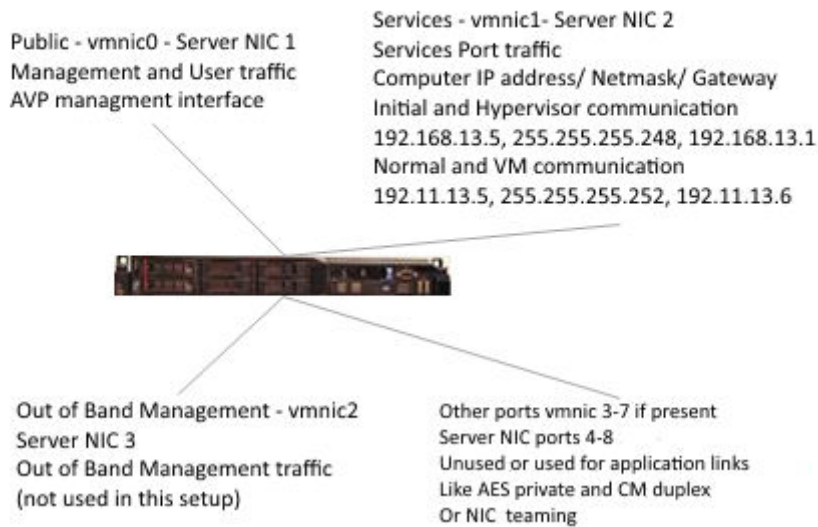

AVP networking Out of Band Management enabled

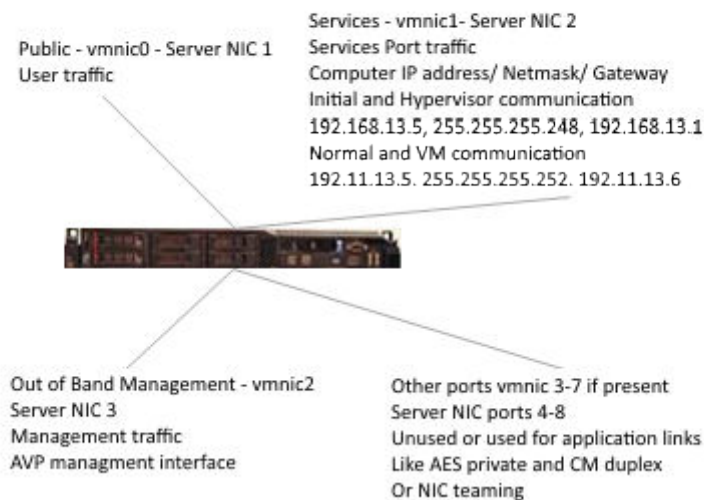

Teaming NICs from CLI

About this task

You can configure the NIC teaming and NIC speeds on Appliance Virtualization Platform from the web interface of the Solution Deployment Manager client and System Manager Solution Deployment Manager. For more information, see *Administering Avaya Aura® System Manager*.

Avaya recommends the use of Solution Deployment Manager web interface for configuring the NIC settings.

With Appliance Virtualization Platform, you can team NICs together to provide a backup connection when the server NIC or the Ethernet switch fails. You can also perform NIC teaming from the command line on Appliance Virtualization Platform.

Appliance Virtualization Platform supports Active-Standby and Active-Active modes of NIC teaming. For more information, see “NIC teaming modes”.

You cannot perform NIC teaming for S8300E server.

Procedure

1. Log in to the Appliance Virtualization Platform host command line, and type `# /opt/avaya/bin/nic_teaming list`.

The system displays the current setup of the system, and lists all vmnics.

For example:

```
Current Setup:
Name: vSwitch0
Uplinks: vmnic0
Name: vSwitch1
Uplinks: vmnic1
Name: vSwitch2
Uplinks: vmnic2
List of all vmnics on host:
vmnic0
vmnic1
vmnic2
vmnic3
```

2. To add a free vmnic to a vSwitch, type `# /opt/avaya/bin/nic_teaming add <vmnic> <vSwitch>`.

The command changes the links to the active standby mode.

For example, to add eth3 to the public virtual switch, type `# /opt/avaya/bin/nic_teaming add vmnic3 vSwitch0`. To verify the addition of eth3, type `esxcli network vswitch standard policy failover get -v vSwitch0`.

The system displays the following message:

```
Load Balancing: srcport
Network Failure Detection: link
Notify Switches: true
Failback: true
Active Adapters: vmnic0
Standby Adapters: vmnic3
Unused Adapters:
```

3. To add eth3 to the list of active adapters, type `# esxcli network vswitch standard policy failover set -v vSwitch0 --active-uplinks vmnic0,vmnic3`.

The command changes the vmnic3 to the active mode.

4. To verify the mode of eth3, type `# esxcli network vswitch standard policy failover get -v vSwitch0`.

The system displays the following message:

```
Load Balancing: srcport
Network Failure Detection: link
Notify Switches: true
Failback: true
Active Adapters: vmnic0, vmnic3
Standby Adapters:
Unused Adapters:
```

5. To remove a vmnic from a vSwitch, type # `/opt/avaya/bin/nic_teaming remove <vmnic> <vSwitch>`.
6. To move an additional vmnic back to standby mode, type # `esxcli network vswitch standard policy failover set -v vSwitch0 --active-uplinks vmnic0 --standby-uplinks vmnic3`

This puts the additional NIC back to standby mode.

7. To verify if the vmnic is moved to standby, type # `esxcli network vswitch standard policy failover get -v vSwitch0`.

The system displays the following:

```
Load Balancing: srcport
Network Failure Detection: link
Notify Switches: true
Failback: true
Active Adapters: vmnic0
Standby Adapters: vmnic3
Unused Adapters:
```



Warning:

The management and virtual machine network connections might be interrupted if you do not use correct network commands. Do not remove or change vmnic0, vmnic1, and vmnic2 from vSwitches or active modes.

Related links

[NIC teaming modes](#) on page 29

NIC teaming modes

Appliance Virtualization Platform supports two modes of NIC teaming: Active-Standby and Active.

Active-Standby

In normal operation all the traffic goes through the active NIC setup. If this connection fails, the other standby link is activated and all the traffic uses the standby link. The settings for active and standby setup are:

- Network failover detection: Link status only
- Notify Switches: Yes

- Failback: Yes. If the active NIC becomes available again, you can use the active NIC over the standby NIC.

Active-Active

This is an active setup that uses route based load balancing based on the originating virtual port ID. This is a basic form of load balancing that may not provide full capacity of both links.

- Load Balancing: Route based on the originating virtual port ID
- Network failover detection: Link status only
- Notify Switches: Yes
- Failback : Yes

Monitoring team and link status

If one of the vmnic interfaces of a team goes down indicating that the server is currently running with only one interface, then the Appliance Virtualization Platform sends a real-time alarm.

If both the vmnic interfaces of a team are down indicating entire team is down, then the Appliance Virtualization Platform sends a critical alarm.

If the issue is fixed and the link is restored, then the Appliance Virtualization Platform clears the alarms.

Related links

[Enabling or disabling alarms in NIC teaming](#) on page 30

[NIC teaming alarms description](#) on page 31

Enabling or disabling alarms in NIC teaming

Before you begin

Ensure that the NIC teaming is configured and ethernet cables are connected for both the vmnic interfaces in the team. For information, see [Teaming NICs from CLI](#) on page 27.

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line.
3. To enable the NIC teaming alarms, type the `/opt/avaya/bin/set_linkmonitor enable` command.

*** Note:**

- It takes around 10 minutes for **cimMonitor** service to come up and start running. Once the **cimMonitor** starts running, it continuously monitors for any vmnic's link status change.
- Before enabling the NIC teaming alarm, if one of the vmnic's cable is not connected, the service does not raise an alarm as the service only monitors link status changes. When the cable is removed, an alarm is raised instantaneously, and when cable is connected back, alarm clears instantaneously.
- You can enable the NIC teaming alarms for a team of 2 vmnics only.

Appliance Virtualization Platform restarts the **cimMonitor** service.

4. To disable the NIC teaming alarms, type the `/opt/avaya/bin/set_linkmonitor disable` command.

Related links

[NIC teaming alarms description](#) on page 31

NIC teaming alarms description

Alarm ID	Severity	Description
NIC_Team_DEGRADED	Minor	This alarm is generated when NIC teaming is configured, and the link is lost, where one of the NICs in the team goes down.
NIC_TEAM_FAULT	Critical	This alarm is generated when NIC teaming is configured and links of both the NICs in the team goes down.
NIC_TEAM_CLEAR	Cleared	This alarm is generated when NIC teaming is configured and links of both the NICs in the team come up.

Setting the Ethernet port speed

About this task

Avaya recommends that the Appliance Virtualization Platform server, Ethernet ports, and the switch ports to which the ports are connected must be set to auto-negotiate on both the server and the customer network switch.

! Important:

Use the procedure only if you must change the Ethernet port speeds. Incorrect setting of Ethernet NIC speeds might result in performance issues or loss of network connection to the system.

You cannot change the Ethernet port speed for the S8300E server.

Procedure

1. Log in to the Appliance Virtualization Platform host command line.
2. To list vmnics, type `#/opt/avaya/bin/nic_port list`.
You must provide the full path.
3. To set a port to 1000 Mbps full duplex, type `/opt/avaya/bin/nic_port set <100|1000> <vmnic>`.

Where 100 or 1000 is the speed in Mbps, and vmnic is the vmnic number. For example, vmnic0 for the public interface of the server.

*** Note:**

Half duplex and 10 Mbps speeds are not supported for use with Appliance Virtualization Platform. Use 100 Mbps only in specific instances, such as while replacing a server that was previously running at 100Mbps. All NIC ports must be connected to the network at least 1Gbps speeds. Most server NICs support 1Gbps.

4. Type `#/opt/avaya/bin/nic_port set auto vmnic`.

*** Note:**

The default setting for ports is autonegotiate. You do not require to configure the speed in normal setup of the system.

Supported TLS version

Appliance Virtualization Platform Release 7.1 and later supports the TLS version 1.2. By default, TLS versions 1.0 and 1.1 are disabled, but you can enable, if required.

Chapter 4: Planning and preconfiguration

Configuration tools and utilities

You must have the following tools and utilities for deploying, upgrading, and configuring Appliance Virtualization Platform:

- A browser for accessing Appliance Virtualization Platform by using the System Manager web interface
- A Solution Deployment Manager client running on your computer if System Manager is unreachable
- An SFTP client for Windows, for example WinSCP
- An SSH client, for example, PuTTY

Supported servers

In the Avaya appliance model, you can deploy or upgrade to Avaya Aura® Release 8.1.3 applications on the following Avaya-provided servers:

- Dell™ PowerEdge™ R620
- HP ProLiant DL360p G8
- Dell™ PowerEdge™ R630
- HP ProLiant DL360 G9
- S8300E, for Communication Manager and Branch Session Manager
- Avaya Solutions Platform 120 Appliance: Dell PowerEdge R640

 Note:

- Avaya Aura® Release 8.0 and later does not support S8300D, Dell™ PowerEdge™ R610, and HP ProLiant DL360 G7 servers.
- Avaya Aura® Release 7.0 and later does not support S8510 and S8800 servers.

For fresh installations, use Avaya Solutions Platform 120 Appliance: Dell PowerEdge R640.

Software details of Appliance Virtualization Platform

For Avaya Aura® application software build details, see Avaya Aura® Release Notes on the Avaya Support website at <http://support.avaya.com/>.

Installing the Solution Deployment Manager client on your computer

About this task

In Avaya Aura® Virtualized Appliance offer, when the centralized Solution Deployment Manager on System Manager is unavailable, use the Solution Deployment Manager client to deploy the Avaya Aura® applications.

You can use the Solution Deployment Manager client to install software patches of only System Manager and hypervisor patches of Appliance Virtualization Platform.

Use the Solution Deployment Manager client to deploy, upgrade, and update System Manager.

From Avaya Aura® Appliance Virtualization Platform Release 7.0, Solution Deployment Manager is mandatory to upgrade or deploy the Avaya Aura® applications.

Procedure

1. Download the `Avaya_SDMClient_win64_8.1.3.0.1035538_49.zip` file from the Avaya Support website at <http://support.avaya.com> or from the Avaya PLDS website, at <https://plds.avaya.com/>.
2. On the Avaya Support website, click **Support by Products > Downloads**, and type the product name as **System Manager**, and Release as **8.1.x**.
3. Click the **Avaya Aura® System Manager Release 8.1.x SDM Client Downloads, 8.1.x** link. Save the zip file, and extract to a location on your computer by using the WinZip application.

You can also copy the zip file to your software library directory, for example, `c:/tmp/Aura`.

4. Right click on the executable, and select **Run as administrator** to run the `Avaya_SDMClient_win64_8.1.3.0.1035538_49.exe` file.

The system displays the Avaya Solution Deployment Manager screen.

5. On the Welcome page, click **Next**.
6. On the License Agreement page, read the License Agreement, and if you agree to its terms, click **I accept the terms of the license agreement** and click **Next**.

7. On the Install Location page, perform one of the following:

- To install the Solution Deployment Manager client in the system-defined folder, leave the default settings, and click **Next**.

If the `C:\Program Files\Avaya\AvayaSDMClient` directory is not empty, the installer displays the following message: To install the SDM client, select an empty directory or manually delete the files from the installation directory.

If the file is locked and you are unable to delete it, reboot the machine, and then delete the file.

- To specify a different location for installing the Solution Deployment Manager client, click **Choose**, and browse to an empty folder. Click **Next**.

To restore the path of the default directory, click **Restore Default Folder**.

The default installation directory of the Solution Deployment Manager client is `C:\Program Files\Avaya\AvayaSDMClient`.

8. On the Pre-Installation Summary page, review the information, and click **Next**.

9. On the User Input page, perform the following:

- a. To start the Solution Deployment Manager client at the start of the system, select the **Automatically start SDM service at startup** check box.
- b. To change the default software library directory on windows, in Select Location of Software Library Directory, click **Choose** and select a directory.

The default software library of the Solution Deployment Manager client is `C:\Program Files\Avaya\AvayaSDMClient\Default_Artifacts`.

You can save the artifacts in the specified directory.

- c. In **Data Port No**, select the appropriate data port.

The default data port is 1527. The data port range is from 1527 through 1627.

- d. In **Application Port No**, select the appropriate application port.

The default application port is 443. If this port is already in use by any of your application on your system, then the system does not allow you to continue the installation. You must assign a different port number from the defined range. The application port range is from 443 through 543.

 Note:

After installing the Solution Deployment Manager client in the defined range of ports, you cannot change the port after the installation.

- e. **(Optional)** Click **Reset All to Default** to reset all values to default.

10. Click **Next**.

11. On the Summary and Validation page, verify the product information and the system requirements.

The system performs the feasibility checks, such as disk space and memory. If the requirements are not met, the user must make the required disk space, memory, and the ports available to start the installation process again.

12. Click **Install**.

13. On the Install Complete page, click **Done** to complete the installation of Solution Deployment Manager Client.

Once the installation is complete, the installer automatically opens the Solution Deployment Manager client in the default web browser and creates a shortcut on the desktop.

14. To start the client, click the Solution Deployment Manager client icon, .

Next steps

- Configure the laptop to get connected to the services port if you are using the services port to install.
- Connect the Solution Deployment Manager client to Appliance Virtualization Platform through the customer network or services port.

For information about “Methods to connect the Solution Deployment Manager client to Appliance Virtualization Platform”, see *Using the Solution Deployment Manager client*.

Chapter 5: Appliance Virtualization Platform deployment and configuration

Appliance Virtualization Platform deployment

You can deploy Appliance Virtualization Platform in two modes: Unattended and Attended.

- **Unattended mode:** In this mode, you need to save a copy of the Appliance Virtualization Platform 8.1 kickstart file (`avp81ks.cfg`) in a USB drive. The USB must be in the FAT32 format. You need to insert the USB drive and the Appliance Virtualization Platform DVD into the server. The system will perform the Appliance Virtualization Platform deployment.

You can generate the kickstart file (`avp81ks.cfg`) from Solution Deployment Manager.

- **Attended mode:** With Appliance Virtualization Platform Release 7.1.2 and later, this is a new mode of deployment. In this mode, you need to insert the Appliance Virtualization Platform DVD into the server and follow the prompt to deploy Appliance Virtualization Platform.

The Appliance Virtualization Platform DVD contains the `firstboot.sh` script. After the Appliance Virtualization Platform installation, the default path of the script is `/opt/avaya/bin/firstboot.sh`.

Appliance Virtualization Platform deployment in unattended mode

Generating the Appliance Virtualization Platform kickstart file Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In the lower pane, click **Generate AVP Kickstart**.

3. On Create AVP Kickstart, perform the following:

- a. Select **8.1**.
- b. Enter the appropriate information in the fields.
- c. Click **Generate Kickstart File**.

For more information, see “Create AVP Kickstart field descriptions.”

The system prompts you to save the generated kickstart file on your local computer.

For Appliance Virtualization Platform Release 8.1 and later, the kickstart file name must be `avp81ks.cfg`.

Related links

[Create AVP Kickstart field descriptions](#) on page 38

Create AVP Kickstart field descriptions

Name	Description
Choose AVP Version	The field to select the release version of Appliance Virtualization Platform.
Dual Stack Setup (with IPv4 and IPv6)	Enables or disables the fields to provide the IPv6 addresses. The options are: • yes: To enable the IPv6 format. • no: To disable the IPv6 format.
AVP Management IPv4 Address	IPv4 address for the Appliance Virtualization Platform host.
AVP IPv4 Netmask	IPv4 subnet mask for the Appliance Virtualization Platform host.
AVP Gateway IPv4 Address	IPv4 address of the customer default gateway on the network. Must be on the same network as the Host IP address.
AVP Hostname	Hostname for the Appliance Virtualization Platform host. The hostname: • Can contain alphanumeric characters and hyphen • Can start with an alphabetic or numeric character • Must contain at least 1 alphabetic character • Must end in an alphanumeric character • Must contain 1 to 63 characters
AVP Domain	Domain for the Appliance Virtualization Platform host. If customer does not provide the host, use the default value. Format is alphanumeric string dot separated. For example, mydomain.com.
IPv4 NTP server	IPv4 address or FQDN of customer NTP server. Format is x.x.x.x or ntp.mycompany.com

Table continues...

Name	Description
Secondary IPv4 NTP Server	Secondary IPv4 address or FQDN of customer NTP server. Format is x.x.x.x or ntp.mycompany.com.
Main IPv4 DNS Server	Main IPv4 address of customer DNS server. One DNS server entry in each line. Format is x.x.x.x.
Secondary IPv4 DNS server	Secondary IPv4 address of customer DNS server. Format is x.x.x.x. One DNS server entry in each line.
AVP management IPv6 address	IPv6 address for the Appliance Virtualization Platform host.
AVP IPv6 prefix length	IPv6 subnet mask for the Appliance Virtualization Platform host.
AVP gateway IPv6 address	IPv6 address of the customer default gateway on the network. Must be on the same network as the Host IP address.
IPv6 NTP server	IPv6 address or FQDN of customer NTP server.
Secondary IPv6 NTP server	Secondary IPv6 address or FQDN of customer NTP server.
Main IPv6 DNS server	Main IPv6 address of customer DNS server. One DNS server entry in each line.
Secondary IPv6 DNS server	Secondary IPv6 address of customer DNS server. One DNS server entry in each line.
Public vLAN ID (Used on S8300E only)	VLAN ID for the S8300E server. If the customer does not use VLANs, leave the default value as 1. For any other server type, leave as 1. The range is 1 through 4090. Use Public VLAN ID only on the S8300E server.
Out of Band Management Setup	The check box to enable or disable Out of Band Management for Appliance Virtualization Platform. If selected the management port connects to eth2 of the server, and applications can deploy in the Out of Band Management mode. The options are: • yes: To enable Out of Band Management The management port is connected to eth2 of the server, and applications can deploy in the Out of Band Management mode. • no: To disable Out of Band Management. The default option.
OOBM vLAN ID (Used on S8300E only)	• For S8300E, use the front plate port for Out of Band Management • For common server, use eth2 for Out of Band Management.
AVP Super User Admin Password	Admin password for Appliance Virtualization Platform. The password must contain at least 8 characters and can include alphanumeric characters and @!\$. You must make a note of the password because you require the password to register to System Manager and the Solution Deployment Manager client.
Confirm Password	Admin password for Appliance Virtualization Platform.

Table continues...

Name	Description
Enable Stricter Password (14 char pass length)	The check box to enable or disable the stricter password. The password must contain at least 14 characters.
Validity in Days (Used on AVP Certificate)	The number of days for the Appliance Virtualization Platform certificate validation. The maximum limit for the certificate validation is 825 days. You can configure from 1 through 825 days.
WebLM IP/FQDN	The IP Address or FQDN of WebLM Server.
WebLM Port Number	The port number of WebLM Server. The default port is 52233.

Button	Description
Generate Kickstart File	Generates the Appliance Virtualization Platform kickstart file and the system prompts you to save the file on your local computer.

Related links

[Generating the Appliance Virtualization Platform kickstart file](#) on page 37

Configuring the Appliance Virtualization Platform USB drive

Before you begin

Use the USB drive that Avaya provides in the media kit for this procedure. The provided USB is a FAT 32 format. If you must use a different USB, use a FAT 32 format file.

Procedure

1. Generate the Appliance Virtualization Platform kickstart file by using Solution Deployment Manager.
2. Save a copy of `avp81ks.cfg` on the USB drive.

Next steps

Install Appliance Virtualization Platform.

Deploying Appliance Virtualization Platform on same or different hardware

Before you begin

- Configure the Appliance Virtualization Platform USB drive.
- Ensure that the backup file is saved on a different server because, after the Appliance Virtualization Platform installation, the server restarts, and all data is lost.
- To use the Solution Deployment Manager client for deploying the virtual machines, install the Solution Deployment Manager client on your computer.

 Note:

To deploy the Appliance Virtualization Platform server while connected to the customer network, ensure that the IP address used for Appliance Virtualization Platform is not in use by another system. If the configured IP address is already in use on the network during installation, the deployment process stops. You must remove the duplicate IP address and restart the deployment.

Procedure

1. Insert the USB drive and the Appliance Virtualization Platform DVD into the server.

Use an external Avaya-approved USB DVD drive for deploying the Appliance Virtualization Platform on S8300E. The only supported USB DVD drive is Digistor DIG-72032, Digistor DIG73322, and comcode 700406267.

2. Perform one of the following:

- For a new deployment, reboot or power-cycle the server.
- For migrating from System Platform to Appliance Virtualization Platform, log on to the System Platform web console, and click **Server Management > Server Reboot/Shutdown > Reboot** to restart the server.

 Warning:

When the server restarts, the Appliance Virtualization Platform is deployed, and all existing data on the server is lost.

The system deploys the Appliance Virtualization Platform and ejects DVD. The deployment process takes about 30 minutes to complete.

 Note:

If using a monitor, the screen changes to black before the deployment is complete. A message in red text might briefly display, which is expected. Do not take any action.

3. Remove the USB drive and Appliance Virtualization Platform DVD.

 Note:

When installing the Appliance Virtualization Platform on an HP server, you must remove the USB drive when the server ejects DVD. Otherwise, the server might become nonoperational on reboot. If the server becomes nonoperational, remove the USB drive, and restart the server.

4. Using an SSH client, connect to the server through the eth1 services port by using the following network parameters for your system:

- IP address: 192.168.13.5
- Netmask: 255.255.255.248
- Gateway: 192.168.13.1

The SSH client must use UTF-8 and TLS 1.2. Alternatively, you can connect to the public network address configured during the installation from a computer on the customer network.

You can access the Appliance Virtualization Platform host with IP address: 192.168.13.6.

5. Log in to Appliance Virtualization Platform as admin and provide the password configured in the Kickstart file.

The system displays the End user license agreement (EULA) screen.

6. Read the EULA, and type `Y` to accept the terms.

You can press any key to read EULA and use the space bar to scroll down.

 Warning:

Accept EULA before you deploy virtual machines. If deployments are attempted before you accept EULA, deployments fail.

7. At the **Connecting AVP to a VMware vCenter is not authorized** prompt, type `Y`.

 Warning:

You must enter, `Y` to proceed. Otherwise, the system considers that you are not accepting the EULA.

8. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.

9. Add a location.

10. Add the Appliance Virtualization Platform host as 192.168.13.6.

11. Install the Appliance Virtualization Platform patch, if applicable.

For more information, see Installing the Appliance Virtualization Platform patch from Solution Deployment Manager.

12. Perform one of the following:

- For deploying on new server, deploy the AVP Utilities virtual machine, and then all other virtual machines.
- For migrating from System Platform Server to Appliance Virtualization Platform, deploy the AVP Utilities virtual machine, and then all other virtual machines with the data that you noted in “System Platform and Template values”.

For instructions to deploy AVP Utilities and other virtual machines, see *Deploying Avaya Aura® AVP Utilities* and product-specific deployment guides.

13. From System Manager Solution Deployment Manager, install the required software patches for the virtual machines.

Appliance Virtualization Platform deployment in attended mode

Deploying Appliance Virtualization Platform using a setup script

About this task

This procedure is applicable only for the Avaya Common Servers and is not applicable for the S8300E server.

Before you begin

- Configure the laptop for direct connection to the server.
- Obtain the Appliance Virtualization Platform DVD.

Procedure

1. Connect the VGA console and USB keyboard from server to computer.
2. Turn on the server.
3. Insert the Appliance Virtualization Platform DVD into the server DVD drive.

The server starts from the DVD.

4. On the avaya-avp Boot Menu window, select **NO USB avaya-avp Installer**, and press `Enter`.

Wait for ESXi to boot. This takes several minutes.

5. To start the deployment, on the Welcome to the VMware ESXi 6.5.0 Installation window, press `Enter`.
6. On the End user License Agreement (EULA) window, select EULA, and press `F11`.
7. On the Select a Disk to Install or Upgrade window, select the correct hard drive is selected, and press `Enter`.

The system displays a Confirm Disk Selection message.

8. To confirm the disk selection, press `Enter`.
9. **(Optional)** If the system displays the option to upgrade or install, use arrow keys to select Install ESXi, overwrite VMFS datastore, and press `Enter`.

This will delete all data on the drive.

10. On the Please select a keyboard layout window, select the layout type, and press `Enter`.
11. On the Enter a root password window, type the root password, and press `Enter`.

The system displays a message for scanning the system. This takes several minutes.

12. To install ESXi 6.5.0, on the Confirm Install window, press `F11`.

When the system completes the deployment, the system displays the Installation Complete window.

13. Remove the Appliance Virtualization Platform DVD.
14. To reboot the system, press `Enter`.

The system displays the Rebooting Server window. The system shuts down and reboots the server. The system displays the host IP address as 0.0.0.0.

Next steps

Assign IP address.

Host IP address assignment

The ESXi uses DHCP to assign a local IP address to eth0. If the action fails, you can assign the IP address using the System Customization window.

Assigning host IP address using System Customization

Procedure

1. On the console, press `F2`.
The system prompts you to provide the credentials that you configured during installation to connect to localhost.
2. On the Authentication Required window, in the **Login Name** and **Password** fields, type the credentials.
3. On the System Customization window, use the arrow key to select **Configure Management Network**.
4. Use the arrow key to select **IP Configuration**, and press `Enter`.
IP Address must be different from your computer IP address.
5. In the **Netmask** field, type the netmask IP address.
6. Press `Enter`.

Configuring the Appliance Virtualization Platform network and other parameters

Procedure

1. Log in to the ESXi host as root using the link local IP address.
2. To execute the script, run the command `/opt/avaya/bin/firstboot.sh`.

The system prompts you to configure the network parameters.

3. Specify the required parameters in the fields.

For specifying the required parameters, see “Network parameters field descriptions”.

4. After entering the values, the system displays a message: `Is this what you want?`
5. Type `y`.

The system displays a message: `Reconfiguration started..`

Wait for the host to reboot. On the console, the system displays the host IP address that you configured.

6. The system prompts you to enable or disable the stricter password policy. To enable stricter password policy, type `y`.

The system displays the following message:

```
For security concern, root account will be locked out after AVP
installation. A new 'admin' account will be created.
YOU WILL BE ASKED TO ENTER PASSWORD FOR NEW 'admin' ACCOUNT!
```

7. Type the new password, which meets the password policy chosen at step 6.
8. At the **Can you log onto this system using 'admin' account** prompt, type one of the following:
 - `y`: If the new password works, the system disables the root account and creates a new admin account.
 - `n`: If the new password does not work, the system prompts you to retype the password for the new admin account.

Related links

[Network parameters field descriptions](#) on page 45

[Enable Stricter Password Policy field descriptions](#) on page 46

Network parameters field descriptions

Name	Description
IP Address	Specifies the IP address of Appliance Virtualization Platform.
Netmask	Specifies the netmask.
Gateway	Specifies the gateway IP address.
Hostname	Specifies the host name of Appliance Virtualization Platform.
Domain (Optional)	Specifies the domain name.
(Optional) Primary DNS Server	Specifies the primary DNS server IP address.
(Optional) Secondary DNS server	Specifies the secondary DNS server IP address.

Table continues...

Name	Description
NTP Server	Specifies the NTP server IP address.
Enable OOBM	Enables or disables the Out of Band Management configuration. The values are <code>y</code> and <code>n</code> . Default value is <code>n</code> .

Related links

[Configuring the Appliance Virtualization Platform network and other parameters](#) on page 44

Enable Stricter Password Policy field descriptions

Name	Description
Enable Stricter Password Policy	Enables or disables the stricter password policy. The default value is <code>n</code>. • <code>n</code>: If you set the value to <code>n</code>, the minimum password length is 8. • <code>y</code>: If you set the value to <code>y</code>, the minimum password length is 14.

Related links

[Configuring the Appliance Virtualization Platform network and other parameters](#) on page 44

Configuring IPv6 using System Customization**Procedure**

1. On the console, press `F2`.
The system prompts you to provide the credentials that you configured during installation to connect to localhost.
2. On the Authentication Required window, in the **Login Name** and **Password** fields, type the credentials.
3. On the System Customization window, use the arrow key to select **IP Configuration**, and press `Enter`.
4. On the IPv6 Configuration dialog box, in the **Static Address #1** field, type the IPv6 address.
For example: `2a07:2a42:xyz0:20::27::145/46`
5. Press `Enter`.

Configuring servers preinstalled with Appliance Virtualization Platform

About this task

For newly purchased common servers, the Appliance Virtualization Platform is preinstalled. This does not apply for migration. You must configure the customer network settings through the Solution Deployment Manager client installed on a computer that is running Windows. The media comes with the server.

Procedure

1. Turn on the server.
2. Install the Solution Deployment Manager client on the computer.
3. Configure the computer with the following:
 - IP address: 192.168.13.5
 - Netmask: 255.255.255.248
 - Gateway: 192.168.13.1
4. Connect to NIC2 with a network cable.
5. Start an SSH session, log in to 192.168.13.6 with admin credentials.

The system prompts to change the password immediately.

6. To change the admin password, perform the following:
 - a. At the prompt, type the Appliance Virtualization Platform default password: AVaya@01
 - b. Type the new password.

For more information about password rules, see “Password policy”.
 - c. Type the password again.

The system changes the host password.

7. To accept the EULA, in **Do you accept the terms of this EULA? (Y)es/(N)o**, type Y.
8. At the **Connecting AVP to a VMware vCenter is not authorized** prompt, type Y.

Warning:

You must enter, Y to proceed. Otherwise, the system considers that you are not accepting the EULA.

9. At the **A VM that requires >32 vCPUs deployment option is available to this system** prompt, type Y to install a virtual machine on Appliance Virtualization Platform, which requires more than 32 vCPUs.

 Note:

This option appears if the server has more than 32 vCPUs. Some application might require this configuration based on the number of CPU requirements. For example, Session Manager Profile 6 footprint requires greater than 32 vCPUs.

If you do not need this configuration, type **N** and proceed to the next step. The system takes the appropriate license based on the entered values.

10. At the **Enhanced Access Security Gateway (EASG)** prompt, read the following messages, and type one of the following:

Enable: (Recommended)

By enabling Avaya Logins you are granting Avaya access to your system.

This is necessary to maximize the performance and value of your Avaya support entitlements, allowing Avaya to resolve product issues in a timely manner.

In addition to enabling the Avaya Logins, this product should be registered with Avaya and technically onboarded for remote connectivity and alarming. Please see the Avaya support site (support.avaya.com/registration) for additional information for registering products and establishing remote access and alarming.

Disable:

By disabling Avaya Logins you are preventing Avaya access to your system.

This is not recommended, as it impacts Avaya's ability to provide support for the product. Unless the customer is well versed in managing the product themselves, Avaya Logins should not be disabled.

- a. 1: To enable EASG.

Avaya recommends to enable EASG.

You can also enable EASG after deploying or upgrading the application by using the command: **EASGManage --enableEASG**.

- b. 2: To disable EASG.

11. Type `cd /opt/avaya/bin`.

Not all commands are available in the `/opt/avaya/bin` location, and must be run with `./`. For example, `./nic_port`. The system only runs the commands that are specified in the procedure from `/opt/avaya/bin` or as directed by Avaya Services. The system might get incorrectly configured if you run commands that are not specified in the procedure.

Most systems do not enable Out of Band Management. Use the `/opt/avaya/bin/set_oobm enable` command only to enable Out of Band Management for the host and all virtual machines.

12. **(Optional)** To enable Out of Band Management on the Appliance Virtualization Platform host, type `/opt/avaya/bin/set_oobm enable`.

The system displays Host Out of Band Management set up is complete.

13. At the prompt, do the following:

- a. Type `/opt/avaya/bin/./serverInitialNetworkConfig`.

The host IP address details are mandatory. Though DNS and NTP values are optional, you must provide the values.

- b. At the prompt, provide the following host details:

```
System is not in a default setup, please use SDM to change IP addresses
Do you wish to setup networking? (y/n) y
Please enter IP address for the AVP host in the format x.x.x.x
For example 172.16.5.1
Please enter value      172.16.107.21
Please enter subnet mask for the AVP host in the format x.x.x.x
For example 255.255.255.0
Please enter value      255.255.255.0
Please enter a default gateway for the AVP host in the format x.x.x.x
For example 172.16.5.254
Please enter value      172.16.107.1
Please enter a hostname for the AVP host.
For example myhost
Please enter value      avphost
Please enter a domain for the AVP host.
For example mydomain.com
Please enter value      mydomain.com
Please enter a main DNS server for the AVP host.
For example 172.16.10.54
Please enter value      172.16.107.1
Please enter a secondary DNS server for the AVP host.
For example 172.16.10.54
Please enter value      172.16.107.2
Please enter a NTP server for the AVP host
For example 172.16.10.55
Please enter value      172.16.107.50
Stopping ntpd
watchdog-ntpd: Terminating watchdog process with PID 33560
Starting ntpd
```

14. To verify the vmk0 settings, type `esxcli network ip interface ipv4 get`.

*** Note:**

Do not change the vmk1s address. vmk1s is fixed for the services port.

The system displays the following details:

Name	IPv4 Address	IPv4 Netmask	IPv4 Broadcast	Address Type	DHCP DNS
vmk1	192.168.13.6	255.255.255.248	192.168.13.7	STATIC	false
vmk0	172.16.107.21	255.255.255.0	172.16.107.255	STATIC	false

15. Start the Solution Deployment Manager client when connected to the services port.

16. Add a location.

17. Add the Appliance Virtualization Platform host as 192.168.13.6.

18. Check the version, and install the Release 8.1.3 feature pack on Appliance Virtualization Platform if required.

19. Install an Appliance Virtualization Platform host license and configure the WebLM Server address by using System Manager Solution Deployment Manager or Solution Deployment Manager Client, if it has not been configured in [step 11](#) on page 49.

For information about installing and configuring Appliance Virtualization Platform license, see “Installing and configuring Appliance Virtualization Platform licensing”.

20. Deploy AVP Utilities.
21. Deploy other Avaya Aura® applications that will reside on this Appliance Virtualization Platform host.
22. Install the Release 8.1.3 patch files for all Avaya Aura® applications, if applicable.

Related links

[Password policy](#) on page 51

Enabling IP forwarding using Services Port VM for AVP Utilities

About this task

IP Forwarding is always disabled after an installation, regardless of the mode of deployment. Use the following procedure to enable IP Forwarding.

Note:

For security reasons, you must always disable IP forwarding after finishing your task.

Procedure

1. Start an SSH session.
2. Log in to AVP Utilities as admin.
3. In the command line, perform one of the following:
 - To enable IP forwarding, type `IP_Forward enable`.
 - To disable IP forwarding, type `IP_Forward disable`.
 - To view the status of IP forwarding, type `IP_Forward status`.

Example

```
IP_Forward enable
Enabling IP Forwarding
Looking for net.ipv4.ip_forward in /etc/sysctl.conf
Status of IP Forwarding
..Enabled
```

Password policy

The password must meet the following requirements:

- Must contain at least eight characters.
- Must contain at least one of each: an uppercase letter, a lowercase letter, a numerical, and a special character.
- Must not contain an uppercase letter at the beginning and a digit at the end.

 Note:

An Uppercase letter at the beginning of a password is not counted for the password complexity rule. The Uppercase letter must be within the password.

Example of a valid password is *myPassword\$*.

If the password does not meet the requirements, the system prompts you to enter a new password. Enter the existing password and the new password in the correct fields.

Ensure that you keep the admin password safe. You need the password while adding the host to Solution Deployment Manager and for troubleshooting.

Activating SSH from AVP Utilities

About this task

For security purpose, SSH access to Appliance Virtualization Platform shuts down in the normal operation. You must activate SSH on Appliance Virtualization Platform.

When you install or preinstall Appliance Virtualization Platform on a server, SSH is enabled. After you accept the license terms during Appliance Virtualization Platform installation, SSH shuts down within 24 hours. After SSH shuts down, you must reactivate SSH by using the **AVP_SSH enable** command from AVP Utilities.

Before you begin

Start an SSH session.

Procedure

1. Log in to the AVP Utilities virtual machine running on Appliance Virtualization Platform with administrator privilege credentials.
2. Type the following:

```
AVP_SSH enable
```

Within 3 minutes, from AVP Utilities, the SSH service starts on Appliance Virtualization Platform and runs for two hours. After two hours, you must reactivate SSH from AVP Utilities.

When SSH is enabled, you can use an SSH client such as PuTTY to gain access to Appliance Virtualization Platform on customer management IP address or the services port IP address of 192.168.13.6.

3. **(Optional)** To find the status of SSH, type `AVP_SSH status`.
4. To disable SSH, type `AVP_SSH disable`.

Enabling and disabling SSH on Appliance Virtualization Platform from Solution Deployment Manager

About this task

For security purpose, SSH access to Appliance Virtualization Platform shuts down in the normal operation. To continue access, enable the SSH service on Appliance Virtualization Platform from Solution Deployment Manager.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In **Application Management Tree**, select a location.
3. Select an Appliance Virtualization Platform host.
4. To enable SSH, do the following:
 - a. Click **More Actions > SSH > Enable SSH**.
 - b. In the Confirm dialog box, in the **Time (in minutes)** field, type the time after which the system times out the SSH connection.
The range is 10 minutes through 120 minutes.
 - c. Click **Ok**.
The system displays `enabled` in the **SSH status** column.
5. To disable SSH, click **More Actions > SSH > Disable SSH**.
The system displays `disabled` in the **SSH status** column.

Chapter 6: Administration

Managing the location

Viewing a location

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. Click the Locations tab.

The Locations section lists all locations.

Adding a location

About this task

You can define the physical location of the host and configure the location specific information. You can update the information later.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. On the **Locations** tab, in the Locations section, click **New**.
3. In the New Location section, perform the following:
 - a. In the Required Location Information section, type the location information.
 - b. In the Optional Location Information section, type the network parameters for the virtual machine.
4. Click **Save**.

The system displays the new location in the **Application Management Tree** section.

Related links

[New and Edit location field descriptions](#) on page 54

Editing the location

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. On the **Locations** tab, in the Locations section, select a location that you want to edit.
3. Click **Edit**.
4. In the Edit Location section, make the required changes.
5. Click **Save**.

Related links

[New and Edit location field descriptions](#) on page 54

Deleting a location

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. On the **Locations** tab, in the Locations section, select one or more locations that you want to delete.
3. Click **Delete**.
4. In the Delete confirmation dialog box, click **Yes**.

The system does not delete the applications that are running on the platform and moves the platform to **Unknown location Platform mapping**.

New and Edit location field descriptions

Required Location Information

Name	Description
Name	The location name.
Avaya Sold-To #	The customer contact number. Administrators use the field to check entitlements.
Address	The address where the host is located.
City	The city where the host is located.
State/Province/Region	The state, province, or region where the host is located.

Table continues...

Name	Description
Zip/Postal Code	The zip code of the host location.
Country	The country where the host is located.

Optional Location Information

Name	Description
Default Gateway	The IP address of the virtual machine gateway. For example, 172.16.1.1.
DNS Search List	The search list of domain names.
DNS Server 1	The DNS IP address of the primary virtual machine. For example, 172.16.1.2.
DNS Server 2	The DNS IP address of the secondary virtual machine. For example, 172.16.1.4.
NetMask	The subnet mask of the virtual machine.
NTP Server	The IP address or FQDN of the NTP server. Separate the IP addresses with commas (,).

Button	Description
Save	Saves the location information and returns to the Locations section.
Edit	Updates the location information and returns to the Locations section.
Delete	Deletes the location information, and moves the host to the Unknown location section.
Cancel	Cancels the add or edit operations, and returns to the Locations section.

Adding an Appliance Virtualization Platform or ESXi host

About this task

Use the procedure to add an Appliance Virtualization Platform or ESXi host. You can associate an ESXi host with an existing location.

If you are adding a standalone ESXi host to System Manager Solution Deployment Manager or to the Solution Deployment Manager client, add the standalone ESXi host using its FQDN only.

Note:

You can add a VMware ESXi host in Solution Deployment Manager only if Standard or Enterprise VMware license is applied on the VMware ESXi host.

If VMware vSphere Hypervisor Free License is applied on the VMware ESXi host or VMware ESXi host is in evaluation period, you cannot add that VMware ESXi host in Solution Deployment Manager.

Solution Deployment Manager only supports the Avaya Aura® Appliance Virtualization Platform and VMware ESXi hosts. If you try to add another host, the system displays the following error message:

```
Retrieving host certificate info is failed: Unable to communicate with
host. Connection timed out: connect. Solution Deployment Manager only
supports host management of VMware-based hosts and Avaya Appliance
Virtualization Platform (AVP).
```

Before you begin

Add a location.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. Click **Application Management**.
3. In **Application Management Tree**, select a location.
4. On the **Platforms** tab, in the Platforms for Selected Location <location name> section, click **Add**.
5. In the New Platform section, do the following:
 - a. Provide details of Platform name, Platform FQDN or IP address, user name, and password.

For Appliance Virtualization Platform and VMware ESXi deployment, you can also provide the root user name.
 - b. In **Platform Type**, select **AVP/ESXi**.
 - c. If you are connected through the services port, set the Platform IP address of Appliance Virtualization Platform to 192.168.13.6.
6. Click **Save**.
7. In the Certificate dialog box, click **Accept Certificate**.

The system generates the certificate and adds the Appliance Virtualization Platform host. For the ESXi host, you can only accept the certificate. If the certificate is invalid, Solution Deployment Manager displays the error. To generate certificate, see VMware documentation.

In the Application Management Tree section, the system displays the new host in the specified location. The system also discovers applications.

8. To view the discovered application details, such as name and version, establish trust between the application and System Manager doing the following:
 - a. On the **Applications** tab, in the Applications for Selected Location <location name> section, select the required application.
 - b. Click **More Actions > Re-establish connection**.

For more information, see “Re-establishing trust for Solution Deployment Manager elements”.

- c. Click **More Actions > Refresh App**.

 Important:

When you change the IP address or FQDN of the Appliance Virtualization Platform host from the local inventory, you require AVP Utilities. To get the AVP Utilities application name during the IP address or FQDN change, refresh AVP Utilities to ensure that AVP Utilities is available.

9. On the **Platforms** tab, select the required platform and click **Refresh**.

Next steps

After adding a new host under Application Management Tree, the **Refresh Platform** operation might fail to add the virtual machine entry under **Manage Element > Inventory**. This is due to the absence of **Application Name** and **Application Version** for the virtual machines discovered as part of the host addition. After adding the host, do the following:

1. In Application Management Tree, establish trust for all the virtual machines that are deployed on the host.
2. Ensure that the system populates the **Application Name** and **Application Version** for each virtual machine.

Changing the network parameters for an Appliance Virtualization Platform host

About this task

Use this procedure to change the network parameters of Appliance Virtualization Platform after deployment. You can change network parameters only for the Appliance Virtualization Platform host.

 Note:

If you are connecting to Appliance Virtualization Platform through the public management interface, you might lose connection during the process. Therefore, after the IP address changes, close Solution Deployment Manager, and restart Solution Deployment Manager by using the new IP address .

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> section, select an Appliance Virtualization Platform host and click **Change Network Params > Change Host IP Settings**.

4. In the Host Network/ IP Settings section, change the IP address, subnet mask, and other parameters as appropriate.

 Note:

An Avaya Aura® Appliance Virtualization Platform host and all virtual machines running on the host must be on the same subnet mask.

If Out of Band Management is configured in an Avaya Aura® Appliance Virtualization Platform deployment, you need two subnet masks, one for each of the following:

- Public or signaling traffic, Avaya Aura® Appliance Virtualization Platform, and all virtual machines public traffic.
- Management, Avaya Aura® Appliance Virtualization Platform, and all virtual machine management ports.

5. To change the gateway IP address, do the following:

- a. Click **Change Gateway**.

The **Gateway** field becomes available for providing the IP address.

- b. In **Gateway**, change the IP address.

- c. Click **Save Gateway**.

6. Click **Save**.

The system updates the Appliance Virtualization Platform host information.

Changing the network settings for an Appliance Virtualization Platform host from Solution Deployment Manager

About this task

With Appliance Virtualization Platform, you can team NICs together to provide a backup connection when the server NIC or the Ethernet switch fails. You can also perform NIC teaming from the command line on Appliance Virtualization Platform.

Appliance Virtualization Platform supports Active-Standby and Active-Active modes of NIC teaming. For more information, see “NIC teaming modes”.

 Note:


- If you add a host with service port IP address in Solution Deployment Manager and change the IP address of the host to the public IP address by using Host Network/ IP Settings, the system updates the public IP address in the database. Any further operations that you perform on the host fail because the public IP address cannot be reached with the service port. To avoid this error, edit the host with the service port IP address again.

- If FQDN of the Appliance Virtualization Platform host is updated by using Host Network/IP setting for domain name, refresh the host so that the FQDN changes reflect in Solution Deployment Manager.

Use this procedure to change network settings, such as changing VLAN ID, NIC speed, and manage NIC team for an Appliance Virtualization Platform host.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> area, select an Appliance Virtualization Platform host.
4. Click **Change Network params > Change Network Settings**.

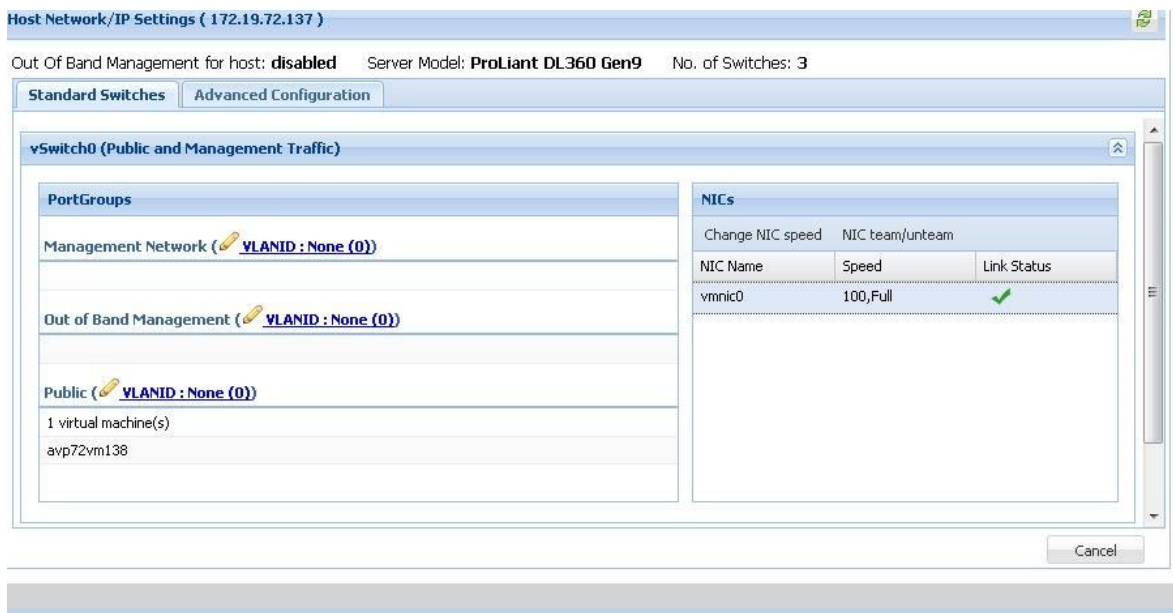

The Host Network/ IP Settings page displays the number of switches as 4.

You can configure port groups for the following switches:

- **vSwitch0**, reserved for the Public and Management traffic.
- **vSwitch1**, reserved for services port. You cannot change the values.
- **vSwitch2**, reserved for Out of Band Management.
- **vSwitch3**. No reservations.
- **vSwitch4**. No reservations.
- **vSwitch5**. No reservations.

5. To change VLAN ID, click **Standard Switches**, and perform the following:

- a. Expand the vSwitch<n> section by clicking the downward arrow .

The section displays the vSwitch details.

- b. Click on the VLANID link or the edit icon (.

The system displays the Port Group Properties page where you can edit the VLAN ID port group property.

- c. In **VLAN ID**, select an ID.

For more information about the value, see NIC teaming.

- d. Click **OK**.

The system displays the new VLAN ID.

6. To change the NIC speed, click **Standard Switches**, and perform the following:

- a. Ensure that the system displays a vmnic in the **NIC Name** column.

- b. Click **Change NIC speed**.

The system displays the selected vmnic dialog box.

- c. In **Configured speed, Duplex**, click a value.

- d. Click **OK**.

For more information, see VLAN ID assignment.

The system displays the updated NIC speed in the **Speed** column.

If the NIC is connected, the system displays a check mark  in **Link Status**.

 Note:

You can change the speed only for common servers. You cannot change the speed for the S8300E server.

7. To change the NIC teaming, click **Standard Switches**, and perform the following:

- a. Select a vmnic.

- b. Click **NIC team/unteam**.

The system displays the Out of Band Management Properties page.

- c. To perform NIC teaming or unteaming, select the vmnic, and click **Move Up** or **Move Down** to move the vmnic from **Active Adapters**, **Standby Adapters**, or **Unused Adapters**.

For more information, see “NIC teaming modes”.

- d. Click **OK**.

The vmnic teams or unteams with **Active Adapters**, **Standby Adapters**, or **Unused Adapters** as required.

- e. To check the status of the vmnic, click **NIC team/unteam**.
8. To get the latest data on the host network IP settings, click **Refresh** .

The system displays the current status of the vmnic.

*** Note:**

You cannot perform NIC teaming for the S8300E server.

Related links

[Host Network / IP Settings field descriptions](#) on page 65

Changing the IP address and default gateway of the host

About this task

When you change the default gateway and IP address from the vSphere web client, the change might be unsuccessful.

You cannot remotely change the IP address of the Appliance Virtualization Platform host to a different network. You can change the IP address remotely only within the same network.

To change the Appliance Virtualization Platform host to a different network, perform Step 2 or Step 3.

Before you begin

Connect the computer to the services port.

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. At the command prompt of the host, do the following:

- a. To change the IP address, type the following:

```
esxcli network ip interface ipv4 set -i vmk0 -I <old IP address of the host>
-N <new IP address of the host> -t static
```

For example:

```
esxcli network ip interface ipv4 set -i vmk0 -I 135.27.162.121 -N 255.255.25
5.0 -t static
```

- b. To change the default gateway, type `esxcfg-route <new gateway IP address>`.

For example:

```
esxcfg-route 135.27.162.1
```

4. Enable SSH on Appliance Virtualization Platform and run the `/opt/avaya/bin/./serverInitialNetworkConfig` command.

For more information, see *Configuring servers preinstalled with Appliance Virtualization Platform*.

Related links

[Configuring servers preinstalled with Appliance Virtualization Platform](#) on page 47

Enabling or disabling IPv6

About this task

Use the following procedure to convert the IPv4 host system to IPv6.

Procedure

1. Start an SSH session and log in to the Appliance Virtualization Platform host.
2. To enable IPv6, do the following:
 - a. Type the `/opt/avaya/bin/set_dualstack enable` command.
 - b. Type the IPv6 address with subnet length.
 - c. Type the IPv6 gateway address.
 - d. To add the IPv6 capable DNS servers, type the IPv6 address of DNS Server.
The default value is `n`.
 - e. To add the IPv6 capable NTP servers, type the IPv6 address of NTP Server.
The default value is `n`.
3. To disable IPv6, type the `/opt/avaya/bin/set_dualstack disable` command.

Changing the password for an Appliance Virtualization Platform host

About this task

Use this procedure to change the password for the Appliance Virtualization Platform host. This is the password for the administrator that you provide when deploying the Appliance Virtualization Platform host.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.

2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> section, do the following:
 - a. Select a host.
 - b. Click **More Actions > Change Password**.
4. In the Change Password section, type the current password and the new password.
For more information about password rules, see “Password policy”.
5. Click **Change Password**.

The system updates the password of the Appliance Virtualization Platform host.

Related links

[Password policy](#) on page 51

Shutting down the Appliance Virtualization Platform host

About this task

You can perform the shutdown operation on one Appliance Virtualization Platform host at a time. You cannot schedule the operation.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> area, select an Appliance Virtualization Platform host.
4. Click **More Actions > Lifecycle Action > Host Shutdown**.

The Appliance Virtualization Platform host and virtual machines shut down.

Shutting down Appliance Virtualization Platform host from CLI

About this task

From Solution Deployment Manager, shut down the virtual machines that are running on the host.

Procedure

1. Start an SSH session and log in to the Appliance Virtualization Platform host.
2. At the prompt, type `/opt/avaya/bin/avpshutdown.sh`.
The system displays `Are you sure you want to stop all VMs and shutdown?`
3. To confirm the shutdown operation, type `Y`.

The system shuts down Appliance Virtualization Platform host, and stops all virtual machines running on the Appliance Virtualization Platform host. The host does not restart automatically.

You must manually turn on the Appliance Virtualization Platform server. All virtual machines running on Appliance Virtualization Platform automatically start.

Restarting Appliance Virtualization Platform or an ESXi host

About this task

The restart operation fails, if you restart the host on which System Manager itself is running. If you want to restart the host, you can do this either through vSphere Web Client or through the Solution Deployment Manager client.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> area, select a platform.
4. Click **More Actions > Lifecycle Action > Host Restart**.
5. On the confirmation dialog box, click **Yes**.

The system restarts the host and virtual machines running on the host.

Related links

[Restarting Appliance Virtualization Platform or an ESXi host](#) on page 64

Rebooting the Appliance Virtualization Platform host from CLI

Before you begin

From Solution Deployment Manager, shut down the virtual machines that are running on the host.

Procedure

1. Start an SSH session and log in to the Appliance Virtualization Platform host.
2. At the prompt, type `/opt/avaya/bin/avpshutdown.sh -r`.

The system displays `Are you sure you want to stop all VMs and reboot?.`

Warning:

If you fail to provide the `-r` option, the system displays `Are you sure you want to stop all VMs and shutdown?` and assumes that you want to perform the shutdown operation.

If you use the shutdown option when reset is intended, the host does not restart as part of the process and you must manually start the server.

3. To confirm the reboot operation, type `Y`.

The system stops all virtual machines that are running on the Appliance Virtualization Platform host. The Appliance Virtualization Platform host reboots and restarts all virtual machines automatically.

Host Network / IP Settings field descriptions

Standard Switches

vSwitch <n> displays the PortGroups and NICs sections.

PortGroups

Name	Description
 or VLAN ID link	Displays the Port Group Properties page where you configure VLAN ID.
VLAN ID	Displays the VLAN ID. The options are: • None (0) • 1 to 4093 The field displays only unused IDs.

Button	Description
OK	Saves the changes.
Cancel	Returns to the Platforms tab.

NICs

Name	Description
NIC Name	Displays the name of the NIC. For example, vmnic0.
Speed	Displays the speed of the NIC. For example, 100,Full.
Link Status	Displays the status of the NIC.

Button	Description
Change NIC speed	Displays the vmnic<n> dialog box.
NIC team/unteam	Displays the Out of Band Management Properties vSwitch<n> dialog box.

NIC speed

Name	Description
Configured speed, Duplex	Displays the NIC speed. The options are: • Autonegotiate • 10,Half • 10,Full • 100,Half • 100,Full • 1000,Full

Button	Description
OK	Saves the changes.

NIC teaming

Button	Description
Move Up	Moves the VMNIC from unused adapters to standby or active adapters or from standby to active adapter.
Move Down	Moves the VMNIC from active to standby adapter or from standby to unused adapter.
Refresh	Refreshes the page.
OK	Saves the changes.

Advanced Configuration

Displays the Unused PortGroups section.

Name	Description
Port Group	Displays the port group.
Virtual Switch	Displays the virtual switch.

Button	Description
Delete	Deletes the selected port group.
Cancel	Returns to the Platforms tab.

Change Network Parameters field descriptions

Network Parameters

Name	Description
Name	The name of the Appliance Virtualization Platform host. The field is display-only.
IPv4	The IPv4 address of the Appliance Virtualization Platform host.
Subnet Mask	The subnet mask of the Appliance Virtualization Platform host.
IPv6	The IPv6 address of the Appliance Virtualization Platform host (if any).
Host Name	The host name of the Appliance Virtualization Platform host
Domain Name	The domain name of the Appliance Virtualization Platform host
Preferred DNS Server	The preferred DNS server
Alternate DNS Server	The alternate DNS server
NTP Server1 IP/FQDN	The NTP Server1 IP address of the Appliance Virtualization Platform host.
NTP Server2 IP/FQDN	The NTP Server2 IP address of the Appliance Virtualization Platform host.
IPv4 Gateway	The gateway IPv4 address. The field is available only when you click Change IPv4 Gateway .

Table continues...

Name	Description
IPv6 Default Gateway	The default gateway IPv6 address (if any). The field is available only when IPv6 has been configured for the system. The user, also needs to click Change IPv6 Gateway .

Button	Description
Change IPv4 Gateway	Makes the IPv4 Gateway field available, and displays Save IPv4 Gateway and Cancel IPv4 Gateway Change buttons.
Change IPv6 Gateway	Makes the IPv6 Default Gateway field available, and displays Save IPv6 Default Gateway and Cancel IPv6 Default Gateway Change buttons.
Save IPv4 Gateway	Saves the gateway IPv4 address value that you provide.
Cancel IPv4 Gateway Change	Cancels the changes made to the IPv4 gateway.
Save IPv6 Default Gateway	Saves the default IPv6 gateway address value that you provide.
Cancel IPv6 Default Gateway Change	Cancels the changes made to the IPv6 default gateway.

Button	Description
Save	Saves the changes that you made to network parameters.

Change Password field descriptions

Name	Description
Current Password	The password for the user you input when adding the host.
New Password	The new password
Confirm New Password	The new password

Button	Description
Change Password	Saves the new password.

AVP and AVPU alarming

The Serviceability Agent that runs on AVP Utilities generates SNMP alarm messages for Appliance Virtualization Platform (AVP) and Avaya Aura® AVP Utilities (AVPU). The alarm messages are then sent to the System Manager or Network Management System (NMS) depending on the configuration. Serviceability Agent converts specific rsyslog entries to SNMP traps.

You can configure the destination of alarm messages by using one of the following:

- The System Manager web console.
- AVP Utilities.

 Note:

If System Manager does not exist in the solution, then you can configure NMS by using AVP Utilities.

Customizing the Appliance Virtualization Platform banner through CLI

About this task

You can use the following procedure to customize the login banner of the Appliance Virtualization Platform host and Direct Console User Interface (DCUI) of an ESXi host.

Procedure

1. Enable SSH on Appliance Virtualization Platform by using either AVP Utilities or Solution Deployment Manager Client.
2. Create the `<banner>.txt` file with your custom message.
3. Copy the `<banner>.txt` file to the `/tmp/` directory of Appliance Virtualization Platform by using SCP.
4. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
5. Type the following command:

```
/opt/avaya/bin/set_banner /tmp/<banner>.txt
```

On successful execution of the command, Appliance Virtualization Platform displays the following message:

```
Banner is replaced successfully.
```

6. To verify that Appliance Virtualization Platform displays the newly customized Appliance Virtualization Platform banner, do the following:
 - a. Log out of the Appliance Virtualization Platform CLI.

- b. Log in to the Appliance Virtualization Platform CLI.

On the login screen, Appliance Virtualization Platform displays the message that you added in the `<banner>.txt` file.

- c. Type the following command:

```
dcui
```

Appliance Virtualization Platform displays the message that you added in the `<banner>.txt` file.

Configuring log rotation on Appliance Virtualization Platform from CLI

About this task

Use the following procedure to rotate and delete the older system log files when the newly generated log files reach to the configured file size limit. This helps the system to avoid the out of disk space situation.

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. Type the following command:

```
esxcli system syslog config set --default-rotate n --default-size m
```

Where, `<n>` is the number of log files that you can rotate and `m` is the file size of log files in KB.

Options are:

- **--default-rotate:** To set the number of log files.
- **--default-size:** To set the file size of log files.

For example, to configure the log rotation file size to 100Kb and number of log files to 10 after which the system deletes the older log file, type the following command:

```
esxcli system syslog config set --default-rotate 10 --default-size 100
```

Snapshot retention command

Using the `/opt/avaya/bin/snap_retention` command you can enable, disable, and view the status of the snapshot retention.

Syntax

```
/opt/avaya/bin/snap_retention [enable <no. of days> | disable | status]
```

enable <no. of days>	Enables the snapshot retention time. Appliance Virtualization Platform retains the application snapshot for the configured time.
disable	Disables the snapshot retention feature.
status	Displays the status of the snapshot retention.

Enabling snapshot retention time

About this task

When you enable and configure the snapshot retention time, Appliance Virtualization Platform retains the application snapshot for the configured time. Appliance Virtualization Platform starts generating the snapshot alarm two days prior to the configured snapshot retention time. Once the number of configured days expires, Appliance Virtualization Platform automatically deletes the expired snapshot.

Procedure

Type `/opt/avaya/bin/snap_retention enable <number of days>`.

The number of days value must be from 1 through 30 days.

When you enable snapshot retention time for a certain day, Appliance Virtualization Platform performs a check and if an snapshot already exists that has crossed the retention period that you have just configured, Appliance Virtualization Platform displays the list of existing snapshots with **Snap_Name** and **Create Time**. Appliance Virtualization Platform prompts you if you want to proceed with current configuration and displays the message that the system will not retain the listed snapshot.

For example, if you have to configure the snapshot retention time for 10 days, type the following command:

```
/opt/avaya/bin/snap_retention enable 10
```

Appliance Virtualization Platform enables the snapshot retention time and displays the following message:

```
Snapshot Auto-deletion is enabled. Retention period is 10 days.
```

Disabling snapshot retention time

Procedure

Type `/opt/avaya/bin/snap_retention disable`.

Appliance Virtualization Platform disables the snapshot retention feature and displays the following message:

```
Snapshot Auto-deletion is disabled.
```

If snapshot retention time is disabled, Appliance Virtualization Platform generates an alarm if the system has snapshot that are older than one week.

Viewing the snapshot retention status

Procedure

Type `/opt/avaya/bin/snap_retention status`.

Appliance Virtualization Platform displays the status of the snapshot retention feature.

Chapter 7: Installing and configuring Appliance Virtualization Platform licensing

Appliance Virtualization Platform license

From Appliance Virtualization Platform Release 7.1.2, you must install an applicable Appliance Virtualization Platform host license file on an associated Avaya WebLM server and configure Appliance Virtualization Platform to obtain its license from the WebLM server. WebLM Server can be either embedded System Manager WebLM Server or standalone WebLM Server. Appliance Virtualization Platform licenses are according to the supported server types.

For information about Appliance Virtualization Platform licenses and supported server types, see “Appliance Virtualization Platform licenses for supported servers”.

To configure the Appliance Virtualization Platform license file:

1. Obtain the applicable license file from the Avaya PLDS website.
2. Install the license file on the System Manager WebLM Server or Standalone WebLM Server.

 Note:

The Appliance Virtualization Platform license file can contain multiple Appliance Virtualization Platform licenses that is for four different server types. One Appliance Virtualization Platform license file contains all the necessary licenses for the complete solution.

3. Configure the applicable **WebLM IP Address/FQDN** field for each Appliance Virtualization Platform host by using either System Manager Solution Deployment Manager, Solution Deployment Manager Client, or Appliance Virtualization Platform host command line interface.

You can view the license status of the Appliance Virtualization Platform host on the **Platforms** tab of the System Manager Solution Deployment Manager or Solution Deployment Manager Client interfaces. The Appliance Virtualization Platform license statuses on the **Platforms** tab are:

- **Normal:** If the Appliance Virtualization Platform host has acquired a license, the **License Status** column displays **Normal**.
- **Error:** If the Appliance Virtualization Platform host has not acquired a license. In this case, the Appliance Virtualization Platform enters the License Error mode and starts a 30-day

grace period. The **License Status** column displays **Error - Grace period expires: <DD/MM/YY> <HH:MM>**.

- **Restricted:** If the 30-day grace period of the Appliance Virtualization Platform license expires, Appliance Virtualization Platform enters the License Restricted mode and restricts the administrative actions on the host and associated virtual machines. The **License Status** column displays **Restricted**. After you install a valid Appliance Virtualization Platform license on the configured WebLM Server, the system restores the full administrative functionality.

 Note:

Restricted administrative actions for:

- **AVP Host: AVP Update/Upgrade Management, Change Password, Host Shutdown, and AVP Cert. Management.**
- **Application: New, Delete, Start, Stop, and Update.**

Appliance Virtualization Platform licensing alarms

If the Appliance Virtualization Platform license enters either License Error Mode or License Restricted Mode, the system generates a corresponding Appliance Virtualization Platform licensing alarm. You must configure the Appliance Virtualization Platform alarming. For information about how to configure the Appliance Virtualization Platform alarming feature, see *Administering Avaya Aura® AVP Utilities*.

Appliance Virtualization Platform licenses for supported servers

The following table describes the applicable Appliance Virtualization Platform license type for S8300E and Common Server Release 2 and 3:

Server type	Appliance Virtualization Platform license feature keyword	Appliance Virtualization Platform license feature display name
• Avaya S8300E	VALUE_AVP_1CPU_EMBD_SRV R	Maximum AVP single CPU Embedded Servers
Common Server Release 2 • HP ProLiant DL360p G8 • Dell™ PowerEdge™ R620 Common Server Release 3 • Dell™ PowerEdge™ R630 • HP ProLiant DL360 G9	• VALUE_AVP_1CPU_CMN_SRV R • VALUE_AVP_2CPU_CMN_SRV R	• Maximum AVP single CPU Common Servers • Maximum AVP dual CPU Common Servers

Table continues...

Server type	Appliance Virtualization Platform license feature keyword	Appliance Virtualization Platform license feature display name
Common Server Release 3 • Dell™ PowerEdge™ R630 • HP ProLiant DL360 G9	VALUE_AVP_XL_SRVR	Maximum AVP XL Server

The following table describes the applicable Appliance Virtualization Platform license type for Avaya Solutions Platform 120 Server:

Avaya Solutions Platform 120 Appliance: Dell PowerEdge R640	Appliance Virtualization Platform license feature keyword	Appliance Virtualization Platform license feature display name
Profile 2	VALUE_AVP_1CPU_CMN_SRVR	Maximum AVP single CPU Common Servers
Profile 3	• VALUE_AVP_2CPU_CMN_SRVR • VALUE_AVP_XL_SRVR	• Maximum AVP dual CPU Common Servers • Maximum AVP XL Server
Profile 4	VALUE_AVP_1CPU_CMN_SRVR	Maximum AVP single CPU Common Servers
Profile 5	• VALUE_AVP_2CPU_CMN_SRVR • VALUE_AVP_XL_SRVR	• Maximum AVP dual CPU Common Servers • Maximum AVP XL Server

WebLM overview

Avaya provides a Web-based License Manager (WebLM) to manage licenses of one or more Avaya software products for your organization. WebLM facilitates easy tracking of licenses. To track and manage licenses in an organization, WebLM requires a license file from the Avaya Product Licensing and Delivery System (PLDS) website at <https://plds.avaya.com>.

The license file of a software product is in an XML format. The license file contains information regarding the product, the major release, the licensed features of the product, and the licensed capacities of each feature that you purchase. After you purchase a licensed Avaya software product, you must activate the license file for the product in PLDS and install the license file on the WebLM server.

License activations in PLDS require the host ID of the WebLM server for inclusion in the license file. The host ID of the WebLM server is displayed on the Server Properties page of the WebLM server.

Obtaining the license file

About this task

For each licensed Avaya product that you are managing from the WebLM server, you can obtain a license file from PLDS, and install it on the corresponding WebLM server. For additional information on using PLDS, see *Getting Started with Avaya PLDS - Avaya Partners and Customers* at <https://plds.avaya.com>.

Caution:

Do not modify the license file that you receive from Avaya. WebLM does not accept a modified license file.

You require the host ID of the WebLM server to obtain the license file from PLDS. For client node locking, while generating the license file, you must provide the WebLM server host ID and client host ID.

Procedure

1. Log on to the System Manager web console.
2. On the System Manager Web Console, click **Services > Licenses**.
3. In the left navigation pane, click **Server properties**.
4. Note the **Primary Host ID**.
5. Using the host ID, generate the license from PLDS.

Installing a license file

About this task

You can install a license file on the WebLM server. Use the Uninstall functionality to remove the license file from the WebLM server.

Licenses installed for WebLM Release 7.1 and later, must support SHA256 digital signature and 14-character host ID.

Before you begin

- Get the license file from the Avaya Product Licensing and Delivery System (PLDS) website at <https://plds.avaya.com>.
- Log on to the WebLM web console with administrator privilege credentials.
- For standard license file, remove the older license file before you install the new file.

Note:

The system displays an error message if an older license file is still available.

For centralized license file, the system automatically overwrites the older license file during installation.

For information about the license file installation errors while installing the license file, see *Administering standalone Avaya WebLM*.

Procedure

1. In the navigation pane, click **Install license**.
2. On the Install license page, click **Browse**, and select the license file.
3. Read the terms and conditions, and click **Accept the License Terms & Conditions**.
4. Click **Install**.

WebLM displays a message on successful installation of the license file. The installation of the license file might fail for reasons, such as:

- The digital signature on the license file is invalid. If you get such an error, request PLDS to redeliver the license file.
- The current capacity use exceeds the capacity in the installed license.

Related links

[Install license field descriptions](#) on page 77

Install license field descriptions

Name	Description
Enter license path	The complete path where the license file is saved.
Browse	The option to browse and select the license file.
Avaya Global License Terms & Conditions	Avaya license terms and conditions that the user must agree to continue the license file installation.

Button	Description
Install	Installs the product license file.

Related links

[Installing a license file](#) on page 76

Configuring WebLM Server for an Appliance Virtualization Platform host using Solution Deployment Manager

Before you begin

1. Add an Appliance Virtualization Platform host.

For information about adding a host, see *Administering Avaya Aura® System Manager*.

2. Obtain the license file from the Avaya PLDS website.
3. Install the license file on the System Manager WebLM Server or Standalone WebLM Server.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> section:
 - a. Select the Appliance Virtualization Platform host.
 - b. Click **More Actions > WebLM Configuration**.

The system displays the WebLM Configuration dialog box.

4. In **WebLM IP Address/FQDN**, type the IP address or FQDN of WebLM Server.

For WebLM configuration, if you select:

- Only one host then **WebLM IP Address/FQDN** displays the existing WebLM Server IP Address.
- Multiple hosts then **WebLM IP Address/FQDN** will be blank to assign the same WebLM Server IP Address for all the selected Appliance Virtualization Platform hosts.

5. In **Port Number**, type the port number of WebLM Server.

Embedded System Manager WebLM Server supports both 443 and 52233 ports.

6. Click **Submit**.

The system displays the status in the **Current Action** column.

The system takes approximately 9 minutes to acquire the Appliance Virtualization Platform host license file from the configured WebLM Server. On the **Platforms** tab, click **Refresh**.

When the Appliance Virtualization Platform host acquires the license, on the **Platforms** tab, the **License Status** column displays **Normal**.

Related links

[WebLM Configuration field descriptions](#) on page 78

[Viewing the Appliance Virtualization Platform host license status using Solution Deployment Manager](#) on page 80

WebLM Configuration field descriptions

Name	Description
WebLM IP Address/FQDN	The IP Address or FQDN of WebLM Server.
Port Number	The port number of WebLM Server. The default port is 52233.

Button	Description
Submit	Saves the WebLM Server configuration.
Cancel	Closes the WebLM Configuration dialog box.

Related links

[Configuring WebLM Server for an Appliance Virtualization Platform host using Solution Deployment Manager](#) on page 77

Configuring WebLM Server for an Appliance Virtualization Platform host from CLI

Before you begin

1. Obtain the license file from the Avaya PLDS website.
2. Install the license file on the System Manager WebLM Server or Standalone WebLM Server.

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. To configure the Appliance Virtualization Platform WebLM server, type `/opt/avaya/bin/weblmurl <option> <WEBLM_SERVER_IP>`:

Where, `<WEBLM_SERVER_IP>` is the IP Address and FQDN of WebLM Server on which the license file is installed.

Options are:

- **-h or -?:** To display command help.
- **-c:** To set a complete WebLM URL with IP Address and FQDN.
- **-x:** To display the current setting of WebLM URL.
- **-d:** To set the WebLM URL to the default (dummy) URL.
- **-g:** To display the URL of the WebLM GUI.
- **-i:** To display the IP Address of the WebLM URL.

 Note:

- a. To set a complete WebLM URL, type `/opt/avaya/bin/weblmurl -c https://<WEBLM_SERVER_IP>:52233/WebLM/LicenseServer`.

For example: `/opt/avaya/bin/weblmurl -c https://13.16.15.72:52233/WebLM/LicenseServer`

- b. To set a default WebLM URL, type `/opt/avaya/bin/weblmurl -d <WEBLM_SERVER_IP>`.
4. Verify the Appliance Virtualization Platform license status.

Related links

[Verifying the Appliance Virtualization Platform license status from host CLI](#) on page 80

Viewing the Appliance Virtualization Platform host license status using Solution Deployment Manager

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> section, view the Appliance Virtualization Platform host license status in the **License Status** column.

Related links

[Configuring WebLM Server for an Appliance Virtualization Platform host using Solution Deployment Manager](#) on page 77

Verifying the Appliance Virtualization Platform license status from host CLI

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. Perform one of the following:
 - a. To display license status, type `/opt/avaya/bin/statuslicense --printLicStatus`.
 - b. To display feature details associated with the license, type `/opt/avaya/bin/statuslicense --printFeature`.
 - c. To display grace period with timestamp, type `/opt/avaya/bin/statuslicense --printGracePeriod`.

Chapter 8: Security

Security Recommendations

Following are a few security recommendations:

- Place the Appliance Virtualization Platform behind frontend firewall.
- Encrypted snapshots are not supported. Therefore, do not keep any unencrypted snapshots, or use snapshot retention command to configure snapshot retention period.

Auditing Security Events

To audit the following security events, monitor `/var/log/hostd.log` or `/var/log/auth.log`.

- Access violation notifications
- Failed login events
- Certificate revocation events

Extended security hardening

Appliance Virtualization Platform supports Standard, Commercial, and Military Grade security hardening. By default, Appliance Virtualization Platform comes with Standard Grade hardening configuration, no additional action is required to set up this configuration.

Commercial and military grade hardening apply specific security attributes as summarized in the following table:

Security attribute	Commercial grade	Military grade
Restricting system Access (SSH, DCUI, ESXi Shell) to appropriate users	Y	Y
Limiting session connections and ensuring that these time out and disconnect if not in use. See Appliance Virtualization Platform security hardening policies on page 82.	Y	Y
Reducing running services to a minimum	Y	Y
Limiting open ports and applying appropriate firewall rules	Y	Y

Table continues...

Security attribute	Commercial grade	Military grade
Requiring the use of strong passwords and ensuring password complexity. See Appliance Virtualization Platform security hardening policies on page 82.	Y	Y
Disabling the use of weak ciphers and ensuring client-server connections are secured with strong SSL protocols. See Appliance Virtualization Platform security hardening policies on page 82.	Y	Y
Configuring of remote logging to a central log host to provide a secure, centralized store of ESXi logs	Y	Y
Limiting of network access by disabling unauthorized networks	Y	Y
Periodic checking for extraneous device files and unauthorized setuid or setgid files, and unauthorized modification to authorized setuid or setgid files	Y	Y
VMware Managed Object Browser (MOB) disabled by default	Y	Y
VMware Embedded Host Client (EHC) is disabled by default. To enable, run the <code>/opt/avaya/bin/harden/set_ehc enable</code> command.	Y	Y
EASG access disabled	—	Y
Military grade specific banner	—	Y
Limiting open ports and applying appropriate firewall rules For information, see the port matrix document on the Avaya Support website.	Y	Y

Related links

[Appliance Virtualization Platform security hardening policies](#) on page 82

Appliance Virtualization Platform security hardening policies

This section describes the policies of the Appliance Virtualization Platform hardened system.

Appliance Virtualization Platform system session restrictions

- SSH access must be enabled and will time out after a pre-defined period.
- DCUI session will timeout after 600 seconds of non-use.
- ESXi Shell session will timeout after 600 seconds of non-use.

Appliance Virtualization Platform password policies

- A user is allowed three attempts to type the password. After three attempts the account will be locked for 15 minutes.

- Passwords must meet the following length and complexity requirements:
 - At least one character each of the four different character classes: number, special character, UPPER_CASE, and lower_case.
 - Minimum length of 15 characters.
 - A new password must not be similar to the old one.

Ciphers supported

- Only FIPS-approved ciphers are supported: aes256-ctr, aes192-ctr, and aes128-ctr.
- Appliance Virtualization Platform only supports TLS 1.2.

Commercial grade hardening checklist

Use the checklist to configure the commercial grade hardening for the Appliance Virtualization Platform host.

No.	Task	Link/Notes	✓
1.	Enable the commercial grade hardening.	Enabling commercial grade hardening for the Appliance Virtualization Platform host on page 83	
2.	Add users, groups, and network IPs to establish connection with Appliance Virtualization Platform host services.	Adding SSH users and disabling unauthorized network access on page 84	
3.	Configure syslog server for remote logging.	Configuring syslog server for remote logging on page 85	
4.	Verify the commercial grade hardening status.	Verifying hardening status and completing remaining hardening settings on page 87	
5.	Run weekly check for extraneous device, unauthorized setuid or setgid files	Checking for extraneous device and unauthorized Setuid or Setgid files on page 88	

Enabling commercial grade hardening for the Appliance Virtualization Platform host

Before you begin

Enable SSH for the Appliance Virtualization Platform host.

Procedure

1. Start an SSH session.

2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. To enable commercial grade hardening, type the `/etc/init.d/avaya-harden start` command.

The system displays the following message:

```
After running this script, the AVP Landing Page, Embedded Host Client and
access will be disabled. Ensure that AVP is registered with an SDM to allow
for management functions and the enablement of SSH access.
```

```
The Embedded Host Client can be enabled by using the AVP CLI set_ehc script.
This should only be enabled for troubleshooting purposes and disabled when
finished. By enabling Avaya Logins you are granting Avaya access to your
system.
```

4. To continue the hardening process, type `y`.

The system starts the hardening process.

When the process completes, the system displays the message: `ok`.

For applying the changes, the system displays the following message to reboot the system: To let the changes take effect, the system needs to be rebooted.

5. To reboot the system, type `y`.

You can also reboot the system later.

Related links

[Enabling and disabling SSH on Appliance Virtualization Platform from Solution Deployment Manager](#) on page 52

[Rebooting the Appliance Virtualization Platform host from CLI](#) on page 65

[Activating SSH from AVP Utilities](#) on page 51

Adding SSH users and disabling unauthorized network access

About this task

Access for Avaya Services requires the following network to be allowed: 192.168.13.0/29.

Before you begin

Enable SSH for the Appliance Virtualization Platform host.

Note:

For Active Directory users, this procedure considers that the network administrator has already configured the Active Directory server and is accessible. Configuration of the Active Directory server is beyond the scope of this document, please refer relevant Microsoft documentation.

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. At the prompt, type the `/etc/init.d/avaya-harden manual_fixes` command.
4. To add additional users to the list of allowed users to enable SSH access, follow the prompt, and perform the following.
 - a. To add local users, type the local user names separated by a space.
For example: `user1 user2`
 - b. To add Active Directory (AD) users, type the AD user names including the AD domain separated by a space.
For example: `<AD domain>\user1 <AD domain>\user2`
5. To add additional groups to the list of allowed groups to enable SSH access, follow the prompt, and perform the following.
 - a. Type the AD domain.
 - b. To add local groups, type the local group names separated by a space.
For example: `group1 group2`
 - c. To add AD groups, type the AD group names including the AD domain separated by a space.
For example: `<AD domain>\group1 <AD domain>\group2`

You must add the defined AD group *AVP Admins* as: `<AD domain>\avp^admins`.
6. To modify the currently allowed network IPs that can establish connection with AVP host services, follow the prompt, and type the IP addresses.

 AVP host services are: CIM Server, CIM Secure Server, cmmds, DNS Client, ipfam, NFC, rdt, SSH Server, vsanvp, vSphere Client, watchd, and vSphere Web Access.

 The system applies the configuration changes to the selected services and sets up the configured values.

Configuring syslog server for remote logging

Before you begin

Enable SSH for the Appliance Virtualization Platform host.

Procedure

1. Start an SSH session.

2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. To configure Syslog.global.logHost to the site-specific syslog server, type the `esxcli system syslog config set --loghost udp://192.168.13.1,<transport protocol://site specific syslog server address:port>` command.

You can configure multiple hosts separated by a comma (,).

*** Note:**

You must include the rsyslog destination (udp://192.168.13.1) as this is used for Appliance Virtualization Platform alarming functionality.

4. To verify the syslog server setting, type the `esxcli system syslog config get` command.

Configuring encrypted syslog forwarding for Appliance Virtualization Platform

You must configure remote logging for Appliance Virtualization Platform to forward logs to AVP Utilities. Appliance Virtualization Platform uses AVP Utilities as its syslog server to forward logs to AVP Utilities. AVP Utilities then forward the logs to external syslog servers.

You can encrypt syslog forwarding for Appliance Virtualization Platform by using the TLS protocol. By default, UDP protocol is configured on Appliance Virtualization Platform to forward syslog messages to AVP Utilities. After you configure the remote logging on Appliance Virtualization Platform, you must also configure AVP Utilities so that it receives syslog messages from Appliance Virtualization Platform.

You can configure syslog using the following protocols:

- UDP
- TCP
- 1-way TLS
- 2-way TLS

Before you begin

Enable SSH for the Appliance Virtualization Platform host.

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. Do one of the following:
 - To set the target to TCP, run the following command: `/opt/avaya/bin/avp_rsyslog_config -s tcp`

- To set the target to TLS, run the following command: `/opt/avaya/bin/avp_rsyslog_config -s "tls,<Cert_file_path>"`
- To reset the target to UDP, run the following command: `/opt/avaya/bin/avp_rsyslog_config -s udp`

*** Note:**

Depending on the protocol that you set in Appliance Virtualization Platform, you must use the same protocol in AVP Utilities. For example, in Appliance Virtualization Platform, if you have set the target to TLS, then you must configure TLS mode only in AVP Utilities.

4. Log on to AVP Utilities as an administrator.
5. Do one of the following:
 - To configure TCP mode, run the following command:
`avpu_tcp_syslog_serv_configure.sh <tcp port number>`
 - To configure TLS mode, run the following command:
`avpu_tcp_syslog_serv_configure.sh <tls port number>`
 - To restore UDP mode, run the following command:
`avpu_tcp_syslog_serv_configure.sh -r`
6. To verify the syslog server setting, run the following command: `opt/avaya/bin/avp_rsyslog_config -g.`

Verifying hardening status and completing remaining hardening settings

About this task

After enabling the commercial grade hardening, adding SSH user and groups, disabling unauthorized network access, and establishing network connection with Appliance Virtualization Platform host services, use this procedure to verify the hardening status and identify any settings that might require manual updates. If required, perform the manual updates that are identified during the execution of the script.

Before you begin

Enable SSH for the Appliance Virtualization Platform host.

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. At the prompt, type the `/etc/init.d/avaya-harden status` command.

The system starts the process and displays the system hardening settings that you need to manually update.

4. Perform the manual updates that are identified during the execution of the script.

Checking for extraneous device and unauthorized Setuid or Setgid files

About this task

After setting up the Appliance Virtualization Platform security hardening, you must run the weekly check for extraneous device files, unauthorized Setuid or Setgid files, and unauthorized modification to authorized Setuid or Setgid files.

Before you begin

Enable SSH for the Appliance Virtualization Platform host.

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. To check for extraneous device files, type `cat /vmfs/volumes/server-local-disk/jitc/log/devicefiles/result.txt`.

The system displays the message: `OK: device files unchanged`.

Note:

If SSH sessions are open at the time the cron job runs or if the Appliance Virtualization Platform host ESXi Shell is accessed by different users, the extraneous device files check can report false error result. These scenarios can cause differences in the `/dev/char/pty` and `/dev/char/tty` directories that lead to display of false error result in the `result.txt` file.

4. To reset the extraneous device files checking, remove the log files. To remove the log files, type `rm -rf /vmfs/volumes/server-local-disk/jitc/log/devicefiles`.
5. To check for unauthorized setuid, type `cat /vmfs/volumes/server-local-disk/jitc/log/setuid/result.txt`.

The system displays the message: `OK: setuid unchanged`.

6. To check for unauthorized setgid, type `cat /vmfs/volumes/server-local-disk/jitc/log/setgid/result.txt`.

The system displays the message: `OK: setgid unchanged`.

Result

All result files must indicate OK.

Appliance Virtualization Platform certificate management

The following certificates are applicable for Appliance Virtualization Platform:

- **X.509 certificates:** Appliance Virtualization Platform uses standard X.509 certificates to encrypt session information sent over SSL connections between server and client systems. When a client application initiates an SSL session with the server, the server sends its certificate to the client application, which checks the X.509 certificate against a list of known Certificate Authorities (CAs) to verify the authenticity of the certificate.
- **AVP server certificates:** Appliance Virtualization Platform server certificates are created during the installation process where the certificate name matches the DNS name of the server. These certificates are not signed by an official root CA but are used by System Manager Solution Deployment Manager or the Solution Deployment Manager client to validate a secure connection.
- **Storing CA certificate for encrypted syslog feature:** To establish TLS connection with AVP Utilities acting as an external syslog server, the CA certificate to authenticate AVP Utilities can be stored on Appliance Virtualization Platform. For more information, see [Configuring encrypted syslog forwarding for Appliance Virtualization Platform](#) on page 86.

Related links

[Certification validation](#) on page 89

[Generating and accepting the Appliance Virtualization Platform host certificates](#) on page 90

[Creating or editing generic CSR](#) on page 91

[Create or edit CSR field descriptions](#) on page 92

[Applying third-party certificates to Appliance Virtualization Platform](#) on page 92

[Load Certificate field descriptions](#) on page 94

Certification validation

With System Manager Solution Deployment Manager and the Solution Deployment Manager client, you can establish a certificate-based TLS connection between the Solution Deployment Manager service and a host that is running Avaya Aura® 7.x and later applications. This connection provides secure communication between System Manager Solution Deployment Manager or the Solution Deployment Manager client and Appliance Virtualization Platform.

The certificate-based sessions apply to the Avaya Aura® Virtualized Appliance offer using self-signed certificates or third-party certificates.

You can check the following with certificate-based TLS sessions:

- Certificate validity dates
- Origin of Certificate Authority
- Chain of Trust
- CRL
- Log Certificate Validation Events

Solution Deployment Manager checks the certificate status of hosts. If the certificate is incorrect, Solution Deployment Manager does not connect to the host.

For the correct certificate:

- The fully qualified domain or IP address of the host to which you are connecting must match the value in the certificate SAN or the certificate Common Name. The certificate must have valid dates.
- Appliance Virtualization Platform does not automatically regenerate their certificates when host details such as IP address or hostname and domain change. The certificate might become incorrect for the host.

If the certificate is incorrect for the Appliance Virtualization Platform host, Solution Deployment Manager regenerates the certificate on the host and then uses the corrected certificate for the connection.

To validate certificates, you can open the webpage of the host. The system displays the existing certificate and you can match the details.

Related links

[Appliance Virtualization Platform certificate management](#) on page 89

Generating and accepting the Appliance Virtualization Platform host certificates

About this task

With Solution Deployment Manager, you can generate certificates only for Appliance Virtualization Platform hosts.

If the certificate is invalid:

- Get a correct certificate for the host and add the certificate.
- Regenerate a self-signed certificate on the host.

Before you begin

Get permissions to add a host to generate certificates.

Procedure

1. To access Solution Deployment Manager, do one of the following:
 - On the System Manager web console, click **Services > Solution Deployment Manager**.
 - On the desktop, click the Solution Deployment Manager icon ().
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> area, select an Appliance Virtualization Platform host.
4. Click **More Actions > Generate/Accept Certificate**.

5. To accept the certificate, in the Certificate dialog box, click **Generate Certificate**, and do the following:
 - a. In the Generate Certificate dialog box, in the **Validity in Days** field, type the validity of the certificate in days.
 - b. Click **Generate Certificate**.
The system displays the message: `Certificate is generated.`
 - c. Click **Ok**.
6. To accept the certificate, click **Accept Certificate**.
7. To view the certificate validity status, click the **View link** in the **Platform Certificate Status** column.

Appliance Virtualization Platform places an IP address and FQDN in generated certificates. Therefore, from Solution Deployment Manager, you can connect to Appliance Virtualization Platform hosts through IP address or FQDN.

In the Platforms for Selected Location <location name> section, the **Platform Certificate Status** column must display a check mark .

 Note:

An alarm is generated everyday if the certificate expiry is below 60 days. This alarm can be cleared by installing a new identity certificate, which has the validity more than 60 days.

Related links

[Appliance Virtualization Platform certificate management](#) on page 89

Creating or editing generic CSR

About this task

Use this procedure to create or edit a generic CSR for third-party Appliance Virtualization Platform certificates. With a generic CSR, you can apply the same set of data for more than one Appliance Virtualization Platform host.

Procedure

1. In **Application Management Tree**, select a location.
2. On the **Platforms** tab, in the Platforms for Selected Location <location name> area, select an Appliance Virtualization Platform host.
3. Click **More Actions > AVP Cert. Management > Generic CSR**.
4. In the Create/Edit CSR dialog box, add or edit the details of the generic CSR, such as organization, organization unit, locality, state, country, and email.
5. Click **Create/Edit CSR** and then click **OK**.

Next steps

Complete the CSR generation, download, third-party signing and push the certificates to the Appliance Virtualization Platform hosts.

Related links

[Appliance Virtualization Platform certificate management](#) on page 89

Create or edit CSR field descriptions

Name	Description
Organization	The organization name of the CSR.
Organization Unit	The organization unit of the CSR.
Locality	The locality of the organization associated with the CSR.
State	The state of the organization associate with the CSR.
Country	The country of the organization associate with the CSR. In the Edit mode, you can specify only two letters for the country name.
Email	The email address associate with the CSR.

Button	Description
Create/Edit CSR	Saves or edits the information entered associated to the CSR.
Cancel	Cancels the add or edit operation of the CSR.

Related links

[Appliance Virtualization Platform certificate management](#) on page 89

Applying third-party certificates to Appliance Virtualization Platform

About this task

Use this procedure to create, download, upload, and push third-party certificates to Appliance Virtualization Platform hosts.

Before you begin

- Add a location.
- Add an Appliance Virtualization Platform host to the location.
- Ensure that the certificate on the Appliance Virtualization Platform host is valid.

 Note:

If you are using a third-party generated CSR, add the private key for the CSR in the file `/etc/vmware/ssl/rui_csr_temp.key` before installing the certificate from Solution Deployment Manager.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> area, select an Appliance Virtualization Platform host.

4. **(Optional)** Add the details of the generic CSR.

If you add the generic CSR details, the system pre-populates the values in the View/Generate CSR dialog box.

For more information about creating the generic CSR, see “Creating or editing generic CSR”.

5. To generate CSR, do the following:
 - a. Click **More Actions > AVP Cert. Management > Manage Certificate**.
 - b. In the Load Certificate dialog box, select one or more Appliance Virtualization Platform hosts.
 - c. Click **View/Generate CSR**.

System Manager displays the View/Generate CSR dialog box.

- d. If the generic CSR details are not added for the Appliance Virtualization Platform host, add the details of the generic CSR.

- e. Click **Generate CSR**.

The system generates CSR for the Appliance Virtualization Platform host.

- f. In the **Current Action** column, click **Status Details** to view the status.

6. To download CSR, do the following:
 - a. Click **More Actions > AVP Cert. Management > Manage Certificate**.
 - b. In the Load Certificate dialog box, select one or more Appliance Virtualization Platform hosts.
 - c. Click **Download CSR**.

In case of Firefox browser, the system prompts you to save the `CSR.zip` file.

- d. In the **Current Action** column, click **Status Details** to view the status.

In the Download CSR Status dialog box, the system displays the path of the downloaded `CSR.zip` file.

7. Extract the downloaded certificates, and ensure that the third-party signs them.
8. To upload and push the signed certificate from a third-party CA, do the following:
 - a. Click **More Actions > AVP Cert. Management > Manage Certificate**.
 - b. In the Load Certificate dialog box, select one or more Appliance Virtualization Platform hosts.
 - c. Click **Browse** and select the required certificates from the local computer.
 - d. Click **I Agree to accept to add the same certificate in SDM**.
 - e. Click **Push Certificate**.
 - f. In the **Current Action** column, click **Status Details** to view the status.

Related links

[Appliance Virtualization Platform certificate management](#) on page 89

Load Certificate field descriptions

Name	Description
Platform IP	The IP address of the Appliance Virtualization Platform host.
Platform FQDN	The FQDN of the Appliance Virtualization Platform host.
Certificate	The option to select the signed certificate for the Appliance Virtualization Platform host.
I agree to accept to add the same certificate in SDM.	The option to accept the certificate in Solution Deployment Manager.

Button	Description
View/Generate CSR	Displays the View/Generate CSR dialog box to generate CSR.
Download CSR	Downloads CSR for the selected host.
Browse	Displays the dialog box where you can choose the signed certificate file. The accepted certificate file formats are: • .crt • .pki
Retrieve Certificate	Displays the Certificate dialog box with the details of the uploaded signed certificate.
Push Certificate	Pushes the uploaded signed certificate to the selected Appliance Virtualization Platform host.
Cancel	Cancels the push operation.

Related links

[Appliance Virtualization Platform certificate management](#) on page 89

Chapter 9: Post-deployment and upgrade tasks

Verifying the Appliance Virtualization Platform software release and the ESXi version

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. To verify the Appliance Virtualization Platform software release, type `cat /opt/avaya/etc/avaya-avp.version` or `/opt/avaya/bin/swversion` command.

The system displays the following:

```
# Maj.Min.FP.SP.PATCH.BUILD
Release: 8.1.x.0.0.xx
```

4. To verify the ESXi version, type the `esxcli system version get` command.

The system displays the following:

```
Product: VMware ESXi
Version: 6.5.0
Build: Releasebuild-xxxxxxx
Update: x
```

Virtual Machine snapshot on Appliance Virtualization Platform

When you apply an update by using Solution Deployment Manager, snapshots are left on Appliance Virtualization Platform. If a snapshot is left on Appliance Virtualization Platform, it is detrimental to system performance and over time can utilize all the available disk space. Therefore, ensure that snapshots are not left on Appliance Virtualization Platform for an extended period of time and are removed on a timely manner.

You can review and delete Virtual Machine snapshots from Appliance Virtualization Platform by using Solution Deployment Manager Snapshot Manager.

Related links

[Deleting the virtual machine snapshot by using Solution Deployment Manager](#) on page 96
[Snapshot Manager field descriptions](#) on page 96

Deleting the virtual machine snapshot by using Solution Deployment Manager

About this task

Use this procedure to delete the virtual machine snapshots that reside on the Appliance Virtualization Platform host by using Solution Deployment Manager.

Procedure

1. To access Solution Deployment Manager, do one of the following:
 - On the System Manager web console, click **Services > Solution Deployment Manager**.
 - On the desktop, click the Solution Deployment Manager icon ().
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> section, select the Appliance Virtualization Platform host.
4. Click **More Actions > Snapshot Manager**.

The system displays the Snapshot Manager dialog box.

5. Select one or more snapshots, and click **Delete**.

You must review all listed snapshots and remove snapshots that are more than 24 hours old.

The system deletes the selected snapshots.

Related links

[Virtual Machine snapshot on Appliance Virtualization Platform](#) on page 95

Snapshot Manager field descriptions

Name	Description
VM ID	The ID of the virtual machine.
Snapshot Age	The duration of snapshot creation. For example: 75 days 19 hours
VM Name	The name of the virtual machine.

Table continues...

Name	Description
Snapshot Name	The name of the snapshot.
Snapshot Description	The description of the snapshot.
SDM Snapshot	The snapshot taken from Solution Deployment Manager. The options are Yes and No .

Button	Description
Cancel	Exits from the Snapshot Manager dialog box.
Delete	Deletes the selected snapshot.

Related links

[Virtual Machine snapshot on Appliance Virtualization Platform](#) on page 95

Enhanced Access Security Gateway

Enhanced Access Security Gateway (EASG) overview

EASG provides a secure method for Avaya services personnel to access the Avaya Aura® application remotely and onsite. Access is under the control of the customer and can be enabled or disabled at any time. EASG must be enabled for Avaya Services to perform tasks necessary for the ongoing support, management and optimization of the solution. EASG is also required to enable remote proactive support tools such as Avaya Expert Systems® and Avaya Healthcheck.

Managing EASG from CLI

About this task

After deploying or upgrading an Avaya Aura® application, you can enable, disable, remove, restore or view the status of EASG.

Before you begin

Log in to the application CLI interface.

Procedure

1. To view the status of EASG, run the command: **EASGStatus**.

The system displays the status of EASG.

2. To enable EASG, do the following:

- a. Run the command: **EASGManage --enableEASG**.

The system displays the following message.

By enabling Avaya Services Logins you are granting Avaya access to your system. This is required to maximize the performance and value of your Avaya support entitlements, allowing Avaya to resolve product issues in a timely manner.

The product must be registered using the Avaya Global Registration Tool (GRT, see <https://grt.avaya.com>) to be eligible for Avaya remote connectivity. Please see the Avaya support site (<https://support.avaya.com/registration>) for additional information for registering products and establishing remote access and alarming.

- b. When the system prompts, type `yes`.

The system displays the message: EASG Access is enabled.

3. To disable EASG, do the following:

- a. Run the command: **`EASGManage --disableEASG`**.

The system displays the following message.

By disabling Avaya Services Logins you are denying Avaya access to your system. This is not recommended, as it can impact Avaya's ability to provide support for the product. Unless the customer is well versed in managing the product themselves, Avaya Services Logins should not be disabled.

- b. When the system prompts, type `yes`.

The system displays the message: EASG Access is disabled.

4. To remove EASG permanently, do the following:

- a. Run the command: **`/opt/avaya/bin/EASGConfig -r`**.

- b. When the system prompts, type `yes`.

Reboot the system to reflect the changes made.

5. To restore EASG on next upgrade, do the following:

- a. Run the command: **`/opt/avaya/bin/EASGConfig -c`**.

- b. Upgrade Appliance Virtualization Platform, to reinstall Avaya logins.

Viewing the EASG certificate information

Procedure

1. Log in to the application CLI interface.
2. Run the command: **`/opt/avaya/easg/bin/EASGProductCert --certInfo`**.

The system displays the EASG certificate details, such as, product name, serial number, and certificate expiration date.

EASG site certificate

EASG site certificates are used by the onsite Avaya technicians who do not have access to the Avaya network to generate a response to the EASG challenge. The technician will generate and provide the EASG site certificate to the customer. The customer loads this EASG site certificate on each server to which the customer has granted the technician access. The EASG site certificate will only allow access to systems on which it has been installed, and will only allow access to the given Avaya technician and cannot be used by anyone else to access the system including other Avaya technicians. Once this is done, the technician logs in with the EASG challenge/response.

Managing site certificates

Before you begin

1. Obtain the site certificate from the Avaya support technician.
2. You must load this site certificate on each server that the technician needs to access. Use a file transfer tool, such as WinSCP to copy the site certificate to `/home/cust` directory, where *cust* is the login ID. The directory might vary depending on the file transfer tool used.
3. Note the location of this certificate and use in place of *installed_pkcs7_name* in the commands.
4. You must have the following before loading the site certificate:
 - Login ID and password
 - Secure file transfer tool, such as WinSCP
 - Site Authentication Factor

Procedure

1. To install the site certificate:
 - a. Run the following command: `sudo EASGSiteCertManage --add <installed_pkcs7_name>`.
 - b. Save the Site Authentication Factor to share with the technician once on site.
2. To view information about a particular certificate: run the following command:
 - `sudo EASGSiteCertManage --list`: To list all the site certificates that are currently installed on the system.
 - `sudo EASGSiteCertManage --show <installed_pkcs7_name>`: To display detailed information about the specified site certificate.
3. To delete the site certificate, run the following command:
 - `sudo EASGSiteCertManage --delete <installed_pkcs7_name>`: To delete the specified site certificate.
 - `sudo EASGSiteCertManage --delete all`: To delete all the site certificates that are currently installed on the system.

Chapter 10: Troubleshooting

Troubleshooting Appliance Virtualization Platform

Appliance Virtualization Platform does not install

Perform the following as appropriate:

- Ensure that you are connected to the services port on the server with the following network configuration on the laptop:
 - IP address: 192.168.13.5
 - Netmask: 255.255.255.248
 - Gateway: 192.168.13.1
- Defective USB drive. Place the `avp81ks.cfg` kickstart file on another USB and connect the USB to the server.
- Unsupported server: Release 7.1 and later does not support S8500 and S8800 servers. Change to a Release 8.1.3 supported server.
- Duplicate IP address for Appliance Virtualization Platform management interface already on the network. Remove the duplicate IP address and reinstall Appliance Virtualization Platform.
- USB stick left plugged in on HP servers. Remove the USB stick, and reboot the server.
- Deployments take longer duration or fail. Ensure that the network settings and network configuration is correct for the virtual machine that is being deployed.

Virtual machine deployment fails during the sanity check

- Ensure that IP forwarding is enabled on AVP Utilities if you deploy virtual machines from the services port with the Solution Deployment Manager client.
- Ensure that System Manager Solution Deployment Manager or Solution Deployment Manager client can connect to the management IP address of the application being deployed.
- Ensure that the server is physically connected. If Out of Band Management is enabled, ensure that the Appliance Virtualization Platform host and the virtual machines are deployed with Out of Band Management configurations.

Virtual machine deployment fails

Ensure that you accept EULA by gaining access to Appliance Virtualization Platform using SSH, and accepting the EULA.

Cannot SSH to Appliance Virtualization Platform

SSH has shutdown. Activate SSH from AVP Utilities or from Solution Deployment Manager. For more information, see [Activating SSH from AVP Utilities](#).

On the monitor, the screen displays a warning message in red and then goes blank

During the Appliance Virtualization Platform installation, the monitor displays blank screen, which is a normal behavior. No action is required.

Related links

[Activating SSH from AVP Utilities](#) on page 51

Unable to connect to Appliance Virtualization Platform host from vSphere Web Client

Condition

The vSphere Web Client throws an SSL verification failure error when you gain access to the Appliance Virtualization Platform host for which you regenerated the certificate.

Cause

The vSphere Web Client might use the old certificate of the Appliance Virtualization Platform host from the cache instead of the regenerated certificate.

Use the following procedure if the system displays an SSL verification error when you gain access to the Appliance Virtualization Platform host from vSphere Web Client.

Solution

1. Restart the Appliance Virtualization Platform host.
2. Using vSphere Web Client, gain access to the Appliance Virtualization Platform host.

Related links

[Restarting Appliance Virtualization Platform or an ESXi host](#) on page 64

Viewing installation log traces

Solution

To view the installation log traces, press `ALT-F12`.

Restarting Appliance Virtualization Platform or an ESXi host

About this task

The restart operation fails, if you restart the host on which System Manager itself is running. If you want to restart the host, you can do this either through vSphere Web Client or through the Solution Deployment Manager client.

Procedure

1. On the System Manager web console, click **Services > Solution Deployment Manager > Application Management**.
2. In **Application Management Tree**, select a location.
3. On the **Platforms** tab, in the Platforms for Selected Location <location name> area, select a platform.
4. Click **More Actions > Lifecycle Action > Host Restart**.
5. On the confirmation dialog box, click **Yes**.

The system restarts the host and virtual machines running on the host.

Related links

[Restarting Appliance Virtualization Platform or an ESXi host](#) on page 64

Rebooting the Appliance Virtualization Platform host from CLI

Before you begin

From Solution Deployment Manager, shut down the virtual machines that are running on the host.

Procedure

1. Start an SSH session and log in to the Appliance Virtualization Platform host.
2. At the prompt, type `/opt/avaya/bin/avpshutdown.sh -r`.

The system displays `Are you sure you want to stop all VMs and reboot?`.

Warning:

If you fail to provide the `-r` option, the system displays `Are you sure you want to stop all VMs and shutdown?` and assumes that you want to perform the shutdown operation.

If you use the shutdown option when reset is intended, the host does not restart as part of the process and you must manually start the server.

3. To confirm the reboot operation, type `Y`.

The system stops all virtual machines that are running on the Appliance Virtualization Platform host. The Appliance Virtualization Platform host reboots and restarts all virtual machines automatically.

Clearing system event logs from CLI

About this task

When Appliance Virtualization Platform continues to generate alarms even after replacing the faulty hardware component, you must clear the system event logs to suppress false alarms.

For example, if the memory module is replaced and Appliance Virtualization Platform continuously generates the MEM_FAULT alarm.

Procedure

1. Start an SSH session.
2. Log in to the Appliance Virtualization Platform host command line interface with admin user credentials.
3. Type the following command:

```
esxcli hardware ipmi sel clear
```

System event logs get cleared from Appliance Virtualization Platform.

Chapter 11: Appliance Virtualization

Platform alarms

The Appliance Virtualization Platform alarms section describes information about alarms generated on Appliance Virtualization Platform. These alarms cover categories such as CPU, memory, environment and power supply alarms. This section also lists alarm severities, causes and its resolutions.

Alarm classifications

Alarms are classified depending on its impact on system operation:

- **Major or Critical alarms** identify failures that cause a critical degradation of service. These alarms require immediate attention.
- **Minor alarms** identify failures that cause some service degradation but do not render a crucial portion of the system inoperable. Minor alarms require attention.
- **Cleared alarms** indicate that an alarm raised earlier is cleared.

AVP Alarms

TEST_ALARM

Event ID	TEST_ALARM
Description	This is a test alarm. To generate a test alarm, see "Generating test alarms for AVP" section from Administering AVP Utilities guide.
Severity	Minor
Cause	NA
Resolution	Not required

FAN_FAULT

Event ID	FAN_FAULT
Description	The FAN_FAULT alarm generates when the system detects a fan failure.
Severity	Major
Cause	Wear and tear, defective hardware, or faulty connection.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM, and log in to the Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep FAN` command to see all fan-related logs. Check if all fans are reported, the failure type, and if the fan speed is reported.
4. Execute `grep avpcimon syslog.log | grep FAULT` command to determine if there are other faults. If there are power or voltage faults clear those first.
5. Using the server documentation, determine the failed fan location and check the wire connections, possibly replacing the failed fan.

FAN_CLEAR

Event ID	FAN_CLEAR
Description	The FAN_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

MEM_FAULT

Event ID	MEM_FAULT
-----------------	-----------

Description The MEM_FAULT alarm generates when the system detects a memory failure.

Severity Major

Cause This is due to a defective hardware or bad connection.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and log in to the Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep MEM` command to see all memory-related logs, check the failure type, and the device.
4. Using the server documentation, find the memory module to be replaced. Also, replace the defective memory device. If the failure is processor cache memory, replace the processor.

 Note:

Sometimes clearing sel logs can solve memory failure issues.

MEM_CLEAR

Event ID	MEM_CLEAR
Description	The MEM_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

DISK_FAULT

Event ID	DISK_FAULT
Description	The DISK_FAULT alarm generates when an abnormal disk condition is detected. This condition can be temporary. If the alarm persists and there is no disk battery alarm present, it can indicate a failed or missing disk.
Severity	Major

Cause Disk battery causing impaired operations, disk being rebuilt after replacement, disk failure or disk being removed.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and log in to the Appliance Virtualization Platform shell using SSH.
2. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep DISK` command to see all disk related-logs and note what disk is reported as failed.
3. Execute `grep avpcimon syslog.log | grep FAULT` command to determine if there are other faults. If there is a RAID battery failure, clear that fault first as it can cause this failure.

 Note:

The disk reported faults could be temporary. If the failure persists for a few hours the disk may require replacement.

4. Reboot the server and check if the failure persists.
5. Follow the server vendor instructions for disk replacement and replace the failed disk.

DISK_CLEARED

Event ID	DISK_CLEARED
Description	The DISK_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

POWER_FAULT

Event ID	POWER_FAULT
Description	The POWER_FAULT alarm generates when a duplicate power supply does not provide power, or it fails.
Severity	Major

Cause Any AC input failure, missing out of specifications, or power supply failure.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and log in to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep POWER` command to see all disk-related logs and note what power source is reported as failed.
4. Execute `grep avpcimon syslog.log | grep FAULT` to determine if there are other faults in the system.
5. Check input AC and power cable.
6. Follow the server vendor instructions for power supply replacement and replace the power supply.

POWER_CLEAR

Event ID	POWER_CLEAR
Description	The POWER_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

TEMP_FAULT

Event ID	TEMP_FAULT
Description	The TEMP_FAULT alarm generates when a temperature sensor detects a temperature above the vendor-defined threshold.
Severity	Major
Cause	Ambient temperature is too high, localized overheating, or temperature sensor failure.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and log in to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product`.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep TEMP` command to see all temperature-related logs and note what temperature sensors detect failures.
4. Execute `grep avpcimon syslog.log | grep FAULT` command to determine if there are other faults in the system. If there are FAN alarms, clear those first.
5. Check the ambient temperature and the server air intakes.
6. Compare the different sensor temperature, if a single sensor detects a fault, it could be a faulty sensor, or could require immediate attention as a component may be overheating.

TEMP_CLEAR

Event ID	TEMP_CLEAR
Description	The TEMP_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

LOG_FAULT

Event ID	LOG_FAULT
Description	This is caused by logs filling up, investigate system is hyperactive.
Severity	Minor
Cause	IPMI log file cannot add any more entries.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and log in to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product`.

3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep LOG` command to see all similar logs, and note when the issue started.
4. Execute `grep avpcimon syslog.log | grep FAULT` to determine if there are other faults in the system. If there are any other alarms, clear those too.
5. Execute the Appliance Virtualization Platform ESXi shell command `localcli hardware ipmi sel clear` to clear the logs.

LOG_CLEAR

Event ID	LOG_CLEAR
Description	The LOG_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

DISKBATTERY_FAULT

Event ID	DISKBATTERY_FAULT
Description	The DISKBATTERY_FAULT alarm generates when the system detects a failing RAID battery.
Severity	Major
Cause	The RAID battery has a limited life and should be replaced as suggested by the server vendor.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and log in to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep DISKBATTERY` command to see all disk battery related logs, and check the failure type and the device.

4. Execute `grep avpcimon syslog.log | grep FAULT` command to determine if there are other faults in the system. If there are any other alarms, clear those too.
5. If the failure persists, replace the RAID battery following the instructions from the server vendor documentation.

DISKBATTERY_CLEAR

Event ID	DISKBATTERY_CLEAR
Description	The DISKBATTERY_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

ETH_FAULT

Event ID	ETH_FAULT
Description	The ETH_FAULT alarm generates when a failure is detected on an ethernet port.
Severity	Major
Cause	Ethernet port is not in service.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and log in to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep ETH` command to see all ethernet-related logs, check the failure type, and the device.
4. Check the status of the ethernet port and the cables and replace the required cables.
5. Check the vendor server documentation for more instructions and possible replacement of the ethernet ports.

ETH_CLEAR

Condition

Event ID	ETH_CLEAR
Description	The ETH_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

SYS_FAULT

Event ID SYS_FAULT

Description The SYS_FAULT alarm generates for different reasons. Check the alarm description for more information. This alarm could indicate a failed board or a fault that has a separate alarm. Check for the presence of other alarms.

Severity Minor

Cause Hardware failure

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and log in to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep SYS` command to see all system-related logs and check the failure type.
4. Execute `grep avpcimon syslog.log | grep FAULT` command to determine if there are other faults in the system. If there are other alarms, clear those first.
5. Using the server documentation, determine the type of failure, and actions required to clear it.

SYS_CLEAR

Event ID	SYS_CLEAR
Description	The SYS_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

PROC_FAULT

Event ID	PROC_FAULT
Description	The PROC_FAULT alarm generates when a fault is detected on a processor.
Severity	Major
Cause	Failing hardware.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and login to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep PROC` command to see all processor-related logs, check the failure type and the device.
4. Execute `grep avpcimon syslog.log | grep FAULT` command to determine if there are other faults in the system. If there are power or voltage failures clear those first.
5. Use the server vendor documentation to determine the processor location and check the processor and heatsink.

PROC_CLEAR

Event ID	PROC_CLEAR
-----------------	------------

Description	The PROC_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

VOLTAGE_FAULT

Event ID	VOLTAGE_FAULT
Description	The VOLTAGE_FAULT alarm generates when a voltage sensor on the motherboard detects an invalid voltage.
Severity	Major
Cause	Failing hardware.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and login to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep VOLTAGE` command to see all voltage-related logs, check the failure type, and the device detecting the failure.
4. Consult the server vendor documentation to determine what can be replaced to restore the correct voltages. This may require a new power supply or a new motherboard.

VOLTAGE_CLEAR

Event ID	VOLTAGE_CLEAR
Description	The VOLTAGE_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

CHASSIS_FAULT

Event ID	CHASSIS_FAULT
Description	The CHASSIS_FAULT alarm generates if the intrusion detection is triggered, and the cover is not closed.
Severity	Minor
Cause	The server chassis was opened.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and login to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep CHASSIS` command to see all memory-related logs, check the failure type, and the device.
4. Using the server vendor documentation determine how to clear the alarm. The server cover may not be in place correctly.

CHASSIS_CLEAR

Event ID	CHASSIS_CLEAR
Description	The CHASSIS_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

WATCHDOG_FAULT

Event ID	WATCHDOG_FAULT
Description	The OS watchdog detects a fault in the system.

Severity Minor

Cause This could be caused by a software or hardware fault.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and login to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep WATCHDOG` command to see all watchdog-related logs, check the failure type, and if it was an isolated occurrence.
4. Execute `grep avpcimon syslog.log | grep FAULT` command to determine if there are other faults in the system. If there are other alarms, clear those first.
5. A hard reset may have happened. If the error persists, reboot your system.

WATCHDOG_CLEAR

Event ID	WATCHDOG_CLEAR
Description	The WATCHDOG_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

BATTERY_FAULT

Event ID	BATTERY_FAULT
Description	The BATTERY_FAULT alarm generates when a fault is detected in a BIOS or other internal battery, not including the RAID battery.
Severity	Major
Cause	Aging battery.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and login to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.
 - b. Type `grep avpcimon syslog.log | grep MEM` command to see all memory-related logs, check the failure type, and the device.
4. Using the server vendor documentation, determine which battery is at fault, replace the battery following documentation instructions.

BATTERY_CLEAR

Event ID	BATTERY_CLEAR
Description	The BATTERY_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

CABLE_FAULT

Event ID	CABLE_FAULT
Description	The CABLE_FAULT alarm generates when there is a cable fault.
Severity	Major
Cause	Failed cable or connection.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and login to Appliance Virtualization Platform shell using SSH.
2. Identify the server type by running `smbiosDump | grep Product` command.
3. On CLI, do the following:
 - a. To go to the logs directory, type: `cd /var/log`.

- b. Type `grep avpcimon syslog.log | grep CABLE` command to see all memory-related logs, check the failure type, and the device.
4. Execute `grep avpcimon syslog.log | grep FAULT` command to determine if there are other faults in the system. If there are power or voltage failures, clear those failures first.
5. Use the server documentation to determine which cable is at fault. Verify the connection and if the cable is connected correctly, replace the failed cable by following the documentation instruction.

CABLE_CLEAR

Event ID	CABLE_CLEAR
Description	The CABLE_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

ASG_FAULT

Event ID	ASG_FAULT
Description	The ASG_FAULT alarm generates when the ASG file needs to be replaced.
Severity	Minor
Cause	Missing or default ASG file installed. Each server should have a unique ASG file to avoid attacks that allows unauthorized access to the system.

Resolution

1. Generate a new ASG file for this server.
2. Install or replace the ASG file using `/opt/avaya/bin/loadauth` command.

ASG_CLEAR

Event ID	ASG_CLEAR
-----------------	-----------

Description	The ASG_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

BOOT_CLEAR

Event ID	BOOT_CLEAR
Description	The BOOT_CLEAR alarm generates after a server reboot.
Severity	Cleared
Cause	Any server reboot causes this trap to be send.
Resolution	Not required

LICENSE_ERROR

Event ID	LICENSE_ERROR
Description	No AVP license acquired, 30 day grace period applies.
Severity	Minor
Cause	No AVP license acquired, 30 day grace period applies.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and login to Appliance Virtualization Platform shell using SSH.
2. Confirm that an associated WebLM Server is configured correctly and is reachable:
Via System Manager SDM/SDM Client:
 - a. Log in to System Manager and navigate to **Home > Services > Solution Deployment Manager** or use SDM Client.
 - b. Select **VM Management** and applicable **Location**.
 - c. Select applicable Appliance Virtualization Platform host and from the **More Actions** drop-down menu list choose **WebLM Configuration**.

- d. Ensure the WebLM IP address/FQDN is configured correctly.

Via Appliance Virtualization Platform host:

- a. Ensure SSH is enabled for the Appliance Virtualization Platform host.
 - b. Enable SSH for Appliance Virtualization Platform using SDM and login to Appliance Virtualization Platform shell using SSH host.
 - c. Ensure the WebLM IP address/FQDN is configured correctly using the following command: `/opt/avaya/bin/weblmurl`.
3. Confirm an applicable Appliance Virtualization Platform license is installed on the configured WebLM Server:
 - a. Log in to the associated WebLM Server (either System Manager or Standalone).
 - b. Under Licensed products, confirm that an applicable AVP license has been installed.
 - c. If an applicable AVP license is not installed, install one via **Install license**.

LICENSE_FAULT

Event ID LICENSE_FAULT

Description The LICENSE_FAULT alarm generates when no valid AVP license is acquired, and the 30 day grace period expires: AVP License Restricted Mode.

Severity Major

Cause No AVP license acquired, the 30 day grace period expired, and AVP management functionality restricted.

Resolution

1. Enable SSH for the Appliance Virtualization Platform using SDM and login to Appliance Virtualization Platform shell using SSH.
2. Confirm that an associated WebLM Server is configured correctly and is reachable:

Via System Manager SDM/SDM Client:

- a. Log in to System Manager and navigate to **Home > Services > Solution Deployment Manager** or use SDM Client.
- b. Select **VM Management** and applicable **Location**.
- c. Select applicable Appliance Virtualization Platform host and from the **More Actions** drop-down menu list, choose **WebLM Configuration**.
- d. Ensure the WebLM IP address/FQDN is configured correctly.

Via Appliance Virtualization Platform host:

- a. Ensure SSH is enabled for the Appliance Virtualization Platform host.
- b. Enable SSH for Appliance Virtualization Platform using SDM and log in to Appliance Virtualization Platform shell using SSH host.

- c. Ensure the WebLM IP address/FQDN is configured correctly using the following command: `/opt/avaya/bin/weblmurl`.
3. Confirm an applicable Appliance Virtualization Platform license is installed on the configured WebLM Server:
 - a. Login to the associated WebLM Server (either System Manager or Standalone).
 - b. Under Licensed products, confirm that an applicable AVP license has been installed.
 - c. If an applicable AVP license has is not installed, install one via **Install license**.

LICENSE_CLEAR

Event ID	LICENSE_CLEAR
Description	The LICENSE_FAULT alarm is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

SNAPSHOT_FAULT

Event ID	SNAPSHOT_FAULT
Description	The SNAPSHOT_FAULT alarm generates with a virtual machine where a snapshot is present on the Appliance Virtualization Platform for more than one week.
Severity	Major
Cause	This can be caused if snapshots are not manually deleted from the SDM after applying updates.
Resolution	Snapshots can be viewed and deleted from the SDM. Please check the SDM documentation for details.

SNAPSHOT_CLEAR

Event ID	SNAPSHOT_CLEAR
-----------------	----------------

Description	The SNAPSHOT_ALARM is cleared.
Severity	Cleared
Cause	NA
Resolution	Not required

NIC_TEAM_DEGRADED

Event ID	NIC_TEAM_DEGRADED
Description	The NIC_TEAM_DEGRADED alarm generates when NIC teaming is configured and link is lost on one of the two NICs in the team.
Severity	Minor
Cause	Ethernet cable is pulled out.
Resolution	Plug in the ethernet cables to appropriate NICs.

NIC_TEAM_FAULT

Event ID	NIC_TEAM_FAULT
Description	The NIC_TEAM_FAULT alarm generates when NIC teaming is configured, and the link is lost on both the NICs in the team.
Severity	Critical
Resolution	Plug in the ethernet cables to appropriate NICs.

NIC_TEAM_CLEAR

Event ID	NIC_TEAM_CLEAR
Description	This alarm generates when both the NICs in the team are connected.
Severity	Other

Cause	NA
Resolution	Not required

CERT_FAULT

Event ID	CERT_FAULT
Description	The CERT_FAULT alarm generates when the certificates installed on the Appliance Virtualization Platform have less than 60 days to expire.
Severity	Major
Cause	Certificate installed on the Appliance Virtualization Platform is nearing its expiry date. This is a notification to remind the administrator to renew the certificate.
Resolution	The certificate needs to be updated from SDM UI with extended validity. Please check SDM documentation for more details.

CERT_CLEAR

Event ID	CERT_CLEAR
Description	The CERT_CLEAR alarm generates when the certificates installed on Appliance Virtualization Platform are renewed and have more than 60 days to expire.
Severity	Other
Cause	NA
Resolution	The certificate needs to be updated from SDM UI with extended validity. Please check SDM documentation for more details.

Chapter 12: Resources

Appliance Virtualization Platform documentation

The following table lists the documents related to Appliance Virtualization Platform. Download the documents from the Avaya Support website at <http://support.avaya.com>.

Title	Description	Audience
Implementing		
<i>Deploying Avaya Aura® Appliance Virtualization Platform</i>	Deploy, configure, and administer Avaya Aura® Appliance Virtualization Platform.	Implementation personnel
<i>Upgrading Avaya Aura® Appliance Virtualization Platform</i>	Upgrade Avaya Aura® Appliance Virtualization Platform.	Implementation personnel
Administration		
<i>Avaya Aura® Appliance Virtualization Platform and AVP Utilities Data Privacy Guidelines</i>	Describes how to administer Avaya Aura® Appliance Virtualization Platform to fulfill Data Privacy requirements.	Implementation personnel, system administrator, service and support personnel

Finding documents on the Avaya Support website

Procedure

1. Go to <https://support.avaya.com>.
2. At the top of the screen, type your username and password and click **Login**.
3. Click **Support by Product > Documents**.
4. In **Enter your Product Here**, type the product name and then select the product from the list.
5. In **Choose Release**, select the appropriate release number.

The **Choose Release** field is not available if there is only one release for the product.

6. In the **Content Type** filter, click a document type, or click **Select All** to see a list of all available documents.

For example, for user guides, click **User Guides** in the **Content Type** filter. The list only displays the documents for the selected category.

7. Click **Enter**.

Accessing the port matrix document

Procedure

1. Go to <https://support.avaya.com>.
2. Log on to the Avaya website with a valid Avaya user ID and password.
3. On the Avaya Support page, click **Support by Product > Documents**.
4. In **Enter Your Product Here**, type the product name, and then select the product from the list of suggested product names.
5. In **Choose Release**, select the required release number.
6. In the **Content Type** filter, select one or both the following categories:
 - **Application & Technical Notes**
 - **Design, Development & System Mgt**

The list displays the product-specific Port Matrix document.
7. Click **Enter**.

Avaya Documentation Center navigation

The latest customer documentation for some programs is now available on the Avaya Documentation Center website at <https://documentation.avaya.com>.

Important:

For documents that are not available on Avaya Documentation Center, click **More Sites > Support** on the top menu to open <https://support.avaya.com>.

Using the Avaya Documentation Center, you can:

- Search for content by doing one of the following:
 - Click **Filters** to select a product and then type key words in **Search**.
 - From **Products & Solutions**, select a solution category and product, and then select the appropriate document from the list.
- Sort documents on the search results page.
- Click **Languages** () to change the display language and view localized documents.
- Publish a PDF of the current section in a document, the section and its subsections, or the entire document.
- Add content to your collection by using **My Docs** ().

Navigate to the **Manage Content > My Docs** menu, and do any of the following:

- Create, rename, and delete a collection.
- Add topics from various documents to a collection.
- Save a PDF of selected content in a collection and download it to your computer.
- Share content in a collection with others through email.
- Receive collection that others have shared with you.
- Add yourself as a watcher using the **Watch** icon ().

Navigate to the **Manage Content > Watchlist** menu, and do the following:

- Enable **Include in email notification** to receive email alerts.
- Unwatch selected content, all content in a document, or all content on the Watch list page.

As a watcher, you are notified when content is updated or deleted from a document, or the document is removed from the website.

- Share a section on social media platforms, such as Facebook, LinkedIn, and Twitter.
- Send feedback on a section and rate the content.

 Note:

Some functionality is only available when you log on to the website. The available functionality depends on the role with which you are logged in.

Training

The following courses are available on the Avaya Learning website at <http://www.avaya-learning.com>. After logging in to the website, enter the course code or the course title in the **Search** field and press **Enter** or click **>** to search for the course.

Course code	Course title
20460W	Virtualization and Installation Basics for Avaya Team Engagement Solutions
20980W	What's New with Avaya Aura® Release 8.1

Viewing Avaya Mentor videos

Avaya Mentor videos provide technical content on how to install, configure, and troubleshoot Avaya products.

About this task

Videos are available on the Avaya Support website, listed under the video document type, and on the Avaya-run channel on YouTube.

- To find videos on the Avaya Support website, go to <https://support.avaya.com/> and do one of the following:
 - In **Search**, type `Avaya Mentor Videos`, click **Clear All** and select **Video** in the **Content Type**.
 - In **Search**, type the product name. On the Search Results page, click **Clear All** and select **Video** in the **Content Type**.

The **Video** content type is displayed only when videos are available for that product.

In the right pane, the page displays a list of available videos.

- To find the Avaya Mentor videos on YouTube, go to www.youtube.com/AvayaMentor and do one of the following:
 - Enter a key word or key words in the **Search Channel** to search for a specific product or topic.
 - Scroll down Playlists, and click a topic name to see the list of videos available for the topic. For example, Contact Centers.

 Note:

Videos are not available for all products.

Support

Go to the Avaya Support website at <https://support.avaya.com> for the most up-to-date documentation, product notices, and knowledge articles. You can also search for release notes, downloads, and resolutions to issues. Use the online service request system to create a service request. Chat with live agents to get answers to questions, or request an agent to connect you to a support team if an issue requires additional expertise.

Using the Avaya InSite Knowledge Base

The Avaya InSite Knowledge Base is a web-based search engine that provides:

- Up-to-date troubleshooting procedures and technical tips
- Information about service packs
- Access to customer and technical documentation
- Information about training and certification programs
- Links to other pertinent information

If you are an authorized Avaya Partner or a current Avaya customer with a support contract, you can access the Knowledge Base without extra cost. You must have a login account and a valid Sold-To number.

Use the Avaya InSite Knowledge Base for any potential solutions to problems.

1. Go to <http://www.avaya.com/support>.
2. Log on to the Avaya website with a valid Avaya user ID and password.
The system displays the Avaya Support page.
3. Click **Support by Product > Product-specific Support**.
4. In **Enter Product Name**, enter the product, and press `Enter`.
5. Select the product from the list, and select a release.
6. Click the **Technical Solutions** tab to see articles.
7. Select relevant articles.

Appendix A: Deploying AVP Utilities and other virtual machines

Deploying AVP Utilities and virtual machines when Out of Band Management is enabled

Before you begin

Install the Solution Deployment Manager client on your computer.

Procedure

1. Connect the computer to the Out of Band Management network with access to the Appliance Virtualization Platform Management Network IP address that you configured in the kick start generator file.
2. Using the Solution Deployment Manager client, create a location.
3. In the location that you created, create a host of Appliance Virtualization Platform by using the Management Network IP address of Appliance Virtualization Platform.
4. Ensure that AVP Utilities OVA is saved in the sub-folder in the `Default_Artifacts` directory during the Solution Deployment Manager client installation.

You can save OVA files of all virtual machines that you want to deploy.

5. Create a new virtual machine in the host that you created in Step 3.
6. To set the OVA software library, select the complete path to the `Default_Artifacts` directory.

In the Configuration Parameters section, the page displays parameters that are specific to AVP Utilities.

7. Fill in the AVP Utilities parameters.

Provide the IP address that you want to allocate to Communication Manager.

If Out of Band Management is enabled, provide information in the Out of Band Management-related fields. If Out of Band Management is disabled, leave the fields blank.

8. Deploy AVP Utilities, and wait for the virtual machine to deploy successfully.
9. Install the AVP Utilities 8.1.3 feature pack.

*** Note:**

The following applies *only* when you install a service or feature pack using the AVP Utilities CLI.

Before you install a service or feature pack, ensure that you install the pre-upgrade patch. Verify the pre-upgrade patch installation using the CLI command **swversion**. Service and feature packs are cumulative and include all the security remediation and bug fixes from previous service or feature packs.

10. Deploy all other virtual machines in the solution one after the other.
11. Install the feature pack for Avaya Aura® applications.
12. Validate the system.

Related links

[Enabling IP forwarding using Services Port VM for AVP Utilities](#) on page 50

Deploying AVP Utilities and virtual machines using services port

Before you begin

- Download the Solution Deployment Manager client from the PLDS website.
- Install the Solution Deployment Manager client on your computer.

Procedure

1. Using the Solution Deployment Manager client, create a location.
2. To connect the computer to the services port on the server, configure the following:
 - **IP address:** 192.168.13.5
 - **Netmask:** 255.255.255.248
 - **Gateway:** 192.168.13.1

On the Solution Deployment Manager client, in the Appliance Virtualization Platform host, provide the IP address 192.168.13.6.

3. In the location that you created, create a host of Appliance Virtualization Platform by using the Management Network IP address of Appliance Virtualization Platform.
4. Ensure that AVP Utilities OVA is saved in the sub-folder in the `Default_Artifacts` directory during the Solution Deployment Manager client installation.

You can save OVA files of all virtual machines that you want to deploy.

5. Create a new virtual machine in the host that you created in Step 3.
6. To set the OVA software library, select the complete path to the `Default_Artifacts` directory.

In the Configuration Parameters section, the page displays parameters that are specific to AVP Utilities.

7. Enter the IP address details for AVP Utilities, deploy AVP Utilities, and wait for the virtual machine to deploy successfully.
8. Install the AVP Utilities 8.1.3 feature pack.

 Note:

The following applies *only* when you install a service or feature pack using the AVP Utilities CLI.


Before you install a service or feature pack, ensure that you install the pre-upgrade patch. Verify the pre-upgrade patch installation using the CLI command **swversion**. Service and feature packs are cumulative and include all the security remediation and bug fixes from previous service or feature packs.


9. Change the AVP Utilities configuration parameters to the following:

- **IP address:** 192.11.13.5
- **Netmask:** 255.255.255.252
- **Gateway:** 192.11.13.6

On the Solution Deployment Manager client, in the Appliance Virtualization Platform host, leave the IP address as 192.168.13.6.

10. **(Optional)** If you want to deploy or access virtual machine using services port while Wi-Fi or other network connection is enabled, then go to **Network & Internet settings** of your computer and enter the values as shown below.

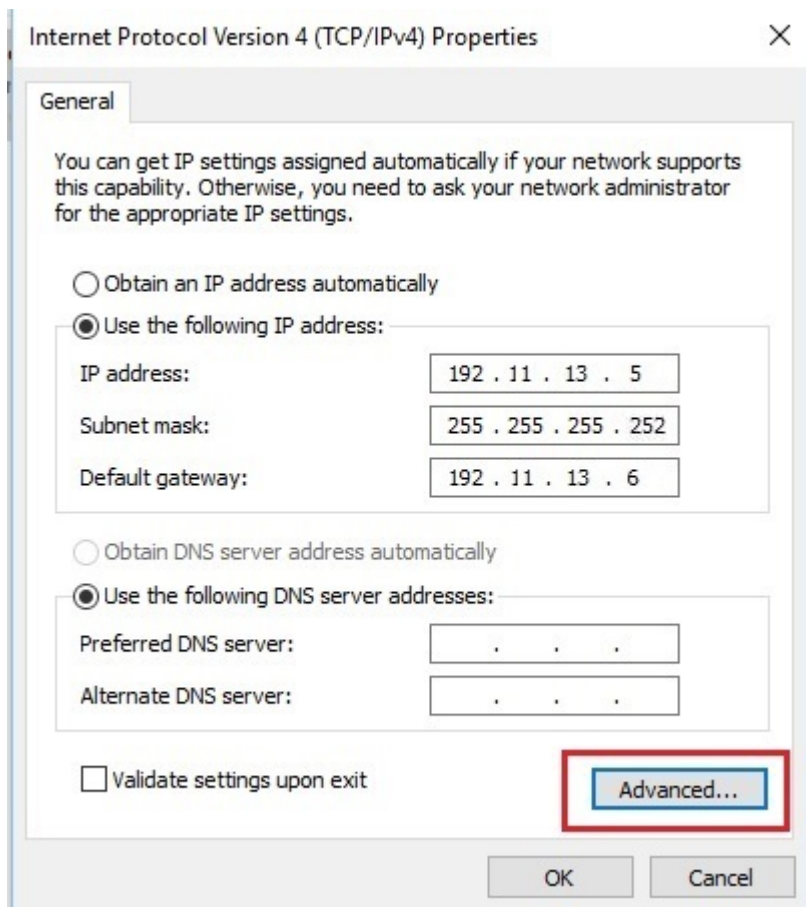

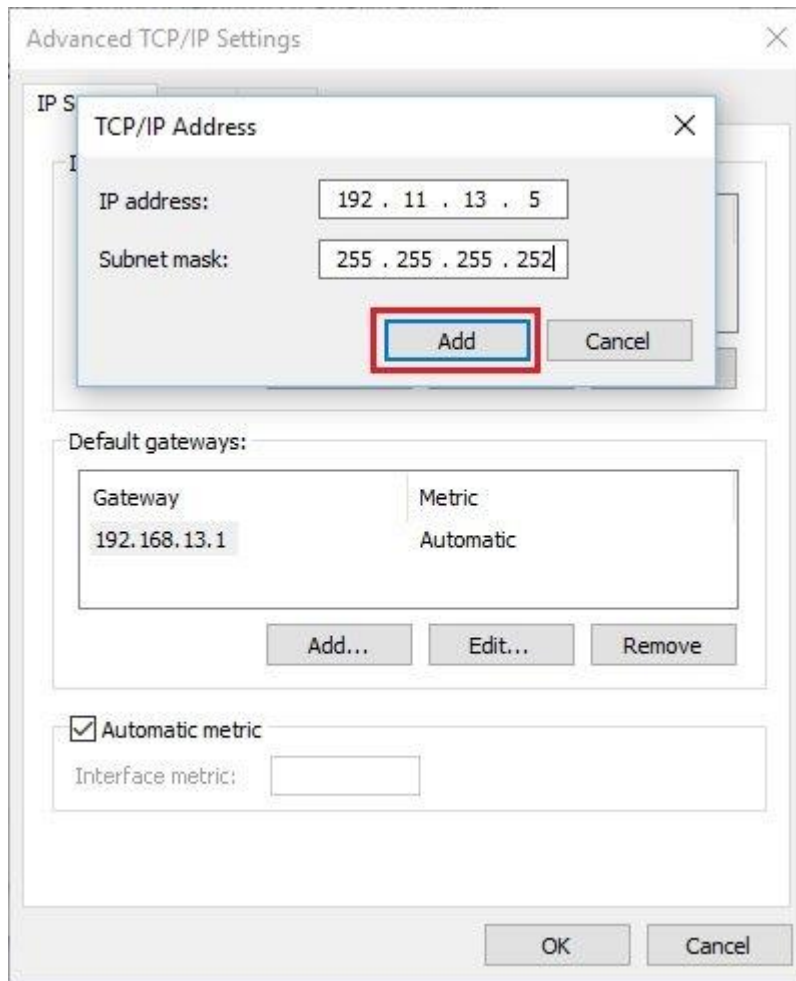

11. Ensure that the IP forwarding feature is enabled on AVP Utilities.
12. Deploy all other virtual machines in the solution one after the other.
13. **(Optional)** During the deployment, if the sanity check fails, verify the host network configuration.

The deployment might be successful, however, sanity check can fail due to a bad network connection.

14. Install the feature pack for Avaya Aura® applications.
15. Validate the system.

Related links

[Enabling IP forwarding using Services Port VM for AVP Utilities](#) on page 50

Index

A

accessing port matrix	125
activate SSH from AVP Utilities	51
adding	
Appliance Virtualization Platform host	55
AVP host	55
ESXi host	55
location	53
adding ESXi host	55
adding location	53
Alarm classifications	104
Alarm Introduction	104
Appliance Virtualization Platform	13 , 29 , 47 , 58 , 65
certificate management	89
change password	51
deploy	40
generating kickstart file	37
license file	73
networking	23
NIC ports	25
NIC teaming	27
reboot	65 , 102
restarting	64 , 102
shutdown	63
shutting down	63
troubleshoot	100
WebLM Configuration	73
Appliance Virtualization Platform alarming	69
Appliance Virtualization Platform host connection errors from vSphere Web Client	101
Appliance Virtualization Platform host Gateway	
change	57
edit	57
Appliance Virtualization Platform host IP address	
change	57
edit	57
Appliance Virtualization Platform host password	
changing	62
Appliance Virtualization Platform license	
supported servers	74
Appliance Virtualization Platform licenses for servers	74
Appliance Virtualization Platform network parameters	57
Appliance Virtualization Platform overview	13
Appliance Virtualization Platform USB drive	
configure	40
applying	
third-party certificates to Appliance Virtualization Platform	92
ASG_CLEAR	118
ASG_FAULT	118
Audit security events	81
Avaya Aura Virtualized Appliance offer	13

Avaya support website	127
Avaya virtualization platform	13
AVP alarms	104
AVP banner	
customize using host CLI	69
AVP license status	80
avpshutdown.sh	63
avpshutdown.sh -r	65 , 102
AVP Utilities	50

B

backup connection	27
BATTERY_CLEAR	117
BATTERY_FAULT	116
BOOT_CLEAR	119

C

CABLE_CLEAR	118
CABLE_FAULT	117
cannot connect to Appliance Virtualization Platform host from vSphere Web Client	101
capabilities	
Solution Deployment Manager client	17 , 18
System Manager Solution Deployment Manager	17
capability comparison	
System Manager Solution Deployment Manager and client capabilities	17
CERT_CLEAR	123
CERT_FAULT	123
certificate management	
Appliance Virtualization Platform	89
certificates	
accepting	90
generating	90
certification	
validation	89
certification validation	89
change	
Appliance Virtualization Platform host IP address	57
Host/ IP Settings	58
network settings	65
Network Settings	58
Change Gateway	67
change history	
deploying Appliance Virtualization Platform	10
change IP address for AVP host	57
change Netmask for Appliance Virtualization Platform host	57
Change Network Params	57
changing	
IP address and default gateway	61

changing the Appliance Virtualization Platform host password	62	DISKBATTERY_CLEAR	111
CHASSIS_CLEAR	115	DISKBATTERY_FAULT	110
CHASSIS_FAULT	115	documentation	
checklist		Appliance Virtualization Platform	124
commercial grade hardening	83	documentation center	125
clear system event logs		finding content	125
from Appliance Virtualization Platform CLI	103	navigation	125
client Solution Deployment Manager	15	documentation portal	125
collection		finding content	125
delete	125	navigation	125
edit name	125		
generating PDF	125	E	
sharing content	125	EASG	
configure		certificate information	98
Ethernet port speed	31	disabling	97
port speed	31	enabling	97
configure Appliance Virtualization Platform USB drive	40	status	97
configure AVP host license		EASG site certificate	99
from host CLI	79	editing	
configure log rotation		generic CSR	91
using CLI	70	location	54
configure server preinstalled with Appliance Virtualization Platform	47	editing the location	54
configuring		Edit Location	54
WebLM Server on Appliance Virtualization Platform ...	77	enable NIC teaming alarms	30
content		Enable Stricter Password Policy	
publishing PDF output	125	field descriptions	46
searching	125	enabling	
sharing	125	SSH on Appliance Virtualization Platform	52
sort by last updated	125	Enabling	50
watching for updates	125	Enhanced Access Security Gateway	
creating		EASG overview	97
generic CSR	91	Errors while connecting to Appliance Virtualization Platform	
CSR		host from vSphere Web Client	101
create field description	92	esxcfg-route	61
edit field description	92	esxcli network ip interface ipv4 set -i vmk0 -l	61
customize AVP banner		ESXi host	
from the host CLI	69	adding	55
		restarting	64, 102
D		ETH_CLEAR	112
deleting		ETH_FAULT	111
location	54	Ethernet port speed	31
deleting a location	54		
deploy Appliance Virtualization Platform	40	F	
deploy AVP Utilities and virtual machines		FAN_CLEAR	105
services port	130	FAN_FAULT	105
deploying		field descriptions	
Appliance Virtualization Platform using a setup script ..	43	change password	68
deploy virtual machines on Appliance Virtualization Platform	129	Create AVP Kickstart	38
disable NIC teaming alarms	30	create CSR	92
disabling		edit CSR	92
SSH on Appliance Virtualization Platform	52	Edit Location	54
DISK_CLEARED	107	Host Network / IP Settings	65
DISK_FAULT	106	load AVP host certificate	94
		New Location	54
		WebLM Configuration	78

field descriptions, Snapshot Manager	96	location (<i>continued</i>)	
finding content on documentation center	125	adding	53
finding port matrix	125	deleting	54
		editing	54
G		view	53
generating		LOG_CLEAR	110
certificates	90	LOG_FAULT	109
generating kickstart file		log trace	
Appliance Virtualization Platform	37	installation	101
generic CSR			
creating	91	M	
editing	91	MEM_CLEAR	106
		MEM_FAULT	105
H		Monitor team and link status	30
hardware supported	33	My Docs	125
host	58, 65		
		N	
I		networking	
InSite Knowledge Base	127	Appliance Virtualization Platform	23
install		network parameters	
Application Enablement Services	34	change	67
Avaya Aura applications	34	New Location	54
Avaya Aura Media Server	34	NIC_TEAM_CLEAR	122
Avaya Breeze	34	NIC_TEAM_DEGRADED	122
Branch Session Manager	34	NIC_TEAM_FAULT	122
Communication Manager	34	NIC teaming	
SAL	34	active mode	29
SDM	34	modes	29
Session Manager	34	standby mode	29
Solution Deployment Manager client	34	NIC teaming alarms table	31
System Manager	34		
WebLM	34	O	
install license file	76	obtain the license file	76
Install License page	77	Out of Band Management	
IP address and default gateway		deploy virtual machines	129
changing	61		
IP forwarding	50	P	
		password	
K		change	68
knowledge required	10	password change	
		Appliance Virtualization Platform host	62
L		password policy	51, 62
LICENSE_CLEAR	121	password rules	51
LICENSE_ERROR	119	port matrix	125
LICENSE_FAULT	120	POWER_CLEAR	108
license file	76	POWER_FAULT	107
install	76	preinstall Appliance Virtualization Platform	47
license file installation	77	PROC_CLEAR	113
load AVP host certificate		PROC_FAULT	113
field descriptions	94		
location			

R

reboot	
Appliance Virtualization Platform	65, 102
restarting	
Appliance Virtualization Platform	64, 102
ESXi host	64, 102

S

scenario	
deploy Appliance Virtualization Platform on services port	130
deploy virtual machines on Appliance Virtualization Platform	130
scenario is enabled	
deploy virtual machines on Appliance Virtualization Platform when Out of Band Management	129
SDM	
installation	34
SDM Client	17
searching for content	125
security hardening	81
policies	82
Security recommendations	81
servers supported	33
services port	
deploy AVP Utilities	130
virtual machines	130
Services Port VM	50
sharing content	125
shutdown	
Appliance Virtualization Platform	63
shutting down	
AVP	63
site certificate	
add	99
delete	99
manage	99
view	99
skills required	10
snap_retention	
commands and parameters	71
disable snapshot retention time	72
enable snapshot retention time	71
view snapshot retention status	72
SNAPSHOT_CLEAR	121
SNAPSHOT_FAULT	121
Snapshot Manager	
virtual machine snapshot	96
Snapshot Manager field descriptions	96
software details	
Appliance Virtualization Platform	34
Solution Deployment Manager	15, 51
supported applications	20
Solution Deployment Manager client	15
Solution Deployment Manager Client	17

sort documents by last updated	125
SSH from AVP Utilities	51
SSL verification failure for Appliance Virtualization Platform host	101
support	127
supported servers	33
SYS_CLEAR	113
SYS_FAULT	112

T

TEMP_CLEAR	109
TEMP_FAULT	108
TEST_ALARM	104
third-party AVP certificates	
creating generic CSR	91
editing generic CSR	91
third-party certificates	
applying to Appliance Virtualization Platform	92
TLS version	32
tools required	10
training	126
troubleshoot	
Appliance Virtualization Platform	100
defective USB	100
duplicate IP address	100

V

validation	
certificate	89
verify	
Appliance Virtualization Platform version and ESXi version	95
verifying AVP host license status	
from host CLI	80
videos	126
view	
location	53
Viewing AVP host	
license status	80
view location	53
Virtualized Appliance	13
Virtualized Environment	13
virtual machine	
snapshot on Appliance Virtualization Platform	95
virtual machine snapshot using SDM	
deleting	96
VOLTAGE_CLEAR	114
VOLTAGE_FAULT	114

W

WATCHDOG_CLEAR	116
WATCHDOG_FAULT	115
watch list	125

Index

WebLM overview	75
WebLM Server on AVP host	77