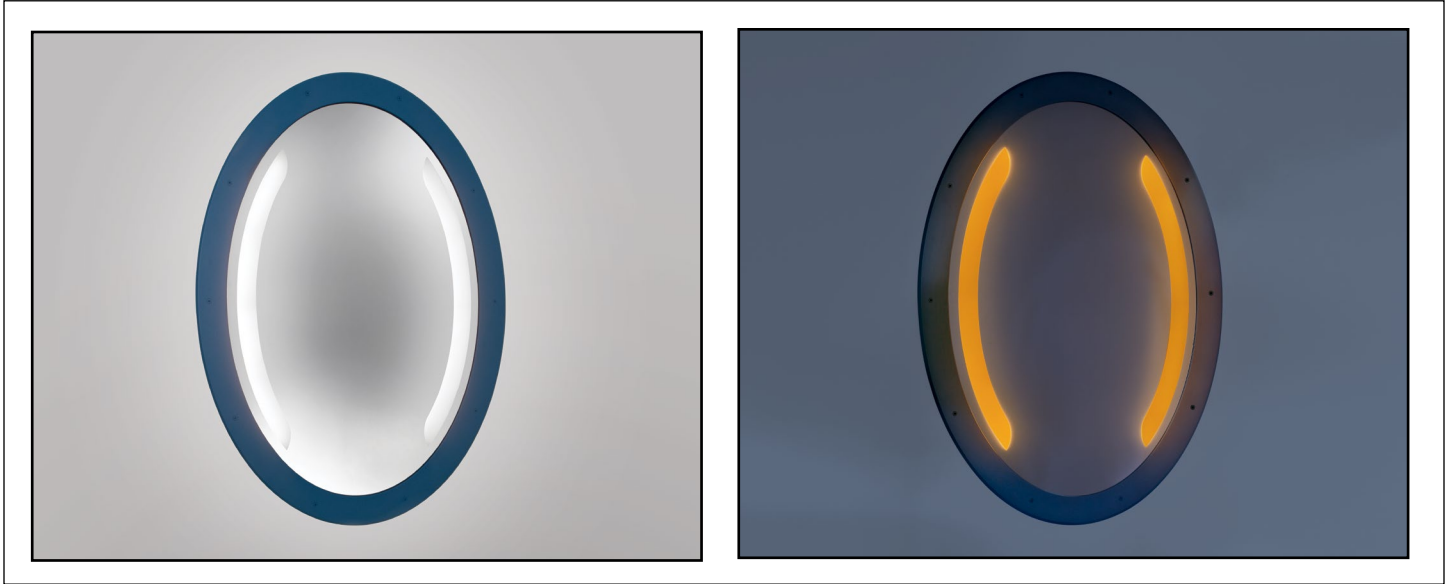


CB1853 SOLE™

Illuminated Mirror for Behavioral Health/High Abuse Care



VisaLighting.com/products/Sole

Type: _____ Project: _____ Location: _____

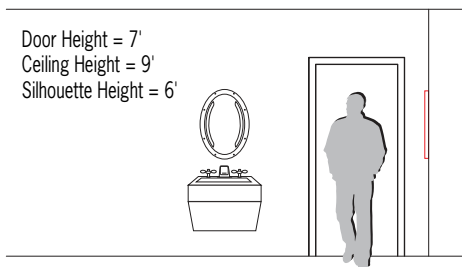

**DIMENSIONS**

W = Width H = Height RD = Recessed Depth

W	23-7/8" (606 mm)
H	33-7/8" (860 mm)
RD	3-3/4" (95 mm)

**FEATURES**

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Remote driver box is delivered wired and attached to the back of the LED assembly
- Recommend removing driver box from LED assembly and mounting in a remote location to allow servicing without disturbing mirror installation
- Optional amber LED Night Light
- IP65 rated for wash down applications
- IK10+ (100 joules) Impact resistant polycarbonate mirror
- Ligature resistant
- Heavy duty 5/16" machined aluminum frame
- Tamper resistant hardware
- Optional antimicrobial coating (no VOC) on mirror frame
- Scratch resistant coating for polycarbonate mirror surface; abrasion resilient silicone hard coating offering the ultimate level of scratch resistance
- No VOC powder coat paint
- ETL listed for wet locations. Not suited for exterior applications

RELATIVE SCALE DRAWING**PHOTOMETRICS**

Compliant



IP65



ADA Compliant



ETL Listed



5 Year Warranty

CB1853 SOLE (cont.)

Illuminated Mirror for Behavioral Health/High Abuse Care



Fill in shaded boxes using information listed below

CB1853	- MVOLT				
MODEL	SOURCE ¹	VOLTAGE MVOLT	SOURCE OPTION ²	FINISH	OPTION ³
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)		NGT	See last page for finish order codes	AMC

SOURCE¹ (Select one)

Dimmable 0-10V to 1%
Minimum 90CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens	Power/Watts
L30K(H)	3000K	800	20
L30K(L)	3000K	400	14
L35K(H)	3500K	800	20
L35K(L)	3500K	400	14
L40K(H)	4000K	800	20
L40K(L)	4000K	400	14

-L output intended to deliver 20fc maintained illuminance at 24 inches from center of mirror face. Intended for users between ages 25-65.

-H output intended to deliver 40fc maintained illuminance at 24 inches from center of mirror face. Intended for users over age 65.

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L80 (reported)	> 60,000 hrs
----------------	--------------

SOURCE OPTION²

		Delivered Lumens	Power/Watts
NGT	Night Light (amber LED) (non-dimming)	50	6

OPTION³

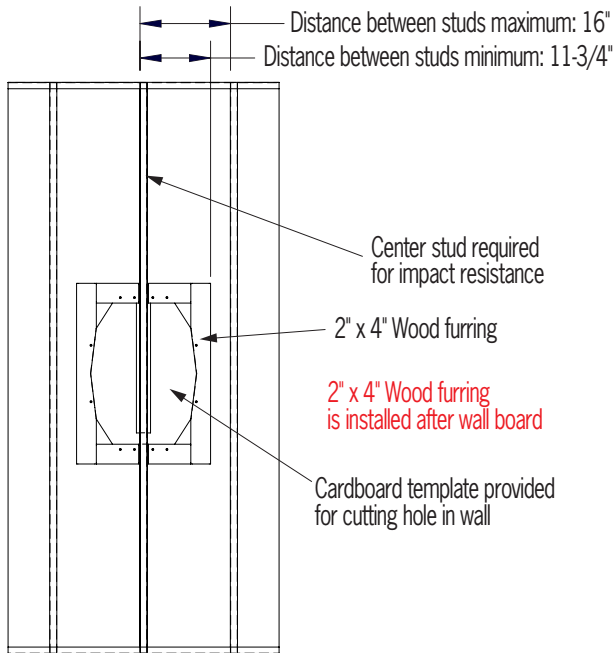
AMC	Antimicrobial coating (no VOC) for painted surfaces
-----	---

CB1853 SOLE (cont.)

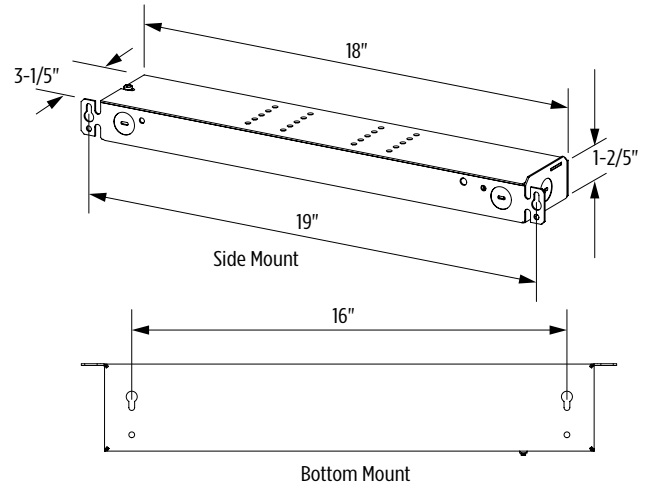
Illuminated Mirror for Behavioral Health/High Abuse Care



FRAMING DETAIL



REMOTE DRIVER INFORMATION



Maximum Recommended Remote Wiring Distance from remote driver box to fixture

- 18AWG – 50ft
- 16AWG – 80ft
- 14AWG – 130ft
- 12AWG – 200ft
- 10AWG – 330ft

See [Sole field instructions](#) for 2" x 4" wood furring dimensions.

- Cardboard hole template provided with each mirror
- No parts required from Visa Lighting prior to installation of wall board. 2" x 4" wood furring is installed after cutting the hole in the wall for the LED assembly
- 2" x 4" wood furring must be installed as described, to achieve rated impact resistance and to avoid a safety hazard
- Remote driver box is delivered wired and attached to the back of the LED assembly
- Recommend removing driver box from LED assembly and mounting in a remote location to allow servicing without disturbing mirror installation

SOLE PRODUCT FAMILY

- CB1851
- CB1853
- CB1855
- CB1857

See [VisaLighting.com/products/Sole](https://www.VisaLighting.com/products/Sole) for more information

CB1853 SOLE (cont.)












Illuminated Mirror for Behavioral Health/High Abuse Care



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes.

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
						
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
						
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VLBK Velvet Black	VNRD Vineyard Red	