

HabiStat Classic Pro Dimming Thermostat, Model Numbers: HTCPD (UK Plug) HTCPDX (European Plug)

When unpacking your new HabiStat thermostat please ensure you read all of the following instructions thoroughly so you can understand how your new thermostat works.

We have attached some helpful graphics to give you a good visual representation of how to use your new thermostat. Retain all documents for future reference.

Here is a quick guide to get to grips with how your new thermostat looks and some of its features:

- An electronic dimming thermostat that gradually increases and decreases power and is especially suitable for use with light emitting heat bulbs
- LCD screen to show current temperature readings in Celsius
- Heat Indicator shows when your thermostat is calling for heat. Note, if set temperature is exceeded by 3°C 'HHH' will flash and the alarm will sound
- Up indicator press or press and hold to increase temperature in increments of 0.1°C
- Down indicator press or press and hold to decrease temperature in increments of 0.1°C
- Locating tabs top and bottom. If you want to permanently fix the thermostat use the locating tabs with screws or double sided tape
- Waterproof chemically resistant removable temperature sensor. Note, when detached 'EEE' will flash and the alarm will sound
- Plug for connection to mains
- Socket for connection to heater. Do not exceed a heater load of 450 watts at 220-240V-50Hz AC
- Super quick acting external fuse. Only use ultra-rapid quick blow type FF3.15 amp for this device
- Section cup. Use to secure probe to a smooth surface if required.

Now you are familiar with how your new thermostat looks, let's go into a little more detail.

This thermostat will measure temperatures of -35°C to 120°C but will only be able to control temperatures between 0°C and 50°C.

Out of the box your thermostat is set to 30°C with a fixed over temperature alarm of 3°C above set temperature.

If you wish to turn on the alarm under normal working conditions, please press and hold both up and down indicators for 5 seconds, when the display shows 'AL', that means alarm sound is now turned on. In the event of an alarm due to over temperature the screen will also flash 'HHH'.

To disable the alarm sound under normal working conditions, please press and hold both up and down indicators for 5 seconds, when the display shows 'NO', that means the alarm sound is now turned off.

In the event of over temperature with the alarm sound turned off the screen will still flash 'HHH' but no alarm will sound.

If your thermostat probe is reading a temperature 3°C or more cooler than the thermostat set temperature 'LLL' will flash on the display, but no alarm will sound.

You will notice your thermostat's temperature probe is now detachable, in the event this becomes unplugged or faulty an alarm will sound while 'EEE' flashes on screen. Please note if you have switched the alarm off this will not sound in the event of a fault.

You might notice these symbols on your thermostat what it is in use, this symbol  is an indicator that your thermostat is sending power to your heat source.

This symbol  will flash in the event where your thermostat is in an alarm mode.

To change your temperature up or down press the directional arrow   you wish to change once the temperature begins to flash you can press or press and hold until the desired temperature is met, these changes are done in 0.1°C increments. Once the new temperature is reached release the button and wait for the temperature to stop flashing, when the flashing stops the new temperature is set.

Graphics to help you install your new thermostat correctly

- Dimming Thermostat
- Heat source e.g. Basking Spot lamp & other suitable heat sources
- Connect to mains power
- Hot end. Put all the heaters, background and hot spot, at one end of the cage
- Attach heat source to socket
- Cooler end. This area will be cooler than the set temperature on the thermostat
- Thermostat probe, the area this is placed will heat to the set temperature of your thermostat, this is best being placed just away from the basking spot
- Temperature gradient
- Basking Spot

Reptiles are Ectotherms which means they regulate body temperature by means of their environment. Your setup must have a correct temperature gradient (1) with a hotter end (2) a cooler end (3) and a basking spot (4). Your reptile will move along the gradient (5) to find the correct temperature. Place the heat source (6) at the hot end of the vivarium (7) to create a basking spot (4). A dimming thermostat uses a very accurate method of temperature control. Power is fed to the heater in a continuously variable amount. This is proportional to the power requested. You will know when your thermostat is heating via the Heat indicator icon (8).

The heat source (6) must not be oversized for the vivarium, but must still be capable of reaching the correct basking spot (4) for the species it's intended for. Please use the correct wattage heat source (6) so that your dimming thermostat doesn't have to constantly dim the heat source (6) to reach the correct basking spot (4) temperature. Ideally, your new dimming thermostat will only need to work the minimal amount and prevent the cool side (3) from getting too hot, not being used to control your basking spot (4). Please do not overload the thermostat, a total load of 450 watts must not be exceeded.

The HabiStat thermostat will ensure the cool end (3) doesn't get too hot, set the temperature a few degrees cooler than the desired basking spot (4) temperature. This will allow your basking spot (4) to get to the correct temperature, but ensure the cool end (3) doesn't get too hot. The thermostat will only read temperatures at the point detected by its sensor (9). The sensor is best placed just away from the basking spot (4) and not in a direct line of sight to the heat source.


Although the thermostat's probe is accurate at recording temperatures, the basking spot (4) temperature and cool side (3) temperature should always be checked with a separate thermometer.

GUARANTEE Your thermostat comes with a one-year warranty from the date of purchase. In the event of a malfunction, please do not open or modify the unit, as any tampering - such as cutting wires or drilling into the casing - will void the warranty. In the unlikely occurrence that your thermostat fails, return it with proof of purchase and a description of the fault to your place of purchase. We will aim to repair or replace the unit as quickly as possible. Repairs within the warranty period are free of charge. For repairs outside the warranty, a £12 administration fee plus postage costs will apply, unless the thermostat is deemed irreparable, in which case no fee will be charged. If your repair falls outside the warranty period, please include payment or credit card details with the thermostat. No liability is accepted other than for the repair or replacement of a faulty product. This does not affect your statutory rights.

Menfield Nutrition Ltd, Arthur Rickwood Farm, Chatteris Road, Nepai, Ely, Cambridgeshire, CB6 2AZ, www.habistat.com info@habistat.com

HabiStat

Dimming Thermostat Instructions

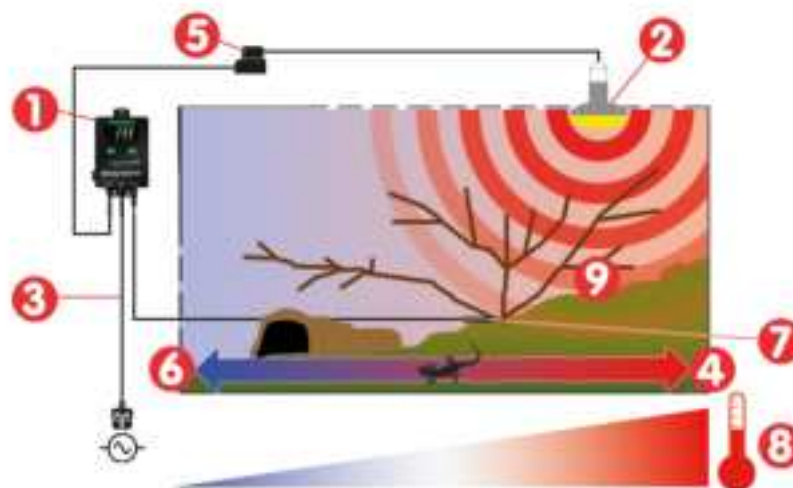

Hottel® Classic Pro Drying Thermostat, Model Numbers HTCM3 ZEN Plus HTCMX Euro PA