
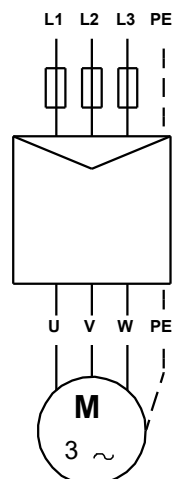
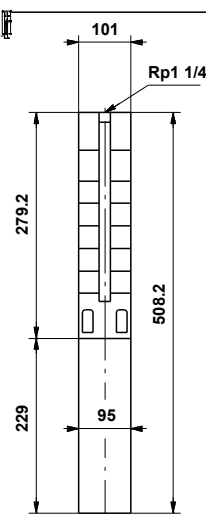
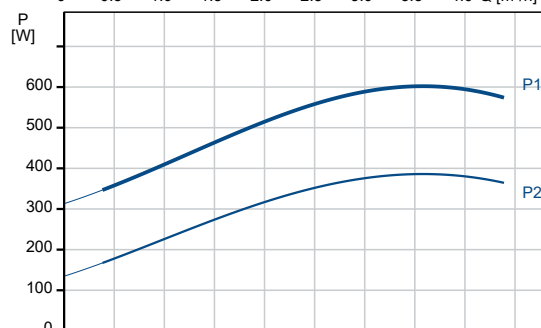


Qty.	Description
1	<div data-bbox="204 161 295 190" data-label="Section-Header"> <p><b>SP 3A-6</b></p> </div> <div data-bbox="363 197 424 528" data-label="Image"> </div> <div data-bbox="593 506 1062 528" data-label="Text"> <p>Note! Product picture may differ from actual product</p> </div> <div data-bbox="204 537 467 564" data-label="Text"> <p>Product No.: <a href="#">10001K06</a></p> </div> <div data-bbox="204 598 1452 853" data-label="Text"> <p>Submersible borehole pump, suitable for pumping clean water. Can be installed vertically or horizontally. All steel components are made in stainless steel, EN 1.4301 (AISI 304), that ensures high corrosive resistance. This pump carries drinking water approval.</p> <p>The pump is fitted with a 0.37 kW MS402 motor with sand shield, lip seal, water-lubricated journal bearings and a volume compensating diaphragm. The motor is a canned type submersible motor offering good mechanical stability and high efficiency. Suitable for temperatures up to 40 °C.</p> <p>The motor is not fitted with a temperature sensor. If temperature monitoring is desired, a Pt1000 sensor can be fitted.</p> <p>The motor is for direct-on-line starting (DOL).</p> </div> <div data-bbox="204 884 512 916" data-label="Section-Header"> <p><b>Further product details</b></p> </div> <div data-bbox="204 920 845 947" data-label="Text"> <p>The pump is suitable for applications similar to the following:</p> </div> <div data-bbox="240 952 510 1095" data-label="List-Group"> <ul style="list-style-type: none"> <li>- raw-water supply</li> <li>- irrigation</li> <li>- groundwater lowering</li> <li>- pressure boosting</li> <li>- fountain applications.</li> </ul> </div> <div data-bbox="204 1099 282 1131" data-label="Section-Header"> <p><b>Pump</b></p> </div> <div data-bbox="204 1135 1452 1209" data-label="Text"> <p>All pump surfaces that are in contact with pumped liquids are made in stainless steel which makes them corrosion- and wear-resistant. The corrosion diagram below shows the capabilities of the pump and motor in relation to the temperature in Celsius (y-axis) and the concentration of chloride in ppm (x-axis).</p> </div> <div data-bbox="204 1229 1109 1585" data-label="Figure"> </div> <div data-bbox="204 1621 1452 1731" data-label="Text"> <p>The elastomer parts in the pump are made of NBR (Nitrile-Butadiene Rubber) and TPU (Thermoplastic Poly-Urethane) which offers good wear resistance and long service intervals.</p> <p>The suction interconnector is fitted with a strainer to prevent large particles from entering the pump. The suction interconnector is designed to comply with NEMA standards for motor mounting/dimensions.</p> </div> <div data-bbox="204 1767 282 1798" data-label="Section-Header"> <p><b>Motor</b></p> </div> <div data-bbox="204 1803 1452 1998" data-label="Text"> <p>The stator is hermetically encapsulated in stainless steel and the windings are embedded in polymer compound. This results in high mechanical stability, optimum cooling and reduces the risk of short circuits in the windings.</p> <p>The shaft seal is of the lip seal type characterised by low friction against the rotor shaft. The NBR elastomer offers good wear resistance, good elasticity and resistance to particles. The rubber material is approved for use in potable water.</p> <p>The motor can be fitted with a Pt100 or Pt1000 sensor that together with a control unit ensures that the maximum operating temperature conditions are not exceeded.</p> </div> <div data-bbox="204 2033 633 2089" data-label="Text"> <p>Liquid: Pumped liquid: Water</p> </div>

Qty.	Description
	<p>Liquid max temp: 40 °C</p> <p>Max liquid t at 0.15 m/sec: 40 °C</p> <p>Selected liquid temperature: 20 °C</p> <p>Density: 998.2 kg/m<sup>3</sup></p> <p>Technical:</p> <p>Pump speed on which pump data are based: 2900 rpm</p> <p>Rated flow: 3 m<sup>3</sup>/h</p> <p>Rated head: 27 m</p> <p>Shaft seal for motor: LIPSEAL</p> <p>Approvals on nameplate: CE,EAC</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p>Motor version: T40</p> <p>Specification for shaft end: SPLINE</p> <p>Materials:</p> <p>Pump: Stainless steel EN 1.4301 AISI 304</p> <p>Impeller: Stainless steel EN 1.4301 AISI 304</p> <p>Motor: Stainless steel DIN W.-Nr. 1.4301 AISI 304</p> <p>Installation:</p> <p>Pump outlet: Rp1 1/4</p> <p>Motor diameter: 4 inch</p> <p>Electrical data:</p> <p>Motor type: MS402</p> <p>Rated power - P2: 0.37 kW</p> <p>Power (P2) required by pump: 0.37 kW</p> <p>Mains frequency: 50 Hz</p> <p>Rated voltage: 3 x 380-400-415 V</p> <p>Rated current: 1.30-1.40-1.50 A</p> <p>Starting current: 400-390-380 %</p> <p>Cos phi - power factor: 0.70-0.64-0.60</p> <p>Rated speed: 2850-2860-2870 rpm</p> <p>Start. method: direct-on-line</p> <p>Enclosure class (IEC 34-5): IP68</p> <p>Insulation class (IEC 85): B</p> <p>Built-in temp. transmitter: no</p> <p>Motor No: 79192002</p> <p>Windings: Enamelled</p> <p>Others:</p> <p>Minimum efficiency index, MEI ≥: 0.70</p> <p>ErP status: EuP Standalone/Prod.</p> <p>Net weight: 10.2 kg</p> <p>Gross weight: 11.4 kg</p> <p>Shipping volume: 0.011 m<sup>3</sup></p> <p>Danish VVS No.: 388313060</p> <p>Swedish RSK No.: 5852977</p> <p>Finnish LVI No.: 4762650</p> <p>Country of origin: DK</p> <p>Custom tariff no.: 84137029</p>

Description	Value
<b>General information:</b>	
Product name:	SP 3A-6
Product No:	10001K06
EAN number:	5708601051364
<b>Technical:</b>	
Pump speed on which pump data are based:	2900 rpm
Rated flow:	3 m³/h
Rated head:	27 m
Stages:	6
Impeller reduc.:	NONE
Shaft seal for motor:	LIPSEAL
Approvals on nameplate:	CE,EAC
Curve tolerance:	ISO9906:2012 3B
Model:	A
Valve:	YES
Motor version:	T40
Specification for shaft end:	SPLINE
<b>Materials:</b>	
Pump:	Stainless steel
Pump:	EN 1.4301
Pump:	AISI 304
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Motor:	Stainless steel
Motor:	DIN W.-Nr. 1.4301
Motor:	AISI 304
<b>Installation:</b>	
Pump outlet:	Rp1 1/4
Motor diameter:	4 inch
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid max temp:	40 °C
Max liquid t at 0.15 m/sec:	40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
<b>Electrical data:</b>	
Motor type:	MS402
Applic. motor:	GRUNDFOS
Rated power - P2:	0.37 kW
Power (P2) required by pump:	0.37 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-400-415 V
Rated current:	1.30-1.40-1.50 A
Starting current:	400-390-380 %
Cos phi - power factor:	0.70-0.64-0.60
Rated speed:	2850-2860-2870 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Built-in motor protection:	NONE
Thermal protec:	external
Built-in temp. transmitter:	no
Motor No:	79192002
Windings:	Enamelled
<b>Others:</b>	
Minimum efficiency index, MEI ≥:	0.70
ErP status:	EuP Standalone/Prod.
Net weight:	10.2 kg
Gross weight:	11.4 kg
Shipping volume:	0.011 m³
Danish VVS No.:	388313060

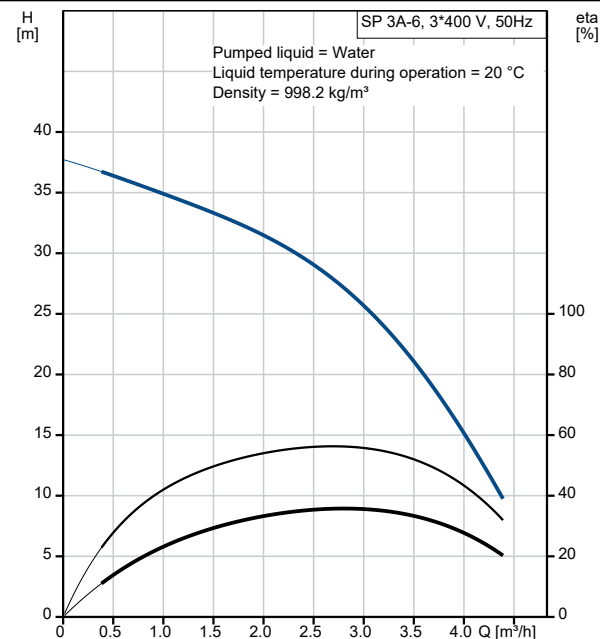

Description	Value
Swedish RSK No.:	5852977
Finnish LVI No.:	4762650
Country of origin:	DK
Custom tariff no.:	84137029