


30" Series 9 Integrated Warming Drawer

Series 9 | Integrated

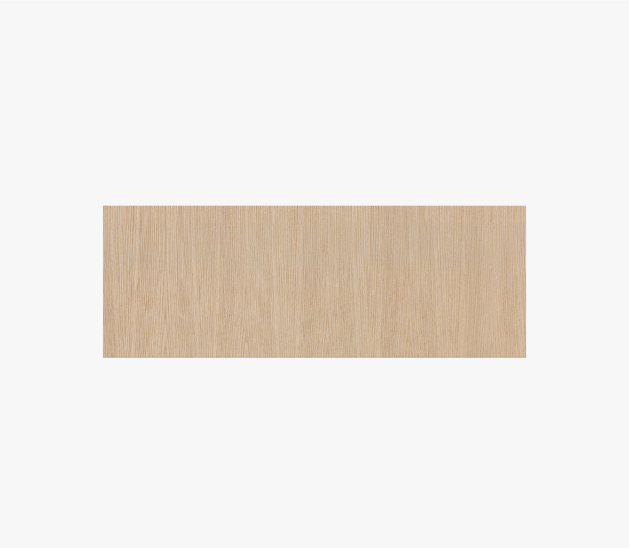

Keep plates warm until ready to serve; rapid proof or slow cook. Panel-ready, you can match it with your cabinetry.

- Integrate your warming drawer into your surrounding cabinetry for seamless design
- Space to keep 16 standard-sized place settings evenly warm, with accessory rack for optimising space
- Easy to clean smooth-glass base
- Six versatile tailored programmes for warming, proofing, dehydrating and slow cooking

DIMENSIONS

| | |
|--------|------------|
| Height | 10 11/16 " |
| Width | 28 7/16 " |
| Depth | 22 3/16 " |

FEATURES & BENEFITS

Complementary Design

Our Warming Drawer is panel ready with push-to-open, to blend seamlessly behind cabinetry.

Multi-Function Flexibility

Choose from six tailored functions including Rapid Proof, Dehydrate and Slow Cook.

Easy To Clean

Cleaning and care of the Warming Drawer is simple. After each use, just wipe out the smooth glass interior with a damp cloth.

Easy To Use

Soft-close with capacitive touch controls, our Warming Drawer comes with an accessory rack for optimising space.

Precise Control

With fast and even heating, our warming drawer is great for keeping food warm and low temperature cooking, as well as resting after a traditional roast in the oven and proofing dough.

Safe And Sound

With Automatic switch-off and Delayed start functionality, our warming drawers help keep dishes warm until it is time to serve the main meal.

SPECIFICATIONS

Accessories (included)

| | |
|------------|---|
| Wire shelf | 1 |
|------------|---|

Accessories (sold separately)

| | |
|--|-----------------------|
| Handle kit Contemporary square fine, aluminium | Part 82105 (optional) |
| Handle kit Contemporary square fine, black | Part 82103 (optional) |
| Handle kit Contemporary square, aluminium | Part 82214 (optional) |
| Handle kit Professional round flush | Part 82139 (optional) |

Capacity

| | |
|---|-----------|
| Accessory rack maximum allowable weight | 42lb |
| Cappuccino cups | 24 |
| Espresso cups | 54 |
| Maximum allowable weight | 55 lbs |
| Place settings | 16 |
| Usable depth | 16 1/16 " |
| Usable height | 9 1/16 " |
| Usable width | 27 1/2 " |

Cleaning

| | |
|------------------------------|---|
| Easy clean smooth-glass base | • |
|------------------------------|---|

Controls

| | |
|------------------|--------------------------|
| Audio feedback | • |
| Automatic timers | 30', 45', 1h, 2h, 4h, 6h |

| | |
|--------------------------------------|---|
| Electronic capacitive touch controls | • |
| Pre-set heating functions | • |
| Soft close drawer | • |
| Standby mode | • |

Functions

| | |
|---------------------|---|
| Cups | • |
| Dehydrate | • |
| Number of functions | 6 |
| Plates | • |
| Rapid proof | • |
| Slow cook | • |
| Warm | • |

Performance

| | |
|---------------------------|------------|
| Heated glass base and fan | • |
| Low temperature cooking | • |
| Temperature levels | 6 |
| Temperature range | 95°F-185°F |

Power Requirements

| | |
|------------------|---------------------------|
| Amperage | 10 A |
| Power outlet | 3-prong grounding-type |
| Supply frequency | 60 Hz |
| Supply voltage | 120 V |

Product Dimensions

| | |
|---|------------|
| Adjustable front door panel to align with surrounding cabinetry | • |
| Depth | 22 3/16 " |
| Height | 10 11/16 " |
| Width | 28 7/16 " |

Safety

| | |
|-----------------------------------|---|
| Automatic turn off after 12 hours | • |
| Full extension slides | • |

| | |
|-----|-------|
| SKU | 82114 |
|-----|-------|

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- [↓](#) 2D-DWG Integrated Warming Drawer
- [↓](#) 2D-DXF Integrated Warming Drawer
- [↓](#) Archicad Integrated Warming Drawer
- [↓](#) Data Sheet Integrated Warming Drawer
- [↓](#) Installation Guide
- [↓](#) Planning Guide Professional Style Dial/Handle Accessories
- [↓](#) Revit Integrated Warming Drawer
- [↓](#) Rhino Integrated Warming Drawer
- [↓](#) Sketchup Integrated Warming Drawer
- [↓](#) User Guide EN

[↓](#) User Guide FR

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 W www.fisherpaykel.com