

MAYTAG MVWC300B Top Loading Automatic Washer User **Manual**

Home » Maytag » MAYTAG MVWC300B Top Loading Automatic Washer User Manual



MAYTAG MVWC300B Top Loading Automatic Washer




Contents

- 1 PRODUCT MODEL NUMBERS
- **2 Washer Dimensions**
- 3 Recessed Area Or Closet Installation
- **4 ELECTRICAL REQUIREMENTS**
- **5 DRAIN SYSTEM**
- 6 Documents / Resources
 - **6.1 References**
- **7 Related Posts**

PRODUCT MODEL NUMBERS

- MVWC200X,
- MVWC400X,
- MVWC450X,
- MVWX500X,
- MVWX600X,
- MVWX700X,
- MVWC300X,
- MVWX550X,
- MVWC350A,
- MVWC360A,
- MVWC200B,
- MVWC300B,
- MVWC425B,
- MVWC215E,
- MVWC415E,
- MVWP475E,
- MVWC416F


Washer Dimensions

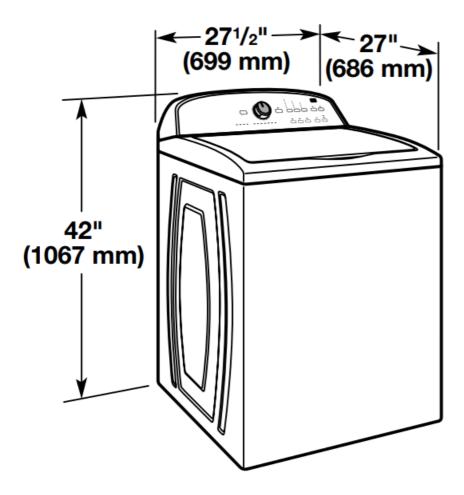

Recessed Area Or Closet Installation

Dimensions show recommended spacing allowed, except for closet door ventilation openings which are minimum required. This washer has been tested for installation with spacing of 0" (0 mm) clearance on the sides. Consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

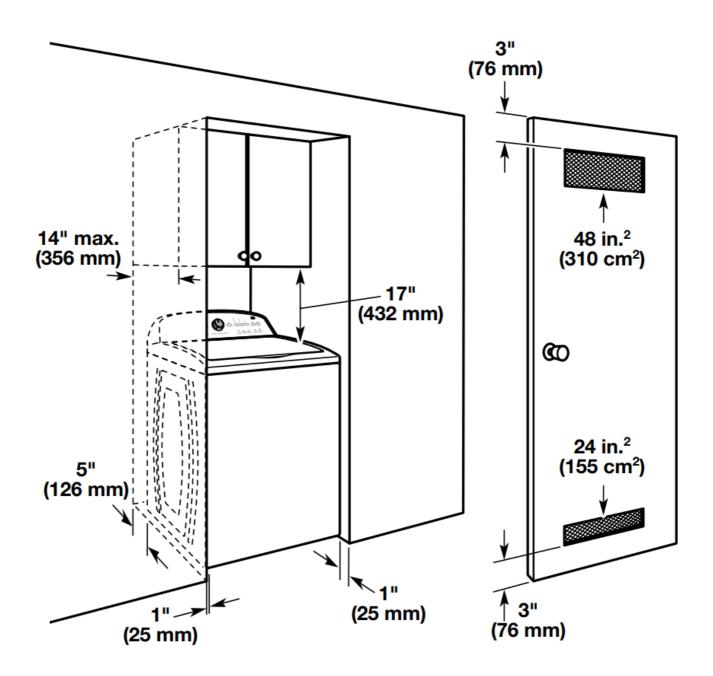

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


Floor standpipe drain system

Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. Top of standpipe must be at least 39" (990 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you must install higher than 96" (2.44 m), you will need a sump pump system.

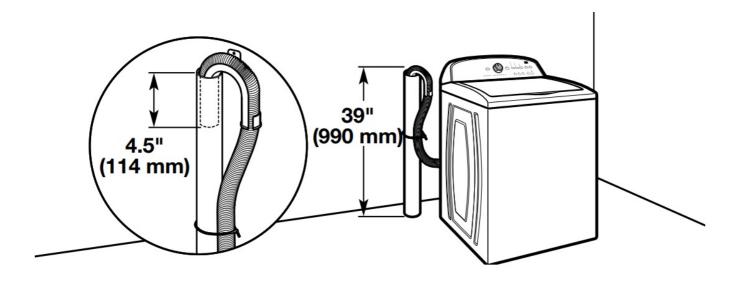


Wall standpipe drain system

See requirements for floor standpipe drain system.

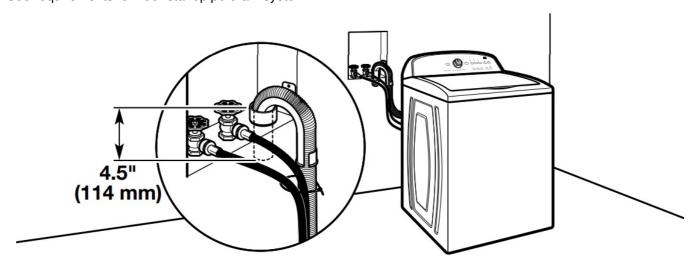

Floor drain system


Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. To order, please see toll-free phone numbers in your Use and Care Guide. Minimum siphon break: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

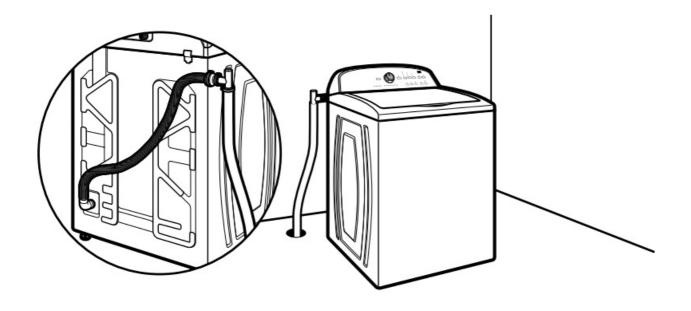

Laundry tub drain system

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 39" (990 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

IMPORTANT: To avoid siphoning, no more than 4.5" (114 mm) of drain hose should be inside standpipe or below the top of wash tub. Secure drain hose with cable tie.

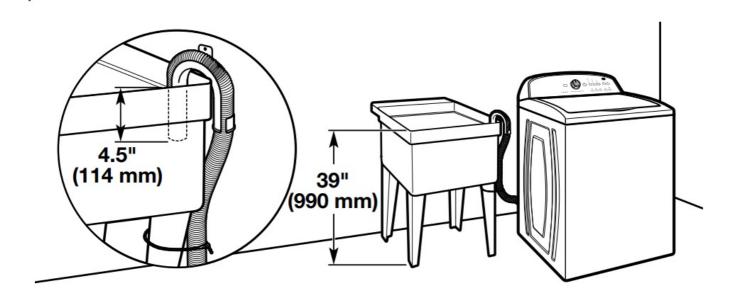

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



Documents / Resources



MAYTAG MVWC300B Top Loading Automatic Washer [pdf] User Manual MVWC300B Top Loading Automatic Washer, MVWC300B, Top Loading Automatic Washer, Loading Automatic Washer, Automatic Washer, Washer

References

- <u>Manual-Hub.com Free PDF manuals!</u>
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.