

Maytronics Dolphin E10 Robotic Pool Cleaner User Manual

Home » Maytronics Dolphin » Maytronics Dolphin E10 Robotic Pool Cleaner User Manual





Dolphin E10 Robotic Pool Cleaner User Manual

Contents

- 1 INTRODUCTION
- **2 SPECIFICATIONS**
- **3 POOL CLEANER PARTS**
- **4 CLEANING THE NET**

CANISTER

- **5 TROUBLESHOOTING**
- 6 Documents / Resources
- 7 Related Posts

INTRODUCTION

Thank you for purchasing a Maytronics Robotic Pool Cleaner.

We are sure that your Maytronics Robotic Pool Cleaner will provide you with reliable, convenient and costeffective pool cleaning. Its reliable filtration in all pool conditions and active brushing, enhance pool hygiene. Robotic Pool Cleaners by Maytronics deliver advanced cleaning technologys, long-lasting performance and easy maintenance. You and your family will be free to enjoy your swim with full confidence that your pool is completely clean.

SPECIFICATIONS

Motor protection:	IP 68
Minimum depth:	0.80m / 2.6ft
Maximum depth:	5m / 16.4ft

Digital Power supply

Input: 100-130 AC V	100-130 AC Volts / 200-230 AC Volts 50-60 Hertz
Output:	<30 VDC IP 54

WARNINGS AND CAUTIONS

3.1 Warnings

- Luse the originally supplied power supply only
- Ensure the electrical outlet is protected by a ground fault interrupter (GFI) or an earth leakage interrupter (ELI)
- Keep the power supply out of standing water
- Position the power supply at least 3m/10ft away from the edge of the pool
- Do not enter the pool while the Pool Cleaner is working
- Unplug the power supply before servicing


3.2 Cautions

Use the Pool Cleaner in the following water conditions only:


Chlorine	Maximum 4 ppm
рН	7.0-7.8
Temperature	6-34°C / 43-93°F
NaCl	Maximum 5000 ppm

POOL CLEANER PARTS


Robotic Pool Cleaner Model E10

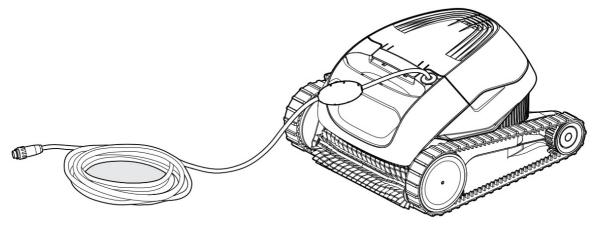

Power supply unit

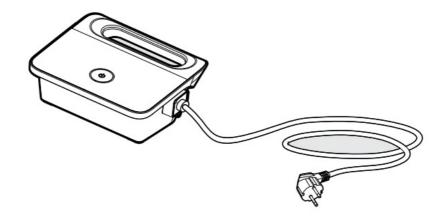


Filtration – options

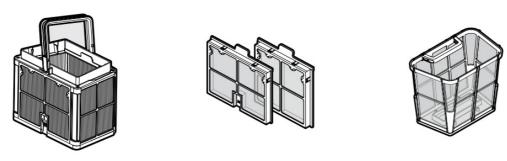


USING THE POOL CLEANER 5.1 Setup


Before using the Pool Cleaner for the first time, perform the following steps:

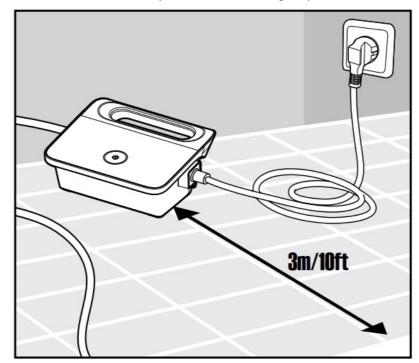


5.1.1 Position the power supply so that it is approximately in the middle of the long side of the pool at a distance of 3m /10ft.

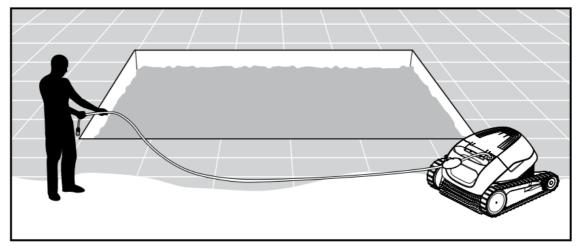

5.1.2 Unwind the cable and stretch it out completely so that it has no kinks.

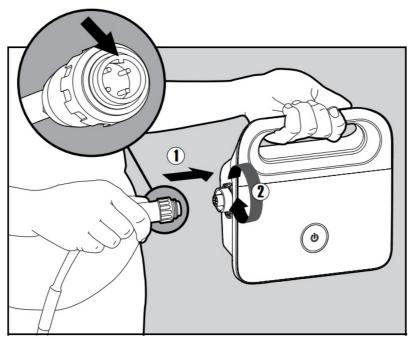


5.1.3 Attach the floating cable to the power supply by inserting it with the notch on the connector (1), lined up with the groove in the socket on the power supply, and turning clockwise (2).

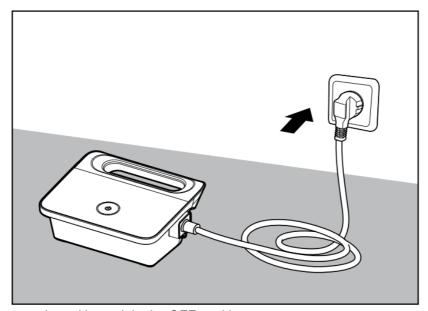


5.1.4 Plug in the power supply and leave it in the OFF position.

5.2 Putting the Pool Cleaner into the pool

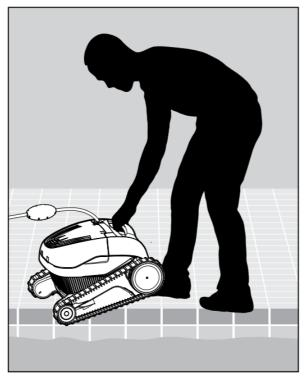


5.2.1 Put the Pool Cleaner into the pool. Release the Pool Cleaner and let it sink to the floor of the pool. Make sure that the floating cable is free of any obstructions.

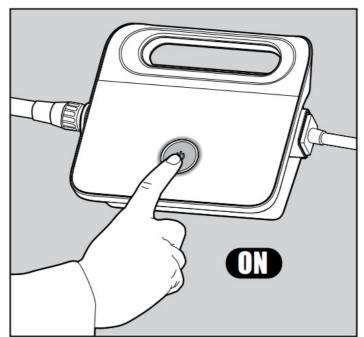


5.2.2 Turn the power supply ON. The Pool Cleaner will now operate until it has reached the end of the cleaning cycle.

5.3 Removing the Pool Cleaner from the pool




Turn OFF and unplug the power supply.

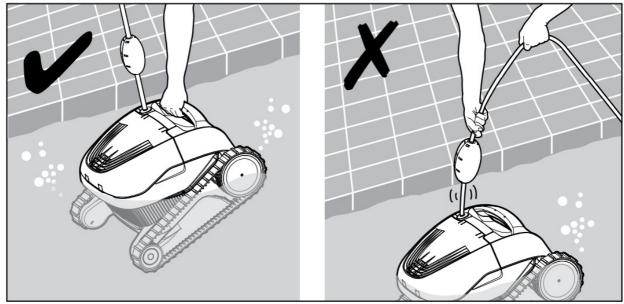

5.3.2 Using the floating cable, bring the Pool Cleaner to the pool's edge. Using the handle, remove the Pool Cleaner from the pool.

DO NOT PULL THE POOL CLEANER FROM THE POOL USING THE CABLE.

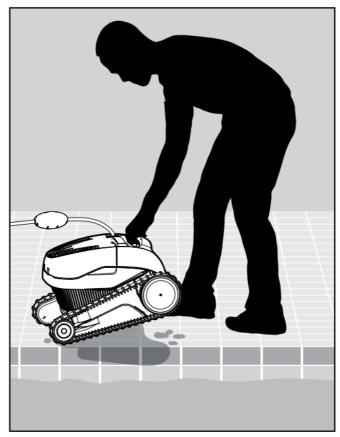

5.3.3 Place the Pool Cleaner on the edge of the pool and let the water drain out.


CLEANING THE FILTER BASKET

Make the power supply is switched off and unplugged.


It is highly recommended to clean the filter basket after each cleaning cycle.

Note: Do not let the filter basket dry out before cleaning.


6.1 Cleaning after use – removing and cleaning the filter basket

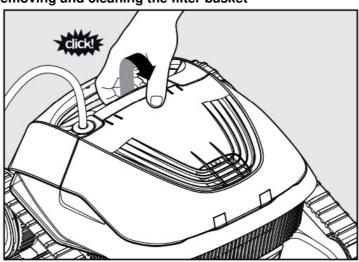


6.1.1 Open the filter cover.

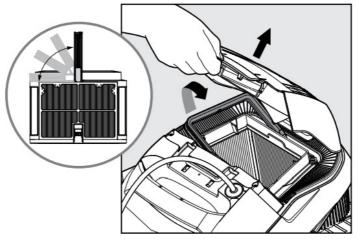


6.1.2 Upon opening the filter cover, the handle will lift independently.



6.1.3 Lift up the basket.




6.1.4 Open the latch to release the bottom lid in order to remove the debris.




6.1.5 Clean the filter basket with a hose.

6.2 Periodic cleaning - recommended at least once a month


Dismantle the 2 ultra-fine filter panels of the basket, according to the following steps:

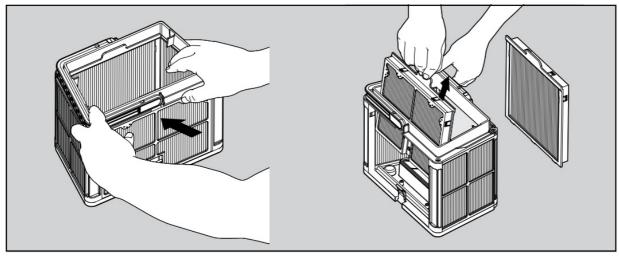


6.2.1 Dismantle the 2 panels using your thumbs.

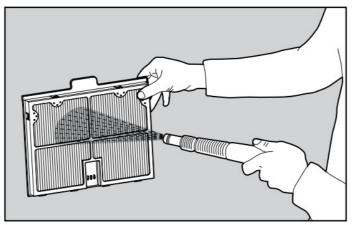

6.2.2 Clean the filter panels with a hose.






6.2.4 Insert the clean filter basket and close the filter cover.


CLEANING THE NET CANISTER

Make sur the power supply is switched off and unplugged. It is highly recommended to clean the net canister after each cleaning cycle. **Note:** Do not let the net canister dry out before cleaning.


7.1 Cleaning after use – removing and cleaning the net canister

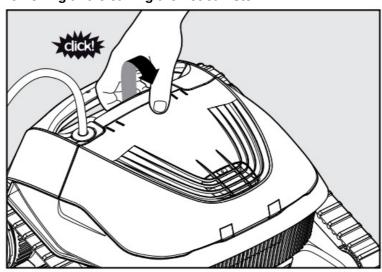

7.1.1 Open the filter cover.



7.1.2 Lift up the net canister.

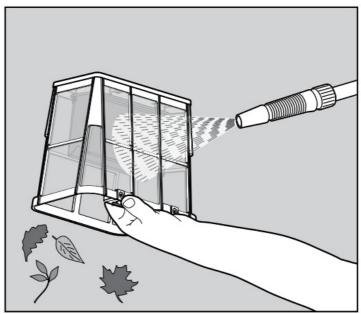


7.1.3 Clean the net canister with a hose.

CLEANING THE IMPELLER


If you notice debris trapped in the impeller:

Make sur the power supply is switched off and unplugged.


8.1 Clean the debris trapped in the impeller opening, according to the following steps:

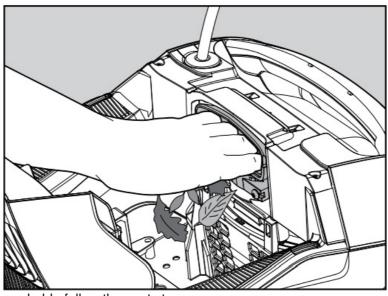

8.1.1 If the debris is not reachable follow the next steps.

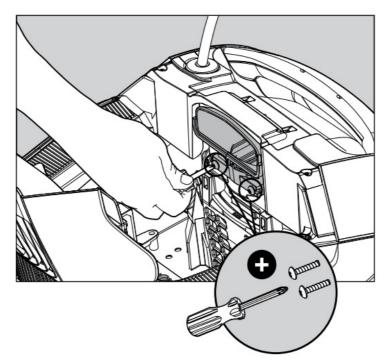

8.1.2 Using a short screwdriver open the 2 screws.

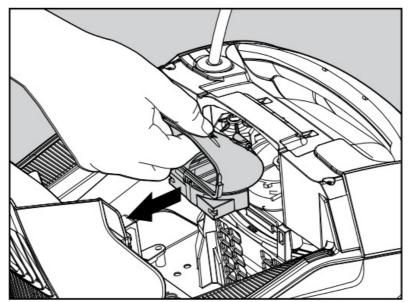

8.1.3 Pull the impeller cover backwards to release it. Clean the debris trapped around the impeller. Assemble the impeller cover.

OFF-SEASON STORAGE

If the Pool Cleaner will not be in use for an extended period of time, perform the following storage steps:

- Make sure that no water is left in the Pool Cleaner
- Thoroughly clean the filter basket and panels / canister and insert in place
- Roll up the cable so that it has no kinks
- Store the Pool Cleaner in a protected area out of direct sun / rain / frost, at a temperature of between 5°-45°C / 41°-113°F


TROUBLESHOOTING

If the suggested solutions do not solve the problem, please contact your dealer or Service Center.

Symptom	Possible reason	Corrective action
The power-sup ply or its switch led are not wor king.	 No voltage in the power socket in the wall. The power supply is not switched O N. The power cable is not well connected into the power supply inlet. 	 Check that there is voltage in the power socket in the wall. Check that the power supply is plugged in and turned ON. Check that the power cable is securely connected all the way into the power supply. Turn the power supply off. Wait 30 seconds then turn it back on.
The Pool Clean er does not mo ve.	 The floating cable is not well connected into the power supply outlet. An obstacle blocks the impeller, tracks or wheels. 	•Check that the floating cable is securely connected a II the way into the power supply •Unplug the power supply. Open the impeller cover an d check that nothing is trapped in the impeller. Verify t hat nothing blocks the tracks or wheels.
The Pool Clean er is moving in circles.	 Clogged filter basket/canister. Debris stuck in the impeller-house or impeller-cover. Power supply incorrectly positioned. Algae or pool water is out of Spec. 	Clean the filter basket/canister. Remove debris stuck in the impeller-house or impelle r-cover (according to the drawings). Place power supply in a position so that the Pool Cle aner can freely reach all the pool area. Correct pool and water conditions.
The Pool Clean er does not tur n or moves in o ne direction onl y.	•Debris stuck in the impeller-house o r impeller-cover.	•Remove debris stuck in the impeller-house or impelle r-cover (according to the drawings).
The Pool Clean er moves but d oes not clean t he pool.	Clogged filter basket/canister. Debris stuck in the impeller-house or impeller-cover.	Clean the filter basket/canister. Remove debris stuck in the impeller-house or impelle r-cover (according to the drawings).
The Pool Clean er cleans only part of the pool.	•Power supply incorrectly positioned. •Not enough floating is released for the correct operation of the Pool Cleaner.	 Place the power supply in a position so that the Pool Cleaner can freely reach all the pool area. Check that there is enough slack in the floating cable for the Pool Cleaner to reach all of the pool. Clean the filter basket/canister.
The floating ca ble has kinks.	Clogged filter basket/canister. Debris stuck in the impeller-house or impeller-cover.	 Clean the filter basket/canister. Remove debris stuck in the impeller-house or impelle r-cover (according to the drawings). To remove the kinks, stretch the floating cable out completely and let it sit for at least a day in the sun.
The Pool Clean er doesn't clim b the walls.	 Clogged filter basket/canister. Algae on walls. Unsuitable pH level. Debris stuck in the impeller-house or impeller-cover. 	•Clean the filter basket/canister. •Check the level of the chemicals of the water. Improp er levels may allow the growth of algae making the wa lls slippery. If so, adjust the levels and scrub the walls. •Remove debris stuck in the impeller-house or impelle r-cover (according to the drawings).



Documents / Resources

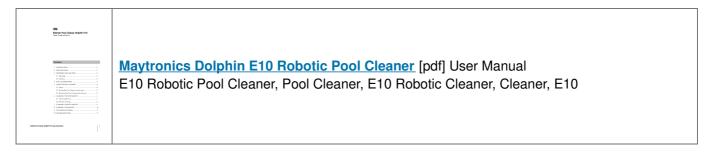

Manuals+,