



MEAN WELL DDR-120A-12 120W DIN Rail Type DC-DC Converter Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL DDR-120A-12 120W DIN Rail Type DC-DC Converter Owner's Manual 




120W DIN Rail Type DC-DC Converter DDR-120 series



User's Manual



https://www.meanwell.com/Upload/PDF/DDR-120,240,480_EN.pdf

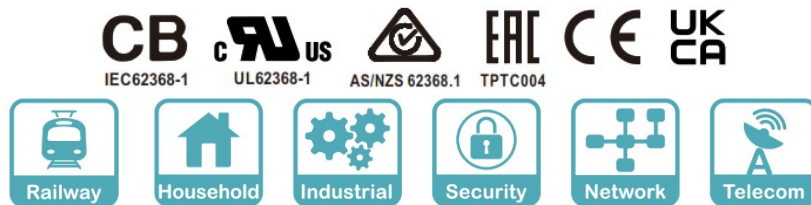

Contents

- 1 DDR-120A-12 120W DIN Rail Type DC-DC Converter
- 2 Features
- 3 Applications
- 4 GTIN CODE
- 5 Description
- 6 Model Encoding
- 7 SPECIFICATION
- 8 Block Diagram
- 9 Derating Curve
- 10 Output derating VS input voltage
- 11 Peak Loading
- 12 Input Fuse
- 13 Input Under-Voltage Protection
- 14 Input Reverse Polarity Protection
- 15 Input Range and Transient Ability
- 16 Inrush Current
- 17 Hold-up Time
- 18 Efficiency vs Load & Vin Curve
- 19 Immunity to Environmental Conditions
- 20 EN45545-2 Fire Test Conditions
- 21 Mechanical Specification
- 22 Installation Manual
- 23 Documents / Resources
 - 23.1 References
- 24 Related Posts

DDR-120A-12 120W DIN Rail Type DC-DC Converter

Features

- Compliance to BS EN/EN50155 and BS EN/EN45545-2 railway standard Width only 32mm
- 2:1 wide input range
- -40~+70C wide working temperature

- 150% peak load capability
- DC output adjustable
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Protections: Short circuit / Overload / Over voltage / Input reverse polarity / Input under voltage protection
- 4KVdc I/O isolation(Reinforced isolation)
- 3 years warranty

Applications

- Bus, tram, metro or railway system
- Industrial control system
- Semi-conductor fabrication equipment
- Factory automation
- Electro-mechanical
- Wireless network
- Telecom or datacom system

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

DDR-120 series is a 120W DIN Rail type DC-DC converter with main features including DIN rail-type easy installation, ultra slim width (32mm), 2:1 wide input voltage, fanless design, -40~+70 C wide operating temperature, 4KVdc I/O isolation, 150% peak load, adjustable output voltage and full protective functions.

This series of models has various input options: 9~18V/16.8~33.6V /33.6~67.2V /67.2~154V and various output options: 12V /24V/ 48V and can be used for industrial & railway control, security control, communication system and other fields. Suitable applications include DC buck/boost regulator, increasing system insulation level and voltage drop compensation along cable...etc.

Model Encoding



SPECIFICATION

MODEL		DDR-120A-12	DDR-120A-24	DDR-120A-48	DDR-120B-12	DDR-120B-24	DDR-120B-48
	DC VOLTAGE	12V	24V	48V	12V	24V	48V

OUTPUT	RATED CURRENT	8.3A	4.2A	2.1A	10A	5A	2.5A
	CURRENT RANGE	0 – 8.3A	0 – 4.2A	0 – 2.1A	0 – 10A	0 – 5A	0 – 2.5A
	RATED POWER	99.6W	100.8W	100.8W	120W	120W	120W
	PEAK CURRENT	12.45A	6.3A	3.15A	15A	7.5A	3.75A
	PEAK POWER Notes	150W (3sec.)			180W (3sec.)		
	RIPPLE & NOISE (max.) Note.2	50mVp-p	50mVp-p	50mVp-p	50mVp-p	50mVp-p	50mVp-p
	VOLTAGE ADJ. RANGE	9 – 14V	24 – 28V	48 – 56V	9 – 14V	24 – 28V	48 – 56V
	VOLTAGE TOLERANCE Not..3	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME	500ms, 60ms @12Vdc			500ms, 60ms @24Vdc		
HOLD UP TIME (Typ.)	Please refer to page 7 Hold up Time(Load de-rating curve)						
INPUT	VOLTAGE RANGE Note.4	9 – 18Vdc	9 – 18Vdc	9 – 18Vdc	16.8 – 33.6 Vdc	16.8 – 33.6 Vdc	16.8 – 33.6 Vdc
	EFFICIENCY (Typ.)	89.%	89.%	89.%	89%	90.%	91%
	DC CURRENT (Typ.)	11.2A @12Vdc			5.6A @24Vdc		
	INRUSH CURRENT (Typ.)	5A @12Vdc			5A @ 24Vdc		
	INTERRUPTION OF VOLTAGE SUPPLY	EN50155:2007-comply with 3ms@ full load			EN50155:2007-comply with Si level (6ms) @id bad. S2 level (10ms)ft 70% load		
PROTECTION		EN50155:2017-comply with S1 level			EN50155:2017-comply with Si level		
	OVERLOAD	Normally works within 150% rated output power for more than 3 seconds and then constant current protection 105-135% rated output power with auto-recovery					
	OVER VOLTAGE	14.4 – 16.8 V	128.8 – 33.6V	157.6 – 67.2V	114.4 – 16.8V	128.8 – 33.6V	157.6 – 67.2V
		Protection type : Shut down o/p voltage, re power on to recover					
	REVERSE POLARITY	By internal MOSFET. no damage. recovers automatically after fault condition removed					

	UNDER VOLTAGE LOCKOUT	1 2Vin (A – type) :Power ON?: 9V , OFF S:8.5V	I 24Vm (B – type) Power ON ;:-= 16.8V , OFF tt; 16.5V
EIMR ONNE NI	WORKING TEMP.	-40 -+7012 (Refer to terating Curve')	
	WORKING HUMIDITY	5 – 95% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 – +85t , 5 – 95% RH non-condensing	
	TEMP. COEFFICIENT	±0.03%/t (0- 55°C)	
	VIBRATION	Component:10 – 500Hz. 5G 10minicycle. 60min. each along X. Y, Z axes; Mounting: Compliance to IEC61373	
	OPERATING ALTITUDE	5000 meters	

SAFE TY & EMC (Note 6)	SAFETY STANDARDS	IEC 62368-1, UL 62368-1, EAC TP TC 004. AS/NZS 62368.1 approved; Design refer to UL508		
	WITHSTAND VOLTAGE	11P-0/P:4KVdc I/P-FG:2.5KVdc O/P-FG:2.5KVdc		
	ISOLATION RESISTANCE	UP-0/P. UP-FG. O/P-FG:>100M Ohms! 500Vdc / 25t / 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level! Note
		Conducted	BS EN/EN55032	Class B
		Radiated	BS EN/EN55032	Class 8
		Voltage Ricker	BS EN/EN61000-3-3	—
		Harmonic Current		—
	EMC IMMUNITY	BS EN/EN55024 , BS EN/EN61000-6-2(BS EN/EN50082-2)		
		Parameter	Standard	Test Level! Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 3, 6KV contact; criteria A
		Radiated	BS EN/EN61000-4-3	Level 3, 10V/m ; criteria A
		EFT / Burst	BS EN/EN61000-4-4	Level 3, 2KV ; criteria A
		Surge	BS EN/EN61000-4-5	Level 3. 1KV/Line-Line level 3. 2KV/Line-Line-FG :criteria A
		Conducted	BS EN/EN61000-4-6	Level 3,10V ; criteria A
		Magnetic Field	BS EN/EN61000-4-8	Level 4. 30A/m ; criteria A

	RAILWAY STAND ARD	Compliance to BS EN/EN45545-2 for fire protection ; Meet BS EN/EN50155 / IEC 60571 including IEC61373 for shock & vibration, BS EN/EN50121-3-2 for EMC (except for 9-18Vin)
OTHERS	MTBF	1769.5K hrs min. Telcordia SR-332 (Bellcore) : 214.5K hrs min. MIL-HDBK-217F (25t)
	DIMENSION	32'125.21102mm (WWI))
	PACKING	510g; 28pcs/15.3Kg/1.22CUFT
NOTE	<p>1.All parameters NOT specially mentioned are measured at normal input (A:12Vdc , B:24Vdc) , rated load and 25t of ambient temperature.</p> <p>2.Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μF & 47 μF parallel capacitor.</p> <p>3.Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4.Derating may be needed under low input voltage. Please check the derating curve for more details.</p> <p>5.3 seconds max., please refer to peak loading curves.</p> <p>6.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p> <p>7.The ambient temperature derating of 3.5t /1000m with fanless models and of 5t /1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>※ Product Liability Disclaimer : For detailed information. please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>	

MODEL		DDR-120C-12	DDR-120C-24	DDR-120C-48	DDR-120D-12	DDR-120D-24	DDR-120D-48
OUTPUT	DC VOLTAGE	12V	24V	48V	12V	24V	48V
	RATED CURRENT	10A	5A	2.5A	10A	5A	2.5A
	CURRENT RANGE	0 – 10A	0 – 5A	0 – 2.5A	0 – 10A	0 – 5A	0 – 2.5A
	RATED POWER	120W	120W	120W	120W	120W	120W
	PEAK CURRENT	15A	7.5A	3.75A	15A	7.5A	3.75A
	PEAK POWER Note.5	180W (3sec.)					
	RIPPLE & NOISE (max.) Note.2	50mVp-p	50mVp-p	50mVp-p	50mVp-p	50mVp-p	50mVp-p
	VOLTAGE ADJ. RANGE	9 – 14V	24 – 28V	48 – 56V	9 – 14V	24 – 28V	48 – 56V
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%

	SETUP, RISE TIME	500ms, 60ms @48Vdc			500ms, 60ms @110Vdc		
	HOLD UP TIME (Typ.)	Please refer to page 7 Hold up Time(Load de-rating curve)					
INPUT	VOLTAGE RANGE Note.4	33.6 – 67.2 Vdc	33.6 – 67.2 Vdc	33.6 – 67.2 Vdc	67.2 – 154 Vdc	67.2 – 154 Vdc	67.2 – 154 Vdc
	EFFICIENCY (Typ.)	90.%	91%	92%	90.%	91%	92.%
	DC CURRENT (Typ.)	2.8A @48Vdc			1.3A @110Vdc		
	INRUSH CURRENT (Typ.)	5A@48Vdc			5A@110Vdc		
	INTERRUPTION OF VOLTAGE SUPPLY	EN50155:2007-comply with SI level (6 ms) @ full load, S2 level (10ms) @ 60% load			EN50155:2007-comply with S2 level (10ms) @ full load		
		EN50155:2017-comply with Si level			EN50155:2017-comply with 51 level		
PROTECTION	OVERLOAD	Normally works within 150% rated output power for more than 3 seconds and then constant current protection 105-135% rated output power with auto-recovery					
	OVER VOLTAGE	14.4 – 16.8 V	128.8 – 33.6V	157.6 – 67.2V	114.4 - 16.8V	128.8 – 33.6V	157.6 – 67.2V
		Protection type : Shut down o/p voltage, re power on to recover					
	REVERSE POLARITY	By internal MOSFET, no damage, recovers automatically after fault condition removed					
	UNDER VOLTAGE LOCKOUT	48Vin (C-type):Power ON≥33.6V , OFF≤33V			110Vin(D-type):Power ON≥67.2V,OFF≤65V		

ENVIRONMENT	WORKING TEMP.	-40 – +70°C (Refer to “Derating Curve”)					
	WORKING HUMIDITY	5 – 95% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 – +85t , 5 – 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.03%/°C (0 – 55°C)					
	VIBRATION	Component:10 – 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC61373					
	OPERATING ALTITUDE	5000 meters					
	SAFETY STANDARDS	IEC 62368-1, UL 62368-1, EAC TP TC 004, AS/NZS 62368.1 approved; Design refer to UL508					
	WITHSTAND VOLTAGE	I/P-0/P:4KVdc I/P-FG:2.5KVdc O/P-FG:2.5KVdc					

SAFETY & EMC (Note 6)	ISOLATION RESISTANCE	UP-0/P, UP-FG, 0/P-FG:>100M Ohms! 500Vdc / 25t/ 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level Note
		Conducted	BS EN1EN55032	Class B
		Radiated	BS EN1EN55032	Class B
		Voltage Flicker	BS EN1EN61000-3-3	
		Harmonic Current		
	EMC IMMUNITY	BS EN1EN55024 , BS EN1EN61000-6-2(BS EN1EN50082-2)		
		Parameter	Standard	Test Level Note
		ESD	BS EN1EN61000-4-2	Level 3, 8KV air ; Level 3, 6KV contact; criteria A
		Radiated	BS EN1EN61000-4-3	Level 3, 10V/m ; criteria A
		EFT Burst	BS EN/EN61000-4-4	Level 3, 2KV ; criteria A
		Surge	BS EN/EN61000-4-5	Level 3, 1KV/Line-Line ;Level 3 , 2KVILine-Line-FG ;criteria A
		Conducted	BS EN/EN61000-4-6	Level 3, 10V ; criteria A
		Magnetic Field	BS EN1EN61000-4-8	Level 4, 30A/m ; criteria A
	RAILWAY STANDARD	Compliance to BS EN1EN45545-2 for fire protection ; Meet BS EN/EN50155 IEC60571 including IEC61373 for shock & vibration, BS EN/EN50121-3-2 for EMC		
OTHERS	MTBF	1769.5K hrs min. Telcordia SR-332 (Bellcore) ; 214.5K hrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	32'125.2'102mm (WH'D)		
	PACKING	510g; 28pcs/15.3Kg/1.22CUFT		


NOTE

1. All parameters NOT specially mentioned are measured at normal input (C:48Vdc , D:110Vdc) , rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 « f & 47 « f parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.
4. Derating may be needed under low input voltage. Please check the derating curve for more details.
5. 3 seconds max., please refer to peak loading curves.
6. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <http://www.meanwell.com>)


7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>


Block Diagram

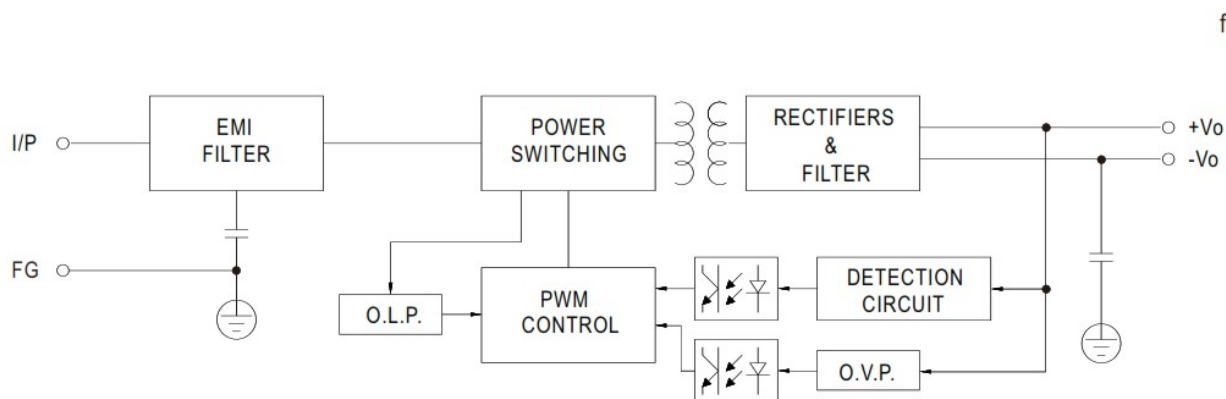

Derating Curve

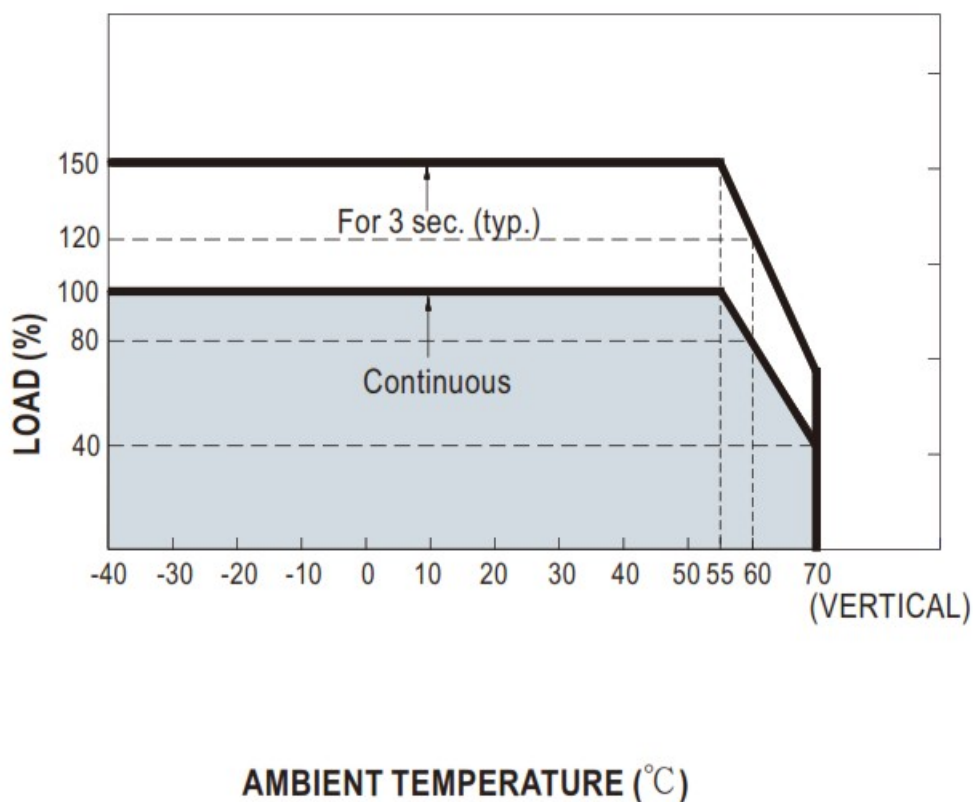

Output derating VS input voltage

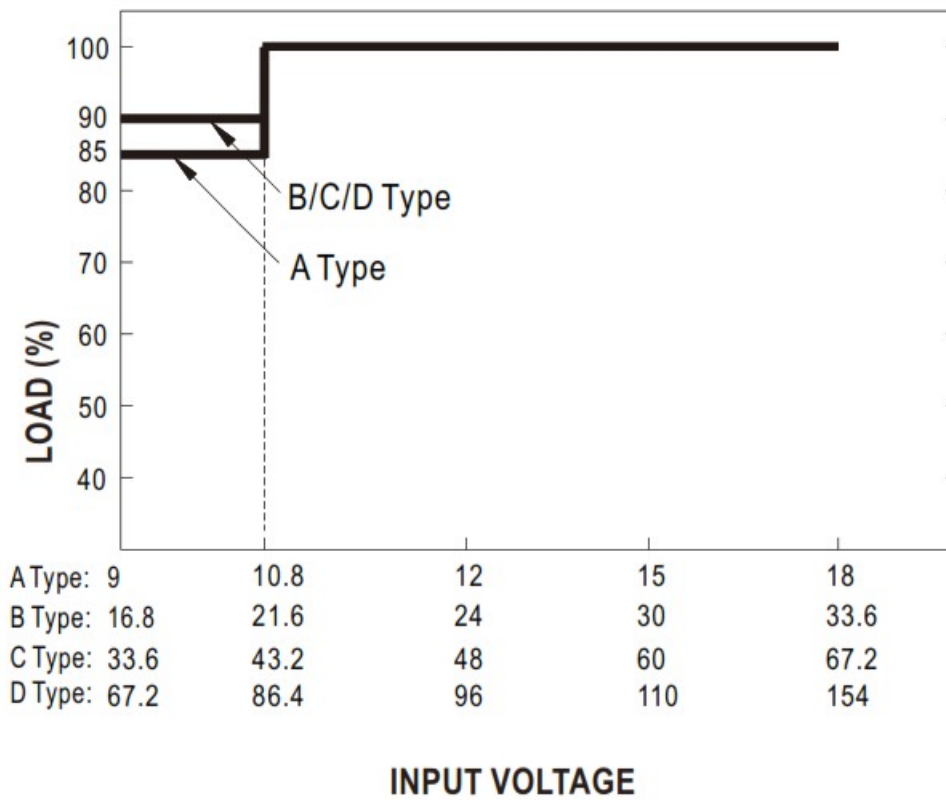

Peak Loading



Input Fuse


There is a fuse connected in series to the positive input line, which is used to protect against abnormal surge. Fuse specifications of each model are shown as below.

Type	Fuse Type	Reference and Rating
A	Time-Lag	Conquer MST, 8A, 250V *2
B	Time-Lag	Conquer MST, 8A, 250V *1
C	Time-Lag	Conquer MST, 4A, 250V *1
D	Time-Lag	Conquer MST, 10A, 250V *2


Input Under-Voltage Protection

If input voltage drops below V_{min} , the internal control IC shuts down and there is no output voltage. It recovers automatically when input voltage reaches above V_{min} , please refer to the curve below.


DDR-120A-24

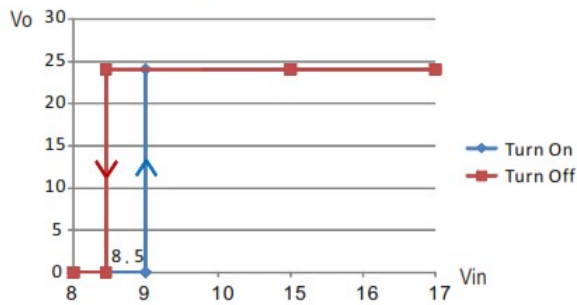


DDR-120B-24

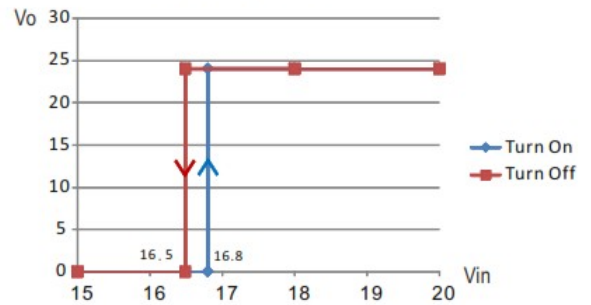

DDR-120C-24

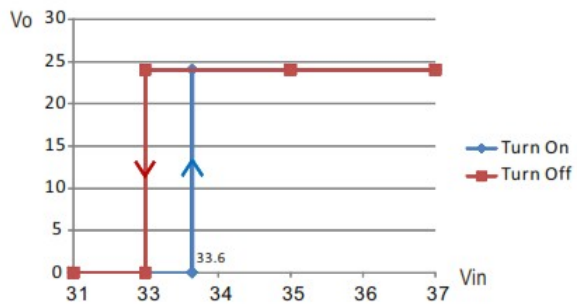

DDR-120D-24

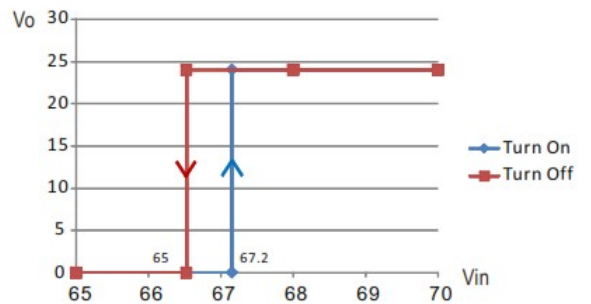

Input Reverse Polarity Protection


There is a MOSFET connected in series to the negative input line. If the input polarity is connected reversely, the MOSFET opens and there will be no output to protect the unit.

Input Range and Transient Ability

The series has a wide range input capability. With -30% / +40% of rated input voltage(except A Type), it can withstand that for 1 second.

Inrush Current


Inrush current is suppressed by a current limit circuit during the initial start-up, and then the circuit is bypassed by a MOSFET to reduce power consumption after accomplishing the start-up.

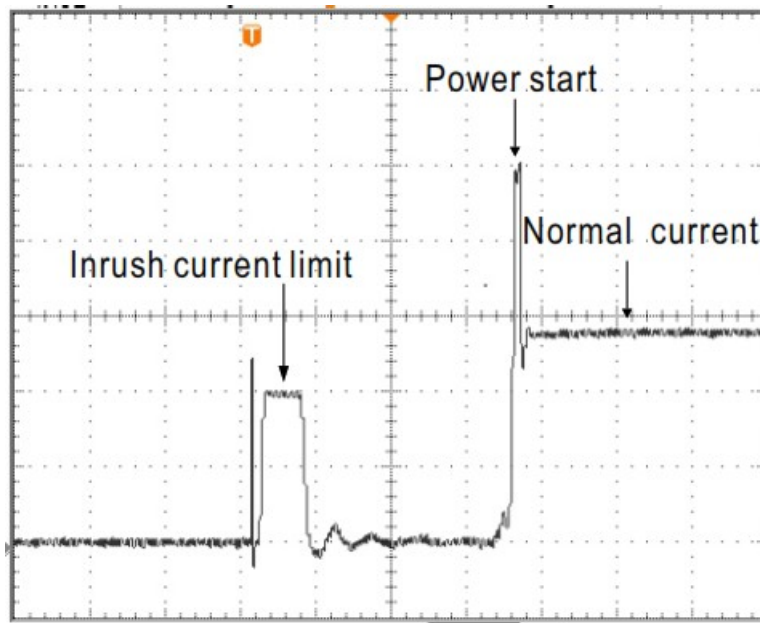


Hold-up Time

- EN50155: 2007 version – D type is in compliance with S2 level (10ms), while A types are in compliance with S1 level (3ms) at full load output condition. To fulfil the requirements of S2 level (10ms), B types require de-rating their output load to 70%, C types require de-rating their output load to 60%, please refer to the curve diagrams below.


DDR-120A-12

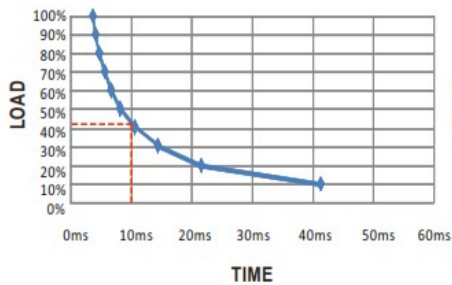


DDR-120A-24

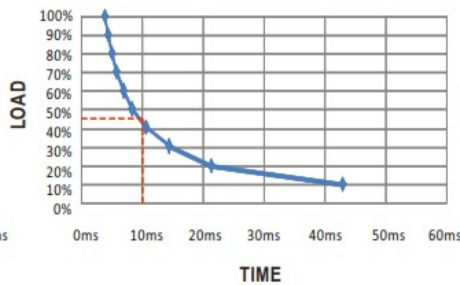


DDR-120A-48

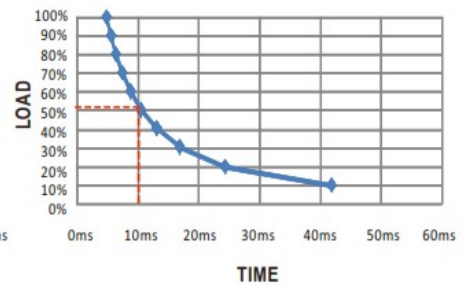


DDR-120B-12

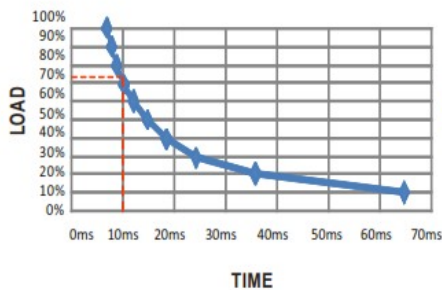


DDR-120B-24

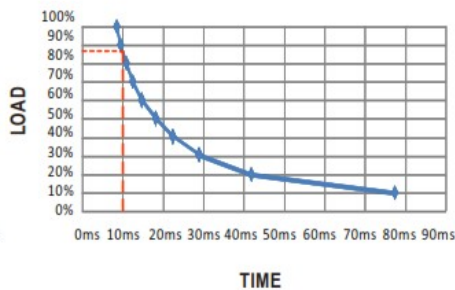


DDR-120B-48

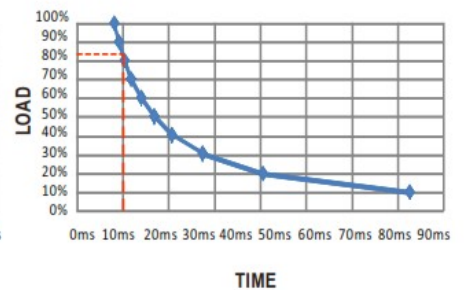


DDR-120C-12

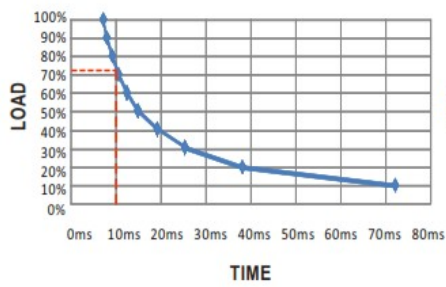


DDR-120C-24

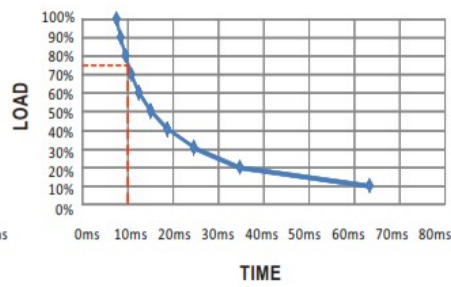


DDR-120C-48

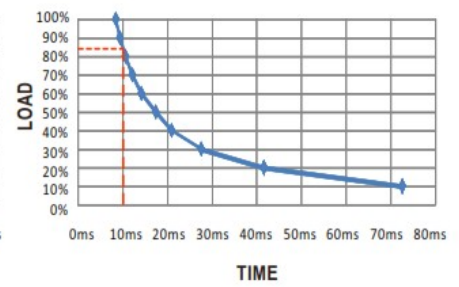


DDR-120D-12

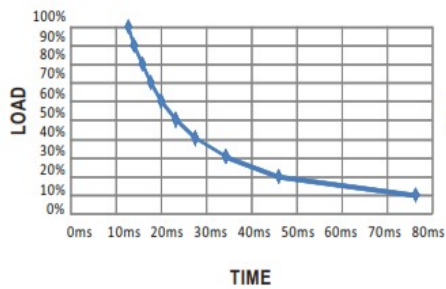

DDR-120D-24

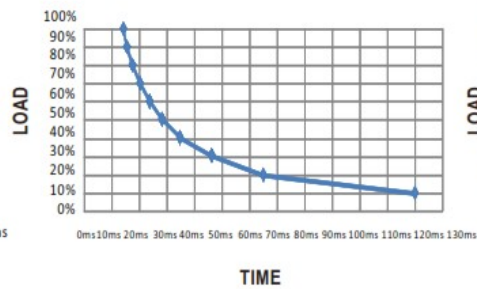

DDR-120D-48

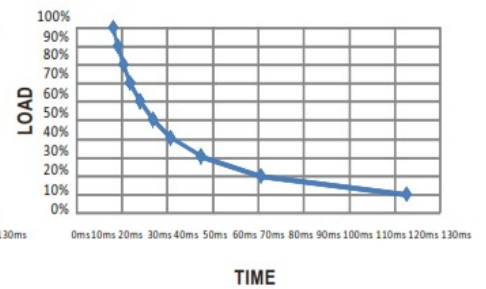


- EN50155: 2017 version – Comply with S1 level (6ms)


Efficiency vs Load & Vin Curve

The efficiency vs load & Vin curves of each model are shown as below.


DDR-120A-12

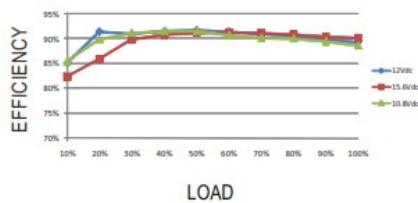


DDR-120A-24

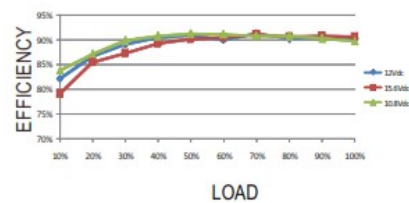


DDR-12A-48

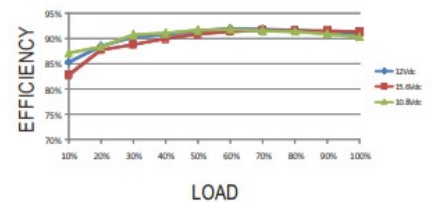


DDR-120B-12

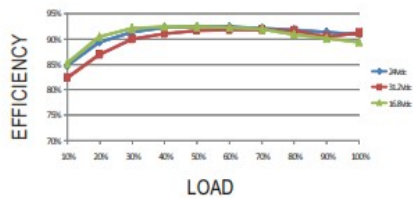


DDR-120B-24

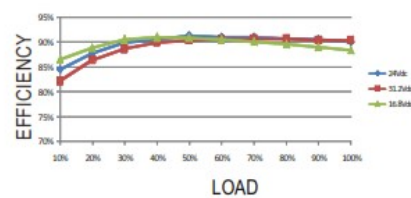


DDR-120B-48

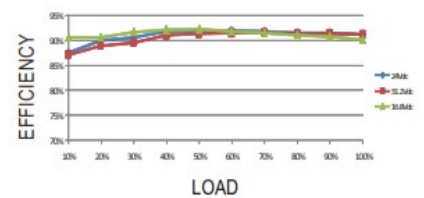


DDR-120C-12

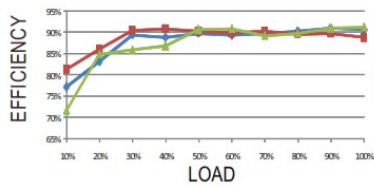


DDR-120C-24

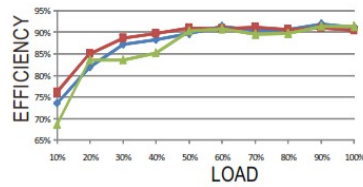


DDR-120C-48

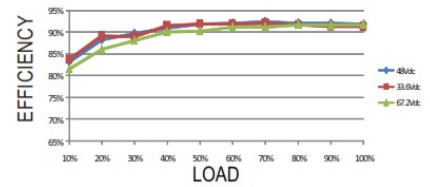


DDR-120D-12

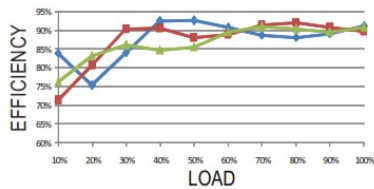

DDR-120D-24

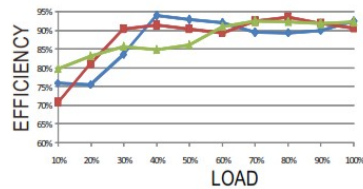

DDR-120D-48

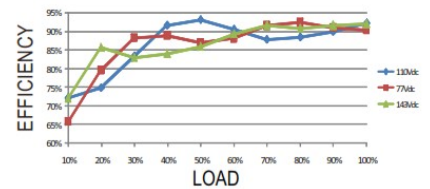

Immunity to Environmental Conditions


Test method	Standard	Test conditions	Status
Cooling Test	EN 50155 section 12.2.3 (Column 2, Class TX) E N 60068-2-1	Temperature: -40°C Dwell Time: 2 hrs/cycle	No damage
Dry Heat Test	EN 50155 section 12.2.4 (Column 2, Class TX) EN 50155 section 12.2.4 (Column 3, Class TX & Column 4, Class TX) EN 60068-2-2	Temperature: 70°C 1 85°C Duration: 6 hrs / 10min	PASS
Damp Heat Test, Cyclic	EN 50155 section 12.2.5 EN 60068-2-30	Temperature: 25°C-5 5°C Humidity: 90%-1 00% RH Duration: 4 8 hrs	PASS
Vibration Test	EN 50155 section 12.2.11 EN 61373	Temperature: 19°C Humidity: 65% Duration: 10 mins	PASS
Increased Vibration Test	112. EN 50155 section 12.2.11 EN 61373	Temperature: 19°C Humidity: 65% Duration: 5 hrs	PASS
Shock Test	EN 50155 section 12.2.11 EN 61373	Temperature: 21 ± 3° C Humidity: 65 ± 5% Duration: 30ms*18	PASS
Low Temperature Storage Test	EN 50155 section 12.2.3 (Column 2, Class TX) E N 60068-2-1	Temperature: -40°C Dwell Time: 16 hrs	PASS
Salt Mist Test	EN 50155 section 12.2.10 (Class ST4)	Temperature: 35°C ± 2°C Duration: 96 hrs	PASS

EN45545-2 Fire Test Conditions

Test Items			Hazard Level		
	Items	Standard	HL1	HL2	HL3
R22	Oxygen index test	EN 45545-2:2013 EN ISO 4589-2:1996	PASS	PASS	PASS
	Smoke density test	EN 45545-2:2013 EN ISO 5659-2:2006	PASS	PASS	PASS
	Smoke toxicity test	EN 45545-2:2013 NF X70-100:2006	PASS	PASS	PASS
R24	Oxygen index test	EN 45545-2:2013 EN ISO 4589-2:1996	PASS	PASS	PASS
R25	Glow-wire test	EN 45545-2:2013 EN 60695-2-11:2000	PASS	PASS	PASS
R26	Vertical flame test	EN 45545-2:2013 EN 60695-11:2003	PASS	PASS	PASS


Mechanical Specification

Case No. Unit:mm

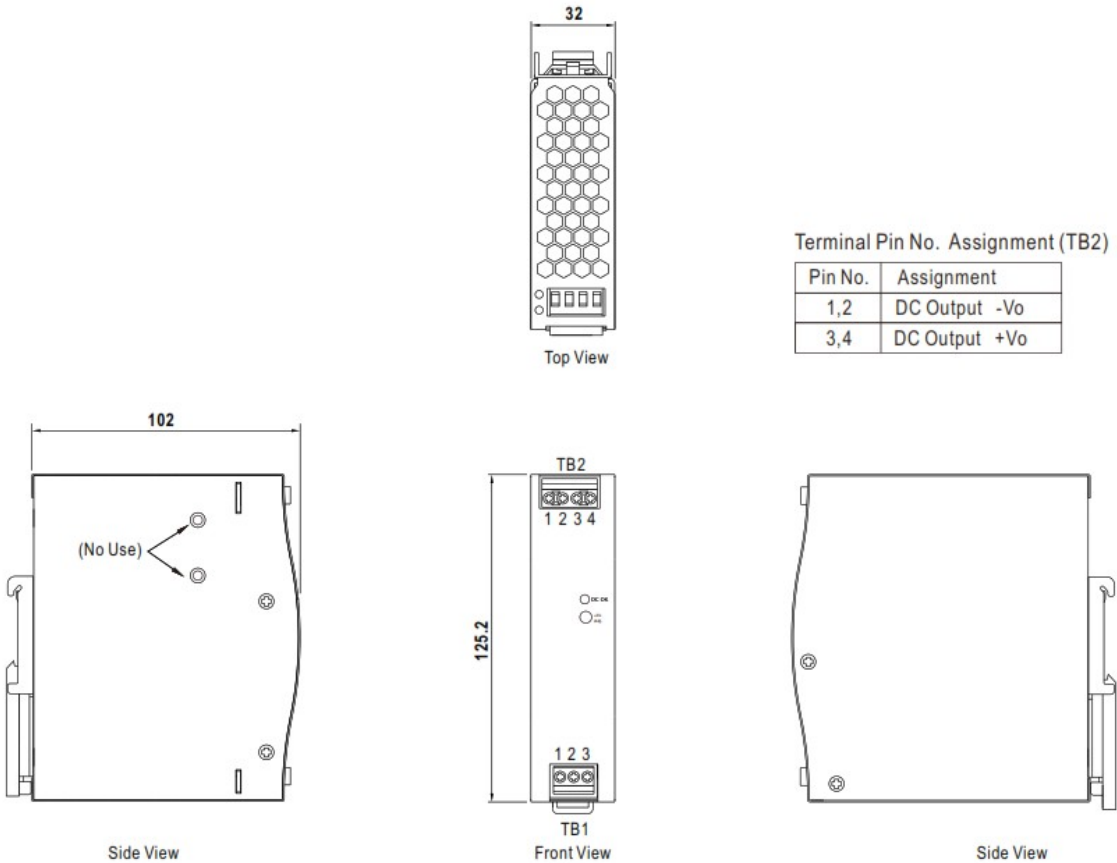



ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15



Bottom View

Terminal Pin No. Assignment (TB1)

Pin No.	Assignment
1	FG \oplus
2	DC Input -Vin
3	DC Input +Vin

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>

Downloaded from Arrow.com.
File Name:DDR-120-SPEC 2022-03-18

Documents / Resources

	<p>MEAN WELL DDR-120A-12 120W DIN Rail Type DC-DC Converter [pdf] Owner's Manual DDR-120A-12, DDR-120A-12 120W DIN Rail Type DC-DC Converter, DIN Rail Type DC-DC Converter, DC-DC Converter, Converter, DDR-120A-24, DDR-120A-48, DDR-120B-12, DDR-120B-24, DDR-120B-48</p>
--	--

References

- [MEAN WELL Switching Power Supply Manufacturer](#)