



MEAN WELL OWA-90E 90W Single Output Moistureproof Adaptor User Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL OWA-90E 90W Single Output Moistureproof Adaptor User Manual 

Contents

- [1 MEAN WELL OWA-90E 90W Single Output Moistureproof Adaptor](#)
- [2 Features](#)
- [3 Description](#)
- [4 SPECIFICATION](#)
- [5 Block Diagram](#)
- [6 Derating Curve](#)
- [7 Static Characteristics](#)
- [8 Mechanical S Specification](#)
- [9 Output Plug Assignment](#)
- [10 Documents / Resources](#)
- [11 Related Posts](#)



MEAN WELL OWA-90E 90W Single Output Moistureproof Adaptor



Features

- Universal AC input / Full range
- Built-in active PFC function
- High efficiency up to 91%
- No load power consumption<0.15W
- Energy efficiency Level VI
- Comply with EU ErP and meet CoC Version 5
- Protections: Short circuit/Over current/
- Over voltage/Over temperature
- Class II power unit, no FG
- Fanless design, cooling by free air convection
- 5 years warranty

Applications


- Robotic lawn mower
- Household appliance
- Battery charging
- General electronic products in dusty or humid environment

Description

OWA-90E is a 90W AC/DC, class II (without earth pin) external power supply series pinpointing the moistureproof feature. The fully-potted silicone inside the plastic enclosure enhances the heat dissipation; it also benefits that the OWA-90E is approved for IP67 level so this series specializes the application in which damp, humidity or dust resistance is needed for the external power supply. OWA-90E follows the latest

energy efficiency demand, and is compliant with EU ErP and meets Code of Conduct(CoC) Version 5; the no load power consumption is less than 0.15W. It is certified with BS EN/EN 61558-2-16; moreover, the compliance to BS EN/EN 60335-1 for selected models can greatly simplify the system design such as household appliances. OWA-90E adopts the universal input range from 90VAC to 264VAC and incorporates a built-in PFC function. With a working efficiency up to 91%, OWA-90E is cooled by free air convection; the working temperature ranges from -40C to +70'C.


Model Encoding

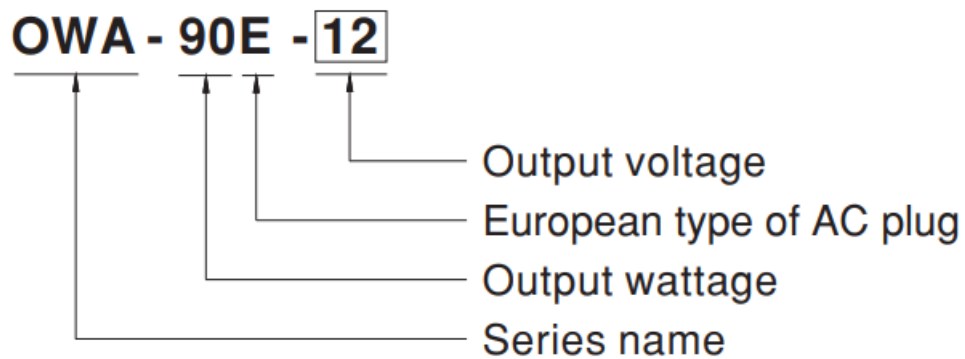


SPECIFICATION

MODEL		OWA-90E-12	OWA-90E-15	OWA-90E-20	OWA-90E-24	OWA-90E-30	OWA-90E-36	OWA-90E-42	OWA-90E-48	OWA-90E-54
OUTPUT	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	RATED CURRENT	7.5A	6A	4.5A	3.75A	3A	2.5A	2.15A	1.88A	1.67A
	RATED POWER	90W	90W	90W	90W	90W	90W	90.3W	90.24W	90.18W
	RIPPLE & NOISE (max.) <small>Note.2</small>	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	250mVp-p	250mVp-p	350mVp-p
	VOLTAGE TOLERANCE <small>Note.3</small>	±4.0%	±4.0%	±4.0%	±3.0%	±3.0%	±2.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME <small>Note.4</small>	500ms, 80ms at 95% load 115VAC / 230VAC								
HOLD UP TIME (Typ.)	16ms at full load 115VAC / 230VAC									
INPUT	VOLTAGE RANGE	90 ~ 264VAC 127 ~ 370VDC								
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.96/230VAC at full load								
	EFFICIENCY (Typ.)	89%	90%	90%	90%	90%	91%	91%	91%	91%
	AC CURRENT (Typ.)	0.95A / 115VAC 0.5A / 230VAC								
	INRUSH CURRENT (Typ.)	COLD START 60A(twidth=550μs measured at 50% Ipeak) at 230VAC								
	LEAKAGE CURRENT	<0.25mA / 240VAC								
PROTECTION	OVERLOAD	105 ~ 115% Protection type : Hiccup mode, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed								
	OVER VOLTAGE	15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 40V	41 ~ 46V	46 ~ 54V	54 ~ 60V	59 ~ 66V
		Protection type : Shut down o/p voltage, re-power on to recover								
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover								
ENVIRONMENT	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")								
	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)								
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
SAFETY & EMC	SAFETY STANDARDS	BS EN/EN61558-1,-2-16 listed; BS EN/EN60335-1 listed(except for OWA-90E-42,48,54); EAC TP TC 004, IP67 approved								
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC								
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN55014-1, BS EN/EN61000-3-2,-3;EAC TP TC 020								
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55024, BS EN/EN55014-2, light industry level (surge L-N : 2KV), criteria A;EAC TP TC 020								
OTHERS	MTBF	292.8K hrs min. MIL-HDBK-217F (25°C)								
	DIMENSION	171*63*37.5mm								
	PACKING	0.92Kg; 16pcs/15.7Kg/1.01CUFT								
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx									


Block Diagram

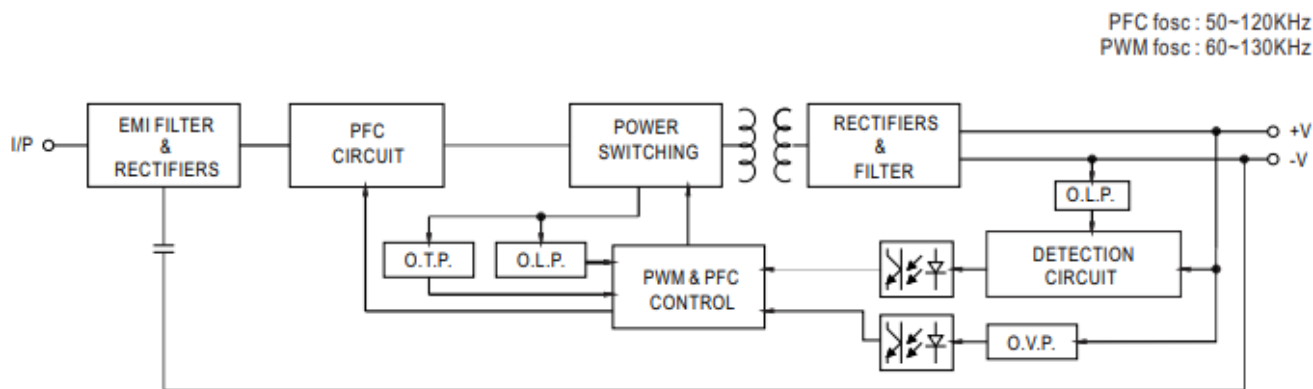


Derating Curve

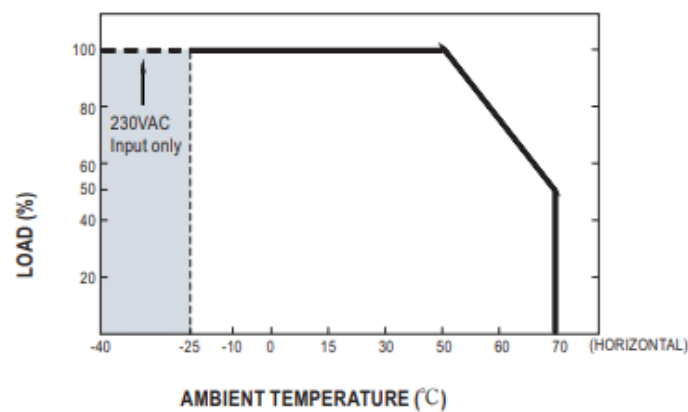

Static Characteristics

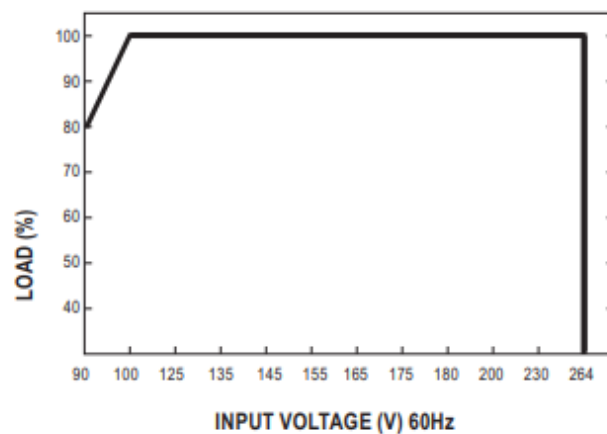


Mechanical S Specification

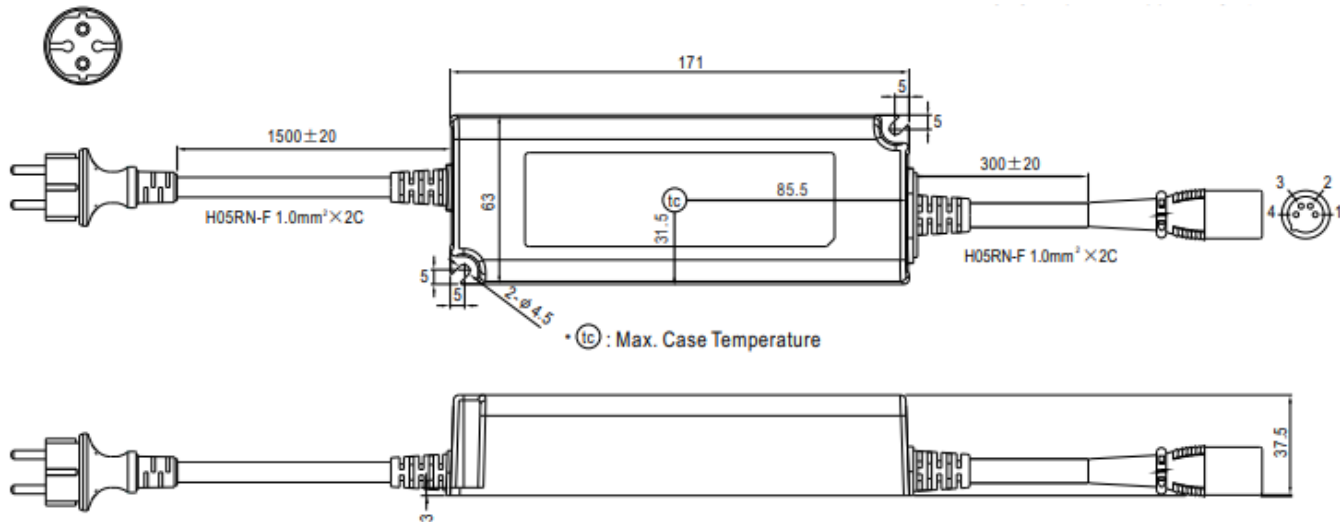

Input Plug Type

All standard models : CEE 7/7

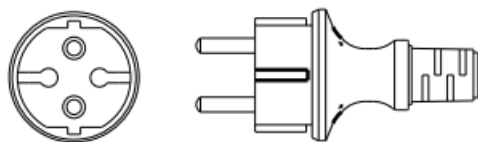


Output Plug Assignment

Model Category	Plug Description	Plug Picture	PIN NO.	OUTPUT
For standard model	XLR 4P, NEUTRIK NC4MX, or equivalent		1,2	+V
			3,4	-V
For optional model	Lumberg 3611 03, or equivalent		1	+V
			2	float
			3	-V
For optional model	XLR 3P, NEUTRIK NC3MX, or equivalent		1	+V
			2,3	-V
For optional model	CHOGORI 22002411-01 or equivalent		1	+V
			2	-V
For optional model	Unicable UT-D170F4-2P or equivalent		1	+V
			2	-V
For optional model	Unicable UT-D224-2P or equivalent		1	+V
			2	-V
For optional model	2.1φ x 5.5φ x 11 mm, center +, tuning fork type	 Outside ⊖ ⊕ Inside	CENTER	+V

Please refer to: <http://www.meanwell.com/manual.html>

Documents / Resources

<div><div>MEAN WELL</div><div>OWA-90E</div><div></div><div>OWA-90E</div></div> <div><div>■ Features</div><ul style="list-style-type: none">High efficiency > 85%Wide input voltage range: AC 100-240VOverload protectionOver temperature protectionShort circuit protectionSurge protectionEMI/RFI suppressionRoHS compliant</div> <div><div>■ Specifications</div><table><tr><th>Model</th><th>Input Voltage (VAC)</th><th>Output Voltage (VDC)</th><th>Output Current (A)</th><th>Output Power (W)</th></tr><tr><td>OWA-90E</td><td>100-240</td><td>5.0</td><td>18.0</td><td>90</td></tr></table></div> <div><div>■ Safety Precautions</div><p>1. Please read the safety instructions carefully before using the product.</p><p>2. Please do not touch the output terminals when the product is powered on.</p><p>3. Please do not use the product in a wet or humid environment.</p><p>4. Please do not use the product in a high temperature environment.</p><p>5. Please do not use the product in a high voltage environment.</p><p>6. Please do not use the product in a high magnetic field environment.</p><p>7. Please do not use the product in a high frequency environment.</p><p>8. Please do not use the product in a high pressure environment.</p><p>9. Please do not use the product in a high speed environment.</p><p>10. Please do not use the product in a high acceleration environment.</p><p>11. Please do not use the product in a high vibration environment.</p><p>12. Please do not use the product in a high shock environment.</p><p>13. Please do not use the product in a high impact environment.</p><p>14. Please do not use the product in a high pressure environment.</p><p>15. Please do not use the product in a high speed environment.</p><p>16. Please do not use the product in a high acceleration environment.</p><p>17. Please do not use the product in a high vibration environment.</p><p>18. Please do not use the product in a high shock environment.</p><p>19. Please do not use the product in a high impact environment.</p><p>20. Please do not use the product in a high pressure environment.</p></div>	Model	Input Voltage (VAC)	Output Voltage (VDC)	Output Current (A)	Output Power (W)	OWA-90E	100-240	5.0	18.0	90	<div><div>MEAN WELL OWA-90E 90W Single Output Moistureproof Adaptor [pdf] User Manual</div><div>OWA-90E, 90W Single Output Moistureproof Adaptor, OWA-90E 90W Single Output Moistureproof Adaptor, Output Moistureproof Adaptor, Moistureproof Adaptor, Adaptor</div></div>
Model	Input Voltage (VAC)	Output Voltage (VDC)	Output Current (A)	Output Power (W)							
OWA-90E	100-240	5.0	18.0	90							